

SONY

HD CAMCORDER

HDW-F900

HDCAM  **Tele-File**


MEMORY STICK


CINEALTA

MAINTENANCE MANUAL Part 2
Volume 2 1st Edition (Revised 1)
Serial No. 10001 and Higher

⚠ 警告

このマニュアルは、サービス専用です。

お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。

危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

設置や保守、点検、修理などを行う前に、別冊のメンテナンスマニュアルPart 1の「安全のために」と別冊のオペレーションマニュアルの「安全のために」を必ずお読みください。

⚠ WARNING

This manual is intended for qualified service personnel only.

To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.

Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegebenen Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres.

Pour toute réparation faire appel à une personne compétente uniquement.

目次 / Table of Contents

このマニュアルについて

本書の目的	5 (J)
関連マニュアル	5 (J)
構成	6 (J)

Manual Structure

Purpose of this manual	5 (E)
Related manuals	5 (E)
Contents	6 (E)

1. Spare Parts

1-1. 補修部品注意事項	1-1
1-1. Notes on Repair Parts	1-1
1-2. Exploded Views	1-2
1-3. Electrical Parts List for Boards	1-52
1-4. Parts List for Frame	1-171
1-5. Packing Materials & Supplied Accessories	1-173
1-6. Optional Fixtures	1-174

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall	
Camera block	3-2
VTR block	3-4
DA-148	3-6
AD-171	3-7
AD-167	3-7
DR-411	3-8
DPR-227	3-9
DPR-152	3-9
DPR-157	3-9
RPR-13	3-9
IF-819	3-10
PA-238	3-11
DU-68	3-11

DU-19	3-11
RE-145F	3-12
SG-267	3-13
SH-74	3-14
TG-213	3-15
VA-195	3-16
VDA-51	3-17
Video Processing	3-18
Audio Processing	3-22
System Control	3-24
Servo Control	3-26
Power Supply	3-28
RF Processing	3-30

4. Schematic Diagrams

AD-171	4-2
AD-167	4-2
APR-55	4-6
CN-1432	4-19
CN-1614	4-19
CN-1642	4-19
CN-2119	4-19
CN-1940	4-20
CN-1946	4-20
CN-2024	4-21
CN-2025	4-22
CN-2044	4-24
CN-2078	4-24
CN-2085	4-24
CN-2046	4-25
CP-361	4-26
CTL-10	4-27
CUE-2	4-28
DA-148	4-29
DEC-95	4-31
DPR-227	4-34
DPR-152	4-34
CN-2140	4-36
DPR-157	4-37
DR-411	4-40
DU-68	4-42
DU-19	4-42
EN-143	4-43

ENC-59	4-49
EQ-89	4-54
HN-243	4-60
IF-819	4-62
MA-92	4-69
MB-877	4-70
PA-238	4-80
PS-569	4-81
RE-139F	4-83
RE-140F	4-84
RE-145F	4-86
RPR-13	4-88
SE-275	4-89
SG-267	4-90
SH-74	4-92
SV-218	4-95
SY-285	4-98
TG-213	4-101
VA-195	4-102
VDA-51	4-104
VN-12	4-107
Frame Wiring	4-110
KY-293	4-112
SW-911	4-112
SW-912	4-112
VR-175	4-112
CN-2043	4-113
HP-90	4-113
SW-1032	4-113
CO-38	4-114

5. Board Layouts

AD-171	5-3
AD-167	5-4
APR-55	5-5
CN-2025	5-9
CN-1432	5-11
CN-1614	5-11
CN-1642	5-11
CN-1940	5-11
CN-2119	5-11
CN-1946	5-12
CN-2024	5-12
CN-2043	5-12

CN-2044	5-12
CN-2046	5-13
CN-2078	5-13
CN-2085	5-13
CN-2140	5-13
CO-38	5-13
DU-19	5-13
DU-68	5-13
CP-361	5-14
CTL-10	5-14
CUE-2	5-14
DR-411	5-15
DA-148	5-17
DEC-95	5-19
DPR-227	5-21
DPR-152	5-23
DPR-157	5-25
EN-143	5-27
ENC-59	5-29
EQ-89	5-30
HN-243	5-31
HP-90	5-31
KY-293	5-31
IF-819	5-32
MA-92	5-33
MB-877	5-34
PA-238	5-37
PS-569	5-39
RE-139	5-39
RE-140	5-40
RE-145F	5-41
RPR-13	5-41
SE-275	5-42
SG-267	5-43
SH-74	5-45
SV-218	5-46
SW-911	5-47
SW-912	5-47
SW-1032	5-47
VR-175	5-47
SY-285	5-48
TG-213	5-49
VA-195	5-51
VDA-51	5-53
VN-12	5-55

このマニュアルについて

本書の目的

本書は、HD カムコーダ HDW-F900 のメンテナンスマニュアル パート 2 Volume 2 です。

本書は、システム / サービスエンジニアの方々にご使用いただくことを想定し、本機の部品レベルまでのサービスを前提とした情報を記載しています。

関連マニュアル

本機には、この「メンテナンスマニュアル パート 2 Volume 2」のほかに、下記のマニュアルが用意されています。

- ・ HDW-F900 オペレーションマニュアル (本機に付属)

本機を実際に運用および操作するのに必要なマニュアルです。

部品番号 : 3-203-940-XX

- ・ HDW-F900 メンテナンスマニュアル パート 1 (本機に付属)

本機の納入設置時に必要な情報、保守に関する情報、初期サービスを前提とした情報を記載しています。

部品番号 : 3-204-100-XX

- ・ HDW-F900 メンテナンスマニュアル パート 2 Volume 1 (別途用意)

本機の部品レベルまでのサービスを前提とした情報(サービスインフォメーション、部品の交換、調整要項等)を記載したマニュアルです。

入手を希望される方は、ソニー営業窓口にお問い合わせください。

部品番号 : 9-968-562-XX

- ・ HDVF-20A オペレーションマニュアル (HDVF-20A に付属)

HDVF-20A を実際に運用および操作するのに必要なマニュアルです。

部品番号 : 3-203-934-XX

- ・ HDVF-20A メンテナンスマニュアル (別途用意)

HDVF-20A の部品レベルまでのサービスを前提とした情報(調整要項、回路図、マウント図、詳細パーツリスト等)を記載したマニュアルです。

入手を希望される方は、ソニー営業窓口にお問い合わせください。

部品番号 : 9-968-559-XX

- ・ “Semiconductor Pin Assignments” CD-ROM 版 (別途用意)

この “Semiconductor Pin Assignments” CD-ROM 版は、B&P カンパニーの機器に使用されている半導体を検索することができます。

この CD-ROM で検索できない半導体は、その半導体が使用されている機種のメンテナンスマニュアルに記載されています。メンテナンスマニュアルには、その機種に使用されているすべての半導体一覧とその ID 番号を記載していますので、この CD-ROM 版と合わせて使用してください。

部品番号 : 9-968-546-XX

構成

メンテナンスマニュアル パート 2 Volume 2

本書の構成を把握していただくために、全章の概略を以下に説明します。

Section 1 Spare Parts

本機に使用している部品のうち、サービス対象の分解図、部品リスト、標準付属品およびフレームリストを記載しています。

Section 2 Semiconductor Pin Assignments

本機で使用している半導体の型名一覧とその半導体標準図検索用ID番号を記載しています。

別売の“Semiconductor Pin Assignments” CD-ROM 版と合わせてご覧ください。また、本書作成時に、CD-ROM 版に含まれていない半導体標準図がある場合は、本章に追加掲載しています。

Section 3 Block Diagrams

本機のオーバーオールブロック図、基板ごとのブロック図を記載しています。

Section 4 Schematic Diagrams

本機の基板ごとの回路図とフレーム図を記載しています。

Section 5 Board Layouts

本機の基板ごとのマウント図を記載しています。

Manual Structure

Purpose of this manual

This manual is the maintenance manual part 2 volume 2 of the HD camcorder HDW-F900.

This manual is intended for use by trained system and service engineers, and is provided information that is premised parts levels service for this unit.

Related manuals

Besides this maintenance manual part 2 volume 2, the following manuals are available:

- **HDW-F900 Operation Manual (Supplied with this unit)**

This manual is necessary for use and the operation of this unit.

Part No.: 3-203-941-XX

- **HDW-F900 Maintenance Manual Part 1 (Supplied with this unit)**

This manual is provided pertinent information on the installation, maintenance, and primary service.

Part No.: 3-204-101-XX

- **HDW-F900 Maintenance Manual Part 2 Volume 1 (Available on request)**

This manual is provided information that is premised the parts level service (service overview, replacement of parts, adjustments and the like.) for this unit. If this manual is required, please contact to your local Sony Sales Office/Service Center.

Part No.: 9-968-563-XX

- **HDVF-20A Operation Manual (Supplied with HDVF-20A)**

This manual is necessary for use and the operation of HDVF-20A.

Part No. : 3-203-934-XX

- **HDVF-20A Maintenance Manual (Available on request)**

This manual is provided information that is premised the parts level service (adjustments, board layouts, schematic diagrams, detailed parts lists and the like.) for HDVF-20A.

If this manual is required, please contact to your local Sony Sales Office/Service Center.

Part No. : 9-968-559-XX

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**

This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in B&P Company equipment.

Semiconductors that cannot be searched for on this CD-ROM are listed in the maintenance manual for the corresponding unit. The maintenance manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.

Part number: 9-968-546-XX

Contents

Maintenance Manual Part 2 Volume 2

The maintenance manuals part 2 volume 2 are organized by the following sections:

Section 1 Spare Parts

Describes the list of available parts used in the unit, exploded views, supplied accessories and frame list.

Section 2 Semiconductor Pin Assignments

Contains information on semiconductors used for the unit.

It includes a complete list of the semiconductors and their ID Nos. for retrieving information on “Semiconductor Pin Assignments” CD-ROM, which is available separately.

Please refer to this section together with the “Semiconductor Pin Assignments” CD-ROM.

Information on the semiconductors not contained in the CD-ROM at the time of issue of this manual, if any, is given in this section as well.

Section 3 Block Diagrams

Describes the block diagrams of overall and each circuit board.

Section 4 Schematic Diagrams

Describes the schematic diagrams of each circuit board and a frame wiring.

Section 5 Board Layouts

Describes the board layouts of each circuit board.

Section 1

Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked $\triangle$ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

In need of repair, get components shown in the list and repair using them.

1-1. 補修部品注意事項

1. 安全重要部品

$\triangle$ 警告

$\triangle$ 印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。

これは部品の共通化、改良等によるものです。

部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に "o" で示される部品は在庫していないことがあり、納期が長くなることがあります。


4. ハーネス

部品番号が記載されていないハーネスは、サービス部品として登録されていません。

これらは、リストに展開されているコンポーネント部品で補修してください。


Front Assembly

1-2. Exploded Views

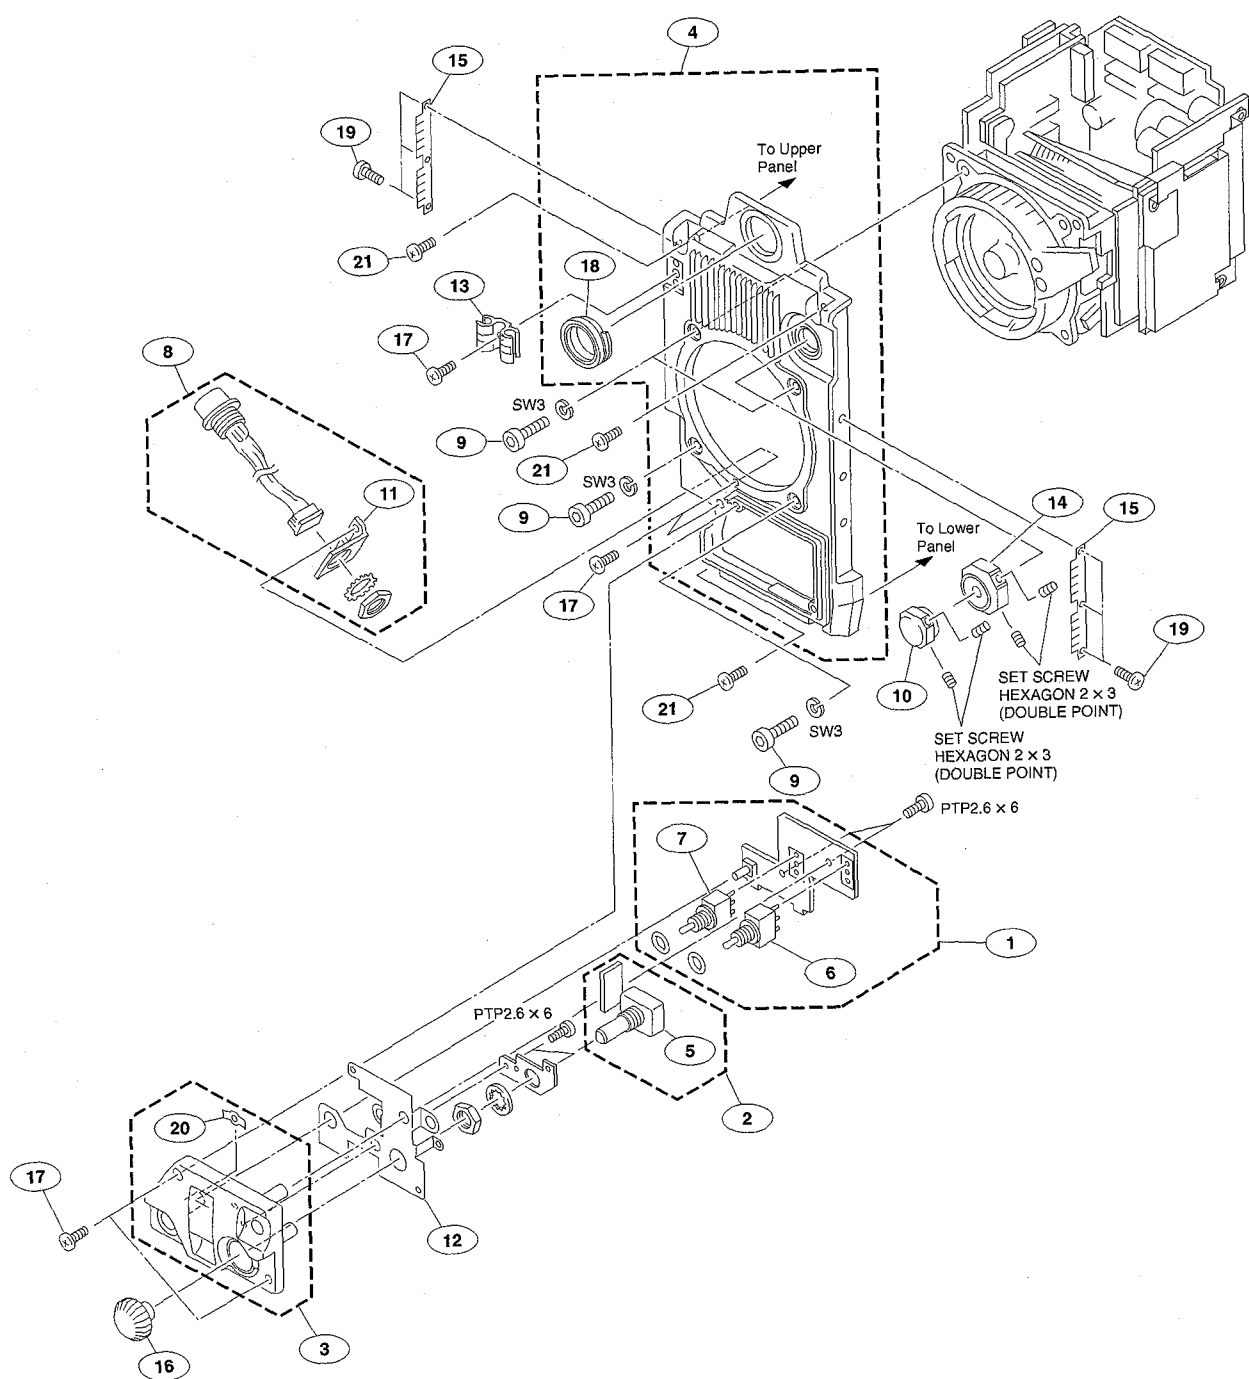

Front Assembly


No.	Part No.	SP Description
1	A-8316-548-B	s MOUNTED CIRCUIT BOARD, SW-911
2	A-8316-549-B	s MOUNTED CIRCUIT BOARD, SW-912
3	X-3679-423-3	s COVER SUB ASSY, FRONT
4	X-3679-429-2	o FRAME SUB ASSY, FRONT
5	1-473-315-21	s ENCODER, ROTARY
6	1-554-395-00	s SWITCH, TOGGLE
7	1-554-396-00	s SWITCH, TOGGLE
8	1-958-073-12	o HARNESS, SUB (LENS)
9	2-623-773-11	s BOLT (M3X8), STAINLESS
10	3-177-457-01	s KNOB (ND), FILTER
11	3-184-835-01	o BRACKET (LENS), CN FITTING
12	3-610-516-01	o PLATE, SHIELD (FRONT)
13	3-679-659-03	o CLAMP, CABLE (PP)
14	3-679-671-02	s KNOB, FILTER (CC)
15	3-680-483-01	o FINGER, SHIELD
16	3-692-111-02	s KNOB, RE
17	3-694-181-01	s AROCK PRECISION +P2.6 TYPE 1
18	3-710-024-01	o PACKING, VF
19	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
20	3-742-066-11	o SPRING, SHUTTER
21	3-742-074-11	s SCREW (3)

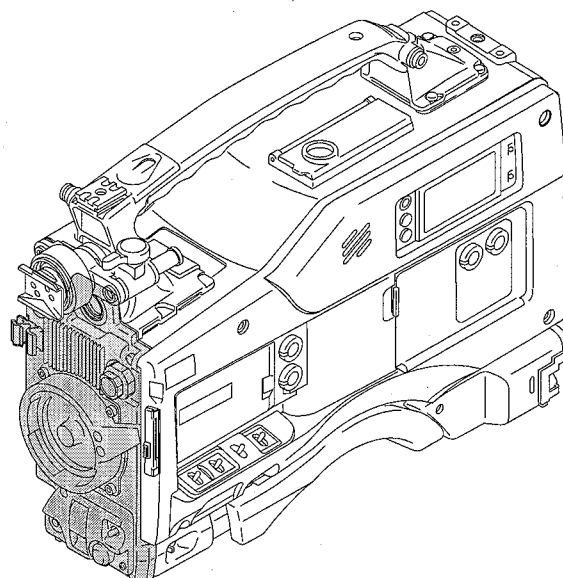

Screws/Washer


Part No.	SP Description
7-621-732-09	s SET-SCREW, HEX 2X3 WP
7-623-208-22	s SPRING WASHER (3MM)
7-685-133-14	s SCREW +P TA2.6X6

CCD Block

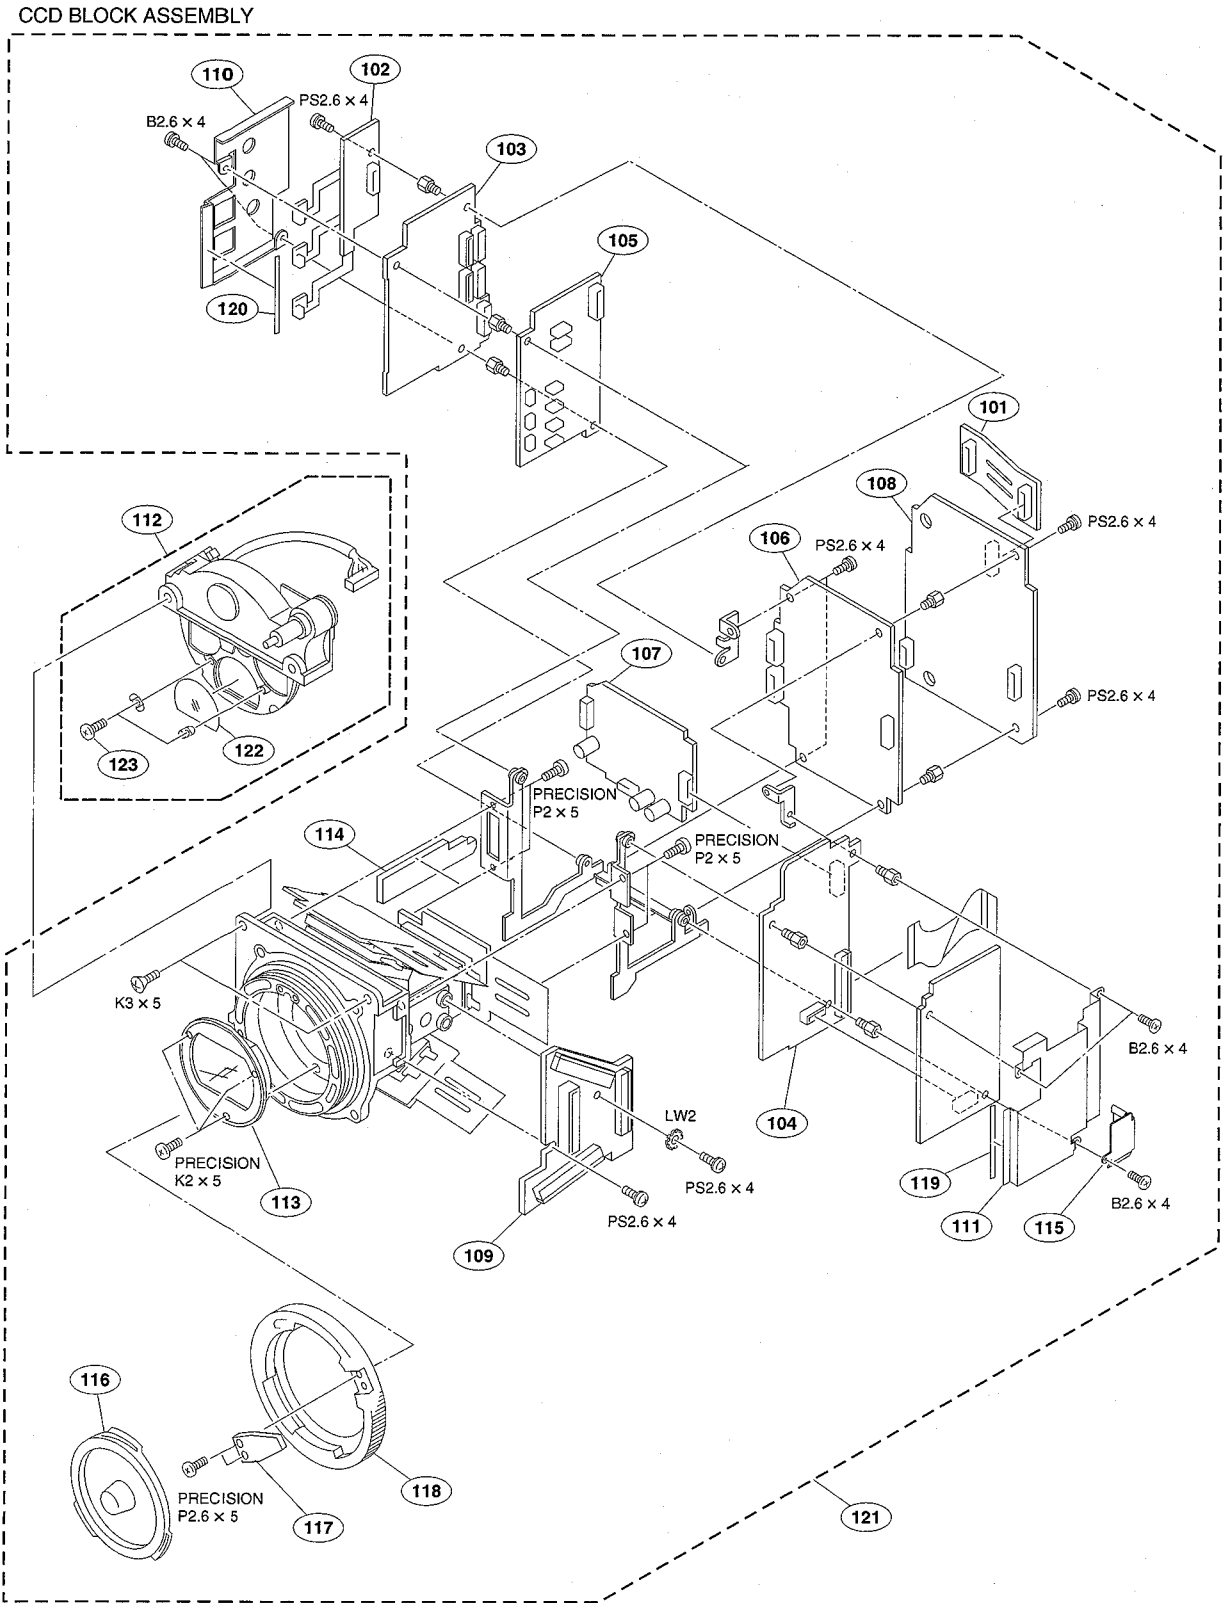

*a: Serial No. 10001 - 10150
 *b: Serial No. 10151 -
 *c: Serial No. 11098 -
 *d: Serial No. 11171 -
 *e: Serial No. 10001 - 11294
 *f: Serial No. 12001 -

No.	Part No.	SP Description
101	*b A-8326-523-A o	MOUNTED CIRCUIT BOARD, CN-2119
	*a A-8316-532-A o	MOUNTED CIRCUIT BOARD, CN-1432
102	*b A-8326-524-A o	MOUNTED CIRCUIT BOARD, DU-68
	*a A-8326-250-A o	MOUNTED CIRCUIT BOARD, DU-19F
103	A-8325-347-A o	MOUNTED CIRCUIT BOARD, PA-238
104	A-8325-348-A o	MOUNTED CIRCUIT BOARD, DR-411
105	*f A-8345-842-A s	MOUNTED CIRCUIT BOARD, NR-75
	*e A-8325-349-A o	MOUNTED CIRCUIT BOARD, NR-68
106	A-8325-350-A o	MOUNTED CIRCUIT BOARD, RP-113
107	A-8325-351-A o	MOUNTED CIRCUIT BOARD, TG-213
108	A-8325-399-A o	MOUNTED CIRCUIT BOARD, SH-74
109	A-8325-596-A o	MOUNTED CIRCUIT BOARD, CN-1946
110	X-3605-844-3 o	PLATE ASSY, SHIELD L
111	X-3679-427-5 o	PLATE ASSY, SHIELD R
	X-3608-390-1 s	PLATE ASSY, SHIELD RS (For BKDW-701:OPTION)
112	*e 1-475-535-11 o	DISK UNIT, FILTER (OPTICAL)
	*f 1-475-535-21 o	DISK UNIT, FILTER (OPTICAL)
113	1-758-483-11 o	FILTER UNIT, OPTICAL
114	3-613-381-01 o	CUSHION, GUIDE
115	3-613-909-02 s	PLATE (FFC), SHIELD
116	3-699-048-01 s	CAP, MOUNT
117	9-980-076-01 o	LEVER, MOUNT
118	9-980-077-01 o	RING, BAYONET
119	*c 3-629-684-02 s	FORM, SHIELD
120	*d 3-629-684-02 s	FORM, SHIELD
121	A-8344-821-B s	CCD UNIT F900HDW
122	9-939-640-01 o	CLEAR FILTER *1
	9-939-641-01 o	ND FILTER (1/4) *1
	9-939-643-01 o	ND FILTER (1/16) *1
	9-939-644-01 o	ND FILTER (1/64) *1
	9-939-647-01 o	CC FILTER (4300K) *1
	9-939-648-01 o	CC FILTER (6300K) *1
	9-939-645-01 o	CROSS FILTER *1
	9-885-029-48 s	FILTER (5600K), CC *1
123	7-627-553-18 s	SCREW, PRECISION +P 2X2 (for CROSS FILTER and 5600K FILTER only.) *1
	9-980-078-01 o	SCREW (113M) *1

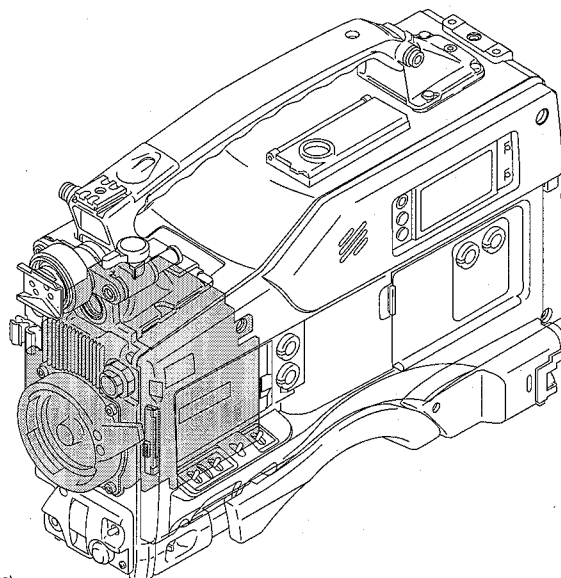


*1 See HDW-F900 Maintenance Manual Part 2 Volume 1, Section 3-6-2, for details.

Screws/Washer


Part No.	SP Description
7-621-773-86 s	SCREW +B2.6X4
7-623-420-07 s	WASHER LW2 (TYPE B)
7-627-452-38 s	SCREW, PRECISION +K 2X5
7-627-553-67 s	SCREW, PRECISION +P2X5
7-628-253-90 s	SCREW +PS 2.6X4
7-682-246-04 s	SCREW +K 3X5

S Side Reel Chassis

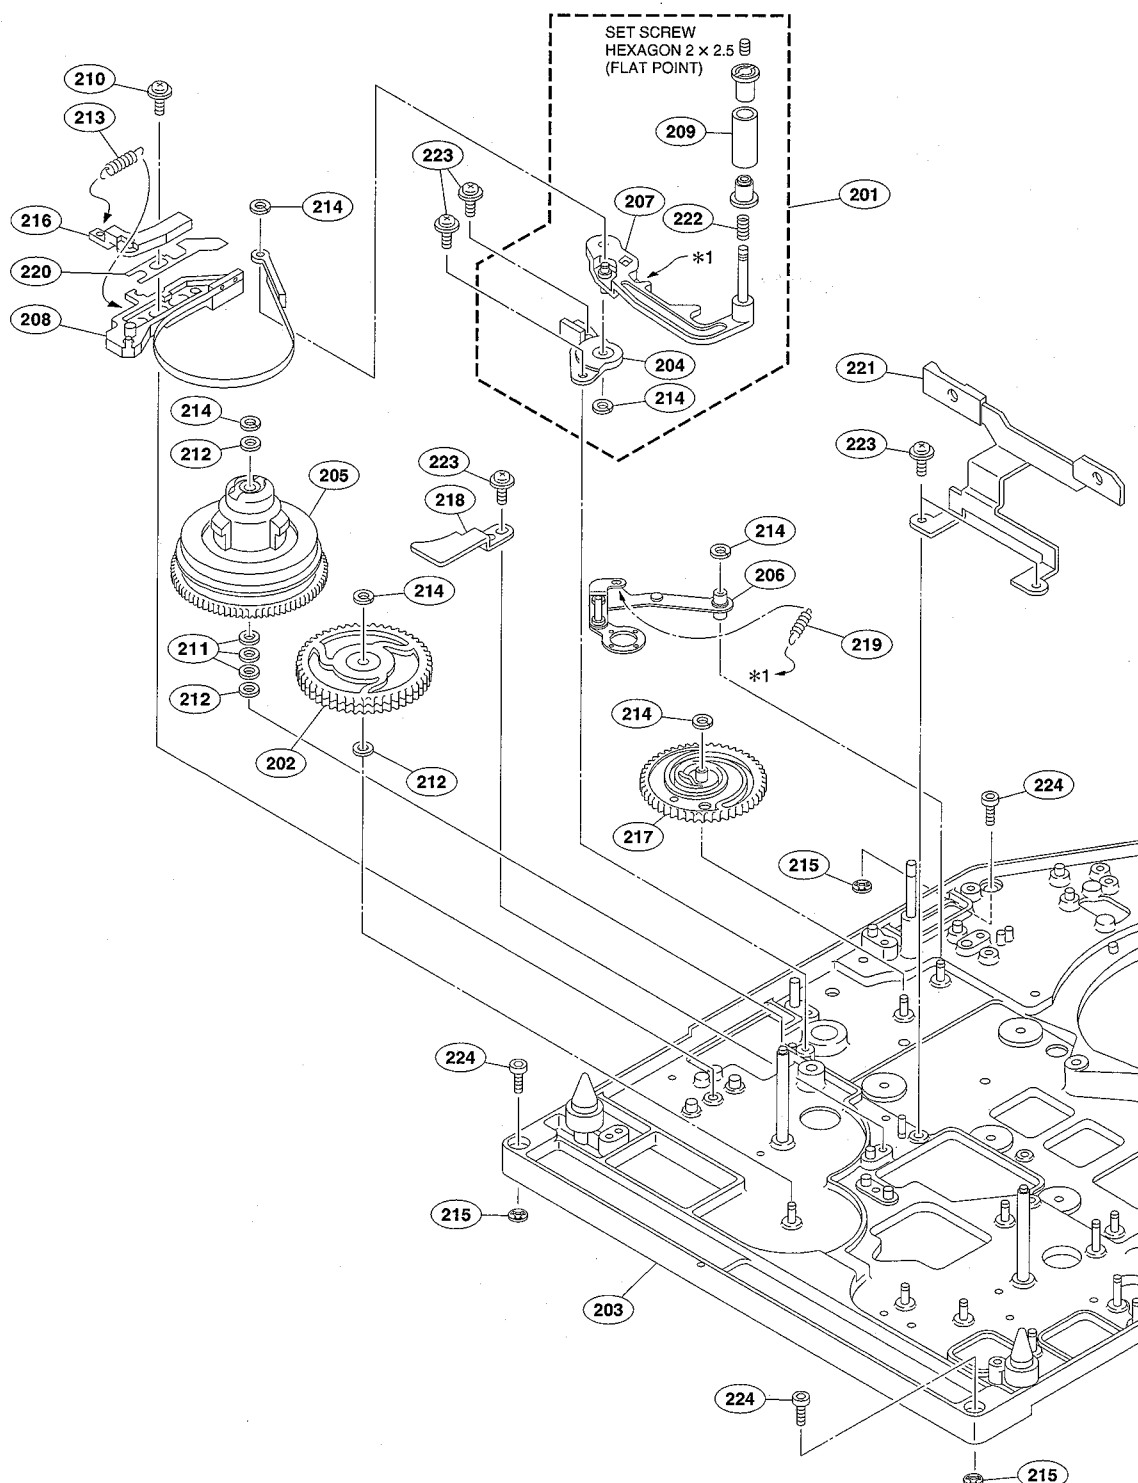

S Side Reel Chassis


No.	Part No.	SP Description
201	A-8278-036-K	s TENSION REGULATOR ASSY
202	A-8278-249-D	s IDLER ASSY, S
203	X-3605-880-1	o CHASSIS ASSY, MECHA
204	X-3678-090-2	o HOLDER ASSY, BEARING
205	X-3608-546-1	s TABLE ASSY, S REEL
206	X-3678-109-2	o ARM ASSY, DRAWER
207	X-3678-111-4	o ARM ASSY, TENSION REGULATOR
208	X-3678-114-2	s BAND ASSY, TENSION REGULATOR
209	X-3678-156-2	s ROLLER (T) ASSY
210	2-640-315-01	o SCREW (M2X5), SMALL (STEEL)
211	3-303-961-01	s WASHER, POLY
212	3-303-961-11	s WASHER, POLY
213	3-491-360-00	s SPRING (STEEL)
214	3-559-408-11	s WASHER, POLYETHYLENE, DIA.1.2
215	3-669-465-01	s WASHER (1.5), STOPPER (PA)
216	3-679-765-01	s BRAKE, S SOFT
217	3-679-777-04	o GEAR, ARM, DRAWER
218	3-680-267-01	o BLACKET BAND
219	3-682-246-02	s SPRING, EXTENSION
220	3-682-247-01	o RETAINER, BASE
221	3-697-128-02	o GUIDE PROTECTOR, CASSETTE (POM)
222	3-729-011-01	s SPRING, COMPRESSION (COIL) (ST)
223	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
224	3-729-084-41	s BOLT (M2X8), HEXAGON HOLE

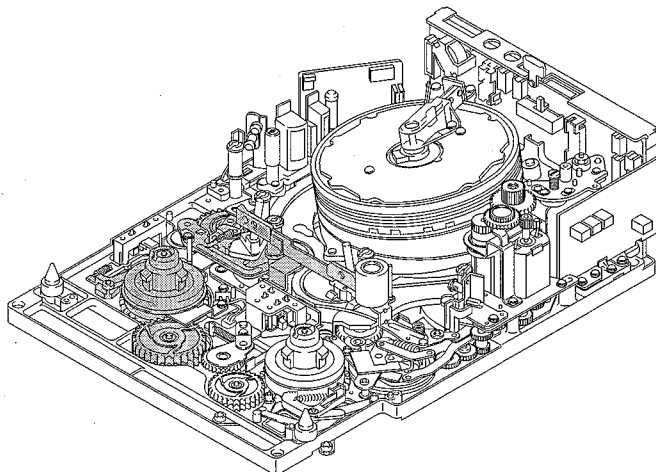

Screw


Part No.	SP Description
7-621-731-08	s SET-SCREW, HEX 2X2.5 (FLAT)

Threading Gear

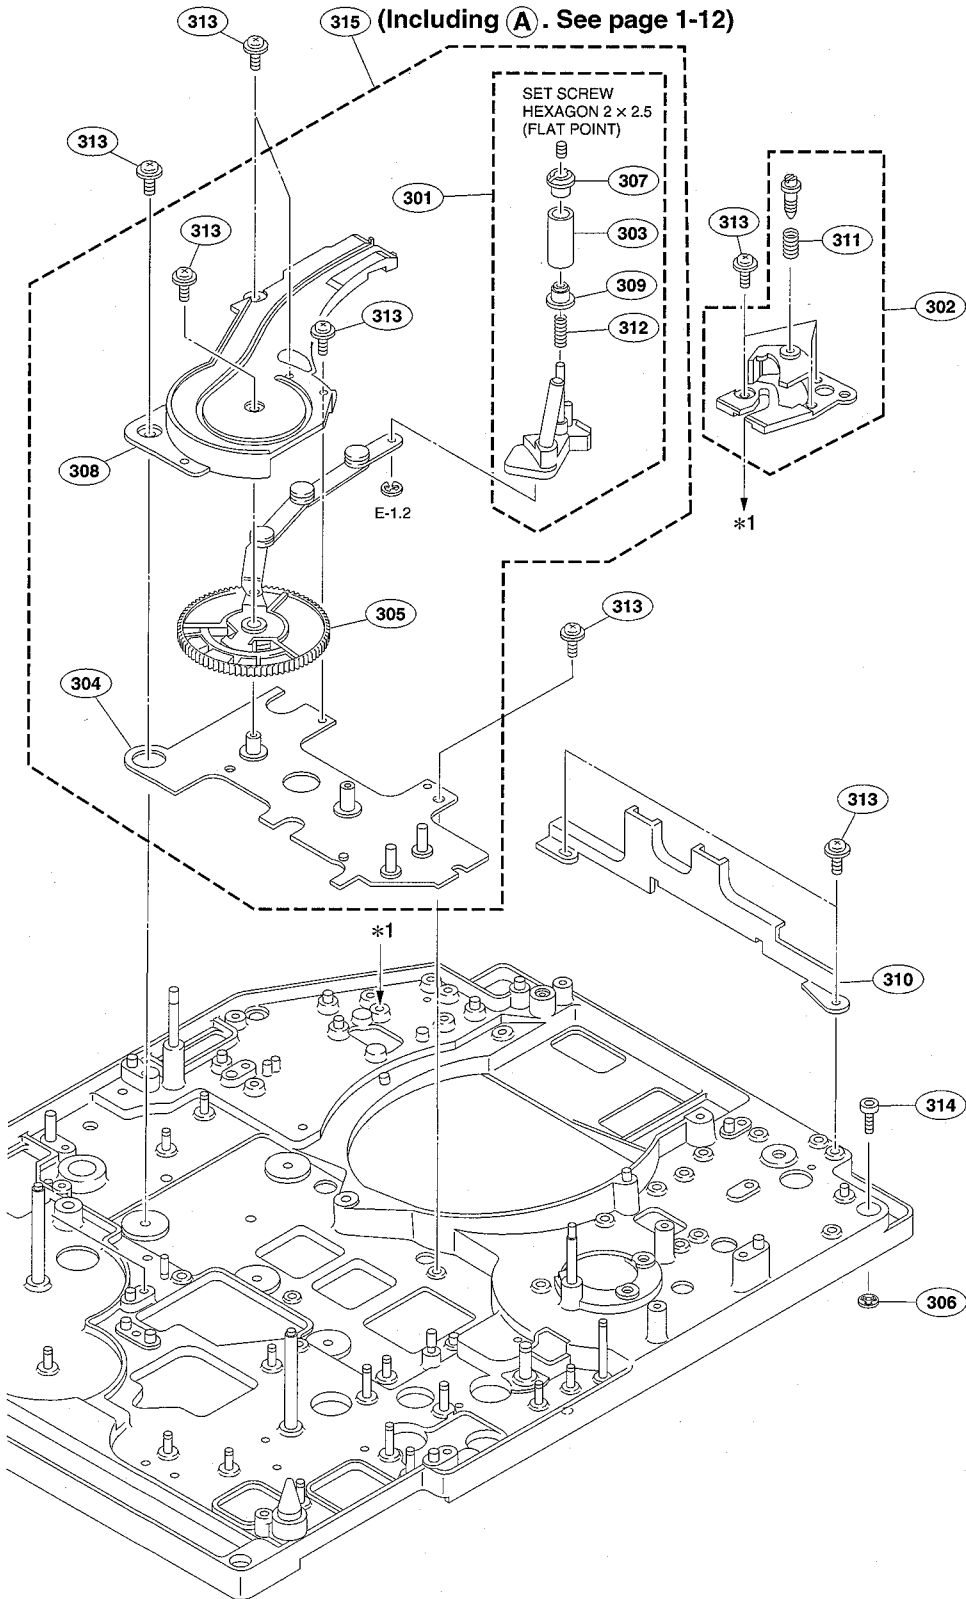

Threading Gear


No.	Part No.	SP Description
301	A-8278-030-K	s SLIDER ASSY, S
302	A-8278-032-D	o CATCHER S ASSY
303	X-3678-091-3	s COLLER ASSY
304	X-3678-119-2	o BASE ASSY, GEAR, THREADING
305	X-3678-123-6	s GEAR ASSY, THREADING S
306	3-669-465-01	s WASHER (1.5), STOPPER (PA)
307	3-679-729-03	s FLANGE, UPPER
308	3-679-739-03	o RAIL, S (POM)
309	3-680-230-01	s FLANGE, LOWER
310	3-680-240-03	o HOLDER HN
311	3-716-167-01	s SPRING, COMPRESSION (COIL) (ST)
312	3-729-011-01	s SPRING, COMPRESSION (COIL) (ST)
313	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
314	3-729-084-41	s BOLT (M2X8), HEXAGON HOLE
315	A-8327-714-A	s LINK ASSY (RP), THREADING

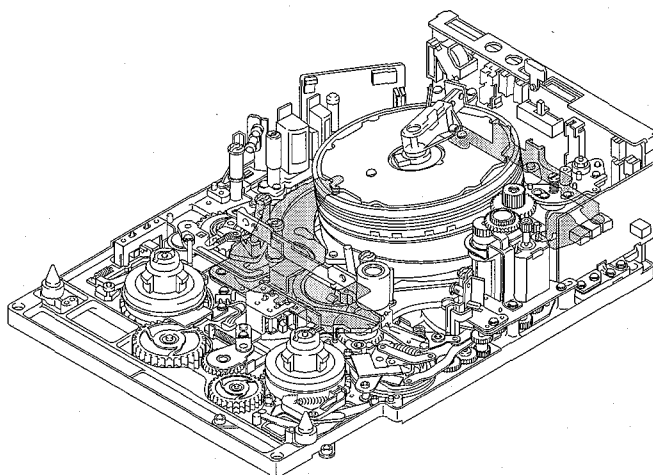

Screw/Washer


Part No.	SP Description
7-621-731-08	s SET-SCREW, HEX 2X2.5 (FLAT)
7-624-101-04	s E RING (1.2)

Gear Assy

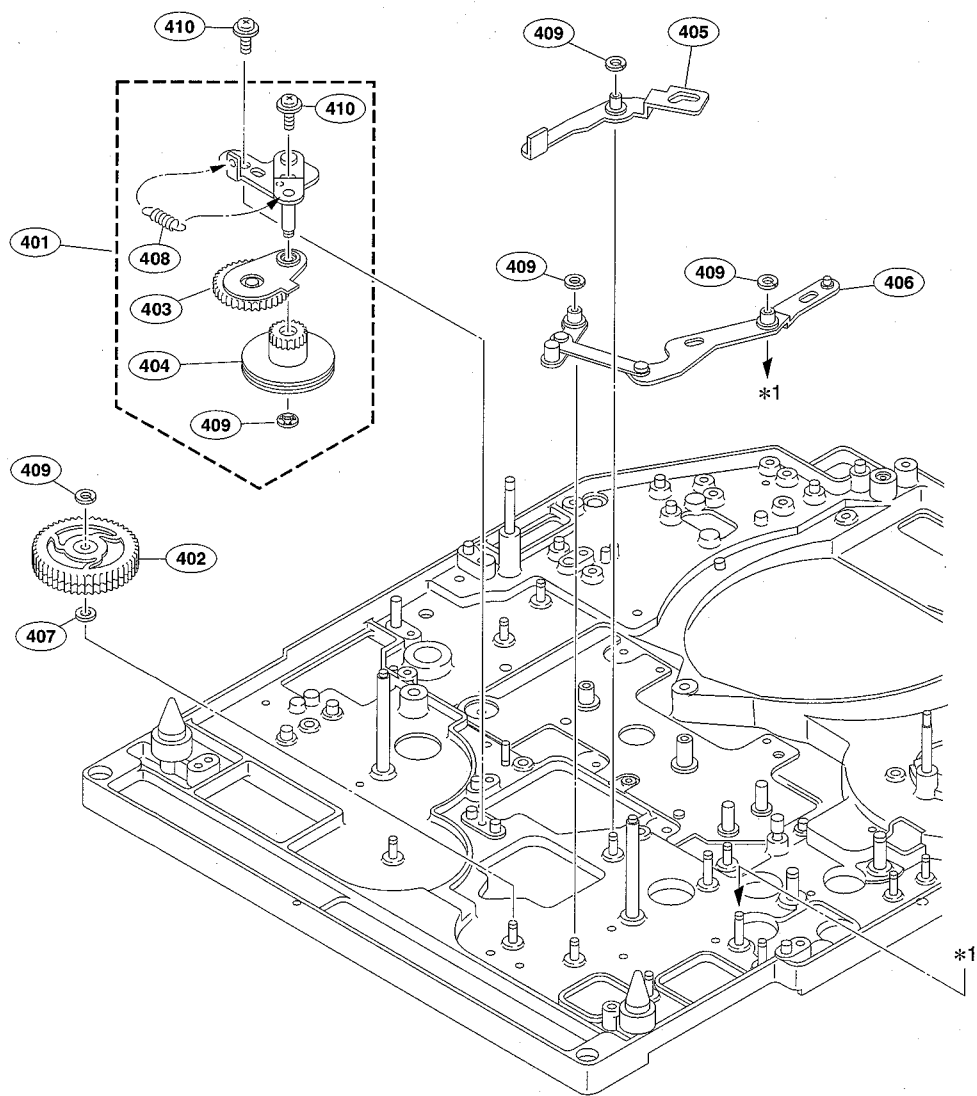


Gear Assy

No.	Part No.	SP Description
401	A-8278-034-G	s GEAR ASSY
402	A-8278-352-B	s IDLER ASSY, T
403	X-3678-065-2	s GEAR ASSY
404	X-3678-066-2	s PULLEY ASSY, RELAY
405	X-3678-099-2	o LEVER ASSY, RELEASE
406	X-3678-108-2	o LEVER ASSY, RELEASE, BRAKE
407	3-303-961-11	s WASHER, POLY
408	3-542-649-00	s SPRING, TENSION
409	3-559-408-11	s WASHER, POLYETHYLENE, DIA.1.2
410	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)

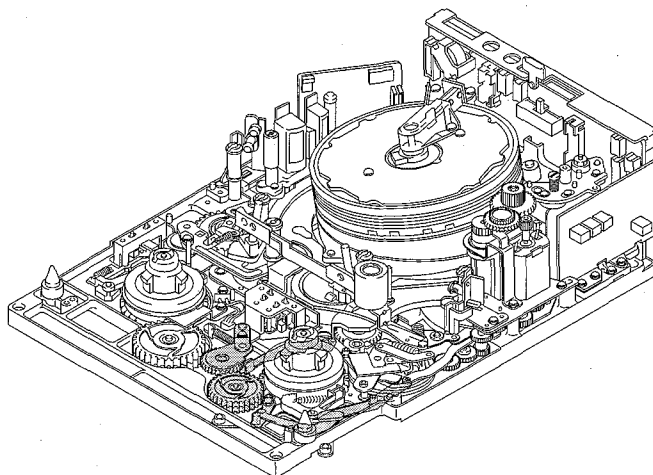


T Side Reel Chassis

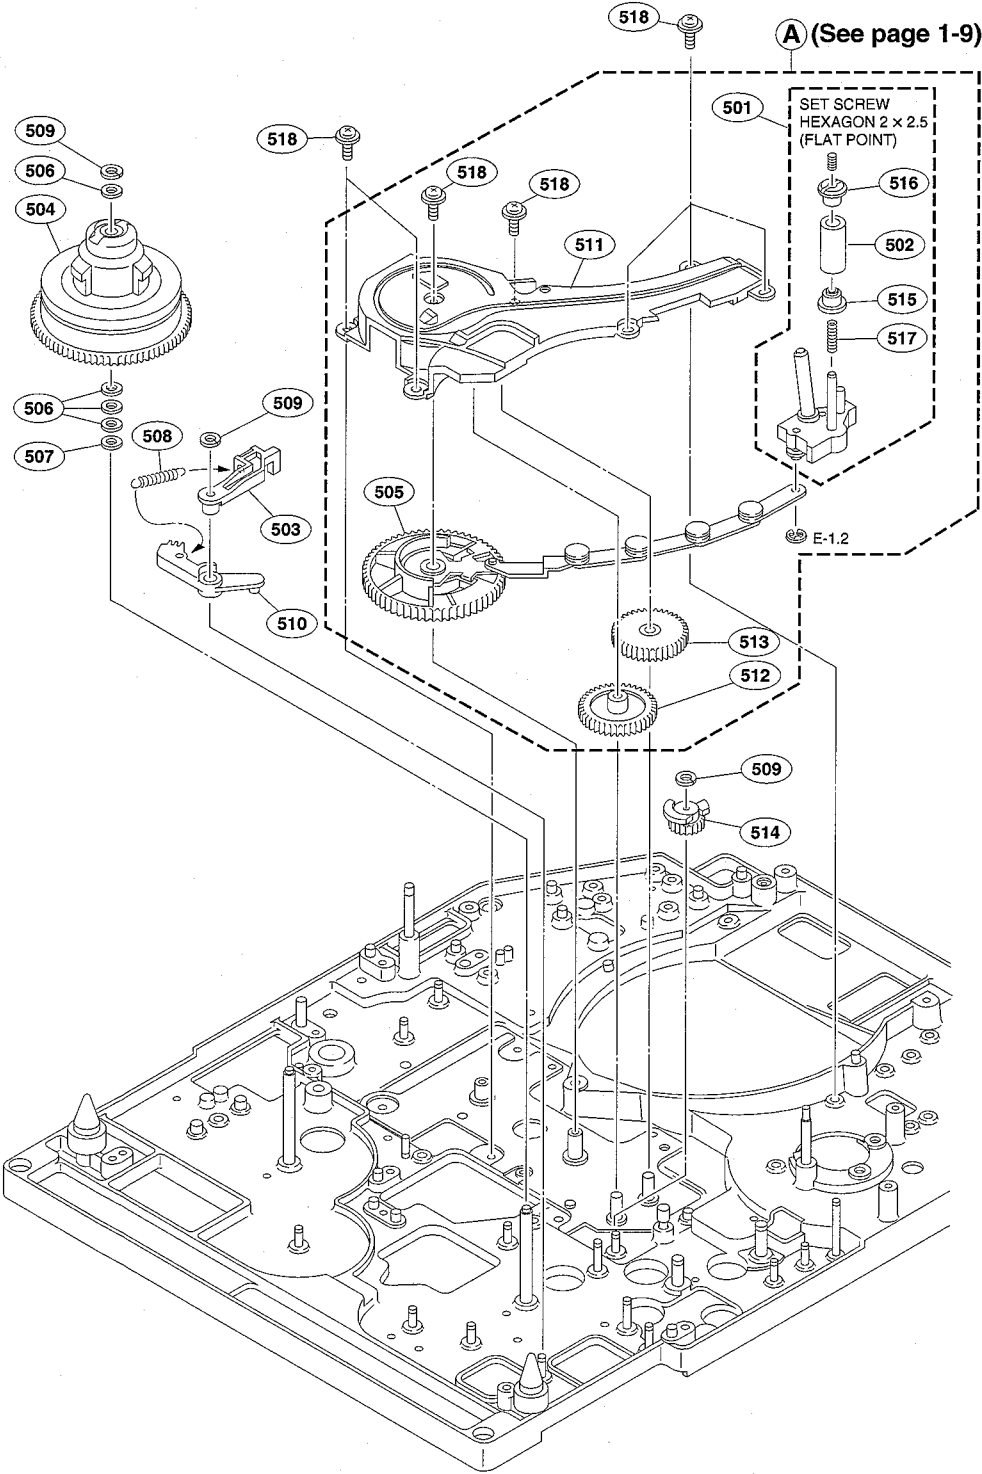

T Side Reel Chassis


No.	Part No.	SP Description
501	A-8278-031-J	s SLIDER ASSY, T
502	X-3678-091-3	s COLLER ASSY
503	X-3678-096-4	s BRAKE ASSY, T SOFT
504	X-3678-547-1	s TABLE ASSY, T REEL
505	X-3678-122-9	s GEAR ASSY, THREADING T
506	3-303-961-01	s WASHER, POLY
507	3-303-961-11	s WASHER, POLY
508	3-424-031-00	s SPRING, REC SLIDER
509	3-559-408-11	s WASHER, POLYETHYLENE, DIA.1.2
510	3-679-719-01	s BRAKE, MAIN
511	3-679-740-05	o RAIL, T
512	3-679-764-01	o GEAR, MIDWAY, ST DRIVING (POM)
513	3-679-779-04	o GEAR, ST DRIVING
514	3-679-780-01	o GEAR, INTERMITTENT
515	3-682-273-01	s FLANGE, LOWER, T2
516	3-682-274-01	s FLANGE, UPPER, T2
517	3-729-011-01	s SPRING, COMPRESSION (COIL) (ST)
518	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)

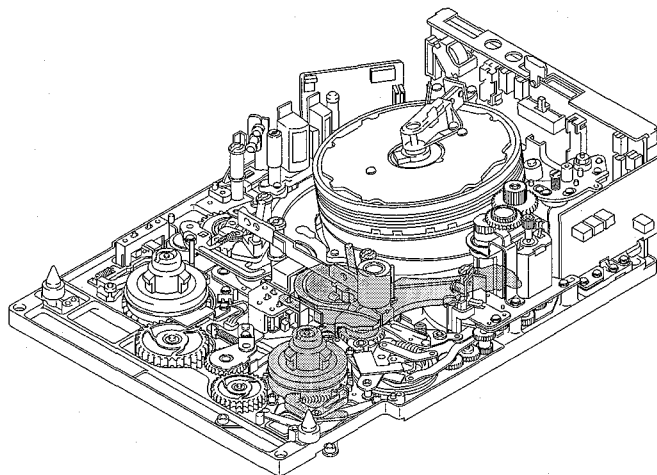

Screw/Washer


Part No.	SP Description
7-621-731-08	s SET-SCREW, HEX 2X2.5 (FLAT)
7-624-101-04	s E RING (1.2)

Cam Gear and Pinch Press Mechanism

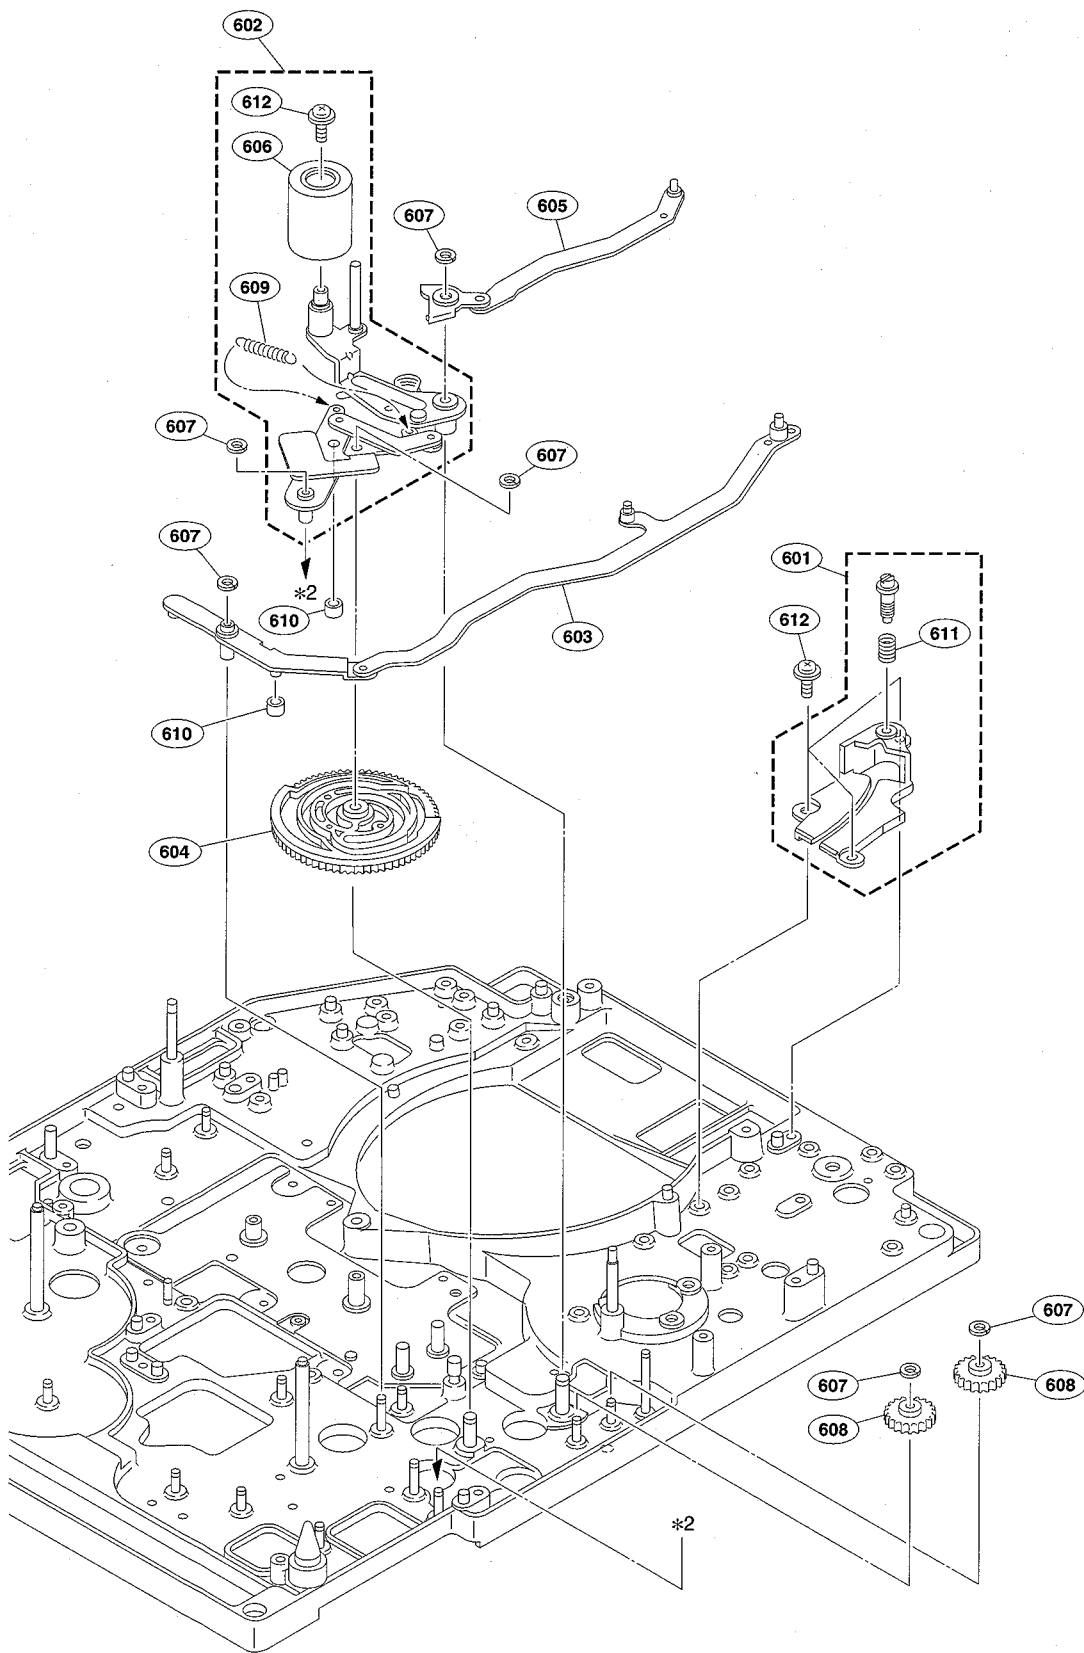


Cam Gear and Pinch Press Mechanism

No.	Part No.	SP Description
601	A-8278-033-D	o CATCHER T ASSY
602	A-8278-048-F	s PINCH ASSY
603	X-3678-110-4	o LINK ASSY, CUE
604	X-3678-113-3	s GEAR ASSY, CAM
605	X-3678-136-2	s LINK ASSY, STOPPER
606	X-3678-926-1	s PINCH ROLLER ASSY
607	3-559-408-11	s WASHER, POLYETHYLENE, DIA.1.2
608	3-679-763-01	o GEAR, MIDWAY
609	3-680-286-02	s SPRING, EXTENSION
610	3-683-340-01	o ROLLER (A)
611	3-716-167-01	s SPRING, COMPRESSION (COIL) (ST)
612	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)

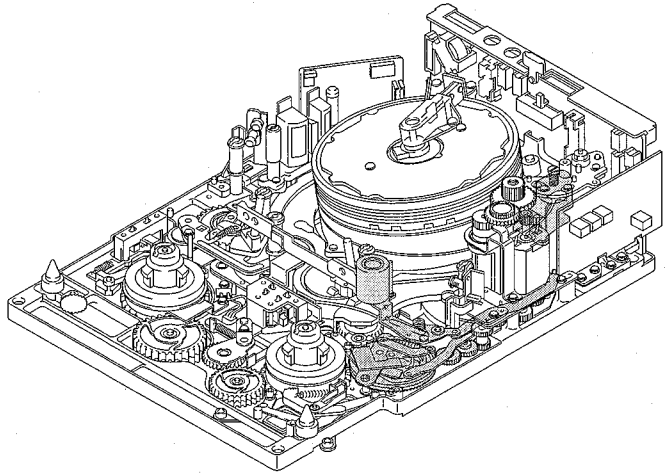

Drum

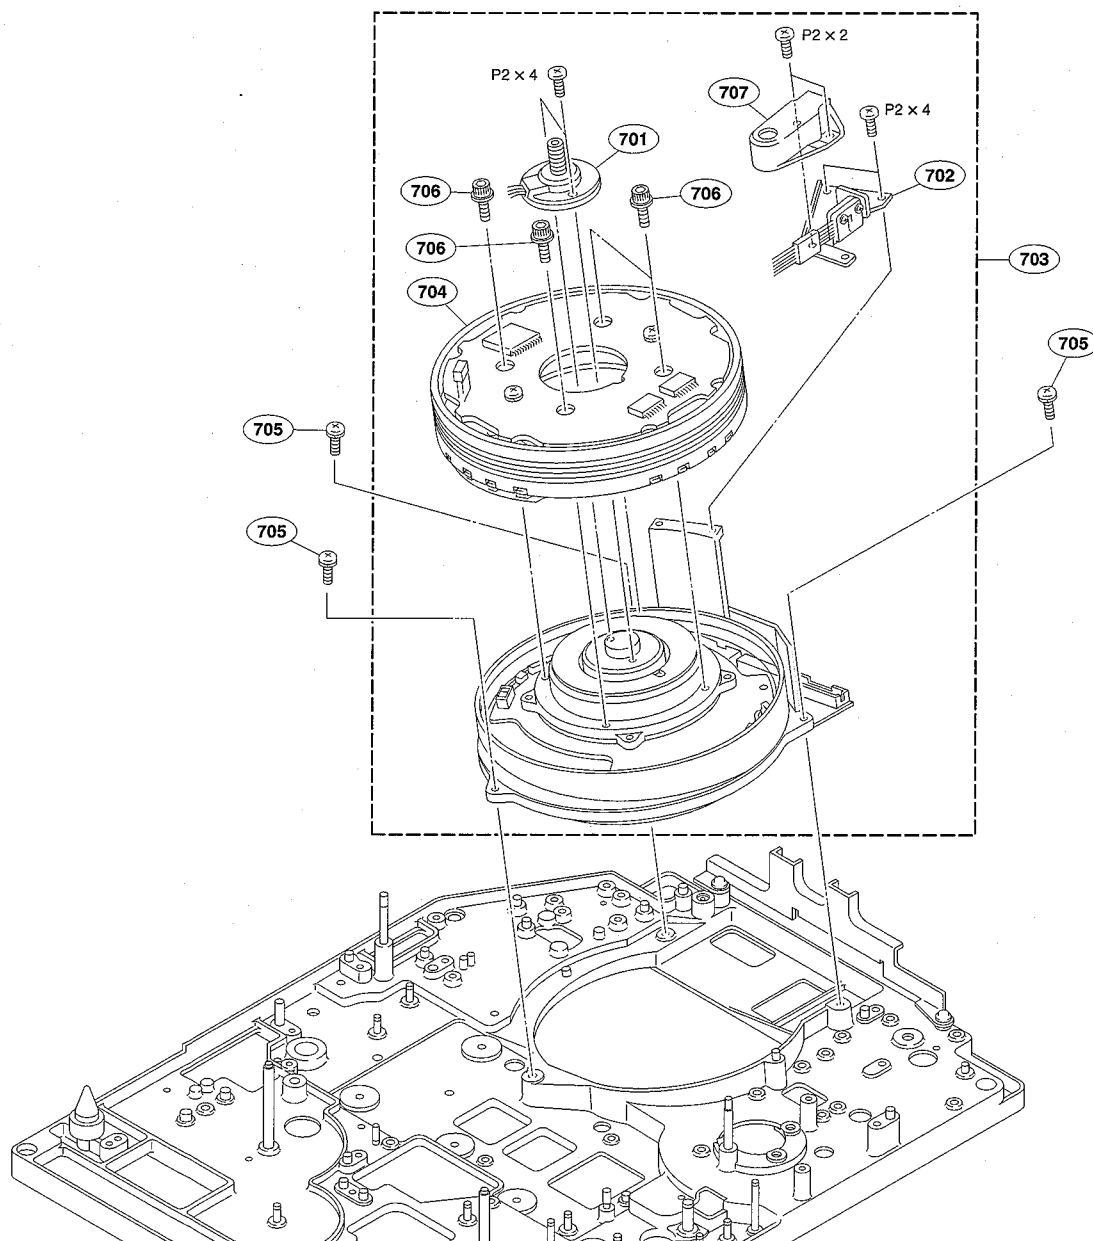


Drum


No.	Part No.	SP Description
701	A-8263-855-A	s RING ASSY (RP) SLIP
702	A-8263-856-A	s BRUSH ASSY (RP)
703	A-8316-736-C	s DRUM ASSY, DHH-04A-R
704	A-8316-738-B	s UPPER DRUM ASSY, DHR-04-R
705	2-640-315-01	o SCREW (M2X5), SMALL (STEEL)
706	3-185-531-01	s BOLT M2X8, W HEXAGON
707	3-185-532-01	o COVER, BRUSH

Screws

Part No.	SP Description
7-621-255-22	s SCREW +P 2X4
7-627-553-18	s SCREW, PRECISION +P2X2

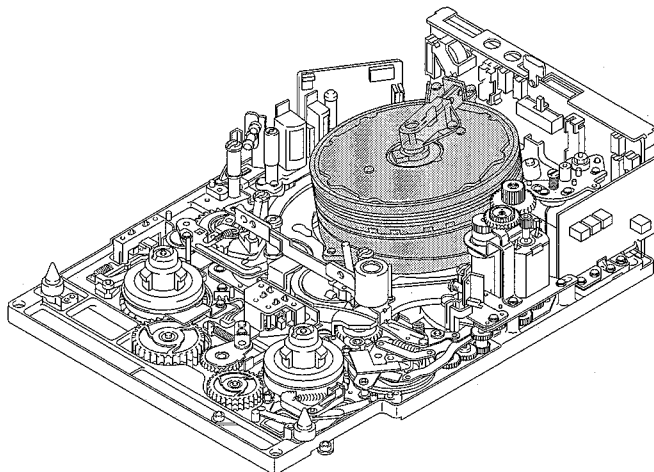


CTL/FE Heads Block

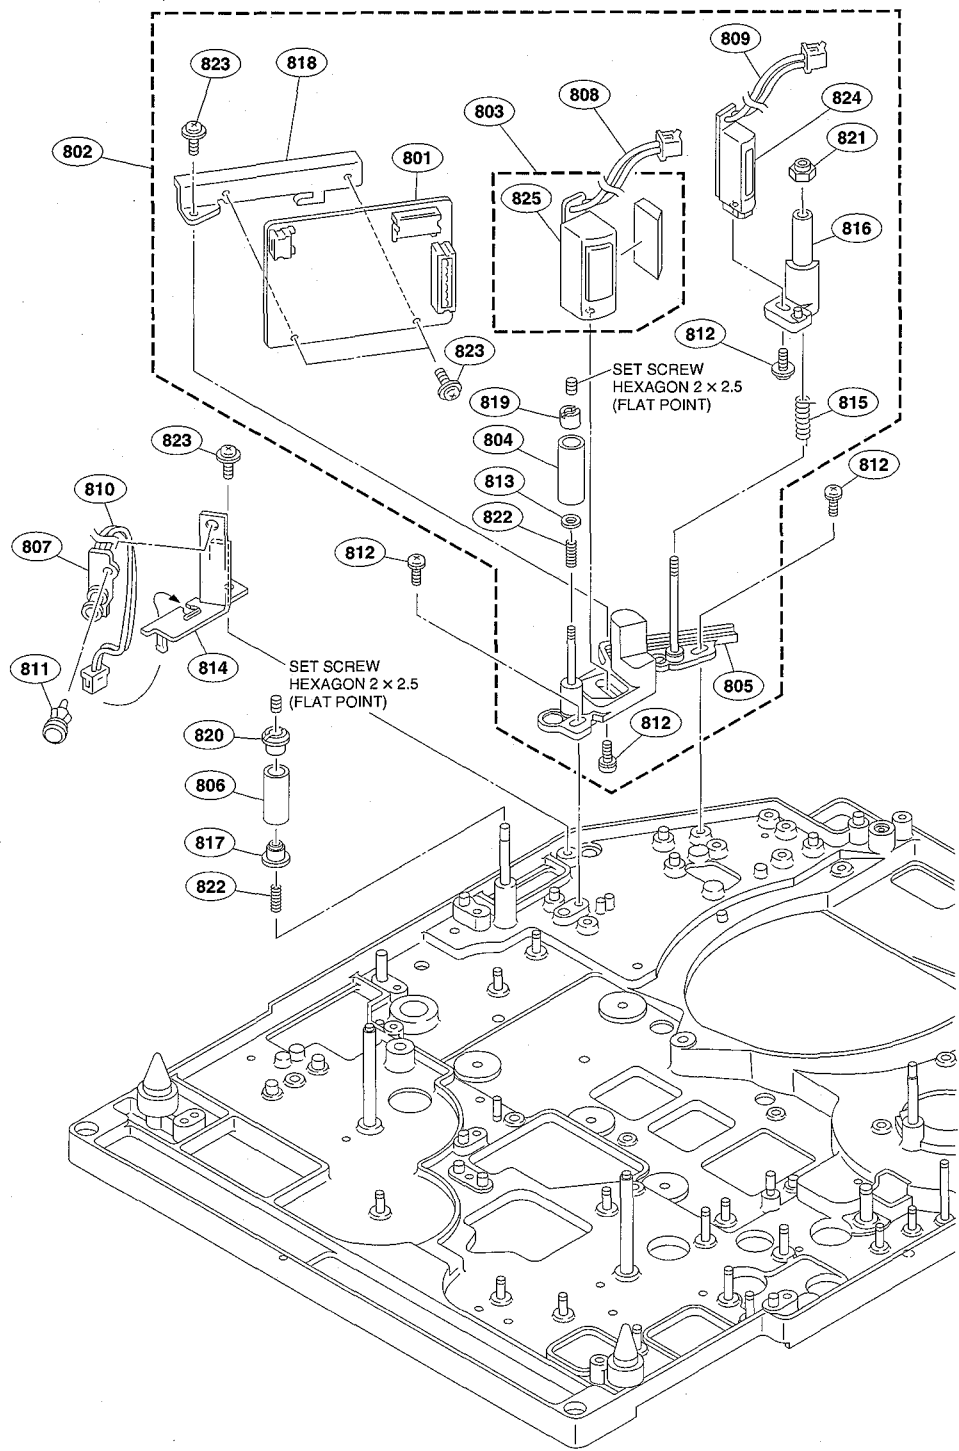

CTL/FE Heads Block

*a: Serial No. 10031 -


No.	Part No.	SP Description
801	A-8263-156-A	o MOUNTED CIRCUIT BOARD, CTL-10
802	A-8263-200-J	o HEAD ASSY, ENTRANCE
803	X-3605-885-1	s HEAD ASSY, (FE291-21A)
804	X-3678-068-2	s ROLLER ASSY, RESIN
805	X-3678-118-3	o BASE ASSY, CTL FE
806	X-3678-129-2	s ROLLER (2) ASSY, RESIN
807	1-543-316-21	s HEAD, SENSING (SMALL TYPE)
808	1-953-411-11	o HARNESS, SUB (FE-HEAD)
809	1-953-412-11	o HARNESS, SUB (CTL-HEAD)
810	1-953-414-11	o HARNESS, SUB (END-SE3)
811	2-279-715-01	s RIVET, NYLON
812	2-640-315-01	o SCREW (M2X5), SMALL (STEEL)
813	3-557-565-00	s WASHER (1.4 DIA) (STEEL)
814	3-679-790-02	o HOLDER, END SENSOR
815	3-680-043-02	s SPRING, CTL
816	3-680-044-02	o BRACKET, CTL
817	3-680-230-01	s FLANGE, LOWER
818	3-680-231-02	o HOLDER, PB
819	3-681-768-01	o NUT, S3
820	3-683-026-01	s FLANGE, UPPER
821	3-698-829-01	s NUT, NYLON
822	3-729-011-01	s SPRING, COMPRESSION (COIL) (ST)
823	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
824	8-825-779-72	s CTL HEAD, PS244-21D
825	*a 8-825-772-63	s HEAD, ERASE (EF291-21A)

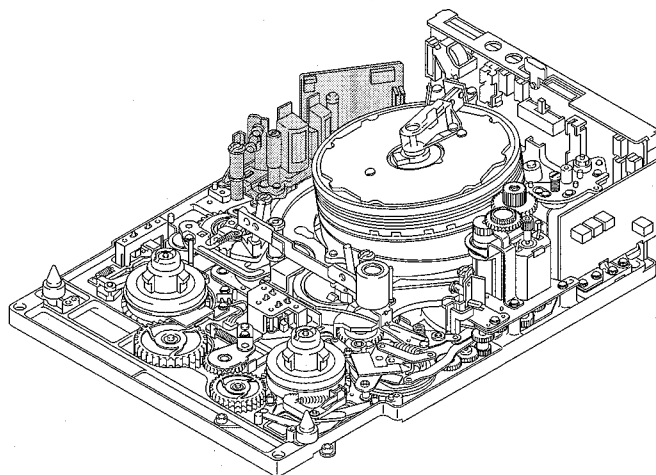

Screw


Part No.	SP Description
7-621-731-08	s SET-SCREW, HEX 2X2.5 (FLAT)

CUE Head Block

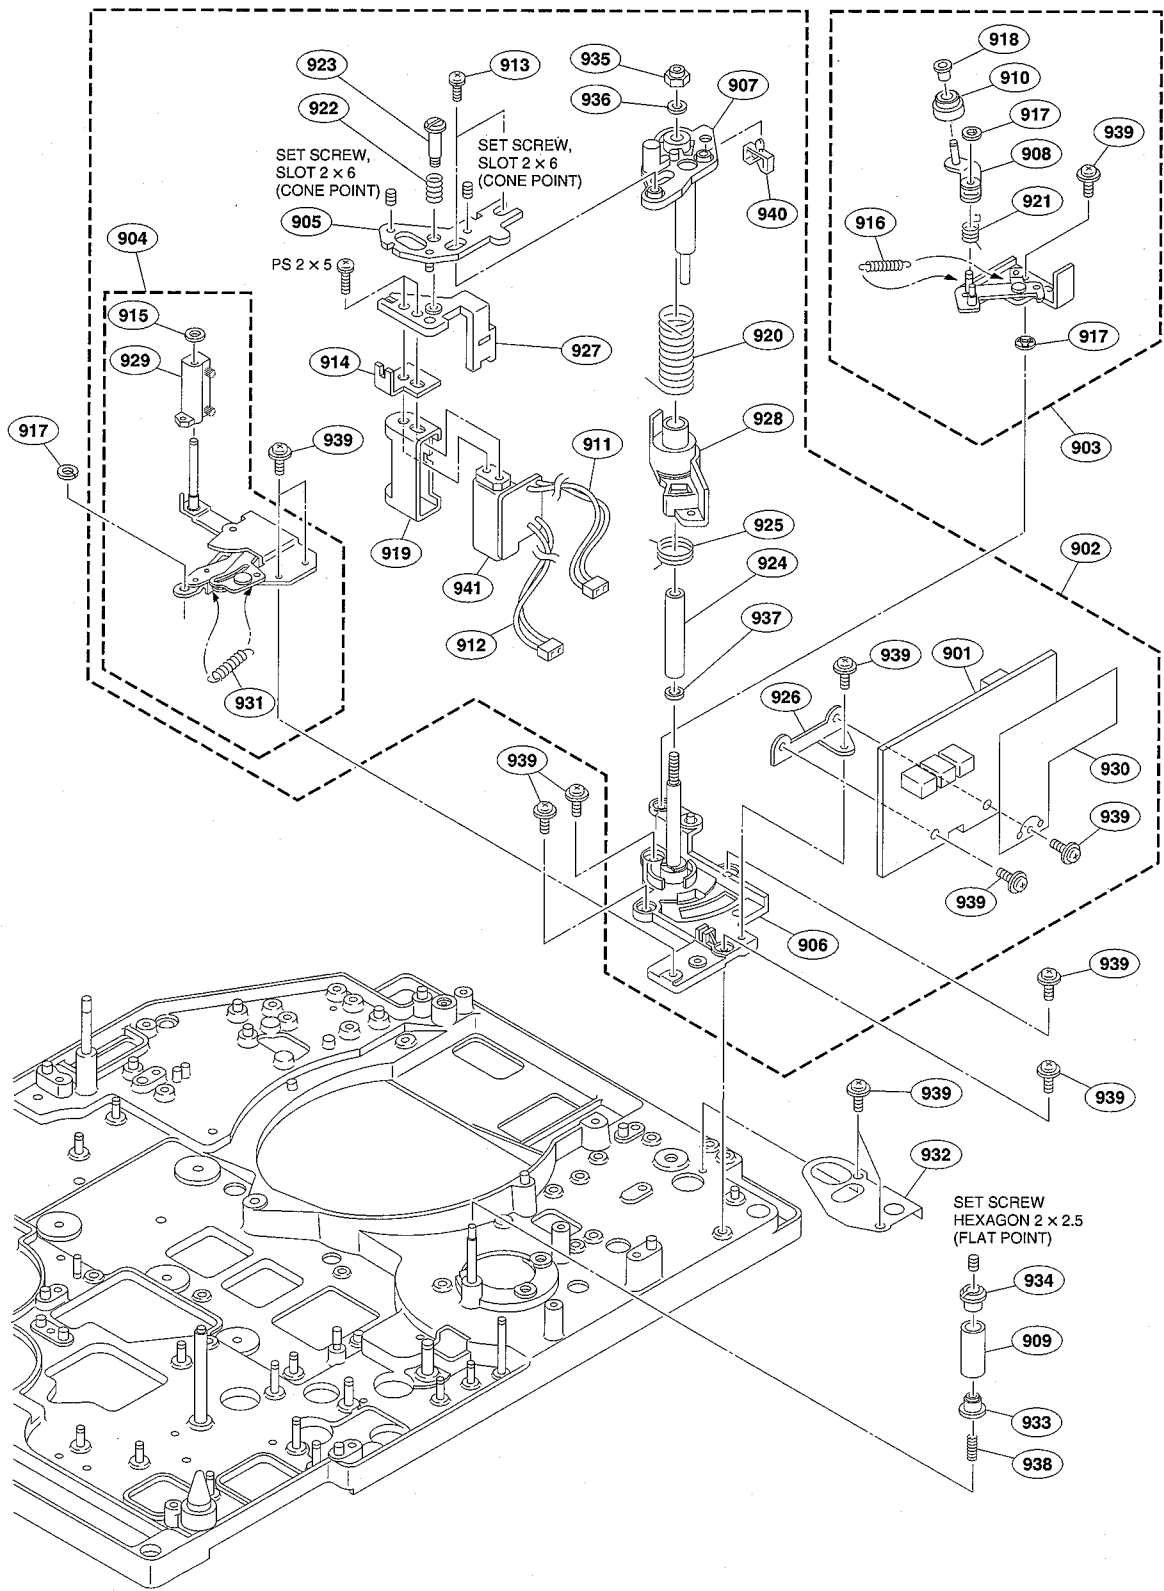

CUE Head Block


No.	Part No.	SP Description
901	A-8263-157-A	o MOUNTED CIRCUIT BOARD, CUE-2
902	A-8263-201-B	o HEAD ASSY, CUE
903	A-8278-044-J	s CLEANER ASSY, VH
904	A-8278-052-E	o CLEANER ASSY, CUE
905	X-3678-094-2	o PLATE ASSY, CUE HEAD
906	X-3678-095-2	o PLATE ASSY, BASE CUE/TC
907	X-3678-112-2	o PLATE ASSY, CUE/TC ADJUSTMENT
908	X-3678-116-3	o ARM ASSY, CL
909	X-3678-156-2	s ROLLER (T) ASSY
910	X-3949-109-1	s ROLLER ASSY, AHC
911	1-953-413-11	o HARNESS, SUB (CUE HEAD-CUE2)
912	1-953-417-11	o HARNESS, SUB (TC HEAD-HN12)
913	2-640-315-01	o SCREW (M2X5), SMALL (STEEL)
914	3-171-570-01	o PLATE (R), ADJUSTMENT
915	3-321-393-01	s WASHER (PLA)
916	3-337-020-01	s SPRING, TENSION (COIL) (STEEL)
917	3-559-408-11	s WASHER, POLYETHYLENE, DIA.1.2
918	3-615-320-01	s CAP, CR
919	3-679-788-01	o CASE, SHIELD
920	3-680-005-01	o SPRING, CUE/TC
921	3-680-009-02	o SPRING, TORSION
922	3-680-222-01	s SPRING, COMPRESSION
923	3-680-223-01	s SHAFT
924	3-680-225-01	o SLEEVE, SHAFT, MAIN, CUE/TC
925	3-680-233-01	o SPRING, RTN
926	3-680-234-01	o HOLDER, PB
927	3-680-259-01	o BRACKET, CUE/TC
928	3-680-262-02	o PLATE, SWING, CUE/TC
929	3-681-778-02	s BRUSH, CUE
930	3-682-275-02	o SEET, INSULATING
931	3-682-787-01	s SPRING, EXTENSION
932	3-683-342-01	o PROTECTOR
933	3-686-173-01	s FLANGE, UNDER (T3)
934	3-686-174-01	s FLANGE, UPPER (T3)
935	3-698-829-01	s NUT, NYLON
936	3-701-437-11	s WASHER PLASTIC (2.1X4X0.25)
937	3-701-439-11	s WASHER PLASTIC (3.1X0.25)
938	3-729-011-01	s SPRING, COMPRESSION (COIL) (ST)
939	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
940	3-906-254-01	o CLAMP
941	8-825-779-61	s HEAD, AU PS244-2103L

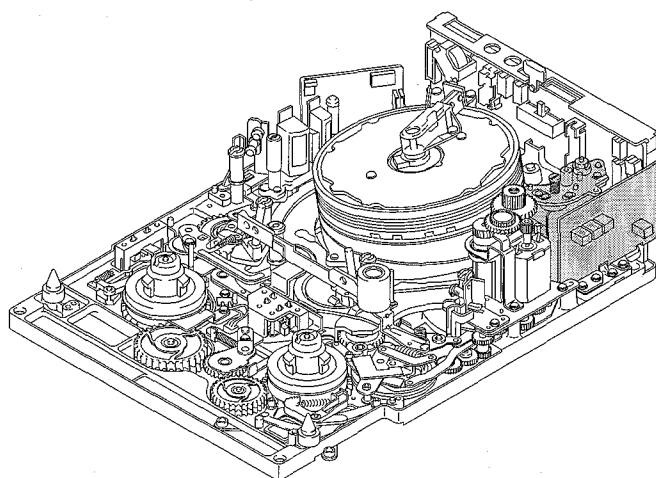

Screws


Part No.	SP Description
7-621-710-55	s SET-SCREW, SLOT 2X6
7-621-731-08	s SET-SCREW, HEX 2X2.5 (FLAT)
7-628-253-15	s SCREW +PS 2X5

Loading Gear and Manual Eject

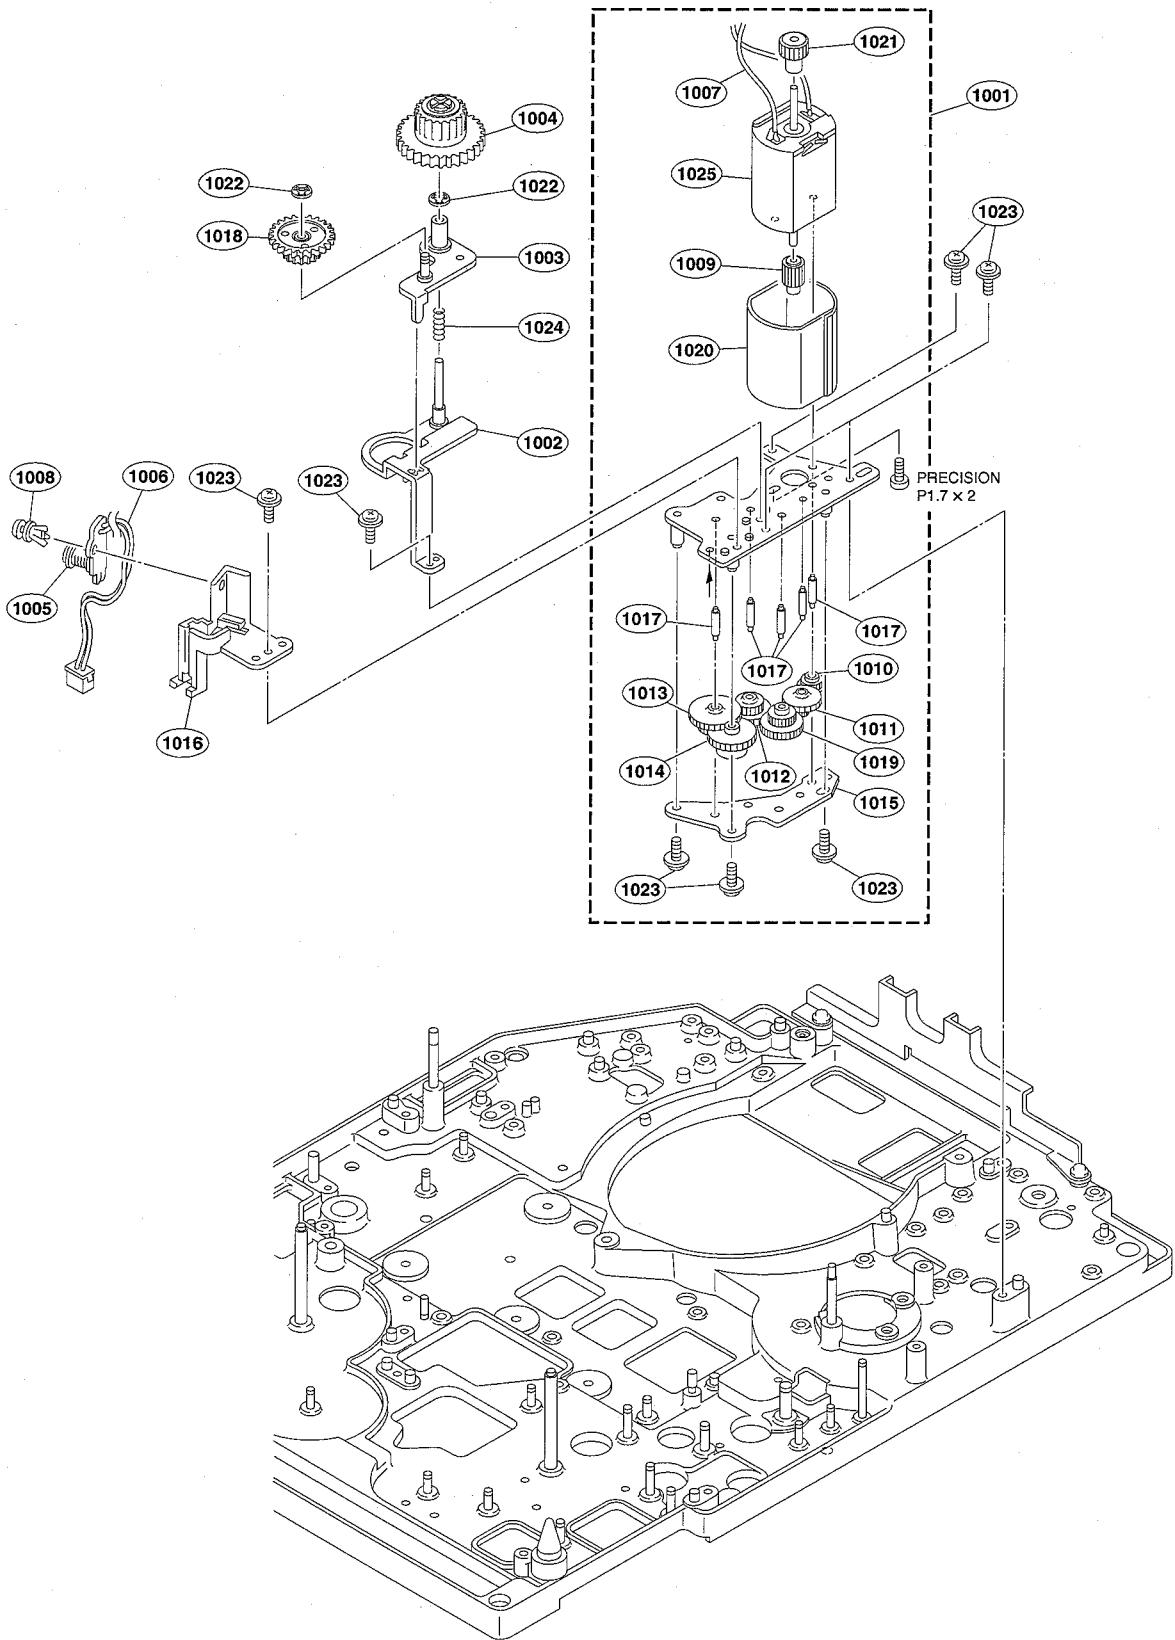

Loading Gear and Manual Eject


No.	Part No.	SP Description
1001	A-8278-035-D	s GEAR BLOCK ASSY
1002	X-3678-115-4	o BASE ASSY, MANUAL EJECT
1003	X-3678-120-2	o BASE ASSY, GEAR, IDOL
1004	X-3678-130-2	o GEAR, MANUAL, DRIVING
1005	1-543-316-21	s HEAD, SENSING (SMALL TYPE)
1006	1-953-415-11	o HARNESS, SUB (TOP-SE4)
1007	1-953-416-11	o HARNESS, SUB (TM-CUE3)
1008	2-279-715-01	s RIVET, NYLON
1009	3-679-748-01	s PINION
1010	3-679-749-01	o GEAR (A)
1011	3-679-750-01	o GEAR (B)
1012	3-679-751-01	o GEAR (D)
1013	3-679-752-01	o GEAR (E)
1014	3-679-753-01	o GEAR (F)
1015	3-679-796-01	o PLATE (A), BLOCK, GEAR
1016	3-679-797-02	o HOLDER, TOP SENSOR
1017	3-679-799-01	o SHAFT, GEAR
1018	3-680-059-02	o GEAR, IDOL
1019	3-680-263-01	o GEAR (C)
1020	3-680-914-01	o CASE, SHIELD
1021	3-680-988-01	s PINION B (GEAR) (POM)
1022	3-726-829-01	s WASHER, STOPPER (PLA)
1023	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
1024	4-945-386-01	s SPRING, COMPRESSION (COIL)
1025	8-835-440-01	s MOTOR (DN20-Q7Z1B) DC 10W UNDER

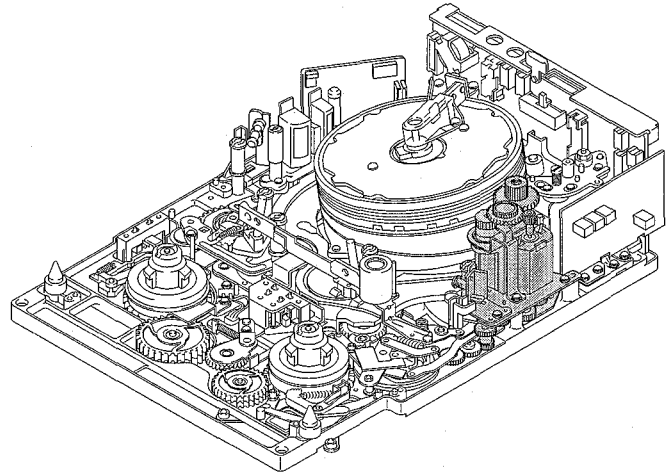


Screw

Part No.	SP Description
7-627-552-28	s SCREW, PRECISION +P1.7X2


HN Board

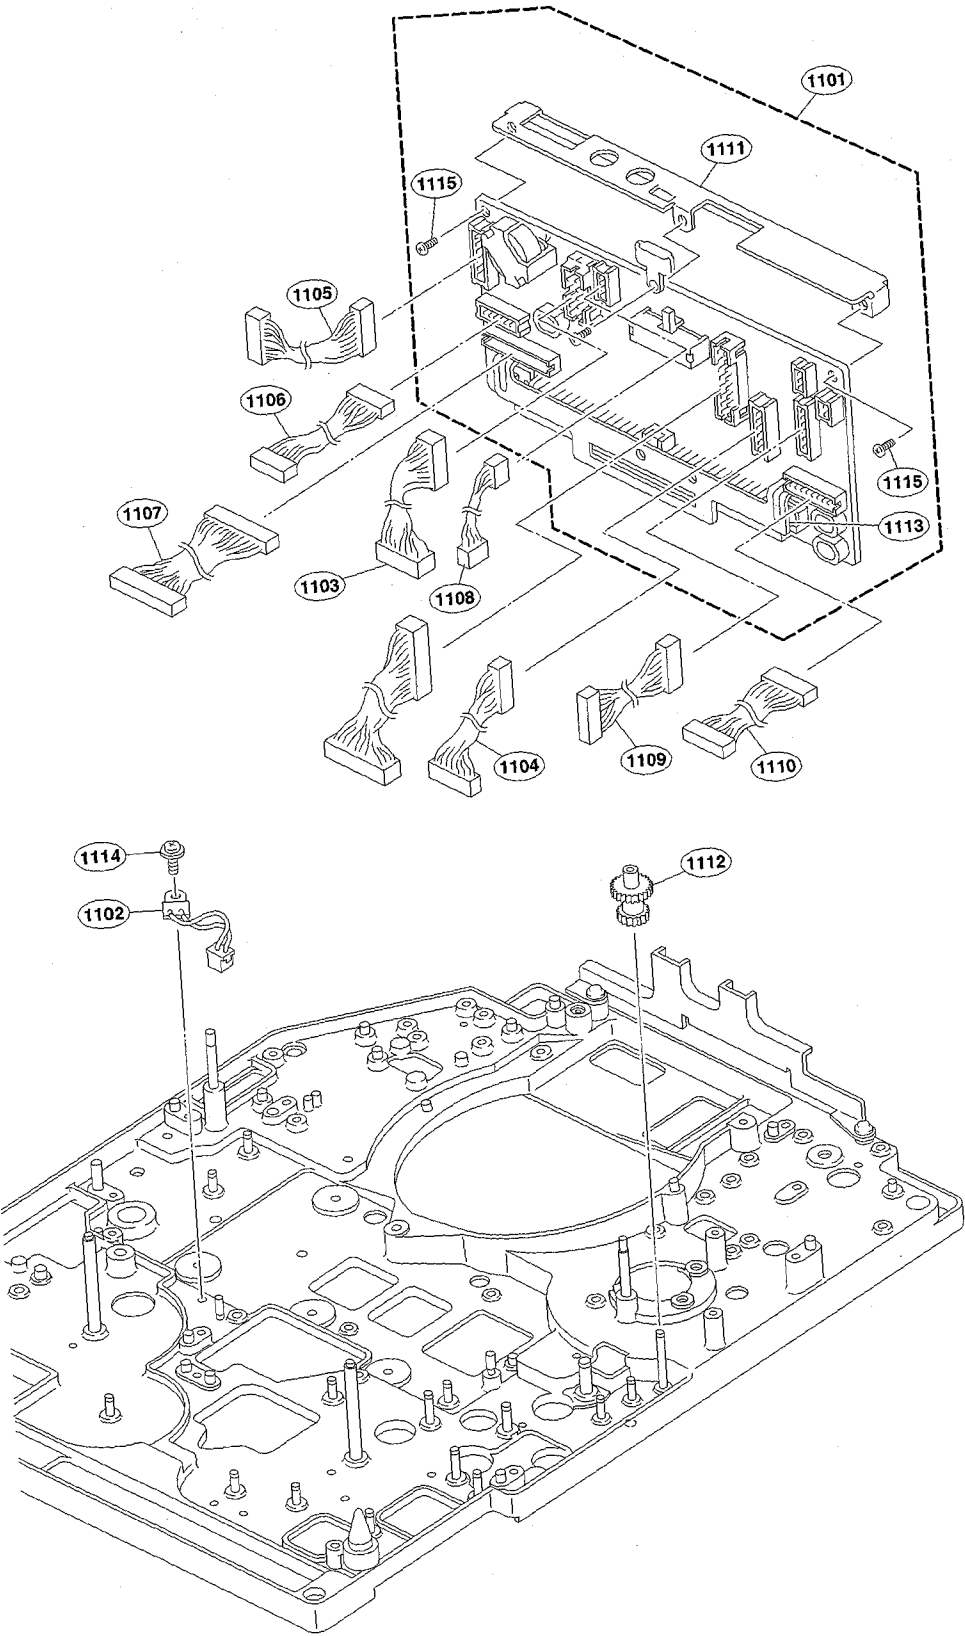

No.	Part No.	SP Description
1101	A-8316-499-A	o MOUNTED CIRCUIT BOARD, HN-243
1102	1-810-599-11	s SENSOR, DEW CONDENSATION
1103	1-953-408-12	o HARNESS, SUB (DR2-HN1)
1104	1-953-420-12	o HARNESS, SUB (DR3-HN10)
1105	1-953-423-11	o HARNESS, SUB (CTL1-HN4)
1106	1-953-424-11	o HARNESS, SUB (SE2-HN5)
1107	1-953-425-11	o HARNESS, SUB (SE1-HN6)
1108	1-953-426-11	o HARNESS, SUB (SR1-HN8)
1109	1-953-427-11	o HARNESS, SUB (CUE1-HN11)
1110	1-953-435-11	o HARNESS, SUB (CAP-HN14)
1111	3-610-599-03	o PLATE (HN-243), ORNAMENTAL
1112	3-679-762-01	o GEAR, JOINT
1113	3-680-489-01	o BRACKET, HN
1114	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
1115	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)

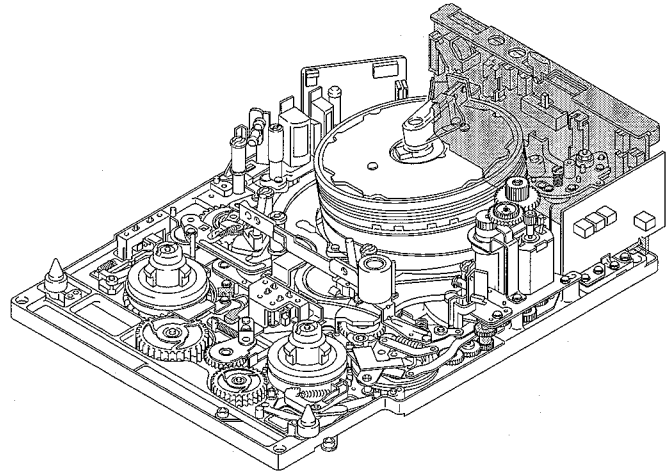


Capstan and SE Board

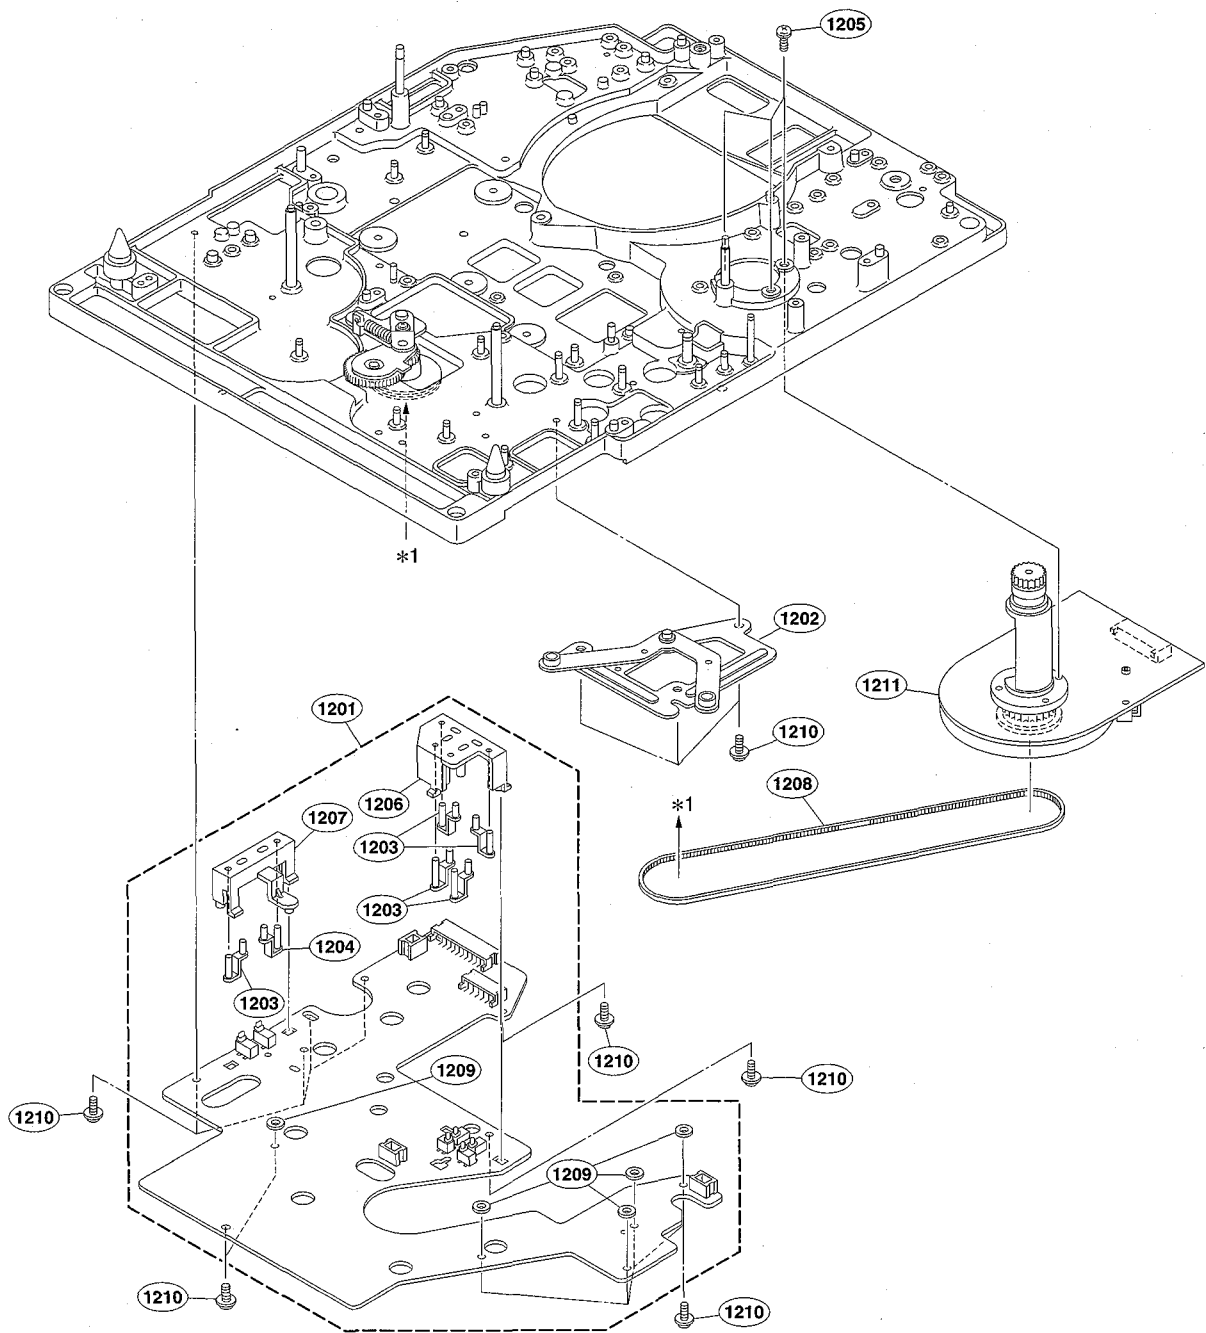


Capstan and SE Board

No.	Part No.	SP Description
1201	A-8310-898-B	o MOUNTED CIRCUIT BOARD, SE-275
1202	X-3678-117-1	o ARM ASSY, JOINT
1203	X-3678-171-1	o PIN ASSY, DETECTION
1204	X-3679-461-1	o PIN ASSY (REC), DETECTION
1205	2-640-315-01	o SCREW (M2X5), SMALL (STEEL)
1206	3-679-714-02	o HOLDER, SENSOR (A)
1207	3-679-715-01	o HOLDER, SENSOR (B)
1208	3-679-723-01	s BELT, TIMING
1209	3-687-087-01	o WASHER
1210	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
1211	8-835-534-01	s MOTOR, DC (SCV-0702A/J-N)

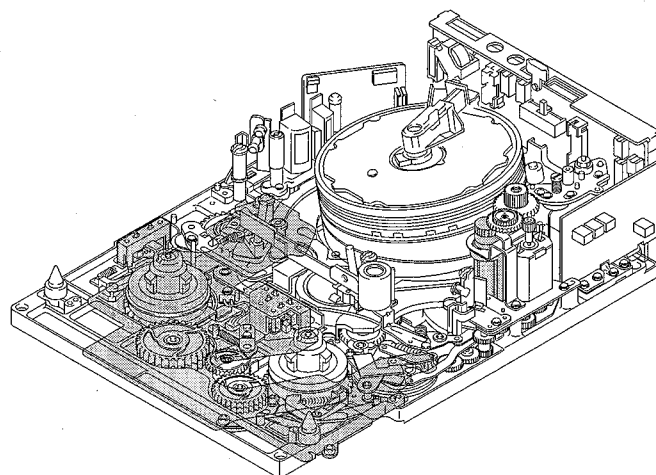


Cassette Compartment

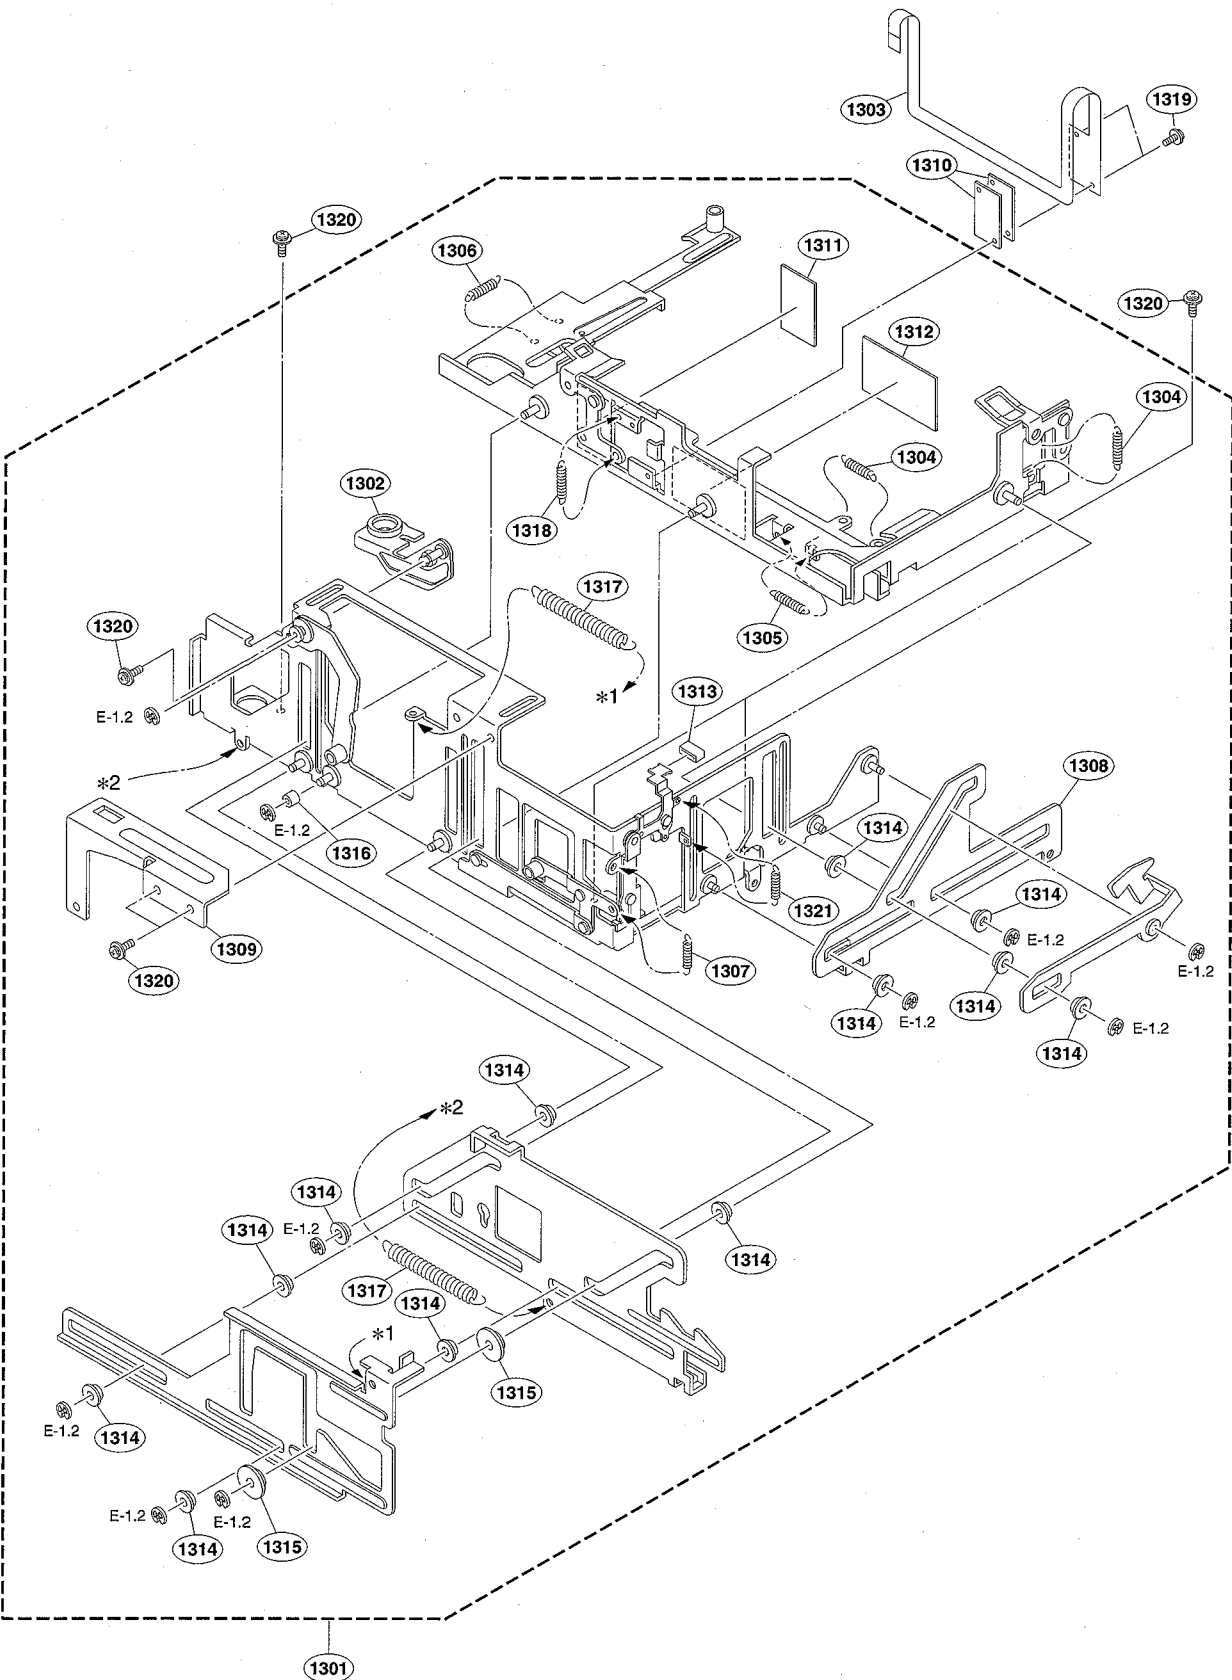

Cassette Compartment


No.	Part No.	SP Description
1301	A-8318-064-L	s CASSETTE COMPARTMENT ASSY (RP)
1302	X-3678-080-5	o ARM (L) ASSY, LID
1303	1-671-386-11	o PRINTED WIRING BOARD, FL-260
1304	3-319-686-01	s SPRING, TENSION (STEEL)
1305	3-329-998-01	s SPRING, TENSION (COIL) (ST)
1306	3-343-503-01	s SPRING, TENSION (STEEL)
1307	3-571-829-00	s SPRING, TENSION
1308	3-612-386-01	o PLATE (A), CAM
1309	3-614-802-06	o PLATE, STOPPER
1310	3-614-804-01	o SHEET, ANTENNA (A)
1311	3-614-805-01	o SHEET, ANTENNA (B)
1312	3-614-806-01	o SHEET, ANTENNA (C)
1313	3-624-199-01	s RUBBER, BRAKE (EPDM)
1314	3-680-032-01	o ROLLER (A)
1315	3-680-081-01	o ROLLER (B)
1316	3-680-258-01	o ROLLER SOPPER
1317	3-680-995-01	o SPRING, EXTENSION
1318	3-727-927-11	s SPRING (POWER TENSION), TENSION
1319	3-729-013-01	s SCREW (M1.4X1.6), WASHER HEAD
1320	3-729-013-21	s SCREW (M1.4X2.5), WASHER HEAD (ST)
1321	4-606-897-01	s SPRING, TENSION

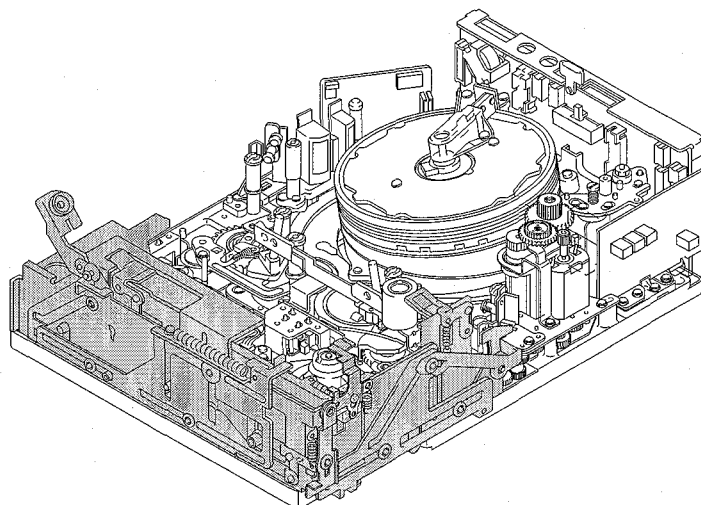

Washer

Part No.	SP Description
7-624-101-04	s E RING (1.2)


VF Holder

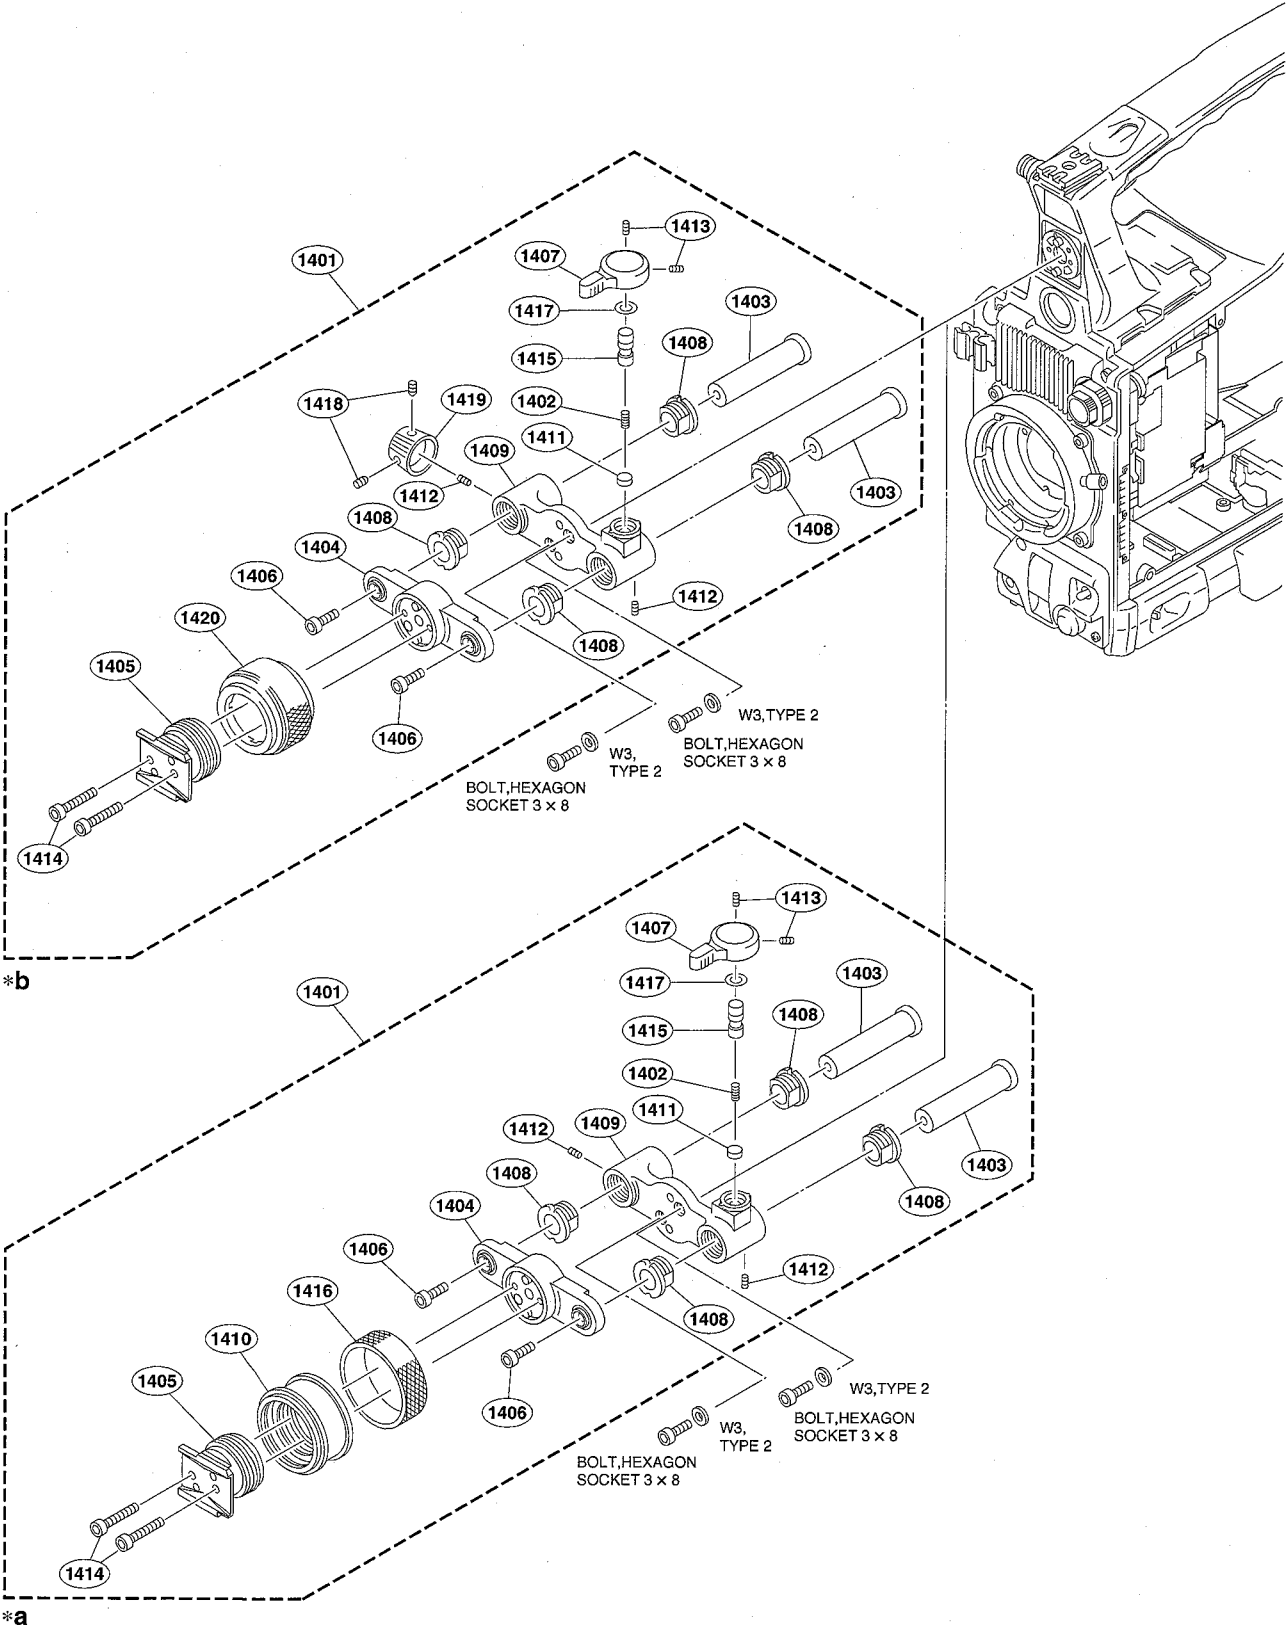

*a: Serial No. 10001 - 10365

*b: Serial No. 10366 -


No.	Part No.	SP Description
1401	*b A-8279-413-D	o SLIDE ASSY (LB), VF
	*a A-8279-111-D	o SLIDE ASSY (WS), VF
1402	3-612-822-01	s SPRING, COMPRESSION
1403	3-617-743-02	o PIPE, VF SLIDE (SUS)
1404	3-617-745-02	o FIXED TABLE (WS), VF SHOE
1405	3-627-853-03	s SHOE, SLIDE
1406	3-657-705-91	s BOLT (M4X25), HEXAGON HOLE
1407	3-673-046-00	s LEVER, LOCK
1408	3-679-684-01	o REST, ARM
1409	3-679-685-12	o TABEL, FIXED, VF SLIDE
1410	*a 3-679-698-01	o RING (C), LOCK (ABS)
1411	3-679-702-01	o CUSHION, STOPPER(SLIDE ASSY)
1412	3-701-505-00	s SET-SCREW, HEX 3X3 ST
1413	3-701-507-00	s SET-SCREW, HEX 3X5 ST
1414	3-711-765-01	s BOLT (M3), HEXAGON SOCKET (STEEL)
1415	3-711-794-11	o PIN, STOOPER
1416	*a 3-720-919-01	o RUBBER, LOCK RING
1417	3-895-622-01	s RING (DIA. 5), O (NBR)
1418	*b 3-690-660-01	o LOCK, SCREW
1419	*b 3-690-674-01	o KNOB, LOCK
1420	*b X-3608-389-1	o ASSY, LOCK RING (B)

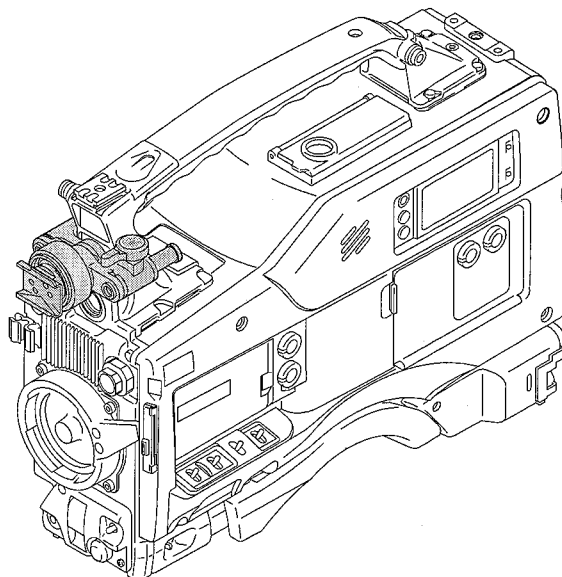

Screw/Washer


Part No.	SP Description
7-623-208-22	s SPRING WASHER (3MM)
7-683-404-04	s BOLT, HEXAGON SOCKET 3X8

Top Frame

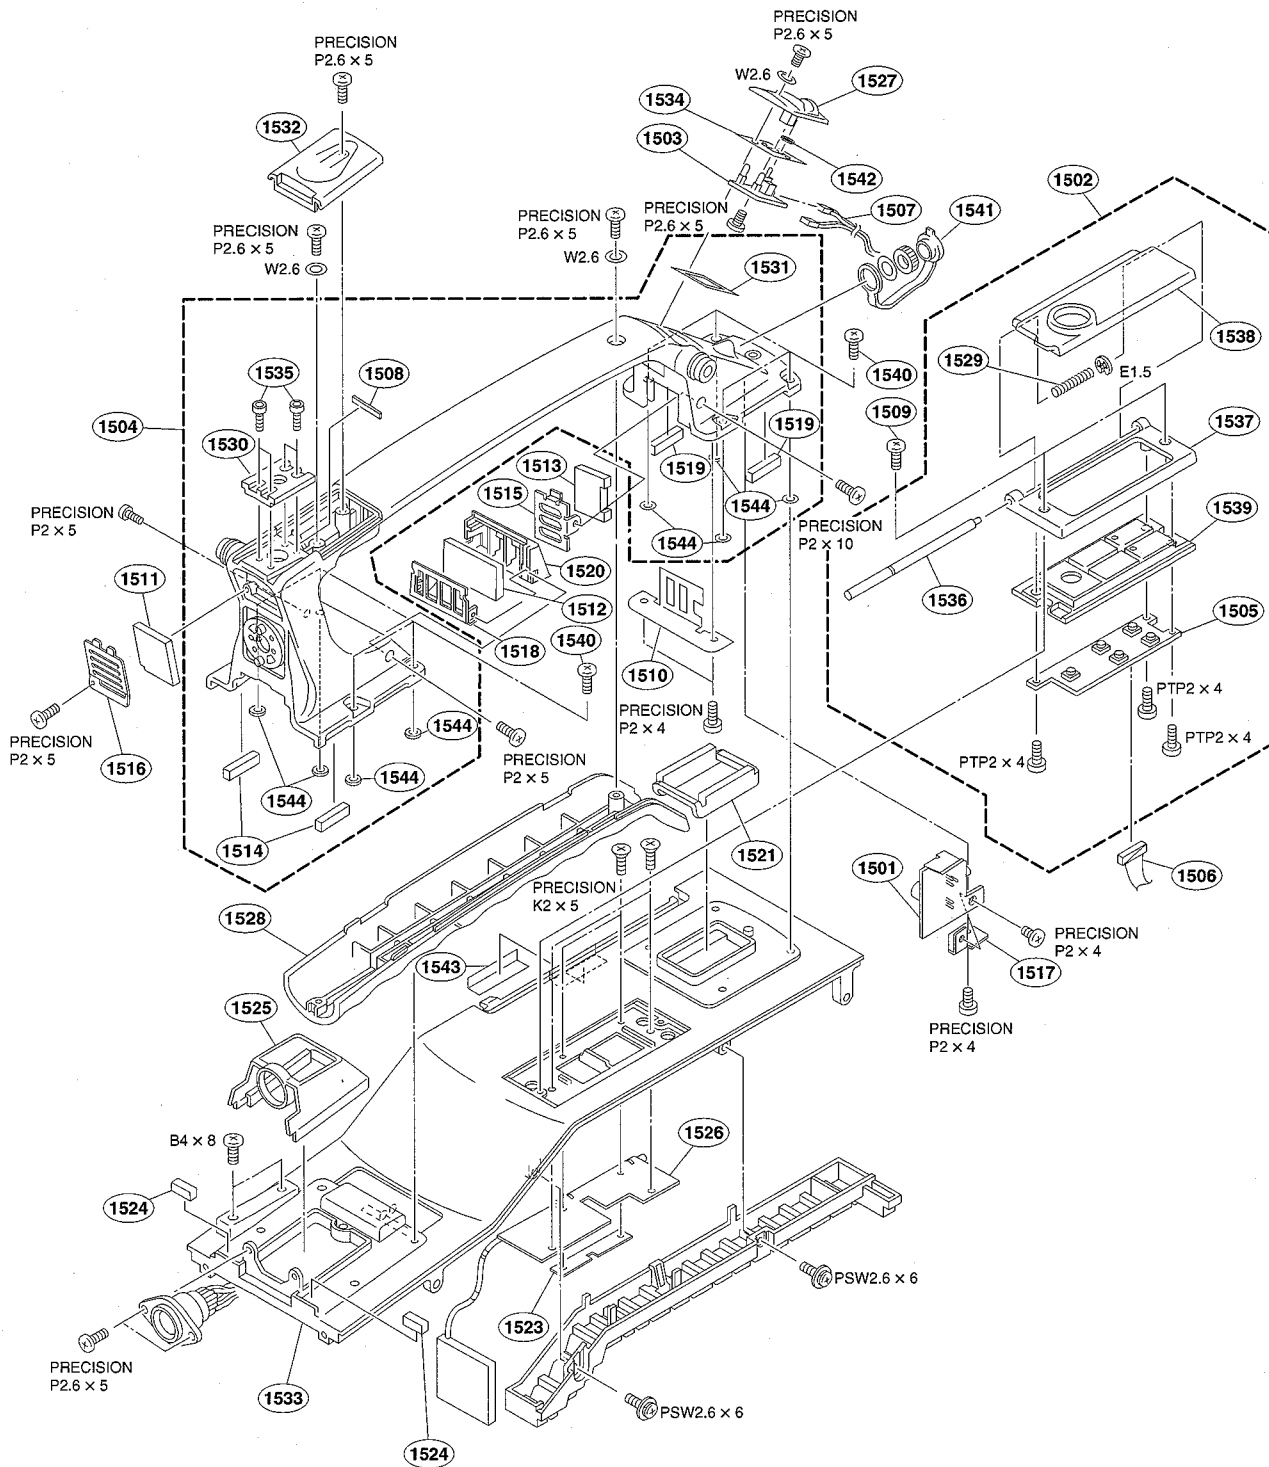

*a: Serial No. 10031 -
 *b: Serial No. 10276 - 10305, 10336 -
 90001 -

No.	Part No.	SP Description
1501	A-8316-519-A	o MOUNTED CIRCUIT BOARD, HP-90
1502	A-8316-530-A	s KEY BOARD ASSY
1503	A-8325-160-A	o MOUNTED CIRCUIT BOARD, SW-1032
1504	X-3679-424-4	s HANDLE ASSY
1505	1-652-769-12	o PRINTED WIRING BOARD, KY-293
1506	1-953-429-11	o HARNESS, SUB (TC8-CP18)
1507	1-960-467-11	o HARNESS, SUB (MB-SW)
1508	2-389-320-01	s CUSHION
1509	3-370-476-11	s SCREW (NYLOCK +B 2X5)
1510	3-610-507-01	o HOLDER (B), FILTER
1511	3-610-511-01	s FILTER F, DUST PROTECTION
1512	3-610-512-01	s FILTER M, DUST PROTECTION
1513	3-610-513-01	s FILTER B, DUST PROTECTION
1514	3-610-525-01	o FILTER R1, DUST PROTECTION
1515	3-610-563-03	o PLATE, COVER (BACK)
1516	3-610-564-03	o PLATE, COVER (FRONT)
1517	3-611-198-01	o BRACKET, HP
1518	3-611-255-02	o HOLDER (M), FILTER
1519	3-611-314-02	o FILTER R2, DROP PROTECTION
1520	3-611-646-01	o COVER, BASE
1521	3-612-298-01	o CUSHION, DROP PROTECTION
1523	3-613-382-01	o PLATE, NUT
1524	3-613-953-01	s CUSHION (F)
1525	3-613-954-01	s PACKING (F)
1526	3-626-751-01	o HEAT PIPE
1527	3-626-757-02	o BRACKET, TALLY
1528	3-627-967-02	o UNDER COVER, HANDLE
1529	3-673-281-00	o SPRING, COMPRESSION (STEEL)
1530	3-679-650-02	o BRACKET, ACCESSORY
1531	3-679-672-01	s PACKING, TARRY
1532	3-679-674-21	o TOP COVER, HANDLE
1533	3-680-085-11	o FRAME, TOP
1534	3-682-495-02	s PACKING TALLY (CR)
1535	3-689-039-11	s SCREW (M2X6), SMALL (STEEL)
1536	3-717-854-01	o SHAFT, KEY BOARD COVER
1537	3-718-042-21	o FRAME, KEY BOARD
1538	3-718-043-23	o COVER, KEY BOARD
1539	3-718-044-01	s COVER, KEY BOARD RUBBER
1540	3-742-074-11	s SCREW (3)
1541	3-849-405-00	s COVER, EARPHONE JACK
1542	3-898-426-01	s PACKING, RUBBER
1543	*a 3-629-518-01	o SPACER, CASSETTE COMPARTMENT
1544	*b 3-629-818-01	o SHEET, ELECTRIC CONDUCTION

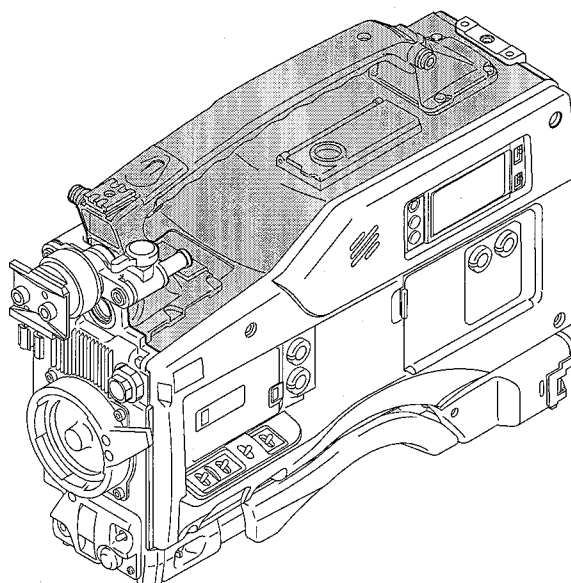


Screws/Washers

Part No. SP Description

7-621-759-40	s SCREW +PSW 2.6X6
7-624-102-04	s STOP RING 1.5, TYPE -E
7-627-452-38	s SCREW, PRECISION +K 2X5
7-627-553-48	s SCREW, PRECISION +P 2X4
7-627-553-78	s SCREW, PRECISION +P2X10
7-627-554-28	s SCREW, PRECISION +P2X5
7-627-556-58	s SCREW, PRECISION +P2.6X5
7-682-561-09	s SCREW +B4X8
7-685-102-19	s SCREW +PTP2X4
7-685-134-19	s SCREW +PTP2.6X8
7-688-002-02	s WASHER (2.6)


Shoulder Pad and Bottom Frame

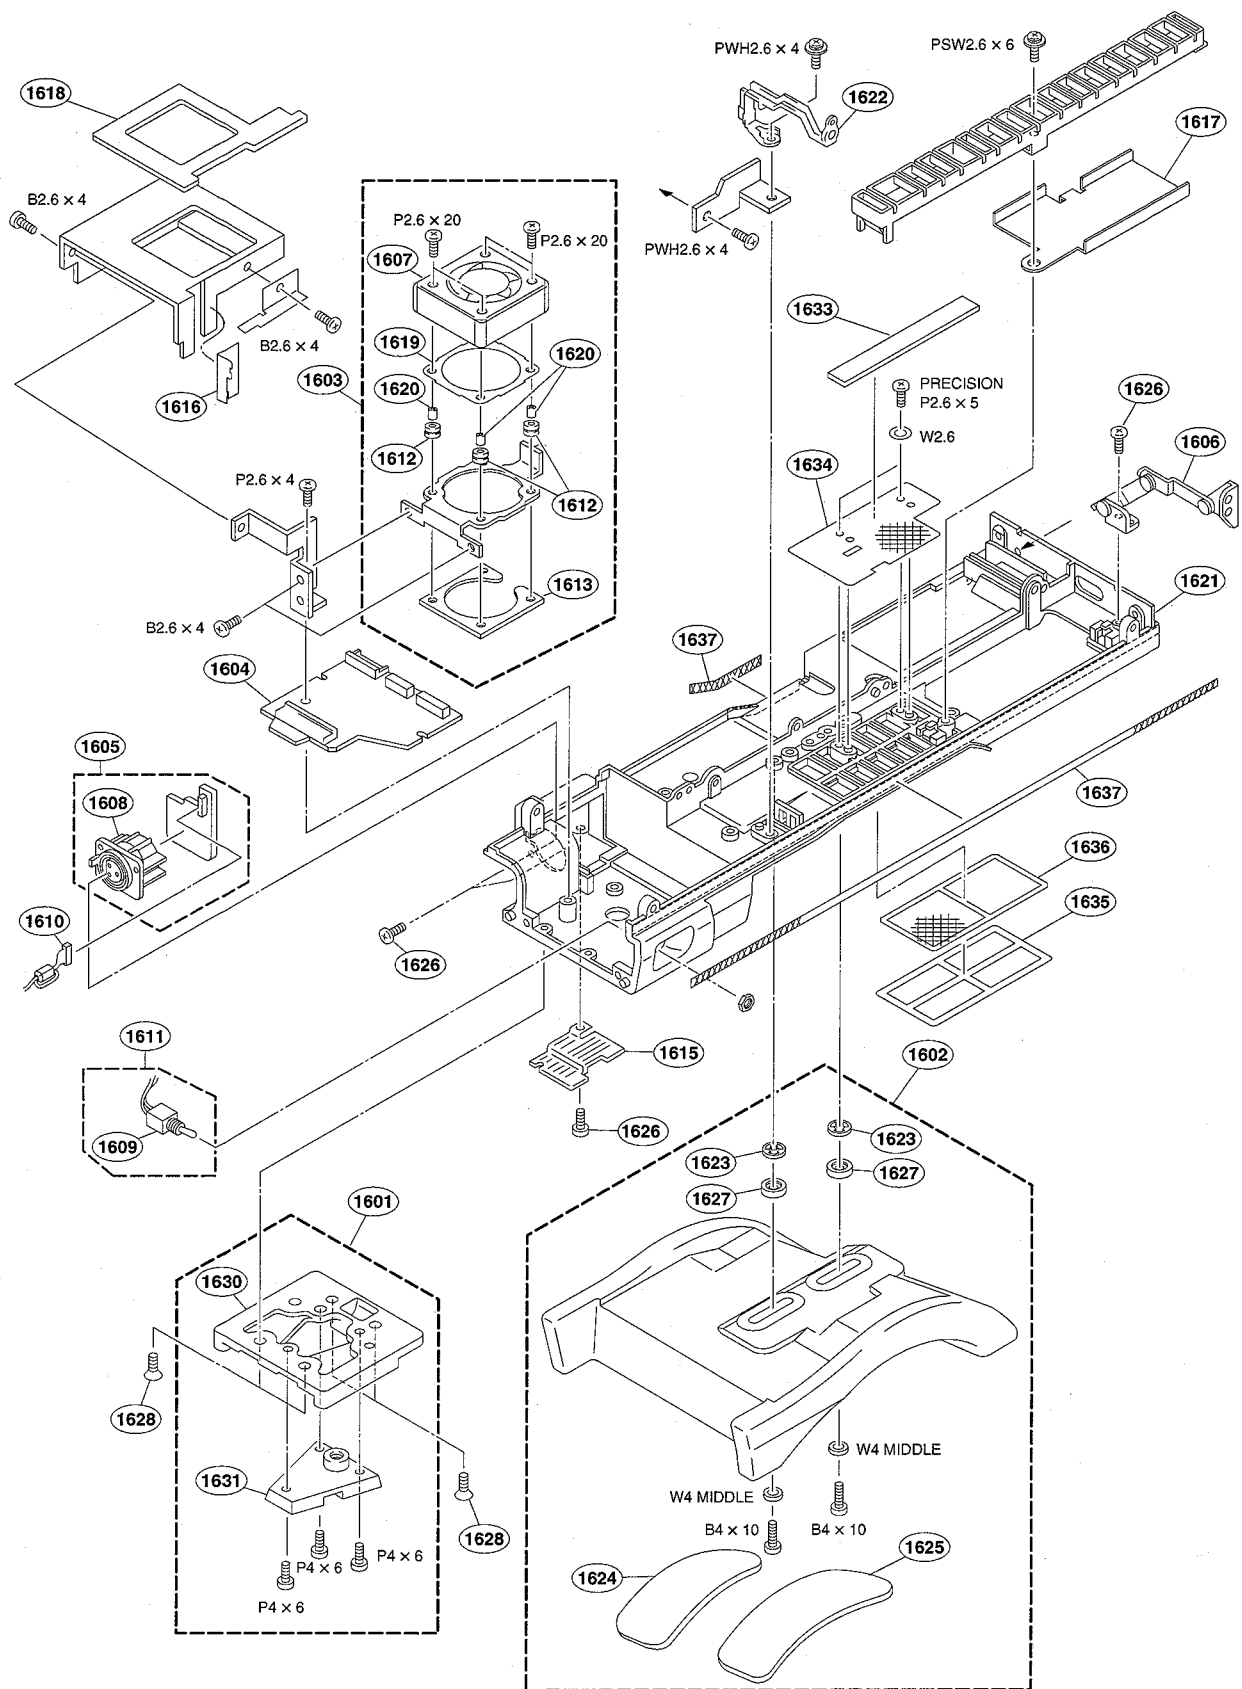

Shoulder Pad and Bottom Frame

*a: Serial No. 10276 - 10305, 10336 -
 *b: Serial No. 10001 - 10335, 11116 -
 *c: Serial No. 10336 - 11115


No.	Part No.	SP Description
1601	*b A-7612-385-E s	SHOE (B) ASSY, V
	*c A-7612-352-E s	SHOE (A) ASSY, V
1602	A-8278-288-B s	PAD ASSY(NS), SHOULDER
1603	A-8278-742-A s	FAN ASSY
1604	A-8316-735-A o	MOUNTED CIRCUIT BOARD, MA-92
1605	A-8317-151-A o	MOUNTED CIRCUIT BOARD, CN-1642
1606	X-3678-157-1 o	HINGE ASSY, METAL
1607	1-698-775-11 s	FAN, DC
1608	1-750-788-11 s	CONNECTOR, (XLR TYPE) 3P
1609	1-771-491-11 s	SWITCH, TOGGLE
1610	1-958-278-11 o	HARNESS, SUB (MIC)
1611	1-959-006-11 o	HARNESS, SUB (MB-PSW)
1612	3-175-712-01 o	BUSHING, RUBBER
1613	3-175-713-01 o	NUT (M2.6), PLATE
1615	3-610-518-02 s	COVER, BOTTOM
1616	3-611-563-02 o	WINDOW
1617	3-611-706-03 o	COVER, FLEXIBLE
1618	3-613-379-01 o	CUSSION, FAN BASE
1619	3-615-459-01 o	FAN SPACER
1620	3-661-806-00 o	SPACER (DIA 2.6X4)
1621	3-680-089-11 o	FRAME, BOTTOM
1622	3-680-247-01 o	HINGE (PP)
1623	3-687-116-01 o	WASHER (4), STOPPER (PLA)
1624	3-693-979-02 o	SHEET (S), STOPPER
1625	3-693-980-02 o	SHEET (L), STOPPER
1626	3-694-181-01 s	AROCK PRECISION +P2.6 TYPE 1
1627	3-725-261-01 o	SPACER, SHOULDER PAD
1628	3-729-072-01 s	SCREW +K4X8 (STEEL)
1630	*b 3-742-012-02 s	SHOE (B), CAMERA
	*c 3-729-065-04 s	SHOE (A), CAMERA
1631	*b 3-742-015-02 o	WEDGE (B), MOUNTING
	*c 3-716-391-02 o	WEDGE, MOUNTING
1633	*a 3-629-806-01 o	CUSSION
1634	*a 3-631-470-01 o	GRILL, SHIELD
1635	*a 3-631-468-01 o	SHEET, FILTER HOLD
1636	*a 3-631-469-01 o	SHEET, FILTER
1637	3-629-684-02 s	FORM, SHIELD

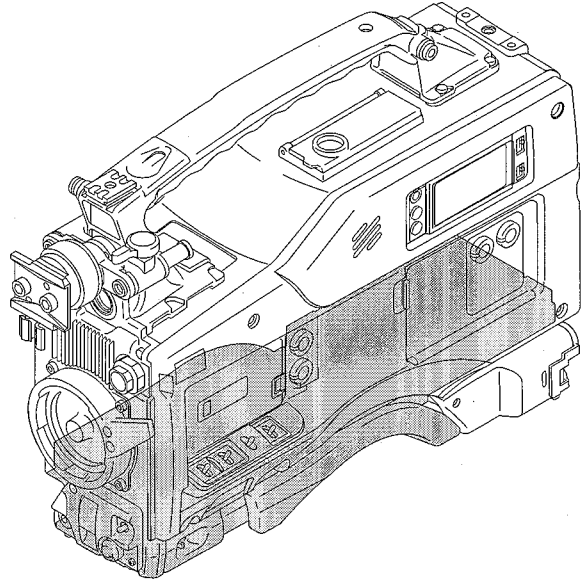

Screws/Washers

Part No.	SP Description
7-621-759-40 s	SCREW +PSW 2.6X6
7-621-773-86 s	SCREW +B2.6X4
7-621-775-90 s	SCREW +B2.6X20
7-627-556-58 s	SCREW, PRECISION +P2.6X5
7-682-160-09 o	SCREW +P4X6
7-682-562-09 s	SCREW +B4X10
7-682-902-01 s	SCREW +PWH 2.6X4
7-688-002-12 s	W2.6 MIDDLE
7-688-004-12 s	WASHER W4 (M)


Connector Box

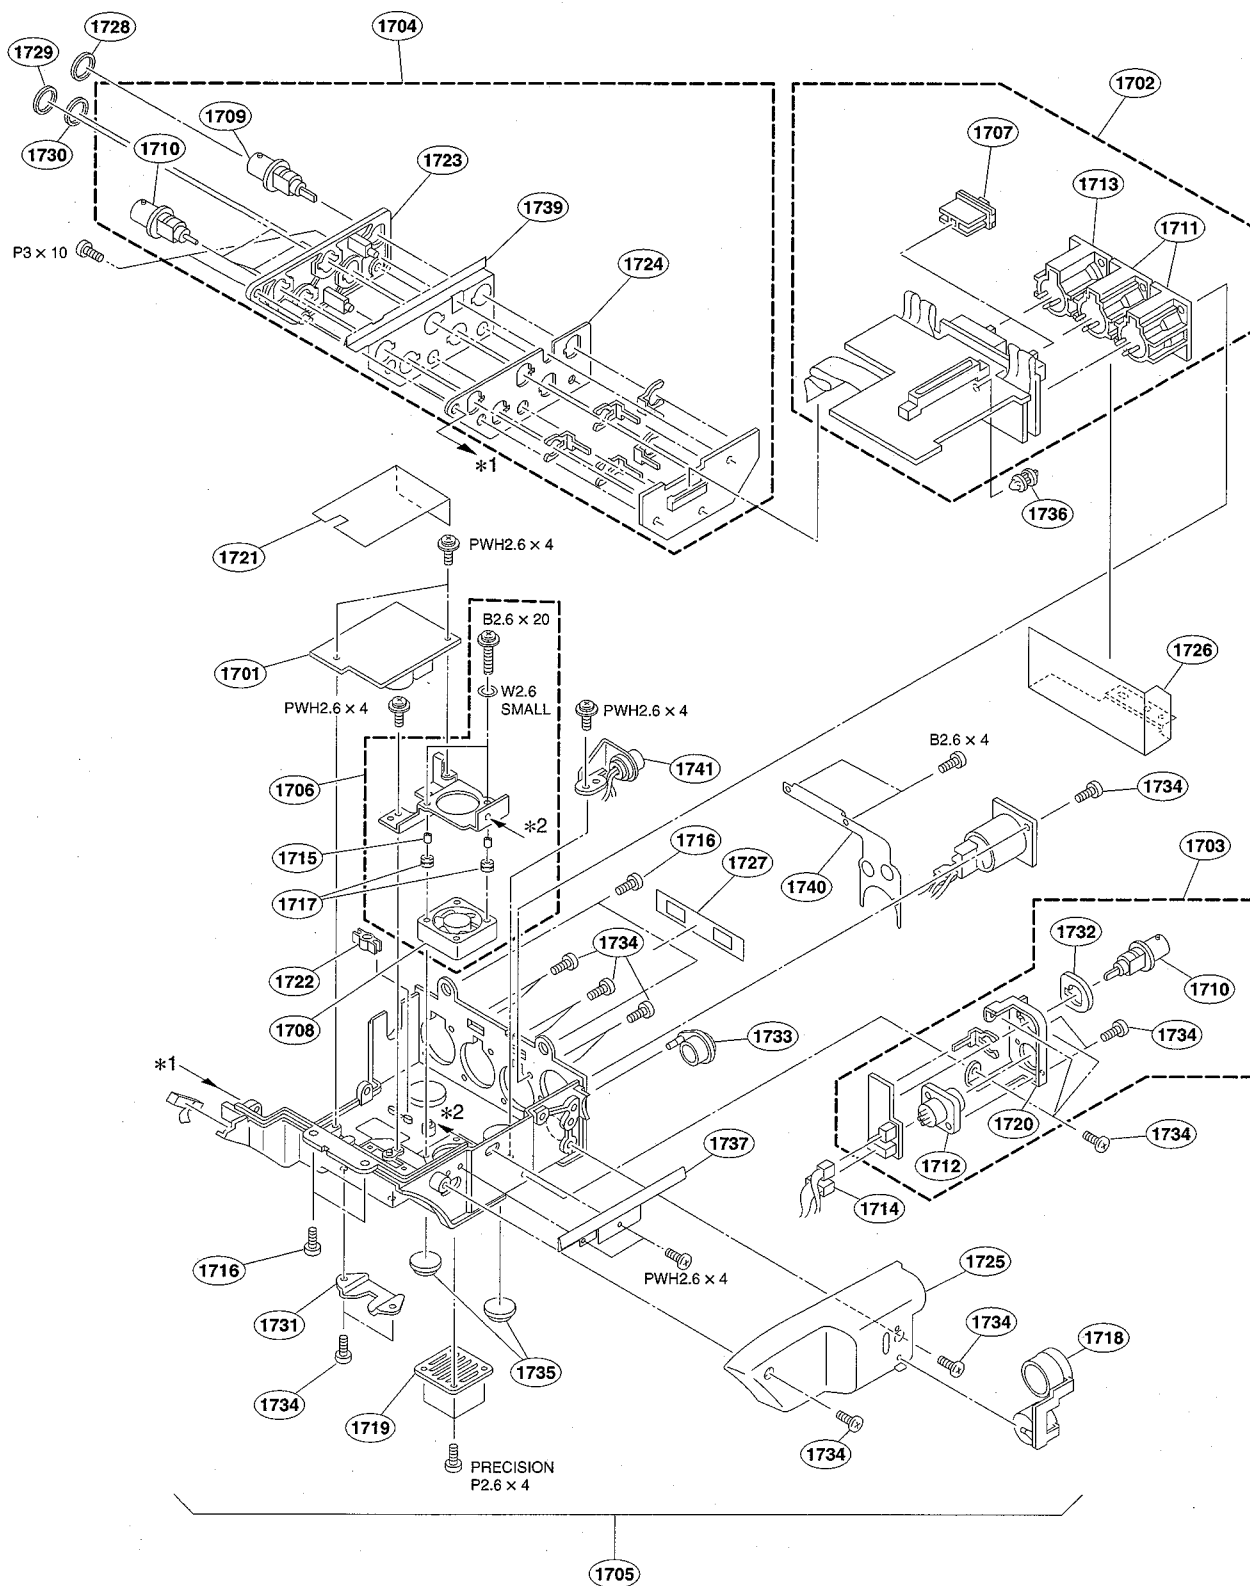

Connector Box

*a: Serial No. 10061 -
 *b: Serial No. 10276 - 10305, 10336 -
 *c: Serial No. 10051 - 10110, 10151 - 10175,
 10236 - 10265, 10336 -


No.	Part No.	SP Description
1701	A-8325-147-A	o MOUNTED CIRCUIT BOARD, PS-569
1702	A-8325-148-A	o MOUNTED CIRCUIT BOARD, CN-2025
1703	A-8325-246-A	o MOUNTED CIRCUIT BOARD, CO-38
1704	A-8325-390-A	o MOUNTED CIRCUIT BOARD, CN-2046
1705	A-8325-401-C	o BOX ASSY, CONNECTOR
1706	A-8325-881-A	s FAN ASSY, R
1707	X-3678-131-3	s KNOB (M) ASSY, SW
1708	1-698-131-31	s MOTOR, DC FAN
1709	1-766-380-11	s CONNECTOR, COAXIAL (BNC TYPE)
1710	1-766-381-11	s CONNECTOR, COAXIAL (BNC TYPE)
1711	1-750-788-11	s CONNECTOR, (XLR TYPE) 3P
1712	1-766-696-11	o CONNECTOR, ROUND TYPE 8P
1713	1-774-795-11	s CONNECTOR, XLR (RECEPTACLE) 5P
1714	1-958-066-11	o HARNESS, SUB (CO2-CN2)
1715	3-307-259-01	o SPESER (DIA 2.6X3)
1716	3-370-475-11	s SCREW (NYLOCK +B 3X6)
1717	3-570-118-00	o CUSHION, MOTOR
1718	3-610-515-02	s RUBBUR (G-IN), DROP PROTECTION
1719	3-610-517-02	o NOZZLE 1
1720	3-610-569-01	o HOLDER, G-IN
1721	3-610-578-02	o SHEET, INSULATING
1722	3-610-592-01	o SUPPORT, BREAKER
1723	3-610-594-02	o HOLDER, 5P BNC
1724	3-610-595-01	o PLATE, SHIELD
1725	3-611-101-03	o PANEL, ORNAMENTAL
1726	3-611-707-02	o COVER, AUDIO
1727	3-613-614-01	o PLATE ORNAMENTAL AUDIO (UC)
1728	3-615-111-01	o RING, COLOR (GREEN)
1729	3-615-111-11	o RING, COLOR (BLUE)
1730	3-615-111-21	o RING, COLOR (RED)
1731	3-626-781-02	o STOPPER
1732	3-680-249-02	o SPACER, V-OUT
1733	3-680-269-01	s RUBBER (DO), DROP PROTECTION
1734	3-694-181-01	s AROCK PRECISION +P2.6 TYPE 1
1735	3-723-097-01	o FOOT, RUBBER (SI-RBR)
1736	4-622-069-01	s SUPPORT, MODEM
1737	*a 3-629-682-01	o SHEET (INSIDE), SHIELD
1739	*b 3-629-679-02	o SHEET (OUTSIDE), SHIELD
1740	*c 3-629-680-03	o PLATE, CONDUCTIVE
1741	*b 1-565-072-11	s CONNECTOR, ROUND TYPE (RF) 4P

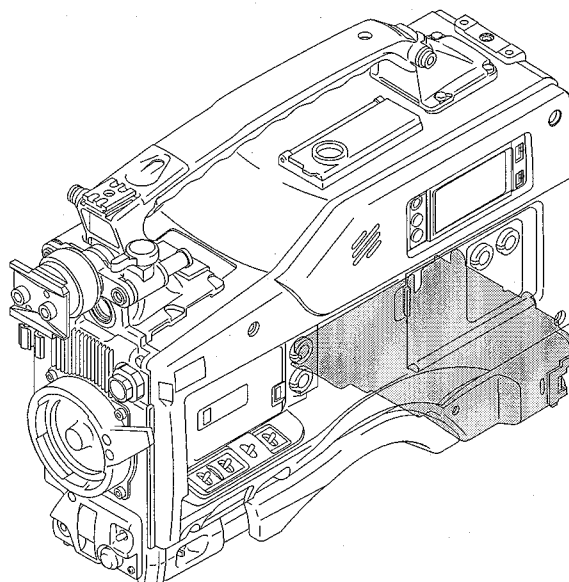

Screws/Washer

Part No.	SP Description
7-621-773-86	s SCREW +B2.6X4
7-621-775-90	s SCREW +B2.6X20
7-627-556-38	s SCREW, PRECISION +P2.6X4
7-682-149-04	s SCREW +P 3X10
7-682-902-01	s SCREW +PWH 2.6X4
7-688-002-03	s WASHER 2.6(SMALL)

Rear Panel

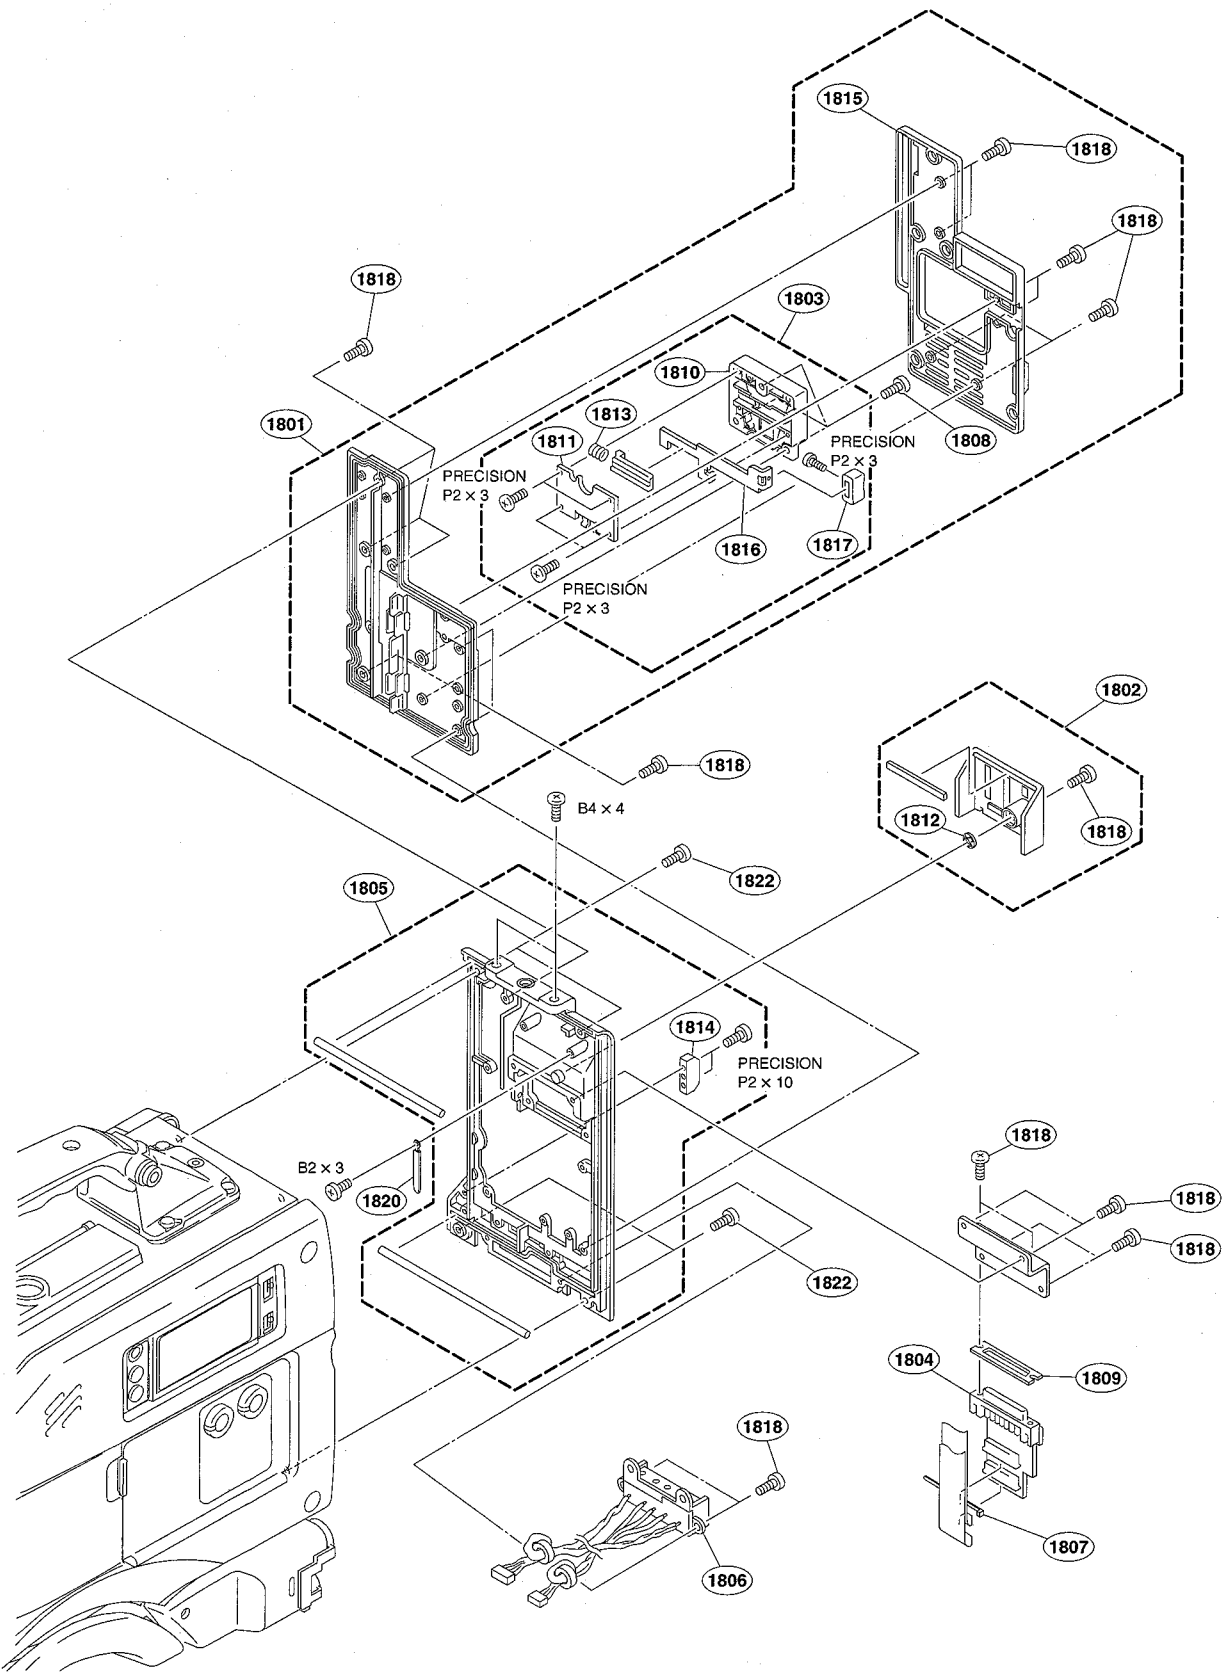


Rear Panel

*a: Serial No. 10001 - 10275, 10306 - 10335

*b: Serial No. 10276 - 10305, 10336 -
90001 -


No.	Part No.	SP Description
1801	A-8278-682-C	o ADAPTOR PLATE (A) ASSY
1802	A-8279-778-A	o CONNECTOR COVER ASSY
1803	A-8279-091-C	s MOUNT ASSY, V
1804	A-8325-141-A	o MOUNTED CIRCUIT BOARD, CN-2024
1805	X-3679-430-4	o FRAME SUB ASSY, REAR
1806	*b 1-961-054-12	o HARNESS, SUB (BAT-CN20(L))
	*a 1-958-070-11	o HARNESS, SUB (BAT-CN20)
1807	2-116-126-01	s BAND (PLA)
1808	3-370-475-11	s SCREW (NYLOCK +B 3X6)
1809	3-610-523-01	s PACKING, DROP PROTECTION (50P)
1810	3-616-721-02	o MOUNT (2), V
1811	3-616-724-01	o LID, REAR
1812	3-669-595-00	s WASHER, 2 (PLA)
1813	3-704-964-01	s SPRING, COMPRESSION
1814	3-679-661-01	o GUIDE
1815	3-679-669-05	o SPACER
1816	3-679-688-02	o LEVER, RELEASE
1817	3-680-952-02	o KNOB, RELEASE LEVER
1818	3-694-181-01	s AROCK PRECISION +P2.6 TYPE 1
1820	3-701-822-00	s HOLDER, WIRE
1821	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1822	3-742-074-11	s SCREW (3)

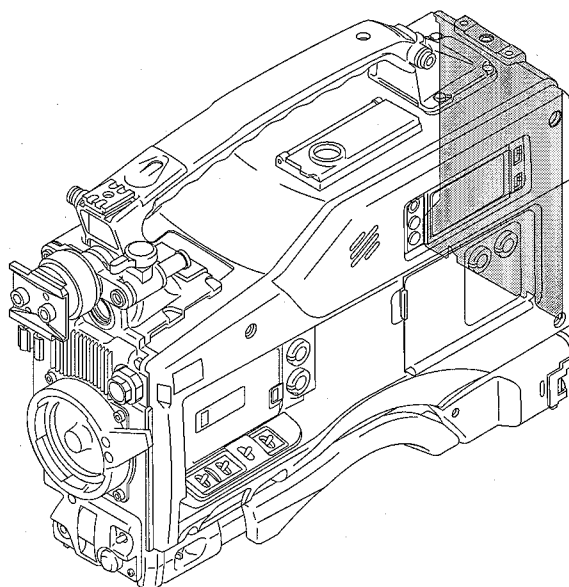

Screws

Part No.	SP Description
7-621-772-08	s SCREW +B2X3
7-627-553-38	s SCREW, PRECISION +P 2X3
7-627-553-78	s SCREW, PRECISION +P2X10
7-682-558-09	s SCREW +B4X4


Outside Panel

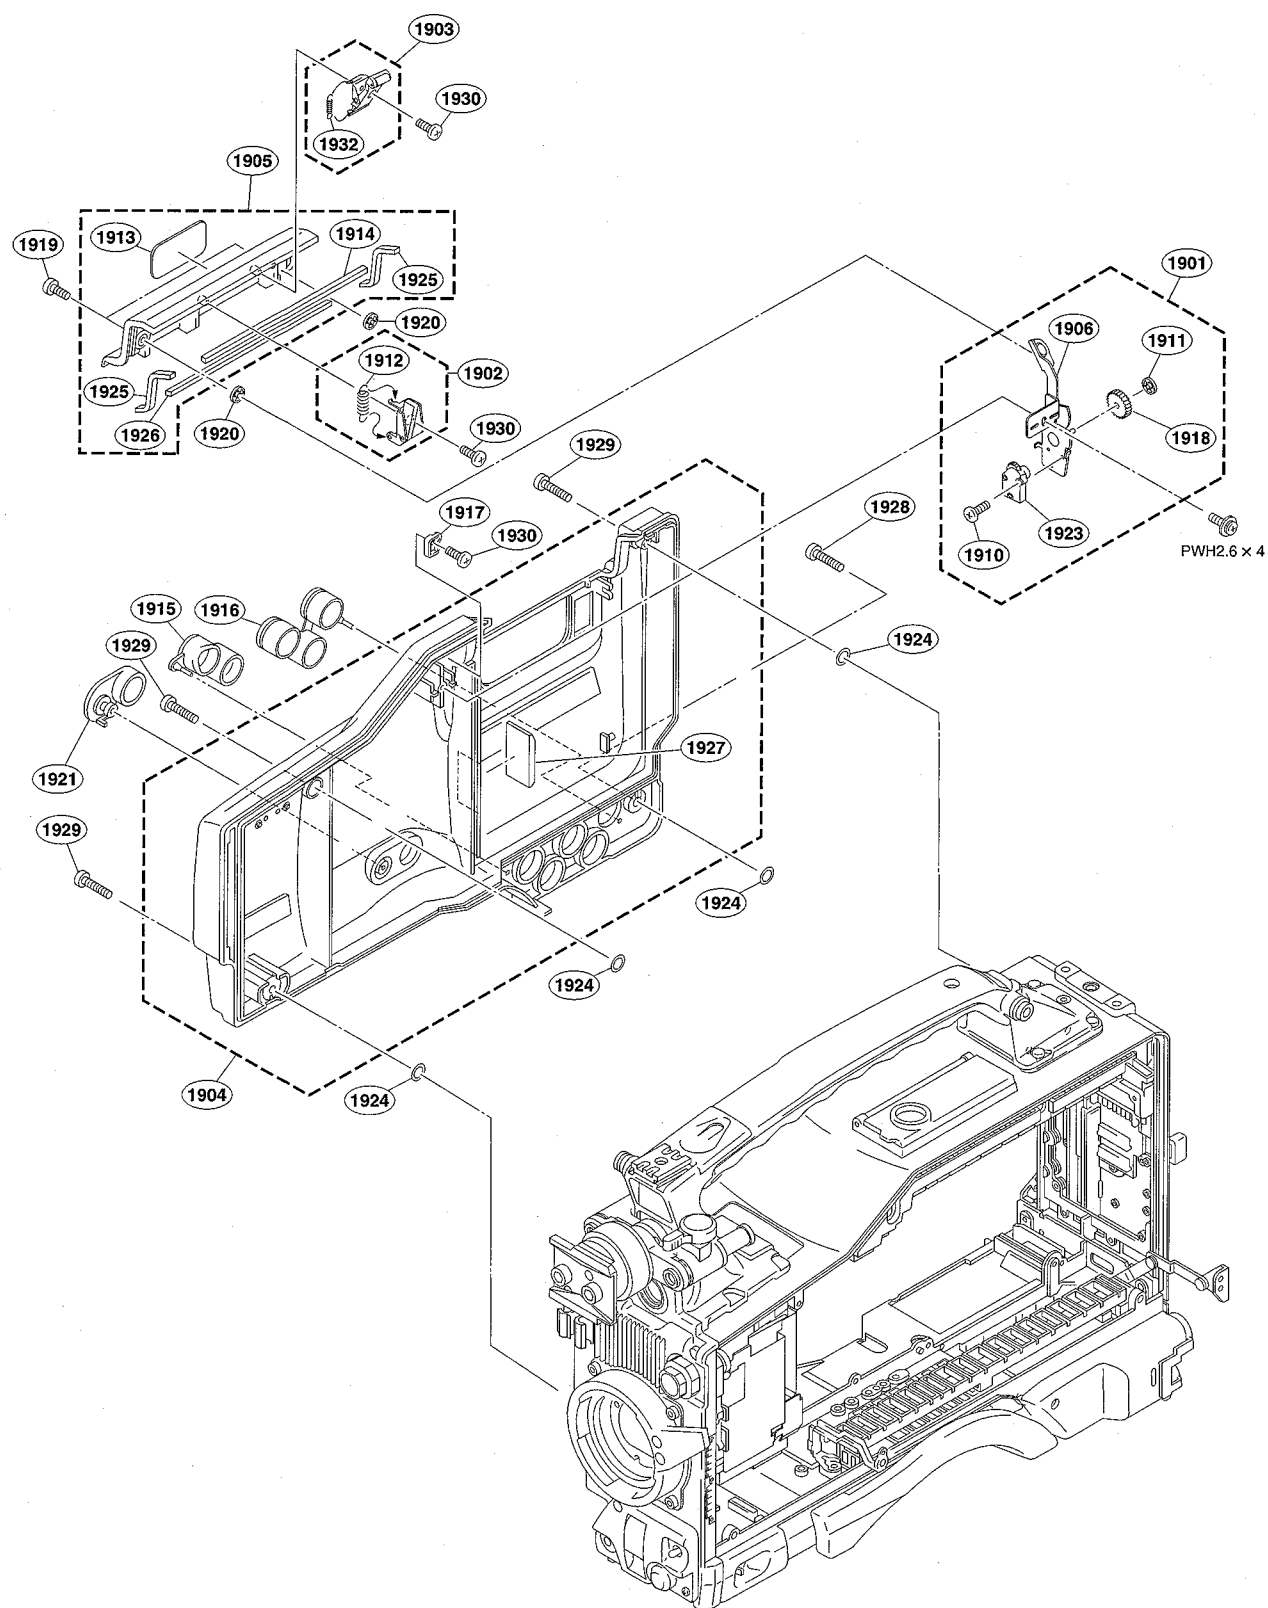

Outside Panel

*a: Serial No. 10001 - 12000


No.	Part No.	SP Description
1901	A-8279-503-A	o ASSY, CASSE-CON DAMPER
1902	A-8278-840-B	s CASSETTE RETAINER ASSY
1903	A-8279-344-A	s ARM ASSY, CASSETTE, LOCK
1904	X-3605-910-5	o PANEL ASSY, OUTSIDE
1905	X-3679-527-3	o LID ASSY, FRONT
1906	X-3608-131-2	o ARM ASSY, LID
1909	3-193-229-01	s EMBLEM, HDVS
1910	3-203-203-01	s SCREW (2X7), DAMPER (+PSW)
1911	3-315-384-31	s WASHER, STOPPER (PLA)
1912	3-329-998-01	s SPRING, TENSION (COIL) (ST)
1913	3-603-755-01	o WINDOW (U), CASSETTE
1914	3-604-823-01	s RUBBER, DROP PROTECTION (F-LID)
1915	3-610-575-02	o CAP(A), BNC (CR)
1916	3-610-576-02	o CAP (B),BNC (CR)
1917	3-611-304-02	o GUIDE, CASSETTE IN
1918	3-611-654-01	o GEAR, MIDWAY
1919	3-622-751-01	s STAINLESS SCREW +B3X8
1920	3-669-596-00	s WASHER, 2.3 (PLA)
1921	3-679-711-01	o COVER, ME
1923	3-681-528-12	s DAMPER
1924	3-682-791-01	s RING, O (NBR)
1925	3-683-023-01	s RUBBER A, DROP PROTECTION (LID)
1926	3-683-025-01	s RUBBER B, DROP PROTECTION (LID)
1927	*a 3-683-035-02	o PLATE GUIDE, CASSETTE
1928	3-687-046-01	s STAINLESS SCREW,+B4X10
1929	3-687-048-01	s STAINLESS SCREW,+B4X20
1930	3-694-181-01	s AROCK PRECISION +P2.6 TYPE 1
1932	3-949-973-01	s SPRING, TENSION

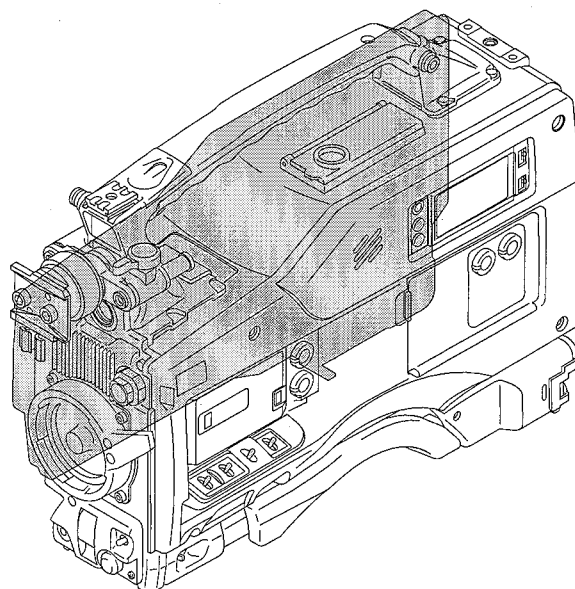

Screw


Part No.	SP Description
7-682-902-01	s SCREW +PWH 2.6X4

MB Board

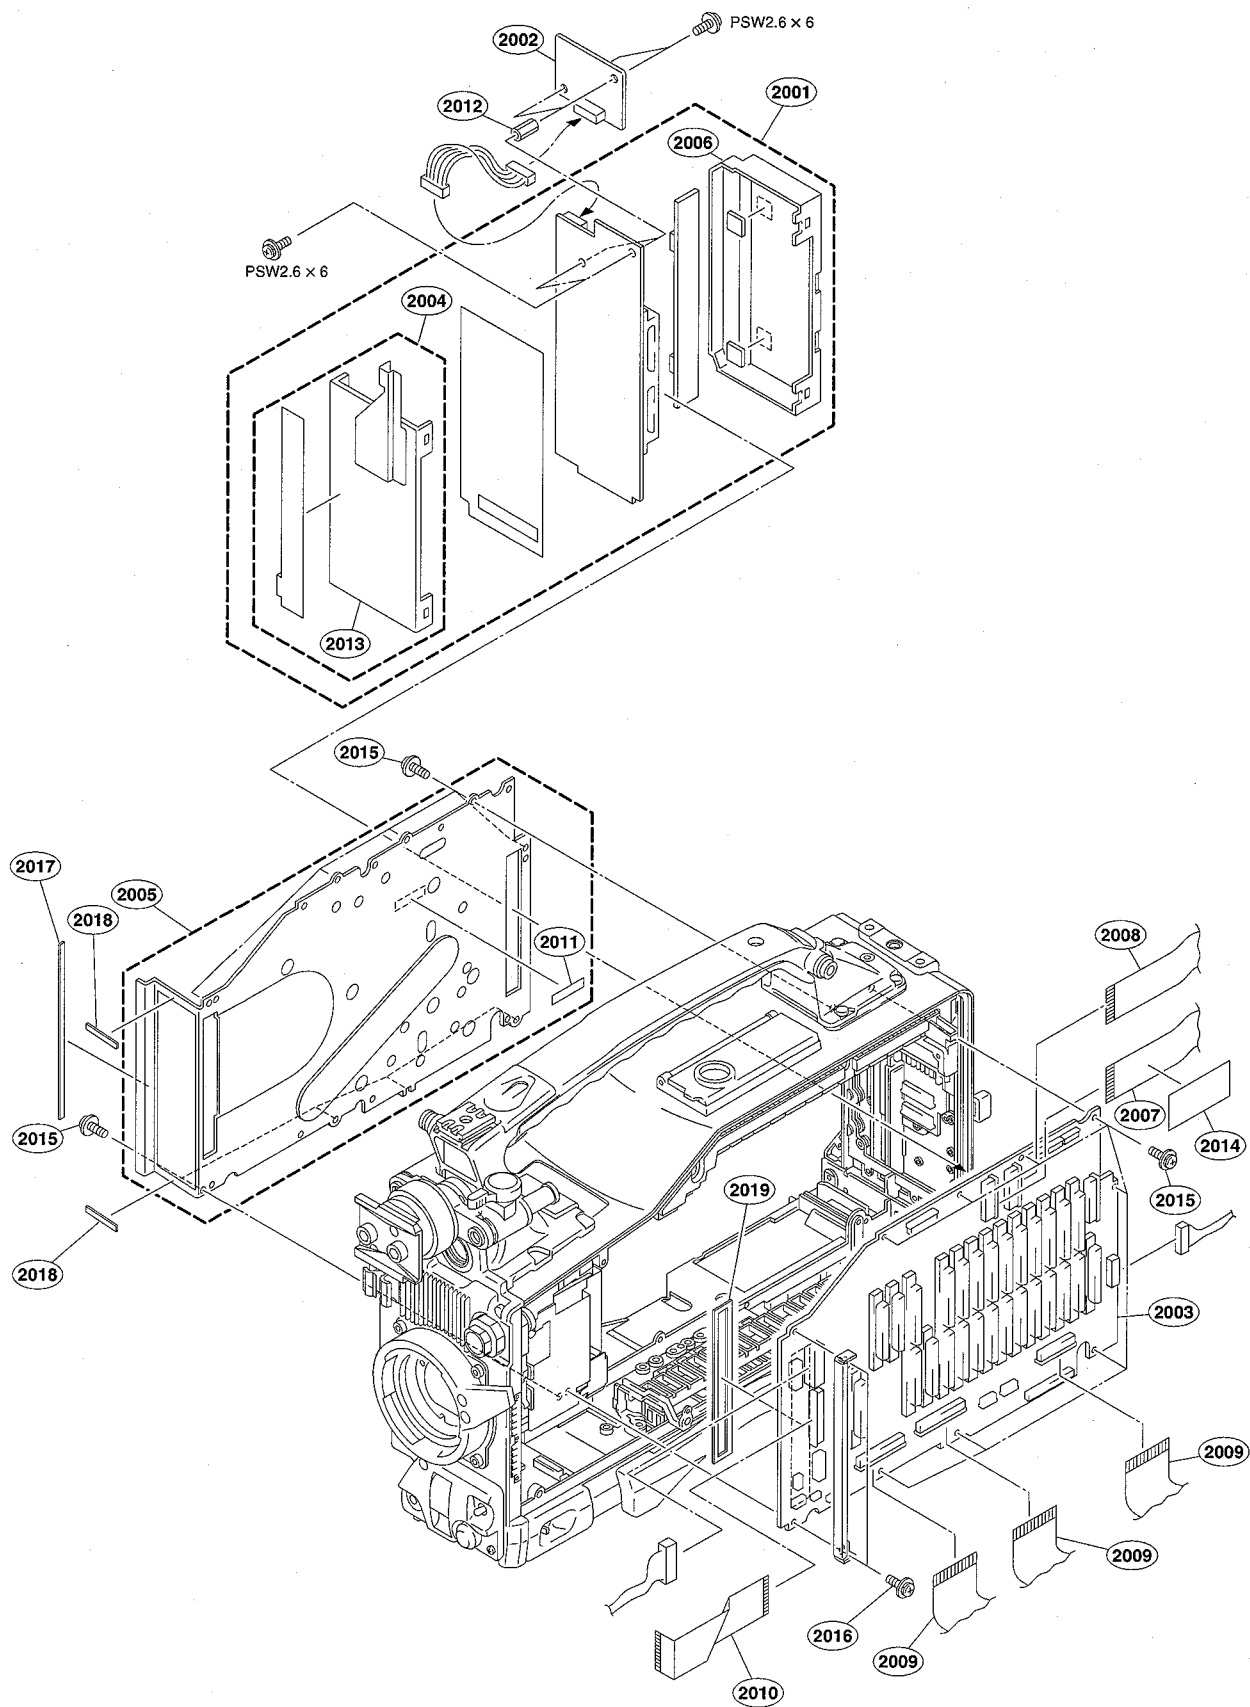

*a: Serial No. 10031 -
 *b: Serial No. 10001 - 10070
 *c: Serial No. 10071 -
 *d: Serial No. 12001 -

No.	Part No.	SP Description
2001	*c A-8326-888-A s	CONVERTER (F) ASSY, DD
	*b A-8316-509-B s	CONVERTER ASSY, DC-DC
2002	A-8320-065-A o	MOUNTED CIRCUIT BOARD, CCM-33B
2003	A-8325-131-A o	MOUNTED CIRCUIT BOARD, MB-877
2004	X-3604-993-1 o	CASE ASSY, SHIELD (B)
2005	X-3678-128-7 o	PLATE, ASSY ACOUSTIC ISOLATION
2006	X-3679-416-1 o	CASE ASSY, SHIELD (A)
2007	1-782-986-13 s	CABLE, FLEXIBLE FLAT (26P)
2008	*d 1-782-987-13 s	CABLE, FLEXIBLE FLAT (26P)
2009	1-757-843-11 s	CABLE, FLAT TYPE (28 CORE)
2010	1-790-445-11 s	WIRE, FLAT TYPE (28 CORE)
2011	2-389-320-01 o	CUSHION (SILICONE RBR)
2012	3-192-607-31 o	SUPPORT (B), PANEL
2013	3-614-803-01 o	CASE, SHIELD B
2014	3-623-847-01 o	SHEET, ELECTROMAGNETIC SHIELD
2015	3-729-013-21 s	SCREW (M1.4X2.5), WASHER HEAD (ST)
2016	3-729-013-41 s	SCREW, WASHERHEAD (+P) (ST)
2017	*a 3-628-838-02 o	PACKING, AIR L
2018	*a 3-628-837-01 o	PACKING, AIR
2019	*a 3-628-836-01 o	PACKING, CONNECTOR

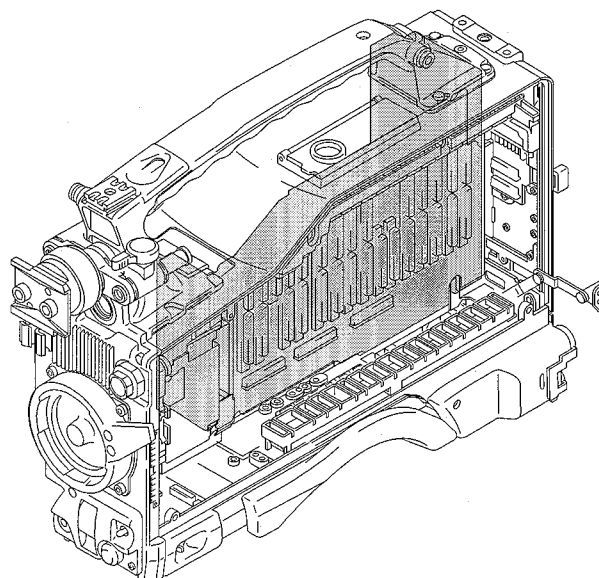


Screw

Part No.	SP Description
7-621-759-40 s	SCREW +PSW 2.6X6


Plug-IN Boards-1

Serial No. 12001 -

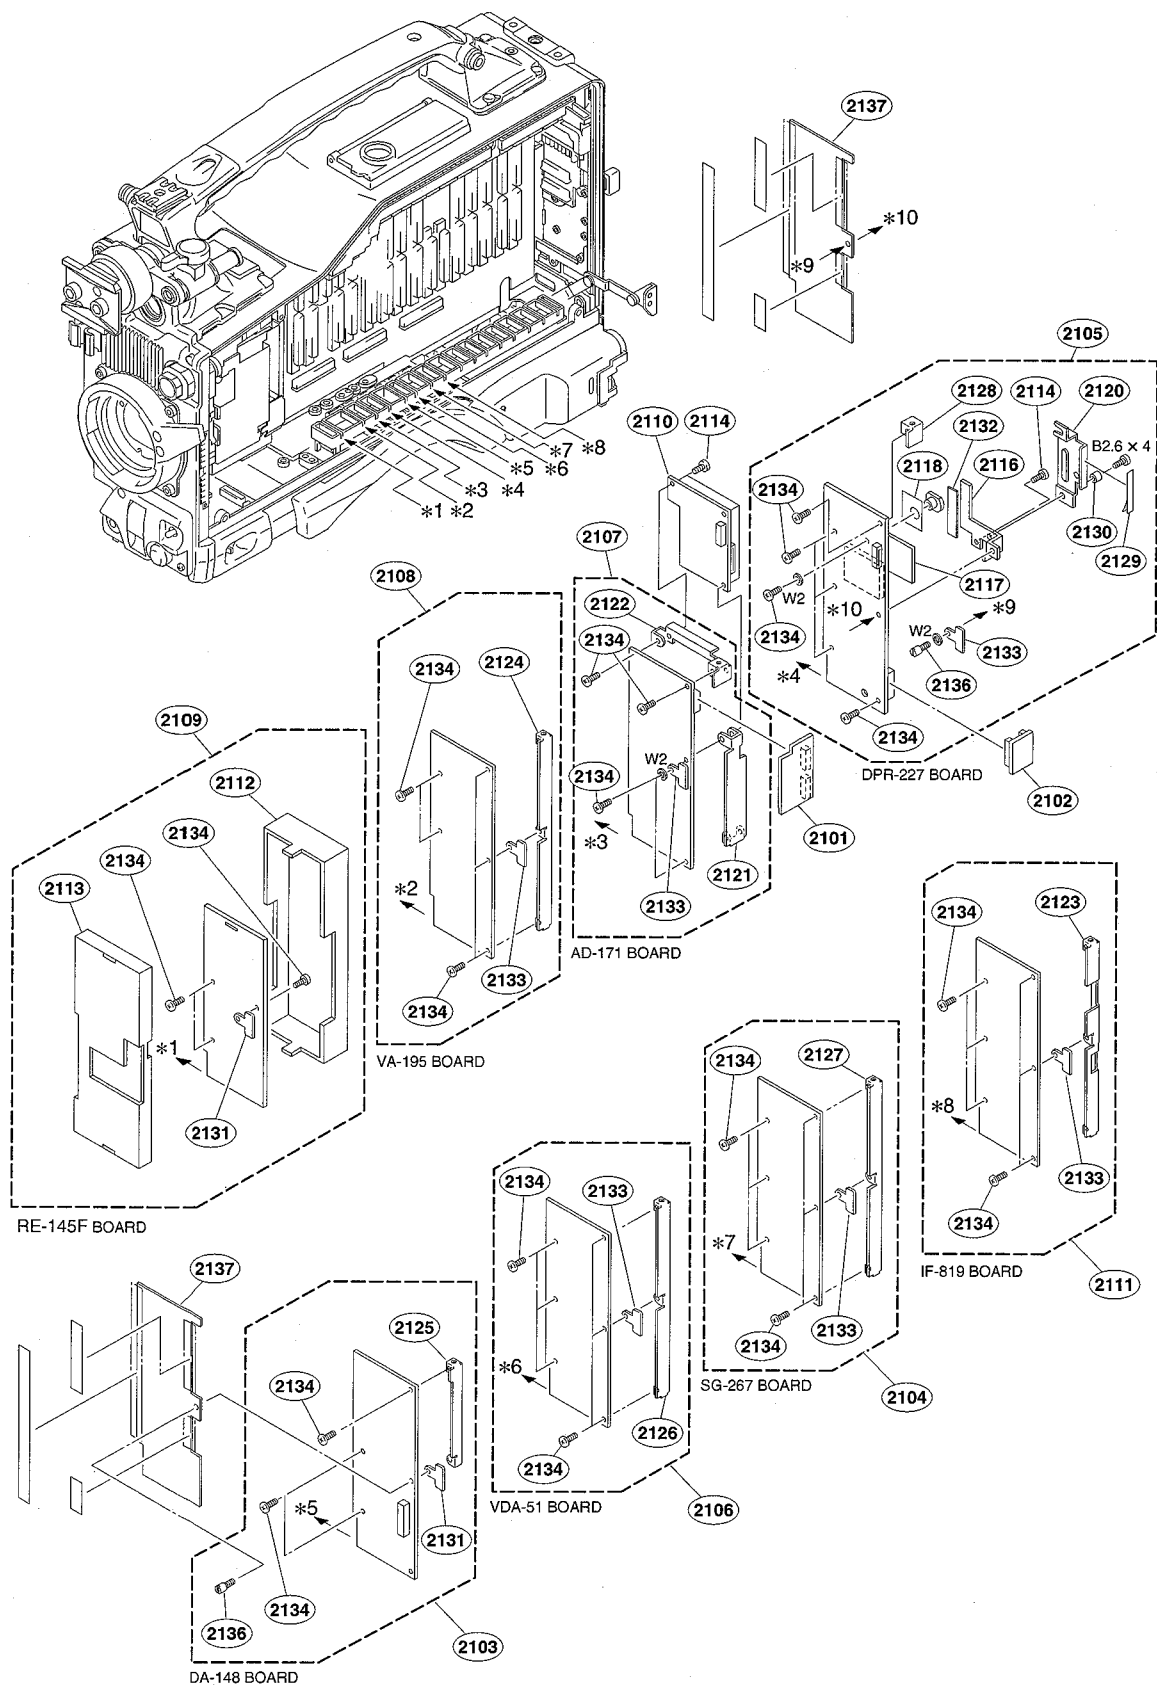

Plug-IN Boards-1

No.	Part No.	SP Description
2101	A-8325-175-A	o MOUNTED CIRCUIT BOARD, CN-1940
2102	A-8325-341-A	o MOUNTED CIRCUIT BOARD, CN-2085
2103	A-8325-353-A	o MOUNTED CIRCUIT BOARD, DA-148
2104	A-8325-354-A	o MOUNTED CIRCUIT BOARD, SG-267
2105	A-8345-181-A	s MOUNTED CIRCUIT BOARD, DPR-227
2106	A-8325-357-A	o MOUNTED CIRCUIT BOARD, VDA-51
2107	A-8345-179-A	s MOUNTED CIRCUIT BOARD, AD-171
2108	A-8325-359-A	o MOUNTED CIRCUIT BOARD, VA-195
2109	A-8325-417-A	o MOUNTED CIRCUIT BOARD, RE-145F
2110	A-8325-505-A	o MOUNTED CIRCUIT BOARD, DPR-157
2111	A-8325-860-A	o MOUNTED CIRCUIT BOARD, IF-819
2112	X-3679-425-1	o CASE ASSY, SHIELD C
2113	X-3679-426-1	o CASE ASSY, SHIELD D
2116	3-610-508-03	o TABLE, CLAMPER
2117	3-610-554-01	o SHEET, THERMAL CONVECTION
2118	3-612-297-01	o INSULATOR (DPR)
2120	3-626-754-01	o CLAMPER, HB
2121	3-626-755-01	o STAY AD (S), PC BOARD
2122	3-626-756-01	o STAY AD (L), PC BOARD
2123	3-626-767-01	o PLATE (IF), ORNAMENTAL
2124	3-626-768-01	o PLATE (VA), ORNAMENTAL
2125	3-626-769-01	o PLATE (DA), ORNAMENTAL
2126	3-626-770-01	o PLATE (VDA), ORNAMENTAL
2127	3-626-771-01	o PLATE (SG), ORNAMENTAL
2128	3-626-780-01	o PLATE (DPR), ORNAMENTAL
2129	3-626-783-02	o LABEL, CAUTION
2130	3-675-965-01	s SPACER (2.6X2)
2131	3-679-662-01	o RING, PULL
2132	3-697-580-01	o SHEET, CUSHION
2133	3-724-753-01	o RING, PULL
2134	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
2136	3-629-815-01	o PIN (M2)
2137	3-629-685-01	o SHEET, ELECTROMAGNETIC SHIELD

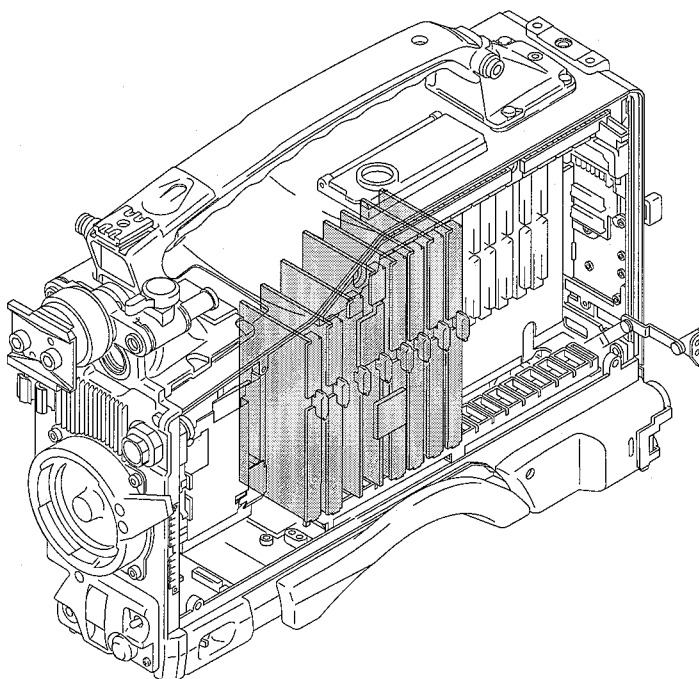


Screw/Washer

Part No. SP Description

7-621-773-86	s SCREW +B2.6X4
7-688-001-12	s WASHER W2, MIDDLE

Plug-IN Boards-1

Serial No. 10001 - 12000

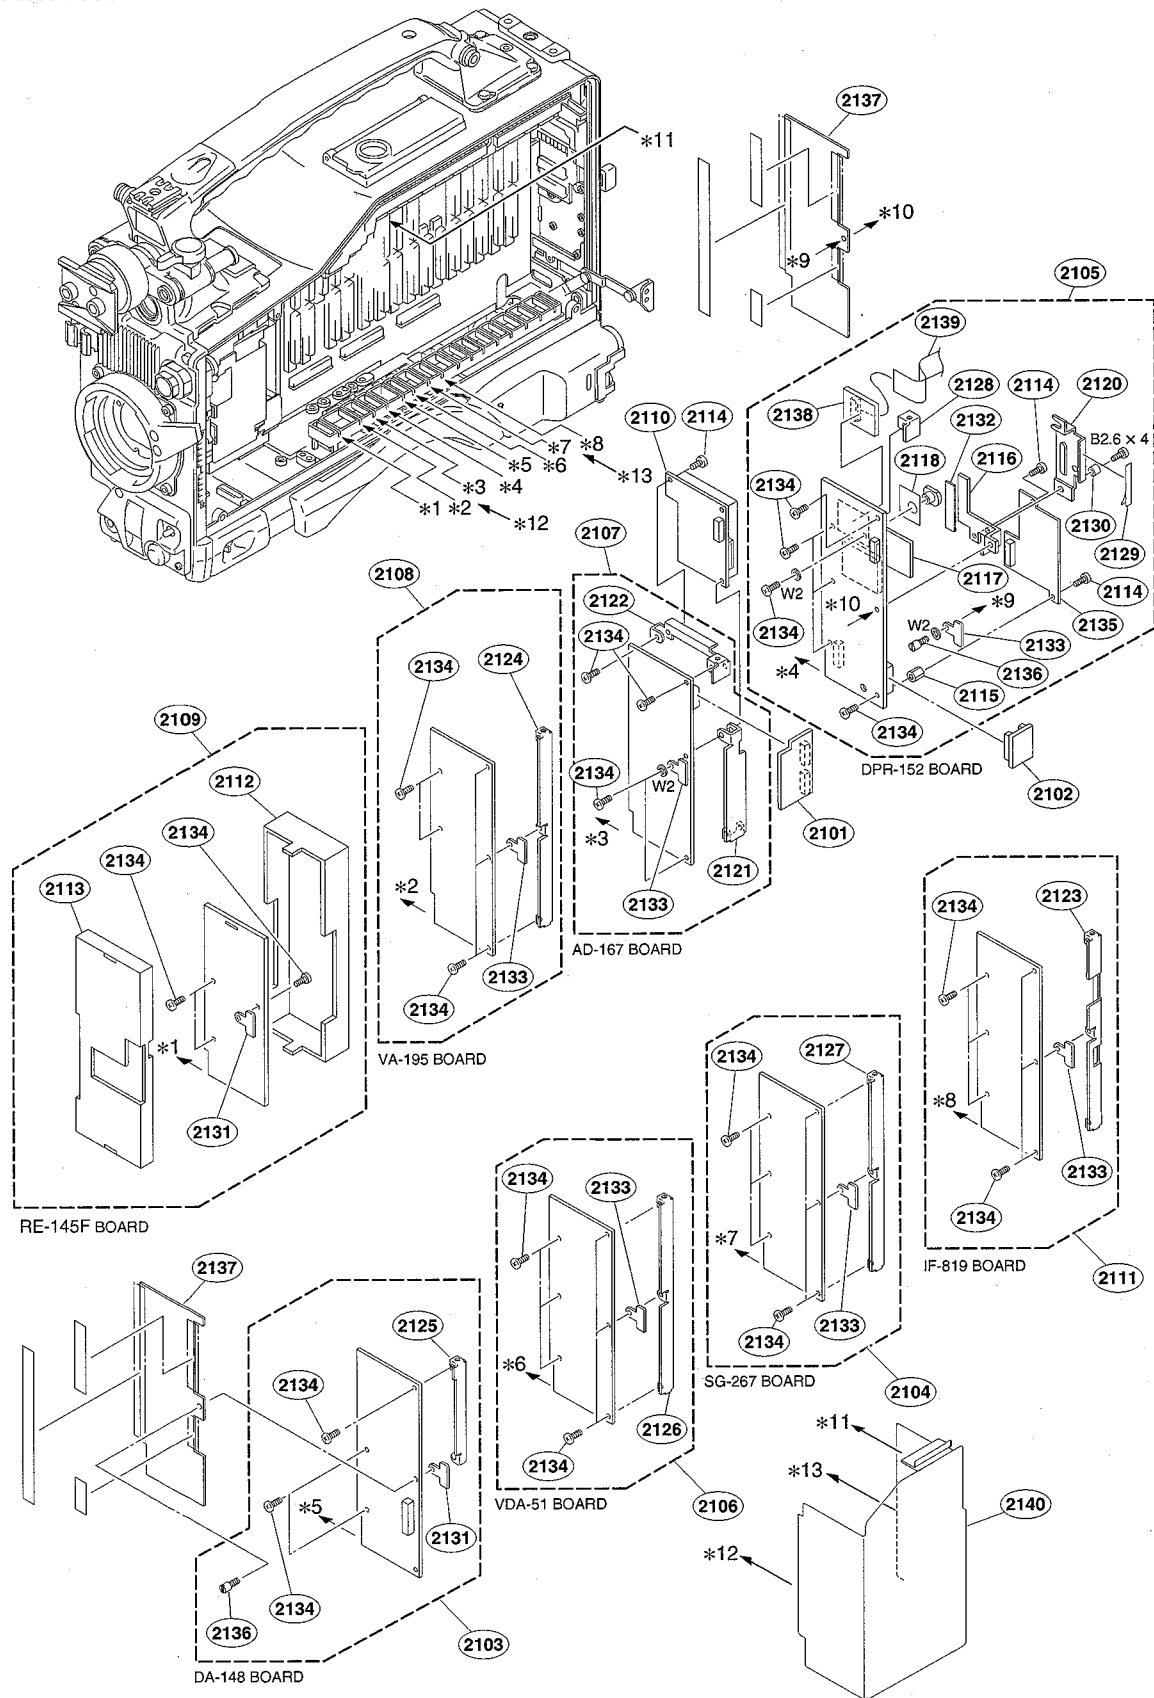


Plug-IN Boards-1

*a: Serial No. 10276 - 10305, 10336 -

90001 -

*b: Serial No. 10276 - 10365

No.	Part No.	SP Description
2101	A-8325-175-A	o MOUNTED CIRCUIT BOARD, CN-1940
2102	A-8325-341-A	o MOUNTED CIRCUIT BOARD, CN-2085
2103	A-8325-353-A	o MOUNTED CIRCUIT BOARD, DA-148
2104	A-8325-354-A	o MOUNTED CIRCUIT BOARD, SG-267
2105	A-8325-355-A	o MOUNTED CIRCUIT BOARD, DPR-152
2106	A-8325-357-A	o MOUNTED CIRCUIT BOARD, VDA-51
2107	A-8325-358-A	o MOUNTED CIRCUIT BOARD, AD-167
2108	A-8325-359-A	o MOUNTED CIRCUIT BOARD, VA-195
2109	A-8325-417-A	o MOUNTED CIRCUIT BOARD, RE-145F
2110	A-8325-505-A	o MOUNTED CIRCUIT BOARD, DPR-157
2111	A-8325-860-A	o MOUNTED CIRCUIT BOARD, IF-819
2112	X-3679-425-1	o CASE ASSY, SHIELD C
2113	X-3679-426-1	o CASE ASSY, SHIELD D
2114	3-370-749-01	s SCREW (M2X0.4), PRECISION
2115	3-605-857-01	o SUPPORT (6.3)
2116	3-610-508-03	o TABLE, CLAMPER
2117	3-610-554-01	o SHEET, THERMAL CONVECTION
2118	3-612-297-01	o INSULATOR (DPR)
2120	3-626-754-01	o CLAMPER, HB
2121	3-626-755-01	o STAY AD (S), PC BOARD
2122	3-626-756-01	o STAY AD (L), PC BOARD
2123	3-626-767-01	o PLATE (IF), ORNAMENTAL
2124	3-626-768-01	o PLATE (VA), ORNAMENTAL
2125	3-626-769-01	o PLATE (DA), ORNAMENTAL
2126	3-626-770-01	o PLATE (VDA), ORNAMENTAL
2127	3-626-771-01	o PLATE (SG), ORNAMENTAL
2128	3-626-780-01	o PLATE (DPR), ORNAMENTAL
2129	3-626-783-02	o LABEL, CAUTION
2130	3-675-965-01	s SPACER (2.6X2)
2131	3-679-662-01	o RING, PULL
2132	3-697-580-01	o SHEET, CUSHION
2133	3-724-753-01	o RING, PULL
2134	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
2135	A-8325-145-A	o MOUNTED CIRCUIT BOARD, RPR-13
2136	*a 3-629-815-01	o PIN (M2)
2137	*a 3-629-685-01	o SHEET, ELECTROMAGNETIC SHIELD
2138	A-8327-358-A	o MOUNTED CIRCUIT BOARD, CN-2140
2139	1-757-539-11	s CABLE, FLEXIBLE FLAT (26P)
2140	*b 3-629-681-03	o PLATE, PB SHIELD

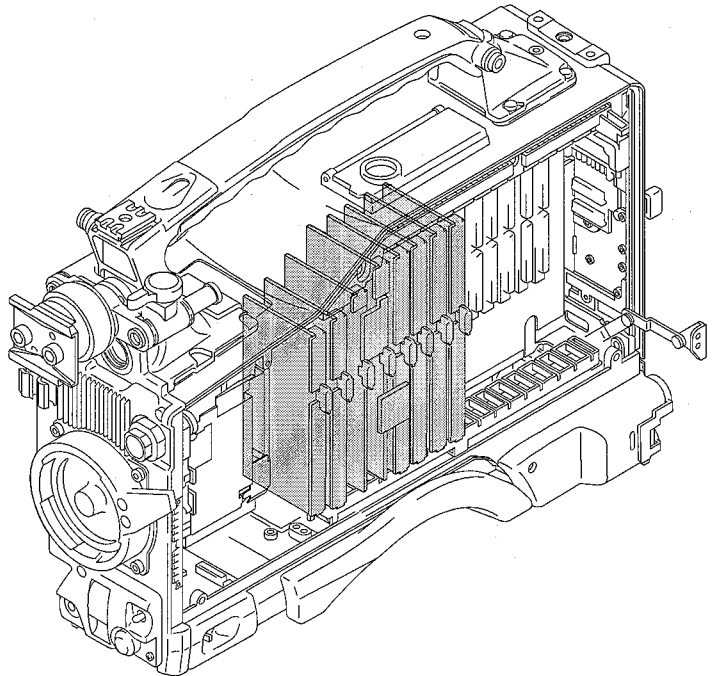


Screw/Washer

Part No. SP Description


7-621-773-86 s SCREW +B2.6X4

7-688-001-12 s WASHER W2, MIDDLE

Plug-IN Boards-2

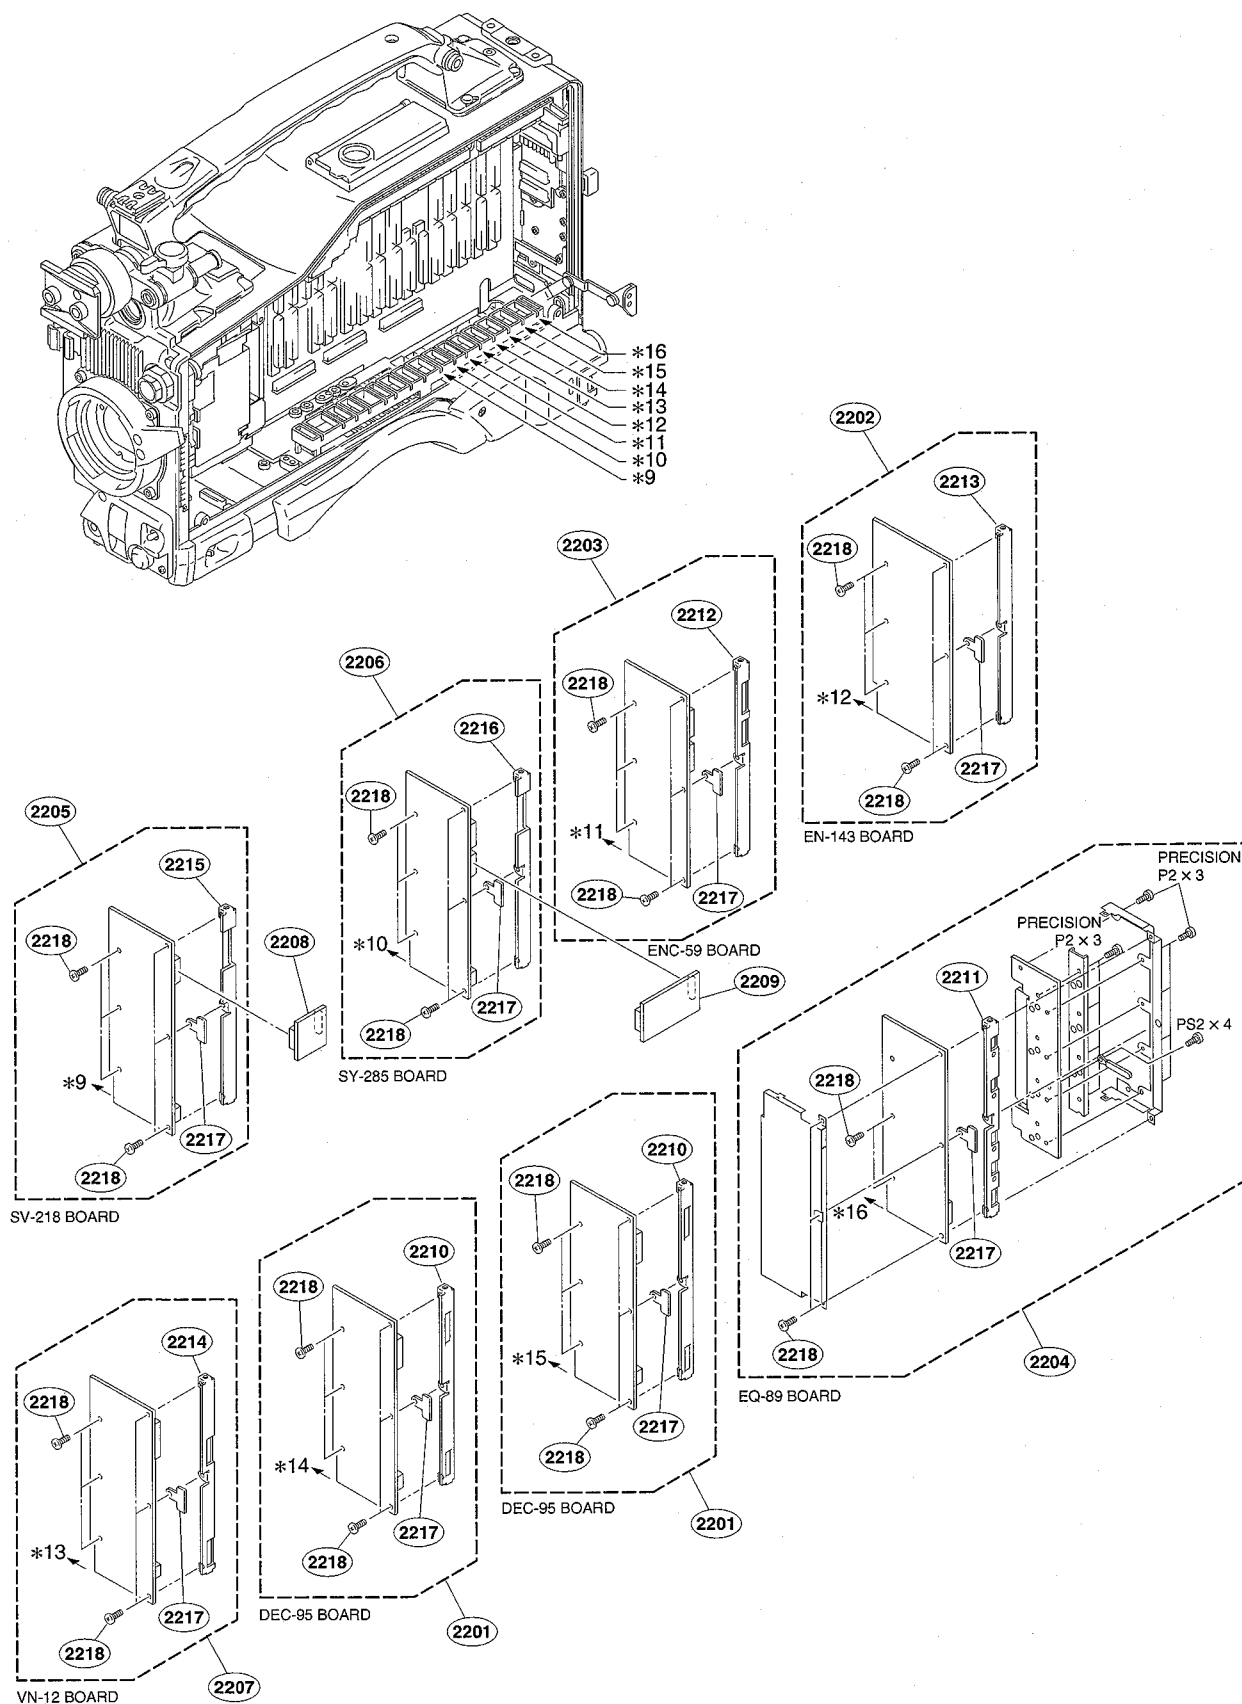


No.	Part No.	SP Description
2201	A-8316-494-A	o MOUNTED CIRCUIT BOARD, DEC-95
2202	A-8325-124-A	o MOUNTED CIRCUIT BOARD, EN-143
2203	A-8325-126-A	o MOUNTED CIRCUIT BOARD, ENC-59
2204	A-8325-128-A	o MOUNTED CIRCUIT BOARD, EQ-89
2205	A-8325-134-A	o MOUNTED CIRCUIT BOARD, SV-218
2206	A-8325-136-A	o MOUNTED CIRCUIT BOARD, SY-285
2207	A-8325-140-A	o MOUNTED CIRCUIT BOARD, VN-12
2208	A-8325-146-A	o MOUNTED CIRCUIT BOARD, CN-2078
2209	A-8325-178-A	o MOUNTED CIRCUIT BOARD, CN-2044
2210	3-610-534-03	o PLATE (DEC), ORNAMENTAL
2211	3-626-747-01	o PLATE (EQ), ORNAMENTAL
2212	3-626-748-01	o PLATE (ENC), ORNAMENTAL
2213	3-626-749-01	o PLATE (EN), ORNAMENTAL
2214	3-626-750-01	o PLATE (VN), ORNAMENTAL
2215	3-626-798-01	o PLATE (SV), ORNAMENTAL
2216	3-626-799-01	o PLATE (SY), ORNAMENTAL
2217	3-724-753-01	o RING, PULL
2218	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)

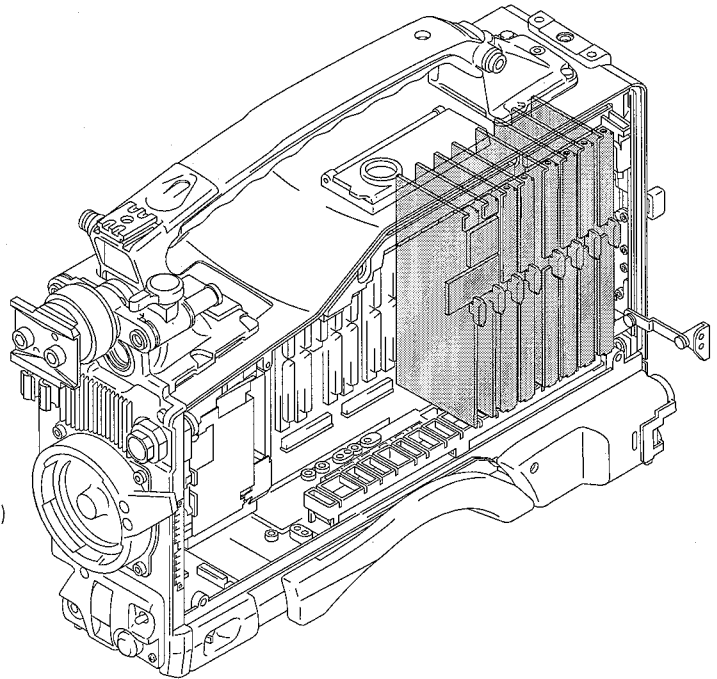

Screws

Part No.	SP Description
7-627-553-37	s SCREW, PRECISION +P2X3
7-628-253-05	s SCREW, +PS2X4


Inside Panel-1

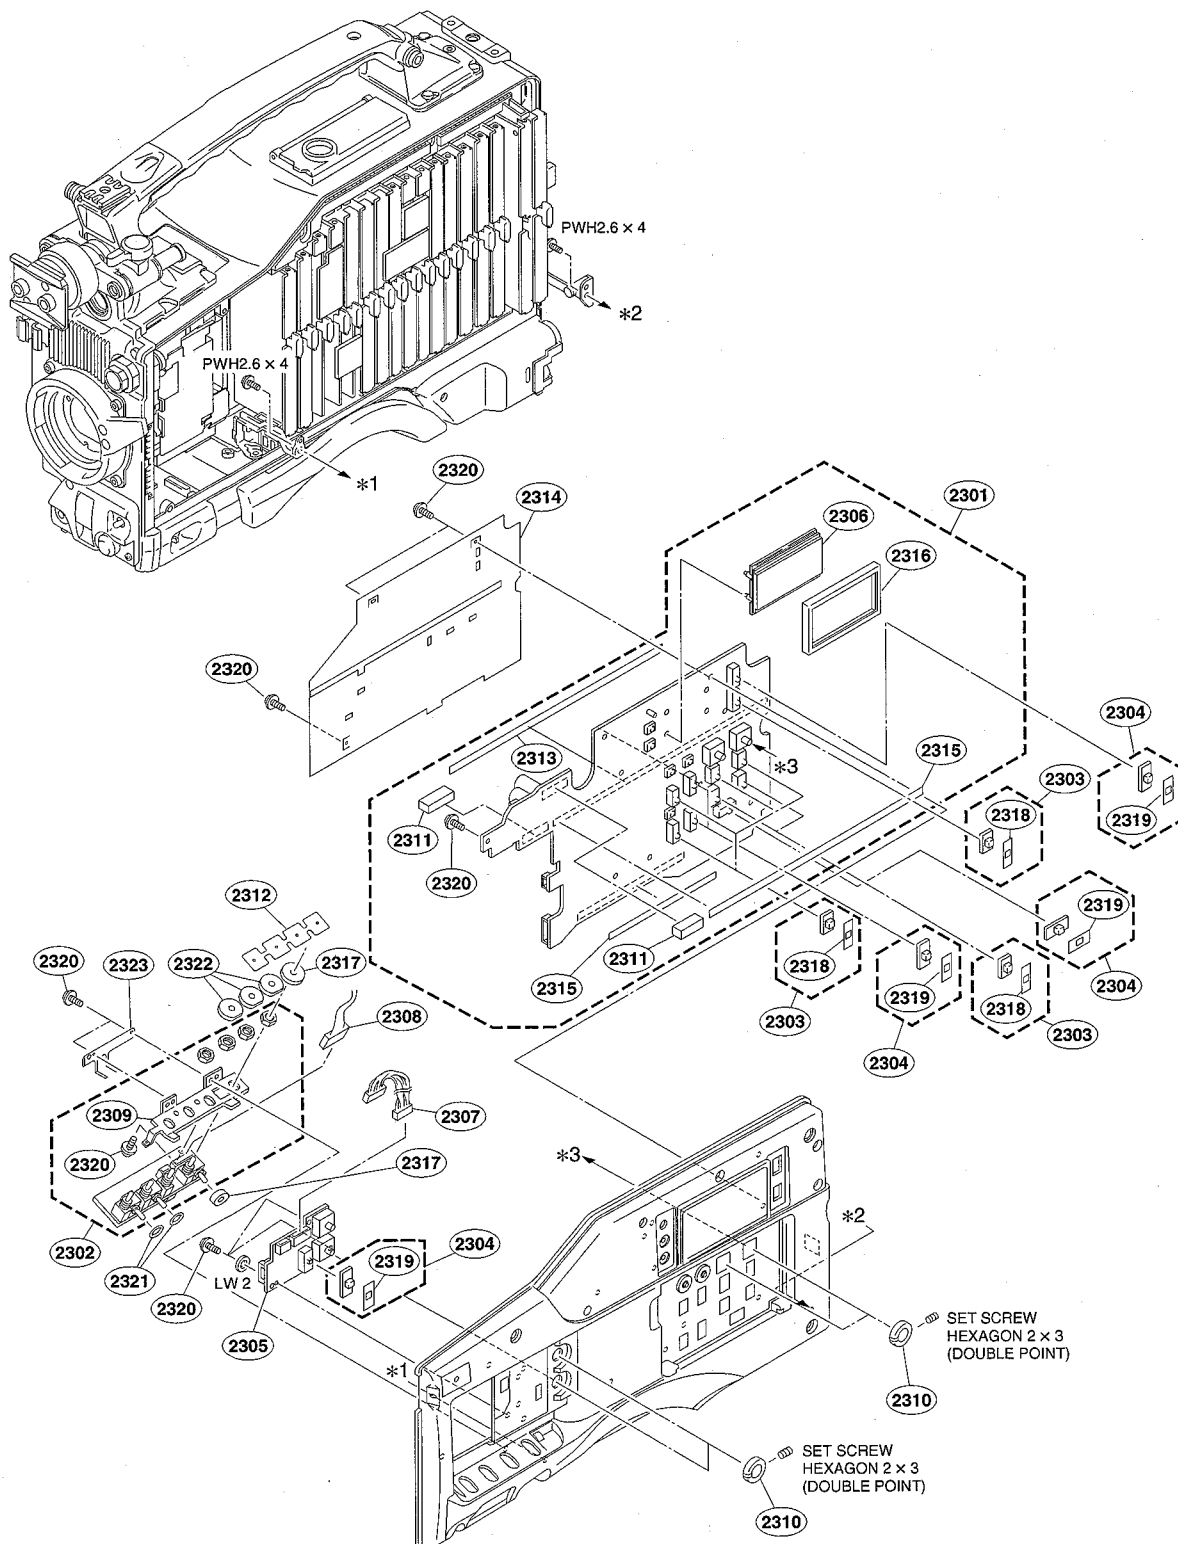

Inside Panel-1

*a: Serial No. 10001 - 10070
 *b: Serial No. 10071 -
 *c: Serial No. 10376 -


No.	Part No.	SP Description
2301	A-8325-138-A	o MOUNTED CIRCUIT BOARD, APR-55
2302	A-8325-179-A	o MOUNTED CIRCUIT BOARD, CP-361
2303	X-3678-125-1	s KNOB (2 POSI) ASSY, SW
2304	X-3678-126-1	s KNOB (3 POSI) ASSY, SW
2305	1-652-770-13	o PRINTED WIRING BOARD, VR-175
2306	1-810-586-11	s LCD MODULE
2307	1-953-434-11	o HARNESS, SUB (TC6-VR16)
2308	1-960-466-11	o HARNESS, SUB (CP-TC)
2309	3-603-713-01	o HOLDER SWITCH
2310	3-610-574-02	s KNOB, VR
2311	3-611-111-01	o SPACER (RE), RUBBER
2312	3-603-767-01	o BLIND SHEET (CAM SW)
2313	3-614-476-01	o SPACER, RUBBER
2314	3-629-489-02	o PLATE, APR, SHIELD
2315	3-680-206-02	o TC INSULATOR
2316	3-680-214-01	o SPACER LCD
2317	3-680-224-01	s PLATE, BLIND, TOGGLE SW
2318	3-717-902-21	o PLATE, ORNAMENTAL
2319	3-717-902-31	o PLATE, ORNAMENTAL
2320	3-729-013-41	s SCREW, WASHERHEAD (+P) (ST)
2321	3-884-053-00	s O-RING (RBR)
2322	*b 3-603-761-01	o DROP, PROTECTION (CAM SW)
	*a 3-680-224-01	s PLATE, BLIND, TOGGLE SW
2323	*c 3-683-017-01	o SPRING, LEAF

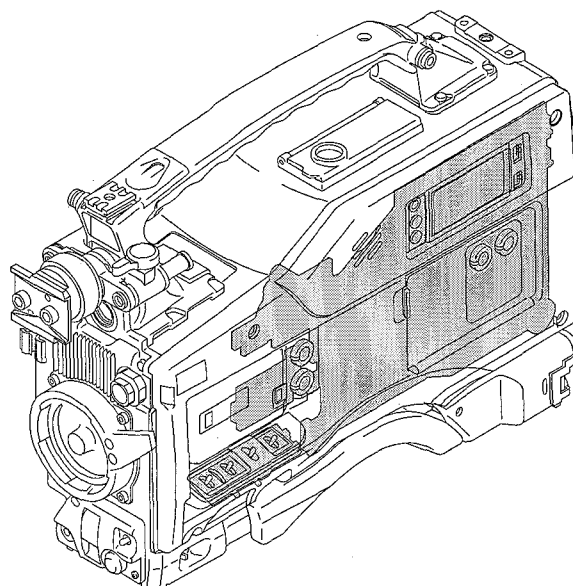

Screws/Washer


Part No.	SP Description
7-621-732-09	s SET-SCREW, HEX 2X3 WP
7-623-305-07	s WASHER LW 2 (TYPE A)
7-682-902-01	s SCREW +PWH 2.6X4

Inside Panel-2

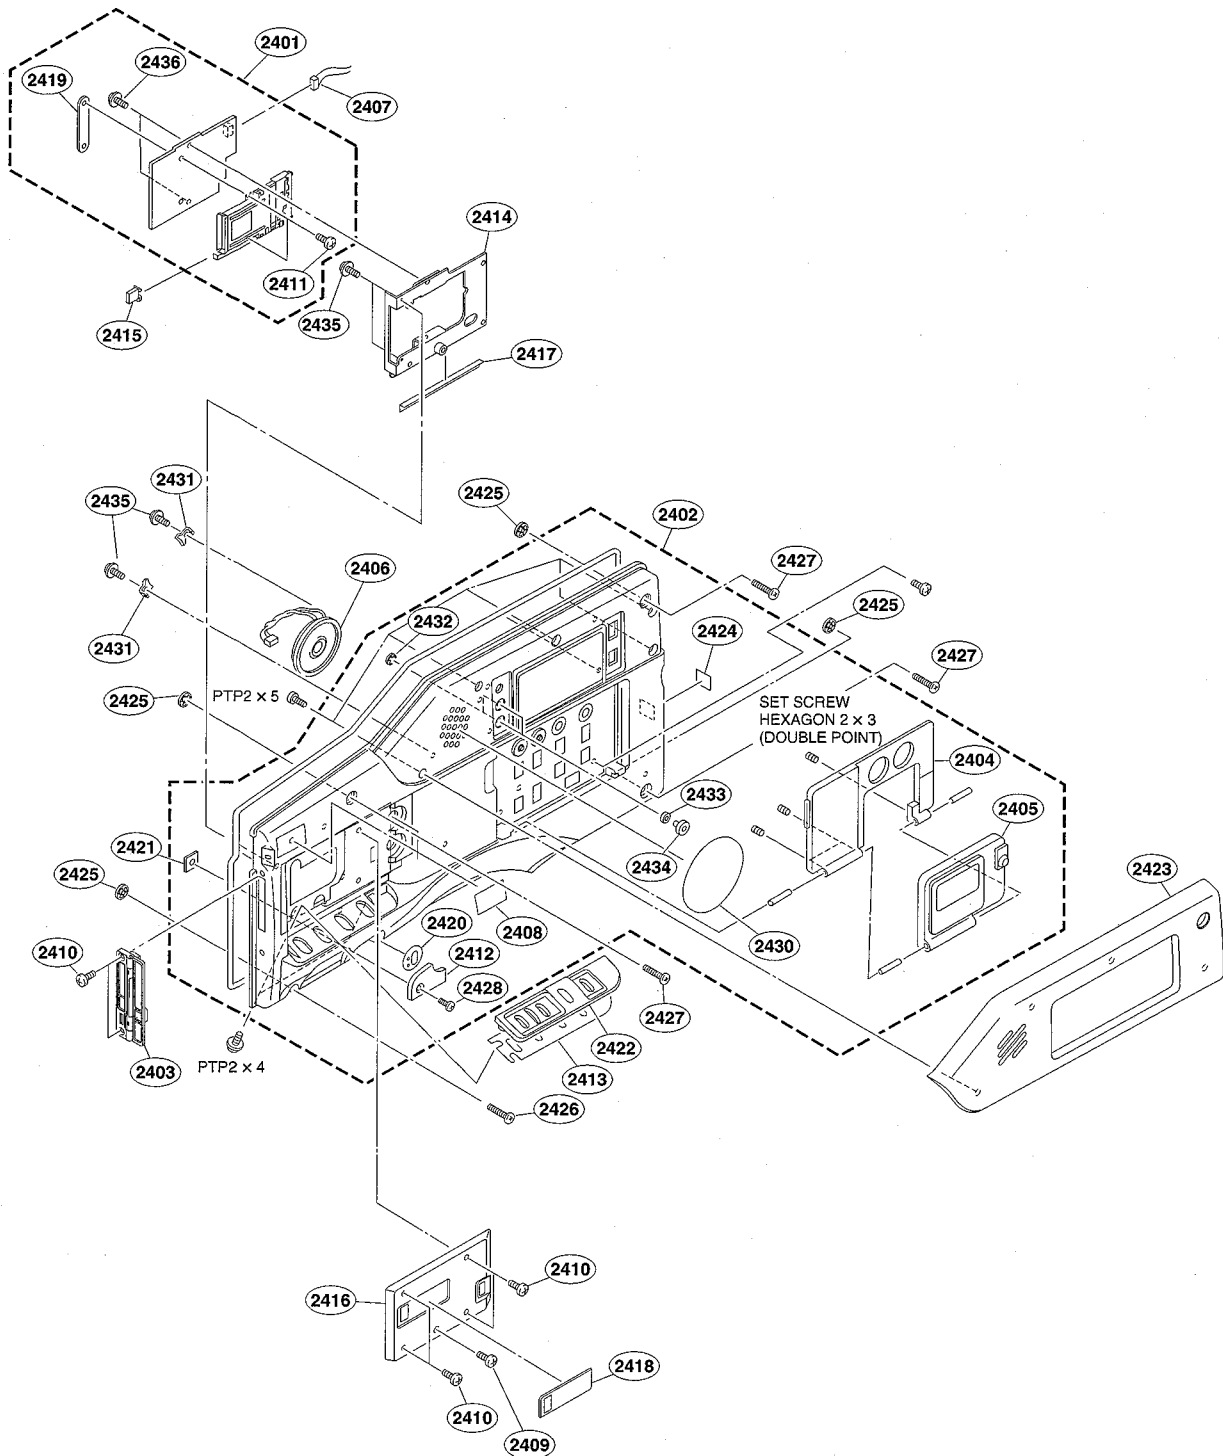

Inside Panel-2

No.	Part No.	SP Description
2401	A-8325-177-A	o MOUNTED CIRCUIT BOARD, CN-2043
2402	X-3605-843-4	o PANEL SUB ASSY, IN SIDE
2403	X-3605-850-2	s MS LID ASSY
2404	X-3679-418-3	o DOOR (A) ASSY, SWITCH
2405	X-3679-419-2	o DOOR (B) ASSY, SWITCH
2406	1-503-293-00	s SPEAKER (3.6CM)
2407	1-960-468-11	o HARNESS, SUB (MS-IF)
2408	3-182-055-01	s LABEL (1), FILTER (PAPER)
2409	3-370-475-11	s SCREW (NYLOCK +B 3X6)
2410	3-370-476-11	s SCREW (NYLOCK +B 2X5)
2411	3-370-749-01	s SCREW (M2X0.4), PRECISION
2412	3-616-729-11	o PLATE, IN SIDE BLIND
2413	3-622-788-01	o SHEET, ORNAMENTAL PLATE STICK
2414	3-626-761-01	o STAY, MS
2415	3-626-764-01	o MS EJECT BUTTON
2416	3-626-765-01	o PANEL, MS ORNAMENTAL
2417	3-626-766-01	o CUSHION2, DROP PROTECTION
2418	3-626-774-01	o MS WINDOW
2419	3-626-775-01	o NUT, PLATE
2420	3-627-855-01	s SW ESCUTCHEON
2421	3-627-952-01	s PLATE, NUT (M2.6)
2422	3-680-216-01	o PLATE, ORNAMENTAL SW CAMERA
2423	3-680-954-11	s PAD, SIDE
2424	3-681-017-01	o LABEL
2425	3-682-791-01	s RING, O (NBR)
2426	3-687-047-01	s STAINLESS SCREW, +B4X16
2427	3-687-048-01	s STAINLESS SCREW, +B4X20
2428	3-694-181-01	s AROCK PRECISION +P2.6 TYPE 1
2430	3-724-716-02	s SHEET, DROP PROTECTION (PLA)
2431	3-724-726-01	o HOLDER, SPEAKER
2432	3-724-757-02	s RETAINER, SW, PUSH
2433	3-724-758-02	s RUBBER (PUSH), DROP
2434	3-724-759-03	s PUSH SW (KNOB)
2435	3-729-013-41	s SCREW, WASHERHEAD (+P) (ST)
2436	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)

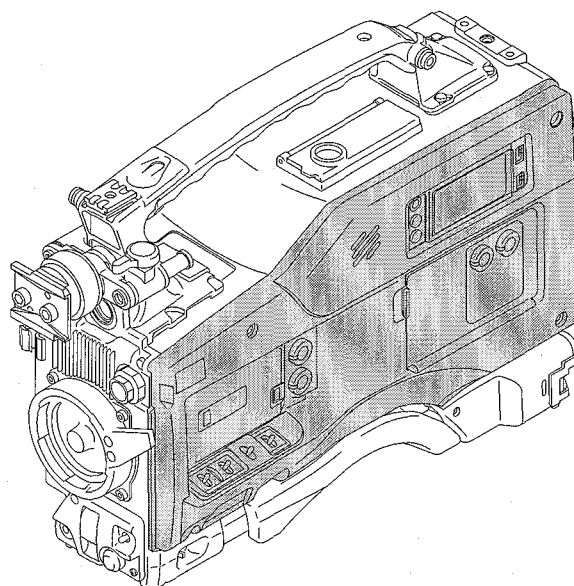

Screws

Part No.	SP Description
7-621-732-09	s SET-SCREW, HEX 2X3 WP
7-627-850-57	s SCREW, PRECISION +P1.4X3.5
7-685-102-19	s SCREW +PTP2X4
7-685-103-19	s SCREW +PTP 2X5

1-3. Electrical Parts List for Boards

AD-167 BOARD

*a: Lot No. 911
 *b: Lot No. 912 -
 *c: Lot No. 092 -
 *d: Lot No. 911 - 002
 *e: Lot No. 003 -
 *f: Lot No. 911 - 0B3
 *g: Lot No. 0B4 -
 *h: Lot No. 911 - 262
 *i: Lot No. 263 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-358-A	o MOUNTED CIRCUIT BOARD, AD-167
1pc	3-626-756-01	o STAY AD(L), PC BOARD
1pc	3-626-755-01	o STAY AD(S), PC BOARD
6pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-724-753-01	o RING, PULL
1pc	7-688-001-12	s WASHER W2, MIDDLE
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C104	*a 1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C107	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C108	1-127-956-11	s CAPACITOR, CHIP FILM 0.1MF
C109	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C110	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C111	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C112	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C113	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C114	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C115	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C116	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C117	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C118	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C119	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C120	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C121	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C122	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C123	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C124	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C125	1-162-904-11	s CAPACITOR, CHIP CERAMIC 0.5PF
C126	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C127	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C128	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C129	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C130	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C131	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C133	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C134	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C135	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C136	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C137	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C138	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C139	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C203	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C204	*a 1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C205	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C206	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C207	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C208	1-127-956-11	s CAPACITOR, CHIP FILM 0.1MF
C209	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C210	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C213	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C214	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C215	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C216	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C217	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C218	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C219	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C220	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C221	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C222	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C223	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C224	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C225	1-162-904-11	s CAPACITOR, CHIP CERAMIC 0.5PF
C226	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C227	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C228	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C229	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C230	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C231	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C233	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C234	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C235	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C236	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C237	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C238	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C239	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C302	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C303	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C304	*a 1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C305	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C306	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C307	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C308	1-127-956-11	s CAPACITOR, CHIP FILM 0.1MF
C309	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C310	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C311	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C312	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C313	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C314	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C315	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C316	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C317	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C318	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C319	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C320	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C321	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C322	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C323	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C324	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C325	1-162-904-11	s CAPACITOR, CHIP CERAMIC 0.5PF
C326	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C327	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C328	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C329	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C330	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C331	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C333	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C334	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C335	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C336	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C337	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C338	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C339	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C401	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C402	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C403	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C404	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C405	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C406	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C407	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C408	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C409	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C410	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C411	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C501	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C502	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C503	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C504	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C505	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C507	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C508	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C509	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C510	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C511	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C512	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C513	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C514	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C515	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C517	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C518	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C519	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C520	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C521	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C522	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C524	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C525	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C527	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C528	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C529	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C530	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C531	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C532	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
CN2	1-770-139-11	o CONNECTOR 70P
CN3	1-695-453-11	s CONNECTOR, BOARD TO BOARD 50P
D101	8-719-059-52	s DIODE MA3J14300LSO
D201	8-719-059-52	s DIODE MA3J14300LSO
D301	8-719-059-52	s DIODE MA3J14300LSO
FB101	*b 1-400-039-21	s FERRITE, EMI (SMD)

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FB201	*b 1-400-039-21	s FERRITE, EMI (SMD)
FB301	*b 1-400-039-21	s FERRITE, EMI (SMD)
FB501	1-469-108-11	s FERRITE, EMI (SMD)
FL101	1-233-943-11	s FILTER, LOW PASS
FL201	1-233-943-11	s FILTER, LOW PASS
FL301	1-233-943-11	s FILTER, LOW PASS
IC3	8-759-669-45	s IC TL062CPWR-12
IC101	8-759-054-61	s IC CLC505AJE
IC102	8-759-523-02	s IC TC74HC4053AFT(EL)
IC103	8-759-669-45	s IC TL062CPWR-12
IC104	8-759-485-84	s IC MC1495DR2
IC105	8-759-054-61	s IC CLC505AJE
IC106	8-759-054-61	s IC CLC505AJE
IC107	8-759-669-86	s IC AD9432BST-80
IC201	8-759-054-61	s IC CLC505AJE
IC202	8-759-523-02	s IC TC74HC4053AFT(EL)
IC203	8-759-669-45	s IC TL062CPWR-12
IC204	8-759-485-84	s IC MC1495DR2
IC205	8-759-054-61	s IC CLC505AJE
IC206	8-759-054-61	s IC CLC505AJE
IC207	8-759-669-86	s IC AD9432BST-80
IC301	8-759-054-61	s IC CLC505AJE
IC302	8-759-523-02	s IC TC74HC4053AFT(EL)
IC303	8-759-669-45	s IC TL062CPWR-12
IC304	8-759-485-84	s IC MC1495DR2
IC305	8-759-054-61	s IC CLC505AJE
IC306	8-759-054-61	s IC CLC505AJE
IC307	8-759-669-86	s IC AD9432BST-80
IC401	8-759-386-26	s IC 74LCX574MTCX
IC402	8-759-386-26	s IC 74LCX574MTCX
IC403	8-759-386-26	s IC 74LCX574MTCX
IC404	8-759-386-26	s IC 74LCX574MTCX
IC405	8-759-386-26	s IC 74LCX574MTCX
IC406	8-759-456-26	s IC 74LCX541MTCX
IC407	8-759-456-26	s IC 74LCX541MTCX
IC408	8-759-456-26	s IC 74LCX541MTCX
IC409	8-759-456-26	s IC 74LCX541MTCX
IC410	8-759-456-26	s IC 74LCX541MTCX
IC411	8-759-575-64	s IC NC7SZ04P5
IC412	8-759-575-64	s IC NC7SZ04P5
IC413	8-759-575-64	s IC NC7SZ04P5
IC501	8-759-064-36	s IC MB88346BPFV
IC502	8-759-669-45	s IC TL062CPWR-12
IC503	8-759-058-62	s IC TC7S08FU-TE85R
IC504	8-759-058-54	s IC TC7S00FU-TE85R
IC505	8-759-562-40	s IC CAT24WC02J-TE13
IC506	8-759-185-42	s IC LM4040AIM3-2.5
IC507	8-759-547-49	s IC CDC509PWR
IC508	8-759-054-61	s IC CLC505AJE
L101	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L102	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L103	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L104	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L201	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L202	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L203	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L204	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L301	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L302	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L303	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L304	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L401	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L501	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L502	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L503	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L504	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
Q101	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q102	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q103	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q104	8-729-928-36	s TRANSISTOR DTA114EE
Q105	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q106	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q201	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q202	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q203	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q204	8-729-928-36	s TRANSISTOR DTA114EE
Q205	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q206	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q301	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q302	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q303	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q304	8-729-928-36	s TRANSISTOR DTA114EE
Q305	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q306	*i 8-729-024-59	s TRANSISTOR 2SA1688-5-TL
	*h 8-729-040-48	s TRANSISTOR 2SA1688-4-SONY-TL
Q501	8-729-928-36	s TRANSISTOR DTA114EE
Q502	8-729-928-90	s TRANSISTOR DTC114EE
Q503	8-729-117-32	s TRANSISTOR 2SC4177
Q504	8-729-117-16	s TRANSISTOR 2SA1611M6
Q505	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q506	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q507	8-729-117-32	s TRANSISTOR 2SC4177
Q508	8-729-117-16	s TRANSISTOR 2SA1611M6
Q509	*c 8-729-014-93	s TRANSISTOR 2SB1440S-TX
R101	*b 1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
	*a 1-218-685-11	s RESISTOR,CHIP 510 1/16W
R102	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R103	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R105	*b 1-218-673-11	s RESISTOR CHIP 160 1/16W (1608)
	*a 1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R106	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R107	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R108	*e 1-218-693-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
	*d 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R109	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R110	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R111	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R112	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R113	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R114	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R115	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R116	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R117	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R118	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R119	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R120	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R121	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R122	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R123	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R124	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R125	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R126	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R127	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R128	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R129	1-216-828-11	s RESISTOR,CHIP 3.9K 1/16W 1608
R130	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R131	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R132	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R133	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R134	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R135	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R136	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R137	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R138	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R139	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R140	1-218-667-11	s RESISTOR,CHIP 91 1/16W (1608)
R141	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R142	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R143	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R144	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R145	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R146	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R147	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R148	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R149	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R150	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R151	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R152	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R153	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R154	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R155	*g 1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
	*f 1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R156	*g 1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
	*f 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R157	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R159	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R160	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R161	*a 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R201	*b 1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
	*a 1-218-685-11	s RESISTOR,CHIP 510 1/16W
R202	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R203	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R205	*b 1-218-673-11	s RESISTOR CHIP 160 1/16W (1608)
	*a 1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R206	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R207	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R208	*e 1-218-693-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
	*d 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R209	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R210	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R211	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R212	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R213	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R214	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R215	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R216	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R217	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R218	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R219	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R220	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R221	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R222	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R223	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R224	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R225	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R226	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R227	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R228	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R229	1-216-828-11	s RESISTOR, CHIP 3.9K 1/16W 1608
R230	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R231	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R232	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R233	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R234	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R235	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R236	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R237	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R238	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R239	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R240	1-218-667-11	s RESISTOR,CHIP 91 1/16W (1608)
R241	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R242	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R243	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R244	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R245	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R246	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R247	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R248	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R249	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R250	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R251	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R252	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R253	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R254	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R255	*g 1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
	*f 1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R256	*g 1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
	*f 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R257	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R259	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R260	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R261	*a 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R301	*b 1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
	*a 1-218-685-11	s RESISTOR,CHIP 510 1/16W
R302	1-218-685-11	s RESISTOR,CHIP 510 1/16W

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R303	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R305	*b 1-218-673-11	s RESISTOR CHIP 160 1/16W (1608)
	*a 1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R306	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R307	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R308	*e 1-218-693-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
	*d 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R309	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R310	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R311	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R312	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R313	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R314	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R315	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R316	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R317	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R318	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R319	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R320	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R321	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R322	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R323	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R324	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R325	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R326	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R327	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R328	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R329	1-216-828-11	s RESISTOR, CHIP 3.9K 1/16W 1608
R330	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R331	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R332	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R333	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R334	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R335	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R336	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R337	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R338	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R339	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R340	1-218-667-11	s RESISTOR,CHIP 91 1/16W (1608)
R341	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R342	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R343	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R344	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R345	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R346	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R347	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R348	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R349	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R350	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R351	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R352	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R353	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R354	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R355	*g 1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
	*f 1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R356	*g 1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
	*f 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R357	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R359	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R360	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R361	*a 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R401	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R501	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R502	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R503	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R504	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R505	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R507	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R508	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R509	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R510	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R511	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R512	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R513	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R514	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R515	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R516	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R517	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R518	1-218-719-11	s RESISTOR,METAL 13K 1/16
R519	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R520	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R521	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R522	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R523	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R524	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R525	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R526	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R527	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R528	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R529	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R530	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R531	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R532	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R533	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R534	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R535	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R536	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R537	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R538	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R540	*b 1-218-719-11	s RESISTOR,METAL 13K 1/16
	*a 1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R541	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R542	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R543	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R544	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R545	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R546	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R547	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R549	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R550	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R551	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R552	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R553	*c 1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
RB401	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB402	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB403	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB404	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB405	1-239-390-11	s RESISTOR,NETWORK 33 (1608)

(AD-167 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB406	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB407	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB408	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB409	1-239-390-11	s RESISTOR,NETWORK 33 (1608)

AD-171 BOARD

*a: Lot No. 2A3
*b: Lot No. 2A4 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8345-179-A	s MOUNTED CIRCUIT BOARD, AD-171
1pc	3-626-756-01	o STAY AD(L), PC BOARD
1pc	3-626-755-01	o STAY AD(S), PC BOARD
6pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-724-753-01	o RING, PULL
1pc	7-688-001-12	s WASHER W2, MIDDLE
C1	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C2	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C3	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C4	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C5	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C6	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C7	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C8	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C9	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C10	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C11	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C12	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C13	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C14	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C15	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C16	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C17	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C18	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C19	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C20	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C21	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C22	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C24	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C26	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C27	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C28	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C29	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C30	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C31	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C32	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C33	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C34	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C35	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C36	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C101	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C102	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C103	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C104	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C105	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C106	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C107	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C108	1-127-956-11	s CAPACITOR, CHIP FILM 0.1MF
C109	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C110	1-113-986-11	s CAPACITOR, TANTALUM 2.2MF/25V
C111	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C112	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C113	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C114	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C115	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C116	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C117	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C118	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C119	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C120	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C121	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C122	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C123	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C124	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C125	1-162-904-11	s CAPACITOR, CHIP CERAMIC 0.5PF
C126	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C127	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C129	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C130	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C131	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C132	1-165-897-11	s CAPACITOR, TANTALUM ELECT 22MF
C133	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C134	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C135	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C136	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C137	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C138	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C139	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C140	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C141	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C142	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C143	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C144	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C145	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C146	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C147	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C148	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C201	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C202	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C203	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C204	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C205	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C206	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C207	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C208	1-127-956-11	s CAPACITOR, CHIP FILM 0.1MF
C209	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C210	1-113-986-11	s CAPACITOR, TANTALUM 2.2MF/25V
C211	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C212	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C213	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C214	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C215	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C216	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C217	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C218	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C219	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C220	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C221	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C222	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C223	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C224	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C225	1-162-904-11	s CAPACITOR, CHIP CERAMIC 0.5PF
C226	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C227	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C229	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C230	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C231	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C232	1-165-897-11	s CAPACITOR, TANTALUM ELECT 22MF
C233	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C234	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C235	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C236	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C237	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C238	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C239	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C240	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C241	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C242	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C243	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C244	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C245	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C246	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C247	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C248	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C301	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C304	1-162-908-11	s CAPACITOR,CERAMIC 3PF/50V 1608
C305	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C306	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C307	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C308	1-127-956-11	s CAPACITOR,CHIP FILM 0.1MF
C309	1-119-751-11	s CAPACITOR,TANTALUM 22MF/16V
C310	1-113-986-11	s CAPACITOR,TANTALUM 2.2MF/25V
C311	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C312	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C313	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C314	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C315	1-119-751-11	s CAPACITOR,TANTALUM 22MF/16V
C316	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C317	1-119-751-11	s CAPACITOR,TANTALUM 22MF/16V
C318	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C319	1-119-751-11	s CAPACITOR,TANTALUM 22MF/16V
C320	1-162-908-11	s CAPACITOR,CERAMIC 3PF/50V 1608
C321	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C322	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C323	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C324	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C325	1-162-904-11	s CAPACITOR,CHIP CERAMIC 0.5PF
C326	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C327	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C329	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C330	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C332	1-165-897-11	s CAPACITOR, TANTALUM ELECT 22MF
C333	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C334	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C335	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C336	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C337	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C338	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C339	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C340	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C341	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C342	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C343	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C344	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C345	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C346	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C347	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C366	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C367	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C400	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C401	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C402	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C403	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C404	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C405	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C406	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C407	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C408	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C409	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C410	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C411	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C412	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
CN2	1-770-139-11	s CONNECTOR 70P
CN3	1-695-453-11	s CONNECTOR,BOARD TO BOARD 50P
D101	8-719-059-52	s DIODE MA3J14300LSO
D201	8-719-059-52	s DIODE MA3J14300LSO
D301	8-719-059-52	s DIODE MA3J14300LSO
FB1	1-414-772-11	s INDUCTOR,MICRO(CHIP TYPE) 2012
FB2	1-414-772-11	s INDUCTOR,MICRO(CHIP TYPE) 2012
FB3	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB4	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB5	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB6	1-414-772-11	s INDUCTOR,MICRO(CHIP TYPE) 2012
FB103	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB104	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB105	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB106	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB203	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB204	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB205	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB206	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB303	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB304	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB305	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB306	1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FL101	1-233-943-11	s FILTER, LOW PASS
FL201	1-233-943-11	s FILTER, LOW PASS
FL301	1-233-943-11	s FILTER, LOW PASS
IC1	8-759-669-45	s IC TL062CPWR-12
IC2	8-759-185-42	s IC LM4040AIM3-2.5
IC3	8-759-058-62	s IC TC7S08FU-TE85R
IC4	8-759-058-54	s IC TC7S00FU-TE85R
IC5	8-759-678-06	s IC CAT24WC02J1-TE13
IC6	8-759-685-33	s IC BU2500FV-E2
IC7	8-759-547-49	s IC CDC509PWR
IC10	8-759-669-45	s IC TL062CPWR-12
IC101	8-759-054-61	s IC CLC505AJE

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC102	8-759-523-02	s IC TC74HC4053AFT (EL)
IC103	8-759-669-45	s IC TL062CPWR-12
IC104	8-759-485-84	s IC MC1495DR2
IC105	8-759-054-61	s IC CLC505AJE
IC106	8-759-054-61	s IC CLC505AJE
IC107	6-703-680-01	s IC ADC12L066CIVYX
IC201	8-759-054-61	s IC CLC505AJE
IC202	8-759-523-02	s IC TC74HC4053AFT (EL)
IC203	8-759-669-45	s IC TL062CPWR-12
IC204	8-759-485-84	s IC MC1495DR2
IC205	8-759-054-61	s IC CLC505AJE
IC206	8-759-054-61	s IC CLC505AJE
IC207	6-703-680-01	s IC ADC12L066CIVYX
IC301	8-759-054-61	s IC CLC505AJE
IC302	8-759-523-02	s IC TC74HC4053AFT (EL)
IC303	8-759-669-45	s IC TL062CPWR-12
IC304	8-759-485-84	s IC MC1495DR2
IC305	8-759-054-61	s IC CLC505AJE
IC306	8-759-054-61	s IC CLC505AJE
IC307	6-703-680-01	s IC ADC12L066CIVYX
IC401	8-759-386-26	s IC 74LCX574MTCX
IC402	8-759-386-26	s IC 74LCX574MTCX
IC403	8-759-386-26	s IC 74LCX574MTCX
IC404	8-759-386-26	s IC 74LCX574MTCX
IC405	8-759-386-26	s IC 74LCX574MTCX
IC406	8-759-669-45	s IC TL062CPWR-12
IC407	8-759-669-45	s IC TL062CPWR-12
IC408	8-759-561-69	s IC PCF8574TS-T
L1	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L2	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L3	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L4	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L101	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L102	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L103	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L105	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L106	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L201	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L202	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L203	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L205	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L206	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L301	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L302	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L303	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L305	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L306	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L401	1-414-392-31	s INDUCTOR (SMD) 1.0UH
Q1	8-729-928-36	s TRANSISTOR DTA114EE
Q2	8-729-928-90	s TRANSISTOR DTC114EE
Q3	8-729-117-32	s TRANSISTOR 2SC4177
Q4	8-729-117-16	s TRANSISTOR 2SA1611M6
Q5	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q6	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q8	8-729-117-32	s TRANSISTOR 2SC4177
Q9	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q101	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q102	8-729-024-59	s TRANSISTOR 2SA1688-5-TL

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q103	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q105	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q106	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q201	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q202	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q203	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q205	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q206	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q301	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q302	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q303	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q305	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q306	8-729-024-59	s TRANSISTOR 2SA1688-5-TL
Q307	8-729-142-90	s TRANSISTOR 2SK853-K5
Q308	8-729-142-90	s TRANSISTOR 2SK853-K5
Q309	8-729-142-90	s TRANSISTOR 2SK853-K5
Q400	8-729-928-36	s TRANSISTOR DTA114EE
R1	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R2	1-216-839-11	s RESISTOR,CHIP 33K 1/10W 1608
R3	1-216-839-11	s RESISTOR,CHIP 33K 1/10W 1608
R4	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R5	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R6	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R7	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R8	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R9	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R10	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R11	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R12	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R13	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R14	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R15	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R16	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R17	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R18	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R19	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R20	1-216-823-11	s RESISTOR, CHIP 1.5K 1/10W
R21	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R22	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R23	1-216-824-11	s RESISTOR, CHIP 1.8K 1/10W 1608
R24	1-216-824-11	s RESISTOR, CHIP 1.8K 1/10W 1608
R25	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R26	1-216-824-11	s RESISTOR, CHIP 1.8K 1/10W 1608
R27	1-216-824-11	s RESISTOR, CHIP 1.8K 1/10W 1608
R28	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R29	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R30	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R31	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R33	1-216-826-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R34	1-216-817-11	s RESISTOR,CHIP 470 1/10W 1608
R35	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R36	1-216-797-11	s RESISTOR,CHIP 10 1/10W 1608
R37	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R38	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R39	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R40	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R41	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R42	1-216-805-11	s RESISTOR,CHIP 47 1/10W 1608

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R43	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R44	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R45	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R46	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R47	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R50	1-218-853-11	s RESISTOR,CHIP 1.8K 1/10W(1608)
R51	1-218-853-11	s RESISTOR,CHIP 1.8K 1/10W(1608)
R52	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R53	1-216-864-11	s CONDUCTOR, CHIP (1608)
R101	1-216-807-11	s RESISTOR, CHIP 68 1/16W 1608
R102	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R103	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R105	1-216-811-11	s RESISTOR, CHIP 150 1/16W(1608)
R106	1-218-839-11	s RESISTOR,CHIP 470 1/10W (1608)
R107	1-216-843-11	s RESISTOR,CHIP 68K 1/10W (1608)
R108	1-218-845-11	s RESISTOR,CHIP 820 1/10W (1608)
R109	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R110	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R111	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R112	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R113	1-216-805-11	s RESISTOR,CHIP 47 1/10W 1608
R114	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R115	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R116	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R117	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R118	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R119	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R120	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R121	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R122	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R123	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R124	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R125	1-216-823-11	s RESISTOR, CHIP 1.5K 1/10W
R126	1-216-801-11	s RESISTOR,CHIP 22 1/10W (1608)
R127	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R128	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R129	1-216-828-11	s RESISTOR,CHIP 3.9K 1/10W 1608
R130	1-216-801-11	s RESISTOR,CHIP 22 1/10W (1608)
R131	1-218-832-11	s RESISTOR,CHIP 240 1/10W (1608)
R132	*b 1-216-829-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
	*a 1-216-819-11	s RESISTOR,CHIP 680 1/10W 1608
R133	*b 1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
	*a 1-218-863-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
R134	*b 1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
	*a 1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R135	1-216-827-11	s RESISTOR, CHIP 3.3K 1/10W 1608
R136	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R137	1-218-840-11	s RESISTOR,CHIP 510 1/10W (1608)
R138	1-216-817-11	s RESISTOR,CHIP 470 1/10W 1608
R139	1-202-924-11	s RESISTOR, CHIP 240 (1608)
R140	1-211-992-11	s RESISTOR,CHIP 91 1/10W (1608)
R141	1-216-839-11	s RESISTOR,CHIP 33K 1/10W 1608
R142	1-216-825-11	s RESISTOR,CHIP 2.2K 1/10W 1608
R143	1-218-843-11	s RESISTOR,CHIP 680 1/10W (1608)
R144	1-216-843-11	s RESISTOR,CHIP 68K 1/10W (1608)
R145	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R146	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R147	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R148	1-216-825-11	s RESISTOR,CHIP 2.2K 1/10W 1608

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R149	1-218-845-11	s RESISTOR,CHIP 820 1/10W (1608)
R150	1-216-835-11	s RESISTOR,CHIP 15K 1/10W
R151	1-216-844-11	s RESISTOR,CHIP 82K 1/16W 1608
R152	1-218-835-11	s RESISTOR,CHIP 330 1/10W (1608)
R153	1-218-835-11	s RESISTOR,CHIP 330 1/10W (1608)
R154	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R157	1-216-864-11	s CONDUCTOR, CHIP (1608)
R158	1-211-985-11	s RESISTOR,CHIP 47 1/10W (1608)
R159	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R160	1-216-864-11	s CONDUCTOR, CHIP (1608)
R161	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R162	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R163	1-216-805-11	s RESISTOR,CHIP 47 1/10W 1608
R164	1-216-834-11	s RESISTOR,CHIP 12K 1/16W 1608
R165	1-216-827-11	s RESISTOR, CHIP 3.3K 1/10W 1608
R169	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R171	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R172	1-216-822-11	s RESISTOR, CHIP 1.2K 1/10W 1608
R173	1-218-839-11	s RESISTOR,CHIP 470 1/10W (1608)
R174	1-216-821-11	s RESISTOR,CHIP 1.0K 1/10W(1608)
R201	1-216-807-11	s RESISTOR, CHIP 68 1/16W 1608
R202	1-216-809-11	s RESISTOR,CHIP 100 1/10W 1608
R203	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R205	1-216-811-11	s RESISTOR, CHIP 150 1/16W(1608)
R206	1-218-839-11	s RESISTOR,CHIP 470 1/10W (1608)
R207	1-216-843-11	s RESISTOR,CHIP 68K 1/10W (1608)
R208	1-218-845-11	s RESISTOR,CHIP 820 1/10W (1608)
R209	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R210	1-216-813-11	s RESISTOR, CHIP 220 1/10W 1608
R211	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R212	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R213	1-216-805-11	s RESISTOR,CHIP 47 1/10W 1608
R214	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R215	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R216	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R217	1-216-833-11	s RESISTOR,CHIP 10K 1/10W (1608)
R218	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R219	1-216-845-11	s RESISTOR,CHIP 100K 1/10W(1608)
R220	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R221	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R222	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R223	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R224	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R225	1-216-823-11	s RESISTOR, CHIP 1.5K 1/10W
R226	1-216-801-11	s RESISTOR,CHIP 22 1/10W (1608)
R227	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R228	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R229	1-216-828-11	s RESISTOR, CHIP 3.9K 1/10W 1608
R230	1-216-801-11	s RESISTOR,CHIP 22 1/10W (1608)
R231	1-218-832-11	s RESISTOR,CHIP 240 1/10W (1608)
R232	*b 1-216-829-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
	*a 1-216-819-11	s RESISTOR,CHIP 680 1/10W 1608
R233	*b 1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
	*a 1-218-863-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
R234	*b 1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
	*a 1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R235	1-216-827-11	s RESISTOR, CHIP 3.3K 1/10W 1608
R236	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R237	1-218-840-11	s RESISTOR,CHIP 510 1/10W (1608)

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R238	1-216-817-11 s	RESISTOR,CHIP 470 1/10W 1608
R239	1-202-924-11 s	RESISTOR,CHIP 240 (1608)
R240	1-211-992-11 s	RESISTOR,CHIP 91 1/10W (1608)
R241	1-216-839-11 s	RESISTOR,CHIP 33K 1/10W 1608
R242	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/10W 1608
R243	1-218-843-11 s	RESISTOR,CHIP 680 1/10W (1608)
R244	1-216-843-11 s	RESISTOR,CHIP 68K 1/10W (1608)
R245	1-216-809-11 s	RESISTOR,CHIP 100 1/10W 1608
R246	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R247	1-218-847-11 s	RESISTOR,CHIP 1K 1/10W (1608)
R248	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/10W 1608
R249	1-218-845-11 s	RESISTOR,CHIP 820 1/10W (1608)
R250	1-216-835-11 s	RESISTOR,CHIP 15K 1/10W
R251	1-216-844-11 s	RESISTOR,CHIP 82K 1/16W 1608
R252	1-218-835-11 s	RESISTOR,CHIP 330 1/10W (1608)
R253	1-218-835-11 s	RESISTOR,CHIP 330 1/10W (1608)
R254	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R257	1-216-864-11 s	CONDUCTOR,CHIP (1608)
R258	1-211-985-11 s	RESISTOR,CHIP 47 1/10W (1608)
R259	1-218-823-11 s	RESISTOR,CHIP 100 1/10W (1608)
R260	1-216-864-11 s	CONDUCTOR,CHIP (1608)
R261	1-218-879-11 s	RESISTOR,CHIP 22K 1/10W (1608)
R262	1-211-969-11 s	RESISTOR,CHIP 10 1/10W (1608)
R263	1-216-805-11 s	RESISTOR,CHIP 47 1/10W 1608
R264	1-216-834-11 s	RESISTOR,CHIP 12K 1/16W 1608
R265	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/10W 1608
R269	1-216-789-11 s	RESISTOR,CHIP 2.2 1/16W(1608)
R271	1-216-845-11 s	RESISTOR,CHIP 100K 1/10W(1608)
R272	1-216-822-11 s	RESISTOR,CHIP 1.2K 1/10W 1608
R273	1-218-839-11 s	RESISTOR,CHIP 470 1/10W (1608)
R274	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R301	1-216-807-11 s	RESISTOR,CHIP 68 1/16W 1608
R302	1-216-809-11 s	RESISTOR,CHIP 100 1/10W 1608
R303	1-216-813-11 s	RESISTOR,CHIP 220 1/10W 1608
R305	1-216-811-11 s	RESISTOR,CHIP 150 1/16W(1608)
R306	1-218-839-11 s	RESISTOR,CHIP 470 1/10W (1608)
R307	1-216-843-11 s	RESISTOR,CHIP 68K 1/10W (1608)
R308	1-218-845-11 s	RESISTOR,CHIP 820 1/10W (1608)
R309	1-216-833-11 s	RESISTOR,CHIP 10K 1/10W (1608)
R310	1-216-813-11 s	RESISTOR,CHIP 220 1/10W 1608
R311	1-216-833-11 s	RESISTOR,CHIP 10K 1/10W (1608)
R312	1-218-878-11 s	RESISTOR,CHIP 20K 1/10W (1608)
R313	1-216-805-11 s	RESISTOR,CHIP 47 1/10W 1608
R314	1-216-845-11 s	RESISTOR,CHIP 100K 1/10W(1608)
R315	1-216-845-11 s	RESISTOR,CHIP 100K 1/10W(1608)
R316	1-216-833-11 s	RESISTOR,CHIP 10K 1/10W (1608)
R317	1-216-833-11 s	RESISTOR,CHIP 10K 1/10W (1608)
R318	1-218-878-11 s	RESISTOR,CHIP 20K 1/10W (1608)
R319	1-216-845-11 s	RESISTOR,CHIP 100K 1/10W(1608)
R320	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/10W(1608)
R321	1-218-868-11 s	RESISTOR,CHIP 7.5K 1/10W(1608)
R322	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/10W(1608)
R323	1-218-868-11 s	RESISTOR,CHIP 7.5K 1/10W(1608)
R324	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/10W(1608)
R325	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/10W
R326	1-216-801-11 s	RESISTOR,CHIP 22 1/10W (1608)
R327	1-218-879-11 s	RESISTOR,CHIP 22K 1/10W (1608)
R328	1-218-879-11 s	RESISTOR,CHIP 22K 1/10W (1608)
R329	1-216-828-11 s	RESISTOR,CHIP 3.9K 1/10W 1608

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R330	1-216-801-11 s	RESISTOR,CHIP 22 1/10W (1608)
R331	1-218-832-11 s	RESISTOR,CHIP 240 1/10W (1608)
R332	*b 1-216-829-11 s	RESISTOR,CHIP 4.7K 1/10W(1608)
	*a 1-216-819-11 s	RESISTOR,CHIP 680 1/10W 1608
R333	*b 1-218-879-11 s	RESISTOR,CHIP 22K 1/10W (1608)
	*a 1-218-863-11 s	RESISTOR,CHIP 4.7K 1/10W(1608)
R334	*b 1-218-847-11 s	RESISTOR,CHIP 1K 1/10W (1608)
	*a 1-218-855-11 s	RESISTOR,CHIP 2.2K 1/10W(1608)
R335	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/10W 1608
R336	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/10W(1608)
R337	1-218-840-11 s	RESISTOR,CHIP 510 1/10W (1608)
R338	1-216-817-11 s	RESISTOR,CHIP 470 1/10W 1608
R339	1-202-924-11 s	RESISTOR,CHIP 240 (1608)
R340	1-211-992-11 s	RESISTOR,CHIP 91 1/10W (1608)
R341	1-216-839-11 s	RESISTOR,CHIP 33K 1/10W 1608
R342	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/10W 1608
R343	1-218-843-11 s	RESISTOR,CHIP 680 1/10W (1608)
R344	1-216-843-11 s	RESISTOR,CHIP 68K 1/10W (1608)
R345	1-216-809-11 s	RESISTOR,CHIP 100 1/10W 1608
R346	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R347	1-218-847-11 s	RESISTOR,CHIP 1K 1/10W (1608)
R348	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/10W 1608
R349	1-218-845-11 s	RESISTOR,CHIP 820 1/10W (1608)
R350	1-216-835-11 s	RESISTOR,CHIP 15K 1/10W
R351	1-216-844-11 s	RESISTOR,CHIP 82K 1/16W 1608
R352	1-218-835-11 s	RESISTOR,CHIP 330 1/10W (1608)
R353	1-218-835-11 s	RESISTOR,CHIP 330 1/10W (1608)
R354	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R356	1-211-969-11 s	RESISTOR,CHIP 10 1/10W (1608)
R357	1-216-864-11 s	CONDUCTOR,CHIP (1608)
R358	1-211-985-11 s	RESISTOR,CHIP 47 1/10W (1608)
R359	1-218-823-11 s	RESISTOR,CHIP 100 1/10W (1608)
R360	1-216-864-11 s	CONDUCTOR,CHIP (1608)
R361	1-218-879-11 s	RESISTOR,CHIP 22K 1/10W (1608)
R363	1-216-805-11 s	RESISTOR,CHIP 47 1/10W 1608
R364	1-216-834-11 s	RESISTOR,CHIP 12K 1/16W 1608
R365	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/10W 1608
R369	1-216-789-11 s	RESISTOR,CHIP 2.2 1/16W(1608)
R371	1-216-845-11 s	RESISTOR,CHIP 100K 1/10W(1608)
R372	1-216-822-11 s	RESISTOR,CHIP 1.2K 1/10W 1608
R373	1-218-839-11 s	RESISTOR,CHIP 470 1/10W (1608)
R374	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R401	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R405	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R406	1-216-832-11 s	RESISTOR,CHIP 8.2K 1/16W 1608
R407	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R408	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/10W(1608)
R409	1-216-833-11 s	RESISTOR,CHIP 10K 1/10W (1608)
R410	1-216-845-11 s	RESISTOR,CHIP 100K 1/10W(1608)
R411	1-216-809-11 s	RESISTOR,CHIP 100 1/10W 1608
R412	1-216-809-11 s	RESISTOR,CHIP 100 1/10W 1608
RB1	1-233-575-11 s	RES,CHIP NETWORK 22
RB2	1-233-575-11 s	RES,CHIP NETWORK 22
RB401	1-233-575-11 s	RES,CHIP NETWORK 22
RB402	1-233-575-11 s	RES,CHIP NETWORK 22
RB403	1-233-575-11 s	RES,CHIP NETWORK 22
RB404	1-233-575-11 s	RES,CHIP NETWORK 22
RB405	1-233-575-11 s	RES,CHIP NETWORK 22
RB406	1-233-575-11 s	RES,CHIP NETWORK 22

(AD-171 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB407	1-233-575-11	s RES, CHIP NETWORK 22
RB408	1-233-575-11	s RES, CHIP NETWORK 22
RB409	1-233-575-11	s RES, CHIP NETWORK 22
RB410	1-233-575-11	s RES, CHIP NETWORK 22
RB411	1-233-575-11	s RES, CHIP NETWORK 22
RB412	1-233-575-11	s RES, CHIP NETWORK 22
RB413	1-233-575-11	s RES, CHIP NETWORK 22
RB414	1-233-575-11	s RES, CHIP NETWORK 22
RB415	1-233-575-11	s RES, CHIP NETWORK 22
RB416	1-233-575-11	s RES, CHIP NETWORK 22
RB417	1-233-575-11	s RES, CHIP NETWORK 22
RB418	1-233-575-11	s RES, CHIP NETWORK 22
S401	1-771-795-11	s SWITCH, SLIDE

APR-55 BOARD SUFFIX -12

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-138-A	o MOUNTED CIRCUIT BOARD, APR-55
1pc	8-759-589-75	s IC ISPLSI1032E-VPR33IC1504-V10
2pcs	3-611-111-01	o SPACER (RE), RUBBER
1pc	3-614-476-01	o SPACER, RUBBER
2pcs	3-680-206-02	o TC INSULATOR
2pcs	4-352-844-01	s PIN, LEAD, COATING
1pc	1-767-156-11	s OSCILLATOR, CRYSTAL (IN BATTERY)
C600	1-131-661-11	s CAPACITOR, ELECT 100MF/10V CHIP
C601	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C602	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C603	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C604	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C605	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C606	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C607	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C608	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C609	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C610	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C611	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C612	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C613	1-131-661-11	s CAPACITOR, ELECT 100MF/10V CHIP
C614	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C615	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C616	1-135-070-00	s CAPACITOR TANTALUM 0.1MF/35V
C618	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C619	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C1000	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1001	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1002	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1003	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1004	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1005	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1006	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1007	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1008	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1009	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1010	1-111-253-11	s CAPACITOR TANTALUM 100MF/6.3V
C1011	1-111-253-11	s CAPACITOR TANTALUM 100MF/6.3V
C1012	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1013	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1014	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1015	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1016	1-107-854-11	s CAPACITOR TANTALUM 68MF/6.3V
C1017	1-107-854-11	s CAPACITOR TANTALUM 68MF/6.3V
C1018	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1019	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1020	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1021	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1022	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1023	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1024	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1025	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1026	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1027	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1028	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1029	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1030	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1031	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C1032	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1033	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1034	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1035	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1036	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1037	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1038	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1039	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1040	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1041	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1042	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1043	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1044	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1045	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1046	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1047	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1048	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1049	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1050	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1051	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1052	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1053	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1054	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1055	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1056	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1057	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1058	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1059	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1060	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C1061	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C1062	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1063	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1064	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1065	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1066	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1067	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1068	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C1069	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C1070	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1071	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1072	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1073	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C1074	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C1075	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1076	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1077	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1078	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1079	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C1080	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1081	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C1082	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C1083	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1084	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1085	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1086	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1087	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1088	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1089	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1090	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C1091	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1092	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1093	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1094	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1095	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1096	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1097	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C1098	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C1099	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1100	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1102	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1103	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1104	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1108	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1109	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1110	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1111	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1112	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1113	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1128	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1129	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1130	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1131	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1132	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1133	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1134	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1135	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1136	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1137	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1138	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1139	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1140	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1141	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1142	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1143	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1144	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1145	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1146	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1147	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1148	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1149	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1150	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C2003	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C2004	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C2005	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2006	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2007	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2008	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2009	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2010	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2011	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2012	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2013	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2014	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2015	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C2016	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C2017	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C2018	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C2019	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2020	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2021	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C2022	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C2023	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C2024	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2025	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2026	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2027	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2028	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2029	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2030	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2031	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2032	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2033	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2034	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2035	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2036	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2037	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2038	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2039	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C2040	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2042	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C2044	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C2045	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C2047	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C2049	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C2051	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2052	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2057	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2058	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2059	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2060	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2061	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2062	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2063	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2064	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2065	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2066	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2067	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2068	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2069	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2070	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2071	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2072	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C3000	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C3001	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C3002	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C3003	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C3004	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3005	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3006	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C3007	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3008	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3009	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C3010	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C3011	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3012	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3013	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C3014	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C3015	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C3018	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3019	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C3020	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C3021	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C3022	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C3023	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C3024	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C3025	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3026	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3027	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3028	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3029	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C3030	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3031	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3032	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3033	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3034	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3035	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4001	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4002	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C4003	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C4004	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4005	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C4006	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4007	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C4008	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4009	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C4010	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C4011	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C4012	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C4013	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4014	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4015	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4016	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4017	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4018	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4019	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C4020	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C4021	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4022	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4024	1-127-965-11	s CAPACITOR, CHIP FILM 0.001MF
C4026	1-127-965-11	s CAPACITOR, CHIP FILM 0.001MF
C4027	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4028	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4031	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C4032	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C4033	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C4034	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4035	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C4036	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C4037	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4038	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4039	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C4040	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C4041	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4042	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4043	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C4044	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4045	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C4046	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C4047	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C4048	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C4049	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4050	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C4051	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4053	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4054	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C4056	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C4058	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4059	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4060	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4061	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C4062	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C4063	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C4064	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C4065	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4070	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C4071	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C4072	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C4073	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4074	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4075	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4076	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4077	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4078	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4079	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4080	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4081	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4082	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4083	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4084	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C4085	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C5000	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5001	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5002	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5006	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C5007	1-164-245-11	s CAPACITOR, CERAMIC 0.015MF/25V
C5008	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5009	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5010	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5011	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5012	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5015	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C5016	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN5	1-764-089-11	o PIN, CONNECTOR (PC BOARD) 4P
CN6	1-691-591-11	o PIN, CONNECTOR (8P) (SMD) (1.5MM)
CN7	1-580-055-21	o PIN, CONNECTOR 2P
CN9	1-764-080-21	s PIN, CONNECTOR (PC BOARD) 8P
CN10	1-764-095-11	o PIN, CONNECTOR (PC BOARD) 10P
CN140	1-766-384-11	s CONNECTOR, FPC (28P)
CN141	1-766-384-11	s CONNECTOR, FPC (28P)
CN142	1-766-384-11	s CONNECTOR, FPC (28P)
D100	8-719-800-76	s DIODE 1SS226
D101	8-719-800-76	s DIODE 1SS226
D102	8-719-941-09	s DIODE DAP202U

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
D103	8-719-941-09	s DIODE DAP202U
D202	8-719-941-23	s DIODE DA204U
D203	8-719-941-23	s DIODE DA204U
D204	8-719-941-09	s DIODE DAP202U
D205	8-719-941-09	s DIODE DAP202U
D300	8-719-938-72	s DIODE SB01-05CP (RECTI)
D400	8-719-941-23	s DIODE DA204U
D401	8-719-941-23	s DIODE DA204U
D502	8-719-032-78	s LED GL3UR8
D600	8-719-029-63	s DIODE RD4.3UH-T1
D601	8-719-029-63	s DIODE RD4.3UH-T1
IC100	8-759-700-84	s IC NJM2041MD
IC101	8-759-700-84	s IC NJM2041MD
IC102	8-759-700-84	s IC NJM2041MD
IC103	8-759-700-84	s IC NJM2041MD
IC104	8-759-700-84	s IC NJM2041MD
IC105	8-759-700-84	s IC NJM2041MD
IC107	8-759-633-55	s IC M5222FP
IC108	8-759-633-55	s IC M5222FP
IC109	8-759-700-84	s IC NJM2041MD
IC110	8-759-700-84	s IC NJM2041MD
IC111	8-759-603-27	s IC M5201FP
IC112	8-759-908-16	s IC TL072CPS
IC113	8-759-700-84	s IC NJM2041MD
IC114	8-759-700-84	s IC NJM2041MD
IC115	8-759-908-16	s IC TL072CPS
IC116	8-759-908-16	s IC TL072CPS
IC117	8-759-603-27	s IC M5201FP
IC118	8-759-700-84	s IC NJM2041MD
IC119	8-759-700-84	s IC NJM2041MD
IC120	8-759-603-27	s IC M5201FP
IC121	8-759-603-27	s IC M5201FP
IC125	8-759-603-27	s IC M5201FP
IC126	8-759-603-27	s IC M5201FP
IC127	8-759-523-95	s IC TC74VHC74FT (EL)
IC128	8-759-431-95	s IC S-81230SGUP-DQB-T1
IC129	8-759-462-08	s IC AK5352-VF (E2)
IC131	8-759-674-62	s IC MM74HCT541MTCX
IC132	8-759-700-84	s IC NJM2041MD
IC133	8-759-700-84	s IC NJM2041MD
IC134	8-759-700-84	s IC NJM2041MD
IC135	8-759-523-79	s IC TC74VHC02FT
IC136	8-759-700-84	s IC NJM2041MD
IC138	8-759-700-84	s IC NJM2041MD
IC139	8-759-523-97	s IC TC74VHC123AFT (EL)
IC141	8-759-196-96	s IC TC7SH08FU (TE85R)
IC142	8-759-196-96	s IC TC7SH08FU (TE85R)
IC143	8-759-196-96	s IC TC7SH08FU (TE85R)
IC144	8-759-196-96	s IC TC7SH08FU (TE85R)
IC200	8-759-603-27	s IC M5201FP
IC201	8-759-603-27	s IC M5201FP
IC202	8-759-462-08	s IC AK5352-VF (E2)
IC203	8-759-196-96	s IC TC7SH08FU (TE85R)
IC204	8-759-196-97	s IC TC7SH32FU (TE85R)
IC205	8-759-196-96	s IC TC7SH08FU (TE85R)
IC206	8-759-196-96	s IC TC7SH08FU (TE85R)
IC207	8-759-700-84	s IC NJM2041MD
IC208	8-759-700-84	s IC NJM2041MD

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
IC209	8-759-700-84 s	IC NJM2041MD
IC210	8-759-700-84 s	IC NJM2041MD
IC211	8-759-669-73 s	IC TL082CPWR
IC212	8-759-669-73 s	IC TL082CPWR
IC213	8-759-700-84 s	IC NJM2041MD
IC214	8-759-700-84 s	IC NJM2041MD
IC217	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC300	8-759-523-78 s	IC TC74VHC00FT (EL)
IC301	8-759-524-10 s	IC TC74VHC157FT (EL)
IC302	8-759-524-50 s	IC TC74VHC541FT (EL)
IC303	8-759-524-50 s	IC TC74VHC541FT (EL)
IC304	8-759-524-28 s	IC TC74VHC245FT (EL)
IC305	8-752-368-47 s	IC CXD206-114R
IC306	6-702-410-01 s	IC IDT71V124SA15Y-TL
IC308	8-759-678-74 o	IC APR55-IC308-V1.00
IC309	8-759-524-17 s	IC TC74VHC161FT (EL)
IC310	8-759-524-17 s	IC TC74VHC161FT (EL)
IC311	8-759-647-49 s	IC AL422B-TEL
IC312	8-759-524-52 s	IC TC74VHC574FT (EL)
IC313	8-759-523-96 s	IC TC74VHC86FT (EL)
IC314	8-759-524-17 s	IC TC74VHC161FT (EL)
IC315	8-759-491-46 s	IC TC74VHCT04AFT (EL)
IC316	8-759-523-78 s	IC TC74VHC00FT (EL)
IC401	8-759-531-50 s	IC PCM1716E-BT2
IC402	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC403	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC404	8-759-603-27 s	IC M5201FP
IC405	8-759-603-27 s	IC M5201FP
IC409	8-759-833-99 s	IC MC74HC4052ADTR2
IC410	8-759-431-97 s	IC NJM386M (TE2)
IC411	8-759-491-46 s	IC TC74VHCT04AFT (EL)
IC413	8-759-700-84 s	IC NJM2041MD
IC414	8-759-700-84 s	IC NJM2041MD
IC415	8-759-700-84 s	IC NJM2041MD
IC416	8-759-700-84 s	IC NJM2041MD
IC418	8-759-669-73 s	IC TL082CPWR
IC419	8-759-669-73 s	IC TL082CPWR
IC420	8-759-700-84 s	IC NJM2041MD
IC421	8-759-700-84 s	IC NJM2041MD
IC422	8-759-603-27 s	IC M5201FP
IC423	8-759-603-27 s	IC M5201FP
IC501	8-759-490-41 s	IC TC74VHCT541AFT (EL)
IC503	8-759-491-51 s	IC TC74VHCT245AFT (EL)
IC505	8-759-296-31 s	IC M48T18-100MHITR
IC506	8-759-348-79 s	IC TE7751
IC511	8-759-490-41 s	IC TC74VHCT541AFT (EL)
IC512	8-759-524-07 s	IC TC74VHC138FT (EL)
IC514	8-759-491-45 s	IC TC74VHCT00AFT (EL)
IC517	8-759-672-76 s	IC AK9813BF-E2
IC518	8-759-491-46 s	IC TC74VHCT04AFT (EL)
IC600	8-759-710-89 s	IC NJM431U (TE1)
IC601	8-759-144-72 s	IC UPC358G2-E2
L100	1-412-935-11 s	INDUCTOR 0.47UH (2520)
L300	1-410-803-11 s	INDUCTOR,CHIP 0.047UH (3225)
L301	1-410-803-11 s	INDUCTOR,CHIP 0.047UH (3225)
L302	1-410-803-11 s	INDUCTOR,CHIP 0.047UH (3225)
L303	1-410-803-11 s	INDUCTOR,CHIP 0.047UH (3225)
L600	1-412-935-11 s	INDUCTOR 0.47UH (2520)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
L601	1-412-935-11 s	INDUCTOR 0.47UH (2520)
L602	1-412-935-11 s	INDUCTOR 0.47UH (2520)
L603	1-412-935-11 s	INDUCTOR 0.47UH (2520)
L604	1-410-795-21 s	CHIP INDUCTOR 0.01UH (3225)
L605	1-410-795-21 s	CHIP INDUCTOR 0.01UH (3225)
LCD501	1-810-586-11 s	LCD MODULE
PH100	1-808-252-11 s	PHOTO COUPLER M30
Q104	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q105	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q106	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q111	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q112	8-729-140-63 s	TRANSISTOR 2SA1611-MSM6
Q113	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q114	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q115	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q116	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q117	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q118	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q119	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q120	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q121	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q122	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q123	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q124	8-729-140-63 s	TRANSISTOR 2SA1611-MSM6
Q125	8-729-012-35 s	TRANSISTOR 2SK711-BL
Q126	8-729-012-35 s	TRANSISTOR 2SK711-BL
Q127	8-729-045-28 s	TRANSISTOR SI4532DY-T1
Q128	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q129	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q130	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q140	8-729-045-28 s	TRANSISTOR SI4532DY-T1
Q141	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q142	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q143	8-729-045-28 s	TRANSISTOR SI4532DY-T1
Q144	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q145	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q146	8-729-045-28 s	TRANSISTOR SI4532DY-T1
Q147	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q148	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q149	8-729-045-28 s	TRANSISTOR SI4532DY-T1
Q150	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q151	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q204	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q205	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q206	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q207	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q208	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q209	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q210	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q211	8-729-230-63 s	TRANSISTOR 2SC4116-YG
Q216	8-729-140-63 s	TRANSISTOR 2SA1611-MSM6
Q217	8-729-012-35 s	TRANSISTOR 2SK711-BL
Q218	8-729-012-35 s	TRANSISTOR 2SK711-BL
Q219	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q220	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q221	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q222	8-729-045-28 s	TRANSISTOR SI4532DY-T1

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
Q404	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q405	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q406	8-729-209-07	s TRANSISTOR 2SC4213-B
Q407	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q408	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q409	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q410	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q411	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q412	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q413	8-729-045-28	s TRANSISTOR SI4532DY-T1
Q414	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q415	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q416	8-729-028-91	s TRANSISTOR DTA144EUA-T106
Q417	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q418	8-729-209-07	s TRANSISTOR 2SC4213-B
Q503	8-729-029-06	s TRANSISTOR DTC124EUA-T106
Q504	8-729-028-83	s TRANSISTOR DTA124EUA-T106
Q600	8-729-020-94	s TRANSISTOR 2SA1314C-TE12L
Q601	8-729-808-42	s TRANSISTOR 2SD1624-T
R500	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R600	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R601	1-218-688-11	s RESISTOR,CHIP 680 1/16W(1608)
R602	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R603	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R604	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R606	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R607	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1000	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1001	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1002	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1003	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1004	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1005	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1006	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1007	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1008	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1009	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1010	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1011	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1012	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1013	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1014	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1015	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1016	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1017	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1018	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R1019	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R1020	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1021	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1022	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1023	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1024	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1025	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1026	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1027	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1028	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1029	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1030	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1031	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R1033	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1034	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1035	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1036	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1037	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1038	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1039	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1040	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R1042	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R1043	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1044	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1045	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1046	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1047	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1048	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1049	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1050	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1051	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1053	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1054	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1056	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R1057	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1058	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1059	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1060	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1061	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1062	1-218-715-11	s RESISTOR,METAL 9.1K 1/16W
R1063	1-218-715-11	s RESISTOR,METAL 9.1K 1/16W
R1064	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1065	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1066	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1067	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1068	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1069	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1070	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1071	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1072	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1073	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1074	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1075	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1076	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1077	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1078	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1079	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1080	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1081	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1082	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1083	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1084	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1085	1-218-719-11	s RESISTOR,METAL 13K 1/16
R1086	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1087	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1088	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1089	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1090	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1091	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1092	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1093	1-218-715-11	s RESISTOR,METAL 9.1K 1/16W
R1094	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R1095	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1096	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1097	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1098	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1099	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1100	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1101	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1102	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1103	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1104	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1105	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1106	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1107	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1108	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1109	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1110	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1111	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1112	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1113	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1114	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1115	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1116	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1117	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R1118	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R1119	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R1120	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1121	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R1122	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1123	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R1124	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1125	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R1126	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1127	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1128	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1129	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1130	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1131	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1132	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1133	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1134	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1135	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R1136	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R1137	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1138	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R1139	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1140	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R1141	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1142	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1143	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1144	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1145	1-218-730-11	s RESISTOR,METAL FILM CHIP 39K
R1146	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1147	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1148	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1149	1-218-742-11	s RESISTOR,METAL 120K 1/16
R1150	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R1151	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1152	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1153	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R1154	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1155	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1156	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1157	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1158	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1159	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1162	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1163	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1164	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1165	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1166	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1167	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1168	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R1169	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1170	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1171	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1172	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1173	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R1174	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1175	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1176	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1177	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R1178	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1179	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1180	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R1181	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1182	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1183	1-218-702-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R1184	1-218-702-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R1185	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1186	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1187	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1188	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1189	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1190	1-218-730-11	s RESISTOR,METAL FILM CHIP 39K
R1191	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1192	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1193	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R1194	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R1195	1-218-742-11	s RESISTOR,METAL 120K 1/16
R1196	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1197	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1198	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1199	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1200	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R1201	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1202	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1204	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1206	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1207	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1208	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1209	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1210	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1211	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R1212	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1213	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1214	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1215	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1216	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R1217	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1218	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1219	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1220	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1221	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1222	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R1223	1-218-735-11	s RESISTOR,CHIP 62K 1/16W(1608)
R1224	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1225	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1226	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R1227	1-218-735-11	s RESISTOR,CHIP 62K 1/16W(1608)
R1228	1-218-726-11	s RESISTOR,CHIP 27K 1/16W (1608)
R1229	1-218-726-11	s RESISTOR,CHIP 27K 1/16W (1608)
R1230	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1231	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1232	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1233	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1234	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1235	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1236	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1237	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1238	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1239	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1244	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1245	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1248	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1251	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R1252	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1253	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1254	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1255	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1256	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1257	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1258	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1259	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1260	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1262	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1265	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1266	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1267	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1268	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1269	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1270	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1271	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1272	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1273	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1274	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1280	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1281	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1282	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1283	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1286	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1287	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1288	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R2000	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2001	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2002	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2003	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2010	1-218-728-11	s RESISTOR,CHIP 33K 1/16W

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R2011	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R2012	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2013	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2014	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2015	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2016	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R2017	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R2018	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R2019	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R2020	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R2021	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R2022	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R2023	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R2024	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2025	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R2026	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2027	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R2028	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2029	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2030	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2031	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2032	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2033	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2034	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R2035	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2036	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R2037	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2038	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R2039	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R2040	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2041	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2042	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2043	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2044	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R2045	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R2046	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R2047	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R2048	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2049	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2050	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R2051	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R2054	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2055	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2066	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R2067	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R2078	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R2079	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R2080	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2081	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R2082	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R2083	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2084	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2085	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R2086	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R2087	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R2088	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R2089	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R2090	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R2091	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R2092	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R2093	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R2094	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R2095	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R2096	1-218-735-11	s RESISTOR CHIP 62K 1/16W(1608)
R2097	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R2098	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R2099	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R2100	1-218-735-11	s RESISTOR CHIP 62K 1/16W(1608)
R2101	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R2102	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R2103	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R2104	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R2105	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2106	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2107	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2108	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2109	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R2110	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R2111	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R2112	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R2113	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2115	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2116	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R2117	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2120	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2121	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2122	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2123	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2124	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2125	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R3000	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3001	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3002	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3003	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3004	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3005	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3007	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R3008	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3009	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3010	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3011	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3012	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3013	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3014	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3015	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3018	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3021	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R3022	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3023	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3024	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3025	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3026	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3027	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3028	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3029	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3030	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3032	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R3034	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R3035	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R3036	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3037	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3038	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3039	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3040	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3041	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3042	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3043	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3046	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3047	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3048	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R3053	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3054	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3055	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3056	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3057	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3058	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3059	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3060	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3062	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3064	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R3070	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3071	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3072	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3073	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4001	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4002	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4003	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4004	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4005	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4006	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4007	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4008	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4009	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4010	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R4011	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R4013	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4014	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4015	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4016	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4017	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4018	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4019	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4022	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4023	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4024	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R4025	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R4026	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4027	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4028	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R4029	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R4030	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W
R4031	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W
R4032	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R4033	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R4034	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4037	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4038	1-218-746-11	s RESISTOR,CHIP 180K 1/16W

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R4040	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4041	1-218-703-11 s	RESISTOR,CHIP 3.0K 1/16(1608)
R4042	1-218-703-11 s	RESISTOR,CHIP 3.0K 1/16(1608)
R4045	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R4046	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4047	1-218-680-11 s	RESISTOR,CHIP 330 1/16W(1608)
R4049	1-218-680-11 s	RESISTOR,CHIP 330 1/16W(1608)
R4051	1-218-713-11 s	RESISTOR,METAL 7.5K 1/16W
R4052	1-218-674-11 s	RESISTOR CHIP 180 1/16W (1608)
R4053	1-218-674-11 s	RESISTOR CHIP 180 1/16W (1608)
R4054	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4055	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4056	1-218-644-11 s	RESISTOR,CHIP 10 1/16W
R4057	1-218-644-11 s	RESISTOR,CHIP 10 1/16W
R4058	1-218-683-11 s	RESISTOR CHIP 430 1/16W (1608)
R4059	1-218-683-11 s	RESISTOR CHIP 430 1/16W (1608)
R4060	1-218-722-11 s	RESISTOR, CHIP 18K 1/16W 1608
R4061	1-218-722-11 s	RESISTOR, CHIP 18K 1/16W 1608
R4062	1-218-677-11 s	RESISTOR,CHIP 240 1/16W (1608)
R4063	1-218-677-11 s	RESISTOR,CHIP 240 1/16W (1608)
R4064	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R4065	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R4066	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R4067	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4068	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4070	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R4071	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R4072	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R4073	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R4074	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4075	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4076	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4077	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4078	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R4079	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R4080	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R4081	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4082	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R4083	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4084	1-218-702-11 s	RESISTOR CHIP 2.7K 1/16W(1608)
R4085	1-218-702-11 s	RESISTOR CHIP 2.7K 1/16W(1608)
R4086	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4087	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4088	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R4089	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R4090	1-218-711-11 s	RESISTOR,METAL 6.2K 1/16W
R4091	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R4092	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R4093	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R4094	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4095	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4096	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R4097	1-218-683-11 s	RESISTOR CHIP 430 1/16W (1608)
R4098	1-218-683-11 s	RESISTOR CHIP 430 1/16W (1608)
R4103	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4104	1-218-644-11 s	RESISTOR,CHIP 10 1/16W
R4105	1-218-698-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R4106	1-218-728-11 s	RESISTOR,CHIP 33K 1/16W
R4107	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R4108	1-218-728-11 s	RESISTOR,CHIP 33K 1/16W
R4109	1-218-698-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R4110	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4112	1-218-728-11 s	RESISTOR,CHIP 33K 1/16W
R4113	1-218-698-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R4114	1-218-728-11 s	RESISTOR,CHIP 33K 1/16W
R4115	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4116	1-218-698-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R4117	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4118	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4119	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4120	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4121	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R4122	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R4123	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4124	1-218-713-11 s	RESISTOR,METAL 7.5K 1/16W
R4125	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4126	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4127	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R4128	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R4129	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4130	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R4131	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R4132	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4138	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4141	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4143	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R4144	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R4145	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R4146	1-218-739-11 s	RESISTOR,CHIP 91K 1/16W(1608)
R4147	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R4148	1-218-739-11 s	RESISTOR,CHIP 91K 1/16W(1608)
R4149	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R4150	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R4151	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R4152	1-218-676-11 s	RESISTOR,CHIP 220 1/16W(1608)
R5000	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R5002	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R5003	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R5004	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R5005	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R5009	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5010	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5011	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5012	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5013	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5014	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5015	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5016	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5017	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5018	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5019	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5020	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5021	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5022	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5023	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R5024	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R5025	1-218-680-11 s	RESISTOR,CHIP 330 1/16W(1608)
R5029	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)

(APR-55 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R5030	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5031	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R5032	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5034	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5035	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5036	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5039	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5040	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5041	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5042	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5043	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5044	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R5045	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R5046	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5047	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
RB100	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB300	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB301	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB302	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB303	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB304	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB305	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB501	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB502	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RV101	1-223-684-11	s RESISTOR, VAR, CARBON 5K
RV102	1-237-039-11	s RESISTOR,ADJ,CERMET 100K
RV103	1-237-039-11	s RESISTOR,ADJ,CERMET 100K
RV151	1-223-684-11	s RESISTOR, VAR, CARBON 5K
RV400	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV401	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
S10	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S101	1-571-277-11	s SWITCH,SLIDE (1-2-2)
S102	1-570-842-11	s SWITCH,SLIDE (2-2-2)
S103	1-571-277-11	s SWITCH,SLIDE (1-2-2)
S104	1-570-842-11	s SWITCH,SLIDE (2-2-2)
S151	1-570-842-11	s SWITCH,SLIDE (2-2-2)
S152	1-571-277-11	s SWITCH,SLIDE (1-2-2)
S153	1-570-842-11	s SWITCH,SLIDE (2-2-2)
S400	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S401	1-570-852-11	s SWITCH, SLIDE
S402	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S501	1-570-852-11	s SWITCH, SLIDE
S502	1-570-852-11	s SWITCH, SLIDE
S503	1-570-852-11	s SWITCH, SLIDE
S504	1-572-725-11	s SWITCH,TACTILE
S505	1-572-725-11	s SWITCH,TACTILE
S506	1-572-725-11	s SWITCH,TACTILE
S507	1-572-725-11	s SWITCH,TACTILE
S509	1-572-725-11	s SWITCH,TACTILE
S510	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S512	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S519	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S520	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S522	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S540	1-692-270-41	s SWITCH, SLIDE

APR-55 BOARD SUFFIX -11

*a: Lot No. 911
 *b: Lot No. 912 -
 *c: Lot No. 092 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-138-A	o MOUNTED CIRCUIT BOARD, APR-55
2pcs	3-611-111-01	o SPACER (RE), RUBBER
1pc	3-614-476-01	o SPACER, RUBBER
2pcs	3-680-206-02	o TC INSULATOR
1pc	1-767-156-11	s OSCILLATOR,CRYSTAL(IN BATTERY)
C600	1-131-661-11	s CAPACITOR,ELECT 100MF/10V CHIP
C601	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C602	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C603	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C604	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C605	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C606	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C608	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C609	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C610	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C611	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C612	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C613	1-131-661-11	s CAPACITOR,ELECT 100MF/10V CHIP
C614	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C615	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C616	1-135-070-00	s CAPACITOR TANTALUM 0.1MF/35V
C618	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C619	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C1000	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1001	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1002	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1003	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1004	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1005	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1006	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1007	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1008	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1009	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1010	1-111-253-11	s CAPACITOR TANTALUM 100MF/6.3V
C1011	1-111-253-11	s CAPACITOR TANTALUM 100MF/6.3V
C1012	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C1013	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1014	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C1015	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1016	1-107-854-11	s CAPACITOR TANTALUM 68MF/6.3V
C1017	1-107-854-11	s CAPACITOR TANTALUM 68MF/6.3V
C1018	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C1019	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C1020	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C1021	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C1022	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1023	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1024	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1025	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1026	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1027	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1028	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1029	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C1030	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C1031	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1032	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1033	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1034	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1035	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1036	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1037	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1038	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1039	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1040	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1041	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1042	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1043	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1044	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1045	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1046	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1047	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1048	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1049	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1050	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1051	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1052	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1053	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1054	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1055	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1056	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1057	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1058	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1059	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1060	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C1061	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C1062	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1063	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1064	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1065	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1066	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1067	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1068	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C1069	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C1070	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1071	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1072	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1073	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C1074	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C1075	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1076	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C1077	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1078	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C1079	1-104-752-11	s CAPACITOR, TANTALUM 33MF/6.3V
C1080	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1081	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C1082	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C1083	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1084	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1085	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1086	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C1087	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C1088	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1089	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C1090	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1091	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1092	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1093	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1094	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1095	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1096	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C1097	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C1098	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C1099	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1100	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1101	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C1102	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1103	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1104	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1105	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C1106	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C1107	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1108	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1109	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C1110	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1111	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C1112	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1113	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C2000	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2003	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C2004	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C2005	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2006	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2007	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2008	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2009	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2010	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2011	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2012	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2013	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2014	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2015	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C2016	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C2017	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2018	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2019	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2020	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2021	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C2022	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C2023	1-127-951-11	s CAPACITOR, CHIP FILM 0.015MF
C2024	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2025	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2026	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C2027	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C2028	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2029	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2030	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2031	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2032	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2033	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C2034	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C2035	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C2036	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C2037	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C2038	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C2039	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2040	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C2041	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C2042	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2043	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C2044	1-162-969-11	s CAPACITOR,CERAMIC 6800PF/25V B
C2045	1-162-969-11	s CAPACITOR,CERAMIC 6800PF/25V B
C2046	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C2047	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2048	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2049	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2051	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C2052	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C2053	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2054	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2055	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C2056	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C3000	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3001	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3002	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3003	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3004	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3005	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3006	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C3007	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3008	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3009	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C3010	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C3011	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3012	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3013	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3014	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3015	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3018	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3019	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C3020	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3021	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3022	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3023	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3024	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3025	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3026	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3027	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3028	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3029	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C3030	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C4001	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4002	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C4003	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C4004	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4005	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C4006	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C4007	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C4008	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4009	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4010	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C4011	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C4012	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C4013	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4014	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4015	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4016	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4017	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4018	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4019	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C4020	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C4021	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4022	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4024	1-127-965-11	s CAPACITOR,CHIP FILM 0.001MF
C4026	1-127-965-11	s CAPACITOR,CHIP FILM 0.001MF
C4027	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4028	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4031	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C4032	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C4033	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C4034	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4035	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C4036	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C4037	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4038	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4039	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C4040	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C4041	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4042	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4043	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C4044	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C4045	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C4046	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C4047	1-164-677-11	s CAPACITOR,CERAMIC 0.033MF/16V
C4048	1-164-677-11	s CAPACITOR,CERAMIC 0.033MF/16V
C4049	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4050	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4051	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4052	1-165-176-11	s CAPACITOR,CERAMIC 47000PF/16V
C4053	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C4054	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C4055	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C4057	1-128-391-11	s CAPACITOR,ELECT 330MF/6.3V
C4058	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4059	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4060	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C4061	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C4062	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C4063	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C4064	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C4065	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C5000	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5001	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5002	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5006	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C5007	1-164-245-11	s CAPACITOR,CERAMIC 0.015MF/25V
C5008	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5009	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5010	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5011	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C5012	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5015	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C5016	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN5	1-764-089-11	o PIN, CONNECTOR (PC BOARD) 4P
CN6	1-691-591-11	o PIN, CONNECTOR (8P) (SMD) (1.5MM)
CN7	1-580-055-21	o PIN, CONNECTOR 2P
CN9	1-764-080-21	s PIN, CONNECTOR (PC BOARD) 8P
CN10	1-764-095-11	o PIN, CONNECTOR (PC BOARD) 10P
CN140	1-766-384-11	s CONNECTOR, FPC (28P)
CN141	1-766-384-11	s CONNECTOR, FPC (28P)
CN142	1-766-384-11	s CONNECTOR, FPC (28P)
D100	8-719-800-76	s DIODE 1SS226
D101	8-719-800-76	s DIODE 1SS226
D102	8-719-941-09	s DIODE DAP202U
D103	8-719-941-09	s DIODE DAP202U
D202	8-719-941-23	s DIODE DA204U
D203	8-719-941-23	s DIODE DA204U
D204	8-719-941-09	s DIODE DAP202U
D205	8-719-941-09	s DIODE DAP202U
D300	8-719-938-72	s DIODE SB01-05CP (RECTI)
D400	8-719-941-23	s DIODE DA204U
D401	8-719-941-23	s DIODE DA204U
D502	8-719-032-78	s LED GL3UR8
D600	8-719-029-63	s ZENER DIODE RD4.3UH-T1
D601	8-719-029-63	s ZENER DIODE RD4.3UH-T1
IC100	8-759-700-84	s IC NJM2041MD
IC101	8-759-700-84	s IC NJM2041MD
IC102	8-759-700-84	s IC NJM2041MD
IC103	8-759-700-84	s IC NJM2041MD
IC104	8-759-700-84	s IC NJM2041MD
IC105	8-759-700-84	s IC NJM2041MD
IC106	8-759-700-84	s IC NJM2041MD
IC107	8-759-633-55	s IC M5222FP
IC108	8-759-633-55	s IC M5222FP
IC109	8-759-700-84	s IC NJM2041MD
IC110	8-759-700-84	s IC NJM2041MD
IC111	8-759-603-27	s IC M5201FP
IC112	8-759-908-16	s IC TL072CPS
IC113	8-759-700-84	s IC NJM2041MD
IC114	8-759-700-84	s IC NJM2041MD
IC115	8-759-908-16	s IC TL072CPS
IC116	8-759-908-16	s IC TL072CPS
IC117	8-759-603-27	s IC M5201FP
IC118	8-759-700-84	s IC NJM2041MD
IC119	8-759-700-84	s IC NJM2041MD
IC120	8-759-603-27	s IC M5201FP
IC121	8-759-603-27	s IC M5201FP
IC124	8-759-523-81	s IC TC74VHC08FT (EL)
IC125	8-759-603-27	s IC M5201FP
IC126	8-759-603-27	s IC M5201FP
IC127	8-759-523-95	s IC TC74VHC74FT (EL)
IC128	8-759-431-95	s IC S-81230SGUP-DQB-T1
IC129	8-759-462-08	s IC AK5352-VF (E2)
IC131	8-759-051-49	s IC SN74HCT541APW (R)
IC132	8-759-700-84	s IC NJM2041MD
IC133	8-759-700-84	s IC NJM2041MD
IC134	8-759-700-84	s IC NJM2041MD
IC136	8-759-700-84	s IC NJM2041MD

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
IC137	8-759-700-84	s IC NJM2041MD
IC138	8-759-700-84	s IC NJM2041MD
IC139	8-759-523-97	s IC TC74VHC123AFT (EL)
IC140	8-759-523-81	s IC TC74VHC08FT (EL)
IC200	8-759-603-27	s IC M5201FP
IC201	8-759-603-27	s IC M5201FP
IC202	8-759-462-08	s IC AK5352-VF (E2)
IC204	8-759-196-97	s IC TC7SH32FU (TE85R)
IC205	8-759-196-96	s IC TC7SH08FU (TE85R)
IC206	8-759-523-81	s IC TC74VHC08FT (EL)
IC207	8-759-700-84	s IC NJM2041MD
IC208	8-759-700-84	s IC NJM2041MD
IC209	8-759-700-84	s IC NJM2041MD
IC210	8-759-700-84	s IC NJM2041MD
IC211	8-759-669-73	s IC TL082CPWR
IC212	8-759-669-73	s IC TL082CPWR
IC213	8-759-700-84	s IC NJM2041MD
IC214	8-759-700-84	s IC NJM2041MD
IC300	8-759-523-78	s IC TC74VHC00FT (EL)
IC301	8-759-524-10	s IC TC74VHC157FT (EL)
IC302	8-759-524-50	s IC TC74VHC541FT (EL)
IC303	8-759-524-50	s IC TC74VHC541FT (EL)
IC304	8-759-524-28	s IC TC74VHC245FT (EL)
IC305	8-752-368-47	s IC CXD206-114R
IC306	8-759-482-20	s IC IDT71V124S15Y-TL
IC308	8-759-678-74	o IC APR55-IC308-V1.00
IC400	8-759-271-86	s IC TC7SH04FU
IC401	8-759-531-50	s IC PCM1716E-BT2
IC402	8-759-196-96	s IC TC7SH08FU (TE85R)
IC403	8-759-196-96	s IC TC7SH08FU (TE85R)
IC404	8-759-603-27	s IC M5201FP
IC405	8-759-603-27	s IC M5201FP
IC409	8-759-523-01	s IC TC74HC4052AFT (EL)
IC410	8-759-431-97	s IC NJM386M (TE2)
IC411	8-759-491-46	s IC TC74VHC704AFT (EL)
IC413	8-759-700-84	s IC NJM2041MD
IC414	8-759-700-84	s IC NJM2041MD
IC415	8-759-700-84	s IC NJM2041MD
IC416	8-759-700-84	s IC NJM2041MD
IC418	8-759-669-73	s IC TL082CPWR
IC419	8-759-669-73	s IC TL082CPWR
IC420	8-759-700-84	s IC NJM2041MD
IC421	8-759-700-84	s IC NJM2041MD
IC422	8-759-603-27	s IC M5201FP
IC423	8-759-603-27	s IC M5201FP
IC501	8-759-490-41	s IC TC74VHCT541AFT (EL)
IC503	8-759-491-51	s IC TC74VHCT245AFT (EL)
IC505	8-759-296-31	s IC M48T18-100MH1TR
IC506	8-759-348-79	s IC TE7751
IC511	8-759-490-41	s IC TC74VHCT541AFT (EL)
IC512	8-759-524-07	s IC TC74VHC138FT (EL)
IC514	8-759-491-45	s IC TC74VHCT00AFT (EL)
IC517	8-759-355-92	s IC AK9813AF (E2)
IC518	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC600	8-759-710-88	s IC NJM431U
IC601	8-759-510-71	s IC BA10358F-E2
L100	1-412-935-11	s INDUCTOR 0.47UH (2520)
L300	1-410-803-11	s INDUCTOR, CHIP 0.047UH (3225)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
L301	1-410-803-11	s INDUCTOR,CHIP 0.047UH (3225)
L302	1-410-803-11	s INDUCTOR,CHIP 0.047UH (3225)
L303	1-410-803-11	s INDUCTOR,CHIP 0.047UH (3225)
L400	1-408-798-00	s CHIP INDUCTOR 1000UH (4532)
L600	1-412-935-11	s INDUCTOR 0.47UH (2520)
L601	1-412-935-11	s INDUCTOR 0.47UH (2520)
L602	1-412-935-11	s INDUCTOR 0.47UH (2520)
L603	1-412-935-11	s INDUCTOR 0.47UH (2520)
L604	1-410-795-21	s CHIP INDUCTOR 0.01UH(3225)
L605	1-410-795-21	s CHIP INDUCTOR 0.01UH(3225)
LCD501	1-810-586-11	s LCD MODULE
PH100	1-808-252-11	s PHOTO COUPLER M30
Q104	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q105	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q106	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q111	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q112	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q113	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q114	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q115	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q116	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q117	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q118	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q119	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q120	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q121	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q122	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q123	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q124	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q125	8-729-012-35	s TRANSISTOR 2SK711-BL
Q126	8-729-012-35	s TRANSISTOR 2SK711-BL
Q204	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q205	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q206	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q207	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q208	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q209	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q210	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q211	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q216	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q217	8-729-012-35	s TRANSISTOR 2SK711-BL
Q218	8-729-012-35	s TRANSISTOR 2SK711-BL
Q219	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q220	8-729-028-91	s TRANSISTOR DTA144EUA-T106
Q221	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q222	8-729-045-28	s TRANSISTOR SI4532DY-T1
Q404	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q405	8-729-014-86	s TRANSISTOR 2SC4207-YGR-TE85L
Q406	8-729-209-07	s TRANSISTOR 2SC4213-B
Q407	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q408	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q409	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q410	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q411	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q412	8-729-230-63	s TRANSISTOR 2SC4116-YG
Q503	8-729-029-06	s TRANSISTOR DTC124EUA-T106
Q504	8-729-028-83	s TRANSISTOR DTA124EUA-T106

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
Q600	8-729-020-94	s TRANSISTOR 2SA1314C-TE12L
Q601	8-729-808-42	s TRANSISTOR 2SD1624-T
R500	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R600	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R601	1-218-688-11	s RESISTOR,CHIP 680 1/16W(1608)
R602	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R603	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R604	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R606	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R607	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1000	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1001	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1002	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1003	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1004	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1005	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1006	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1007	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1008	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1009	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1010	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1011	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1012	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1013	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1014	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1015	1-220-751-11	s RESISTOR,METAL FILM CHIP 2.2K
R1016	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1017	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1018	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R1020	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1021	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1022	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1023	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1024	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1025	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1026	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1027	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1028	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1029	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1030	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1031	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1033	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1034	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1035	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1036	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1037	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1038	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1039	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1040	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R1042	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R1043	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1044	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1045	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1046	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1047	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1048	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1049	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1050	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R1051	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1053	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1054	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1056	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R1057	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1058	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1059	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R1060	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1061	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1062	1-218-715-11	s RESISTOR,METAL 9.1K 1/16W
R1063	1-218-715-11	s RESISTOR,METAL 9.1K 1/16W
R1064	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1065	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1067	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1069	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1071	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1073	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1074	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1075	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1076	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1077	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1078	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1079	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1080	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1081	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1082	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1083	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1084	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1085	1-218-719-11	s RESISTOR,METAL 13K 1/16
R1086	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1087	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1088	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1089	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1090	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1091	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1092	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1093	1-218-715-11	s RESISTOR,METAL 9.1K 1/16W
R1094	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W
R1095	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1096	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1097	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1098	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1099	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1100	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1101	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1102	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R1103	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1104	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1105	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1106	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1107	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1108	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1109	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1110	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1111	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1112	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1113	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1114	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1115	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R1116	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1117	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R1118	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R1119	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R1120	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1121	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R1122	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1123	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R1124	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1125	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R1126	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1127	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1128	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1129	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1130	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1131	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1132	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1133	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1134	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1135	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R1136	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R1137	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1138	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R1139	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1140	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R1141	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R1142	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1143	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1144	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R1145	1-218-730-11	s RESISTOR,METAL FILM CHIP 39K
R1146	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1147	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1148	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R1149	1-218-742-11	s RESISTOR,METAL 120K 1/16
R1150	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R1151	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1152	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1153	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1154	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1155	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1156	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1157	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1158	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1159	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1162	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1163	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1164	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1165	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)
R1166	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1167	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1168	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R1169	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1170	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1171	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1172	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1173	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R1174	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1175	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1176	1-218-689-11	s RESISTOR,CHIP 750 1/16W (1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R1177	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R1178	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1179	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1180	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R1181	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1182	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R1183	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R1184	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R1185	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1186	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1187	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1188	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1189	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1190	1-218-730-11	s RESISTOR METAL FILM CHIP 39K
R1191	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1192	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1193	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R1194	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R1195	1-218-742-11	s RESISTOR,METAL 120K 1/16
R1196	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1197	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R1198	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1199	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R1200	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R1201	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1202	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1204	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1206	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1207	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1208	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1209	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1210	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R1211	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R1212	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1213	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1214	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1215	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R1216	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1217	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1218	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1219	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1220	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1221	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1222	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R1223	1-218-735-11	s RESISTOR CHIP 62K 1/16W(1608)
R1224	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1225	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R1226	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R1227	1-218-735-11	s RESISTOR CHIP 62K 1/16W(1608)
R1228	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1229	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R1230	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1231	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R1232	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1233	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1234	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1235	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1236	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1237	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R1238	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1239	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R1240	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1241	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1242	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1243	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1244	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1245	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1247	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1248	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1249	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1251	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R1252	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1253	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1254	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1255	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1256	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1257	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1258	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1259	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1260	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R1262	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R1265	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1280	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R1281	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R2000	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2001	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2002	*b 1-215-461-00	s RESISTOR,METAL FILM 47K 1/4W
	*a 1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2003	*b 1-215-461-00	s RESISTOR,METAL FILM 47K 1/4W
	*a 1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2004	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2005	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2010	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R2011	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R2012	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2013	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2014	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2015	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2016	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R2017	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R2018	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R2019	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R2020	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R2021	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R2022	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R2023	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R2024	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2025	1-218-689-11	s RESISTOR CHIP 750 1/16W (1608)
R2026	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2027	1-218-689-11	s RESISTOR CHIP 750 1/16W (1608)
R2028	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2029	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R2030	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2031	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2032	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2033	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2034	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R2035	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R2036	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R2037	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R2038	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R2039	1-218-723-11 s	RESISTOR,CHIP 20K 1/16W(1608)
R2040	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2041	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2042	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2043	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2044	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R2045	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R2046	1-218-684-11 s	RESISTOR,CHIP 470 1/16W (1608)
R2047	1-218-684-11 s	RESISTOR,CHIP 470 1/16W (1608)
R2048	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R2049	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R2050	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R2051	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R2052	1-218-680-11 s	RESISTOR,CHIP 330 1/16W(1608)
R2053	1-218-680-11 s	RESISTOR,CHIP 330 1/16W(1608)
R2054	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R2055	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R2058	1-218-714-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R2059	1-218-703-11 s	RESISTOR,CHIP 3.0K 1/16(1608)
R2060	1-218-714-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R2061	1-218-703-11 s	RESISTOR,CHIP 3.0K 1/16(1608)
R2062	1-218-707-11 s	RESISTOR,CHIP 4.3K 1/16W(1608)
R2063	1-218-707-11 s	RESISTOR,CHIP 4.3K 1/16W(1608)
R2064	1-218-727-11 s	RESISTOR,CHIP 30K 1/16W(1608)
R2065	1-218-727-11 s	RESISTOR,CHIP 30K 1/16W(1608)
R2066	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R2067	1-218-700-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R2078	1-218-724-11 s	RESISTOR,CHIP 22K 1/16W(1608)
R2079	1-218-724-11 s	RESISTOR,CHIP 22K 1/16W(1608)
R2080	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2081	1-218-720-11 s	RESISTOR,CHIP 15K 1/16W(1608)
R2082	1-218-724-11 s	RESISTOR,CHIP 22K 1/16W(1608)
R2083	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2084	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2085	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R2086	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R2087	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R2088	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R2089	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R2090	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R2091	1-218-734-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R2092	1-218-734-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R2093	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R2094	1-218-734-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R2095	1-218-712-11 s	RESISTOR,METAL 6.8K 1/16W
R2096	1-218-735-11 s	RESISTOR,CHIP 62K 1/16W(1608)
R2097	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R2098	1-218-734-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R2099	1-218-712-11 s	RESISTOR,METAL 6.8K 1/16W
R2100	1-218-735-11 s	RESISTOR,CHIP 62K 1/16W(1608)
R2101	1-218-726-11 s	RESISTOR,CHIP 27K 1/16W (1608)
R2102	1-218-724-11 s	RESISTOR,CHIP 22K 1/16W(1608)
R2103	1-218-726-11 s	RESISTOR,CHIP 27K 1/16W (1608)
R2104	1-218-724-11 s	RESISTOR,CHIP 22K 1/16W(1608)
R2105	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R2106	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R2107	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R2108	1-218-732-11 s	RESISTOR,CHIP 47K 1/16W(1608)
R2109	1-218-666-11 s	RESISTOR,CHIP 82 1/16W (1608)
R2110	1-218-666-11 s	RESISTOR,CHIP 82 1/16W (1608)
R2111	1-218-666-11 s	RESISTOR,CHIP 82 1/16W (1608)
R2112	1-218-666-11 s	RESISTOR,CHIP 82 1/16W (1608)
R2113	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R2115	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R2116	1-218-652-11 s	RESISTOR,CHIP 22 1/16W (1608)
R2117	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R2120	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R2121	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R2122	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R2123	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R2124	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R2125	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R2126	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R2127	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3000	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3001	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3002	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3003	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3004	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3005	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3007	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R3008	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3009	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3010	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3011	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3012	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3013	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3014	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3015	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3018	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3021	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R3022	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3023	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3024	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3025	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3026	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3027	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3028	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3029	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3030	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3032	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R3034	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R3035	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R3036	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3037	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3038	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3039	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3040	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3041	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3042	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3043	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3046	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R3047	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3048	1-218-660-91 s	RESISTOR,CHIP 47 1/16W (1608)
R3053	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R3054	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3055	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3056	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3057	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3058	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3059	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3060	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3062	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3063	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3064	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R4001	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4002	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4003	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4004	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4005	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4006	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4007	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4008	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4009	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4010	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R4011	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R4013	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4014	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4015	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4016	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4017	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4018	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4019	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4022	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4023	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R4024	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R4025	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R4026	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4027	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4028	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R4029	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R4030	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R4031	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R4032	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R4033	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R4034	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4037	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4038	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R4040	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4041	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R4042	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R4043	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4044	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4045	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R4046	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4047	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R4049	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R4051	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R4052	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)
R4053	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)
R4054	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4055	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4056	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4057	1-218-644-11	s RESISTOR,CHIP 10 1/16W

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R4058	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R4059	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R4060	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R4061	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R4062	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R4063	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R4064	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R4065	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4066	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4067	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4068	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4070	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R4071	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R4072	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R4073	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R4074	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4075	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4076	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4077	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4078	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R4079	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R4080	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R4081	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4082	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R4083	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4084	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R4085	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R4086	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4087	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4088	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R4089	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R4090	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W
R4091	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4092	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R4093	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R4094	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4095	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4096	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R4097	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R4098	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R4100	1-218-687-11	s RESISTOR CHIP 620 1/16W (1608)
R4102	1-218-687-11	s RESISTOR CHIP 620 1/16W (1608)
R4103	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4104	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4105	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R4106	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R4107	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4108	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R4109	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R4110	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4112	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R4113	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R4114	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R4115	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4116	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R4117	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4118	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4119	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4120	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R4121	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4122	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4123	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4124	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R4125	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4126	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4127	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R4128	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4129	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4130	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4131	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R4132	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4138	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4141	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4143	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5000	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R5002	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5003	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5004	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5005	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5009	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5010	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5011	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5012	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5013	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5014	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5015	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5016	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5017	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5018	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5019	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5020	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5021	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5022	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5023	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R5024	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R5025	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R5029	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R5030	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5031	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R5032	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5034	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5035	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5036	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5039	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5040	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5041	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5042	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5043	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5044	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R5045	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R5047 *c	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
RB100	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB300	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB301	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB302	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB303	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB304	1-239-711-11	s NETWORK, RESISTOR 0 (1608)

(APR-55 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
RB305	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB501	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB502	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RV101	1-223-684-11	s RESISTOR, VAR, CARBON 5K
RV102	1-237-039-11	s RESISTOR,ADJ,CERMET 100K
RV103	1-237-039-11	s RESISTOR,ADJ,CERMET 100K
RV151	1-223-684-11	s RESISTOR, VAR, CARBON 5K
RV400	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV401	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
S10	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S101	1-571-277-11	s SWITCH,SLIDE (1-2-2)
S102	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S103	1-571-277-11	s SWITCH,SLIDE (1-2-2)
S104	1-570-842-11	s SWITCH,SLIDE (2-2-2)
S151	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S152	1-571-277-11	s SWITCH,SLIDE (1-2-2)
S153	1-570-842-11	s SWITCH,SLIDE (2-2-2)
S400	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S401	1-570-852-11	s SWITCH, SLIDE
S402	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S501	1-570-852-11	s SWITCH, SLIDE
S502	1-570-852-11	s SWITCH, SLIDE
S503	1-570-852-11	s SWITCH, SLIDE
S504	1-572-725-11	s SWITCH,TACTILE
S505	1-572-725-11	s SWITCH,TACTILE
S506	1-572-725-11	s SWITCH,TACTILE
S507	1-572-725-11	s SWITCH,TACTILE
S509	1-572-725-11	s SWITCH,TACTILE
S510	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S512	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S519	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S520	1-571-275-31	s SWITCH,SLIDE (1-1-2)
S522	1-570-860-11	s SWITCH,SLIDE (1-1-2)
S540	1-692-270-41	s SWITCH, SLIDE

CN-1432 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8316-532-A	o MOUNTED CIRCUIT BOARD, CN-1432
CN1	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN2	1-568-361-21	s CONNECTOR, BOARD TO BOARD 24P

CN-2119 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8326-523-A	o MOUNTED CIRCUIT BOARD, CN-2119
CN1	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN2	1-568-361-21	s CONNECTOR, BOARD TO BOARD 24P

CN-1614 BOARD

*a: Lot No. 214 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	*a 1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
CN1	1-573-324-31	o CONNECTOR, BOARD TO BOARD 20P
CN2	1-695-442-21	o PIN, CONNECTOR (PC BOARD) 10P
R1	1-218-701-11	s RESISTOR, CHIP 2.4K 1/16W(1608)
R2	1-218-712-11	s RESISTOR, METAL 6.8K 1/16W
R3	1-218-720-11	s RESISTOR, CHIP 15K 1/16W(1608)
R4	1-218-730-11	s RESISTOR METAL FILM CHIP 39K
R5	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R6	1-218-701-11	s RESISTOR, CHIP 2.4K 1/16W(1608)
R7	1-218-712-11	s RESISTOR, METAL 6.8K 1/16W
R8	1-218-720-11	s RESISTOR, CHIP 15K 1/16W(1608)
R9	1-218-730-11	s RESISTOR METAL FILM CHIP 39K
R10	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)

CN-1642 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8317-151-A	o MOUNTED CIRCUIT BOARD, CN-1642
CN1	1-750-788-11	s CONNECTOR (XLR TYPE) 3P
CN2	1-695-207-21	o PIN, CONNECTOR (PC BOARD) 6P

CN-1940 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-175-A	o MOUNTED CIRCUIT BOARD, CN-1940
CN1	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P
CN2	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P

CN-1946 BOARD

*a: Lot No. 911 - 0A1
*b: Lot No. 0A2 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-596-A	o MOUNTED CIRCUIT BOARD, CN-1946
C1	1-127-518-11	s CAPACITOR, ELECT 100MF/16V
C2	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C3	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C4	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	*b 1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
*a	1-107-854-11	s CAPACITOR TANTALUM 68MF/6.3V
C9	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C11	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C12	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C13	1-127-518-11	s CAPACITOR, ELECT 100MF/16V
C14	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN1	1-778-003-11	o CONNECTOR, BOARD TO BOARD 80P
CN2	1-785-767-21	o CONNECTOR, FPC 30P
CN3	1-785-767-21	o CONNECTOR, FPC 30P
CN4	1-785-767-21	o CONNECTOR, FPC 30P
IC1	8-759-185-42	s IC LM4040AIM3-2.5
IC2	8-759-381-53	s IC UPC814G2-E2
Q1	8-729-117-32	s TRANSISTOR 2SC4177
Q3	8-729-820-86	s TRANSISTOR 2SB1121-ST
R1	1-218-871-11	s RESISTOR, CHIP 10K 1/10W(1608)
R2	1-218-856-11	s RESISTOR, CHIP 2.4K 1/10W(1608)
R3	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R4	1-218-876-11	s RESISTOR, CHIP 16K 1/10W(1608)
R7	1-218-849-11	s RESISTOR, CHIP 1.2K 1/10W(1608)
R8	1-218-854-11	s RESISTOR, CHIP 2K 1/10W(1608)

CN-2024 BOARD

*1: Board No. suffix 11
*2: Board No. suffix 12 -

*a: Lot No. 911 - 094
*b: Lot No. 0A1 -
*c: Lot No. 091
*d: Lot No. 092 -
*e: Lot No. 2C3 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-141-A	o MOUNTED CIRCUIT BOARD, CN-2024
C1	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C2	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C9	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C11	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-766-235-11	s HOUSING, CONNECTOR(FPC.FFC) 26P
CN2	1-766-235-11	s HOUSING, CONNECTOR(FPC.FFC) 26P
CN3	1-784-847-11	o CONNECTOR,BOARD TO BOARD 50P
CN4	1-793-093-11	o CONNECTOR, BOARD TO BOARD 60P
FB1	*2 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
	*1 1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB2	*2 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
	*1 1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB3	*2 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
	*1 1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB4	*c 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB5	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB6	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB7	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB8	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB9	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB10	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB11	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB12	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB13	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB14	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB15	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB16	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB17	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB18	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB19	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB20	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB21	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB22	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB23	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB24	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB25	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB26	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB27	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB28	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)

(CN-2024 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FB29	*2 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB50	*c 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB51	*c 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB52	*c 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB53	*2 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB54	*2 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
IC1	8-759-547-49	s IC CDC509PWR
IC2	8-759-560-33	s IC DS90LV031ATMX
IC3	8-759-389-41	s IC 74LCX646MTCX
IC4	8-759-389-41	s IC 74LCX646MTCX
IC5	8-759-389-41	s IC 74LCX646MTCX
IC6	8-759-386-25	s IC 74LCX245MTCX
IC7	8-759-389-41	s IC 74LCX646MTCX
IC8	8-759-389-41	s IC 74LCX646MTCX
IC9	8-759-389-41	s IC 74LCX646MTCX
IC10	8-759-271-86	s IC TC7SH04FU
IC11	8-759-271-86	s IC TC7SH04FU
R1	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R5	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R7	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R8	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R10	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R11	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R12	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R13	*a 1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R14	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R16	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R18	*b 1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R19	*d 1-216-295-00	s CONDUCTOR, CHIP (2012)
R20	*e 1-216-295-00	s CONDUCTOR, CHIP (2012)
RB1	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB2	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB3	*1 1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB4	*1 1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB5	*1 1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB6	*1 1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB7	*1 1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB8	*1 1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB9	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB10	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB11	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB12	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB13	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB14	1-239-407-11	s NETWORK RESISTOR(CHIP) 330

CN-2025 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-148-A	o MOUNTED CIRCUIT BOARD, CN-2025
2pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
2pcs	7-622-205-05	s NUT M2 TYPE2
C1	1-124-261-00	s CAPACITOR,ELECT 10M/50V
C2	1-124-261-00	s CAPACITOR,ELECT 10M/50V
C3	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C4	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C5	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C6	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C7	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C8	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C9	1-135-070-00	s CAPACITOR TANTALUM 0.1MF/35V
C10	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C11	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C12	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C13	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C14	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C101	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C102	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C103	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C104	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C105	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C106	1-124-261-00	s CAPACITOR,ELECT 10M/50V
C107	1-124-261-00	s CAPACITOR,ELECT 10M/50V
C108	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C109	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C110	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C111	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C201	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C202	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C203	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C204	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C205	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C206	1-124-261-00	s CAPACITOR,ELECT 10M/50V
C207	1-124-261-00	s CAPACITOR,ELECT 10M/50V
C208	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C209	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C210	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C211	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C300	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C301	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C302	1-126-925-11	s CAPACITOR,ELECT 470MF/10V
C303	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C304	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C305	1-126-925-11	s CAPACITOR,ELECT 470MF/10V
C306	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C307	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C308	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C309	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C310	1-126-925-11	s CAPACITOR,ELECT 470MF/10V
C311	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C312	1-126-925-11	s CAPACITOR,ELECT 470MF/10V
C313	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-695-452-11	o CONNECTOR, BOARD TO BOARD 50P
CN2	1-565-874-11	s PIN, CONNECTOR (PC BOARD) 2P
CN10	1-564-720-11	o PIN,CONNECTOR(4P)
CN20	1-564-720-11	o PIN,CONNECTOR(4P)
CN100	1-750-788-11	s CONNECTOR (XLR TYPE) 3P

(CN-2025 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
CN200	1-750-788-11	s CONNECTOR (XLR TYPE) 3P
CN300	1-774-795-11	s CONNECTOR, XLR (RECEPTACLE) 5P
D1	9-910-999-49	o SUPPLIED BY SCE
D2	9-910-999-49	o SUPPLIED BY SCE
D3	8-719-800-76	s DIODE 1SS226
D4	8-719-800-76	s DIODE 1SS226
D100	8-719-800-76	s DIODE 1SS226
D101	8-719-800-76	s DIODE 1SS226
D200	8-719-800-76	s DIODE 1SS226
D201	8-719-800-76	s DIODE 1SS226
D300	8-719-800-76	s DIODE 1SS226
D301	8-719-800-76	s DIODE 1SS226
D302	8-719-941-86	s DIODE DAN202U
D303	8-719-800-76	s DIODE 1SS226
D304	8-719-800-76	s DIODE 1SS226
D305	8-719-941-86	s DIODE DAN202U
FL1	1-239-895-11	s FILTER, EMI (SMD)
FL300	1-239-895-11	s FILTER, EMI (SMD)
FL301	1-239-895-11	s FILTER, EMI (SMD)
FL302	1-239-895-11	s FILTER, EMI (SMD)
FL303	1-239-895-11	s FILTER, EMI (SMD)
IC1	8-759-510-71	s IC BA10358F-E2
IC2	8-759-710-88	s IC NJM431U
IC100	8-759-700-84	s IC NJM2041MD
IC200	8-759-700-84	s IC NJM2041MD
IC300	8-759-700-94	s IC NJM5532M
IC301	8-759-700-94	s IC NJM5532M
L1	1-412-170-11	s MICRO INDUCTOR 0.47UH
L2	1-412-170-11	s MICRO INDUCTOR 0.47UH
L100	1-412-137-11	s INDUCTOR,MICRO 10UH
L101	1-412-137-11	s INDUCTOR,MICRO 10UH
L200	1-412-137-11	s INDUCTOR,MICRO 10UH
L201	1-412-137-11	s INDUCTOR,MICRO 10UH
Q1	8-729-271-31	s TRANSISTOR 2SC2713-G
Q2	8-729-271-31	s TRANSISTOR 2SC2713-G
Q3	8-729-020-94	s TRANSISTOR 2SA1314C-TE12L
Q4	8-729-808-42	s TRANSISTOR 2SD1624-T
Q300	8-729-209-07	s TRANSISTOR 2SC4213-B
Q301	8-729-209-07	s TRANSISTOR 2SC4213-B
Q302	8-729-028-91	s TRANSISTOR DTA144EUA-T106
Q303	8-729-209-07	s TRANSISTOR 2SC4213-B
Q304	8-729-209-07	s TRANSISTOR 2SC4213-B
Q305	8-729-028-91	s TRANSISTOR DTA144EUA-T106
R1	1-216-083-00	s RESISTOR CHIP 27K 1/10W(2012)
R2	1-216-083-00	s RESISTOR CHIP 27K 1/10W(2012)
R3	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R4	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R5	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R6	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R7	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R8	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R11	1-216-295-91	s CONDUCTOR, CHIP (2012)
R100	1-216-295-91	s CONDUCTOR, CHIP (2012)
R102	1-216-295-91	s CONDUCTOR, CHIP (2012)
R103	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R104	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R105	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)

(CN-2025 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R107	1-216-637-11 s	RESISTOR,CHIP 270 1/10W (2012)
R108	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R109	1-216-662-11 s	RESISTOR,CHIP 3K 1/10W (2012)
R110	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R111	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R112	1-216-637-11 s	RESISTOR,CHIP 270 1/10W (2012)
R113	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R114	1-216-641-11 s	RESISTOR,CHIP 390 1/10W(2012)
R115	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R116	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R117	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R118	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R119	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R120	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R121	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R200	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R202	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R203	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R204	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R205	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R207	1-216-637-11 s	RESISTOR,CHIP 270 1/10W (2012)
R208	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R209	1-216-662-11 s	RESISTOR,CHIP 3K 1/10W (2012)
R210	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R211	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R212	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R213	1-216-637-11 s	RESISTOR,CHIP 270 1/10W (2012)
R214	1-216-641-11 s	RESISTOR,CHIP 390 1/10W(2012)
R215	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R216	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R217	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R218	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R219	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R220	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R221	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R304	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R305	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R306	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R307	1-216-674-11 s	RESISTOR,CHIP 9.1K 1/10W(2012)
R308	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R309	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R310	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R311	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R312	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R313	1-216-674-11 s	RESISTOR,CHIP 9.1K 1/10W(2012)
R314	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R315	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R316	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R317	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R318	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R319	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R320	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R321	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R322	1-216-674-11 s	RESISTOR,CHIP 9.1K 1/10W(2012)
R323	1-216-674-11 s	RESISTOR,CHIP 9.1K 1/10W(2012)
R324	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R325	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R326	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R327	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)

(CN-2025 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R328	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R329	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R330	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R331	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
R332	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R333	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
S100	1-572-042-11 s	SWITCH,SLIDE (2-4-3)
S200	1-572-042-11 s	SWITCH,SLIDE (2-4-3)
VDR1	1-806-497-00 s	VARISTOR ERZ-V05D220

CN-2043 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-177-A o	MOUNTED CIRCUIT BOARD, CN-2043
1pc	3-626-775-01 o	NUT, PLATE
2pcs	3-370-749-01 s	SCREW (M2X0.4), PRECISION
CN1	1-785-593-21 s	CONNECTOR, MEMORY STICK
CN2	1-764-091-11 o	PIN, CONNECTOR (PC BOARD) 6P
D1	8-719-989-53 s	LED CL-200HR-C-TSL
R1	1-218-680-11 s	RESISTOR,CHIP 330 1/16W(1608)

CN-2044 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-178-A o	MOUNTED CIRCUIT BOARD, CN-2044
CN1	1-766-295-21 s	CONNECTOR, BOARD TO BOARD 24P
CN2	1-766-295-21 s	CONNECTOR, BOARD TO BOARD 24P

CN-2046 BOARD

*a: Lot No. 911 - 085
*b: Lot No. 091 -
Serial No. 90001 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-390-A	o MOUNTED CIRCUIT BOARD, CN-2046
1pc	3-610-594-02	o HOLDER, SP BNC
1pc	3-610-595-01	o PLATE, SHIELD
C1	1-110-501-11	s CAPACITOR, CERAMIC 0.33MF/16V
C2	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C5	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C6	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
CN1	1-569-531-11	s HOUSING, CONNECTOR 20P
CN2	1-766-380-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-766-381-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-766-381-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-766-381-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-766-381-11	s CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-800-76	s DIODE 1SS226
D2	8-719-800-76	s DIODE 1SS226
D3	8-719-800-76	s DIODE 1SS226
D4	8-719-800-76	s DIODE 1SS226
D5	8-719-800-76	s DIODE 1SS226
D6	8-719-800-76	s DIODE 1SS226
D7	8-719-941-23	s DIODE DA204U
D8	8-719-941-23	s DIODE DA204U
D9	8-719-105-28	s DIODE RD2.4M-B
D10	8-719-105-28	s DIODE RD2.4M-B
FB7	*b 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB8	*b 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB9	*b 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB10	*b 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FB11	*b 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
FL1	1-239-897-12	s FILTER, EMI (SMD)
FL2	1-239-897-12	s FILTER, EMI (SMD)
FL3	1-239-897-12	s FILTER, EMI (SMD)
FL4	1-239-897-12	s FILTER, EMI (SMD)
FL5	1-239-895-11	s FILTER, EMI (SMD)
FL6	1-239-895-11	s FILTER, EMI (SMD)
IC1	8-759-369-74	s IC NJM4556AMTE2
IC2	8-759-669-45	s IC TL062CPWR-12
IC3	8-759-209-57	s IC TC4S69F
R1	*a 1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R2	*a 1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R3	*a 1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R4	*a 1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R5	*a 1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R6	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R7	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R8	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R9	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R10	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R11	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R12	1-218-728-11	s RESISTOR, CHIP 33K 1/16W
R13	1-218-665-11	s RESISTOR, CHIP 75 1/16W (1608)

(CN-2046 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R14	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R15	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R16	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R17	1-218-696-11	s RESISTOR, CHIP 1.5K 1/16W(1608)
R18	1-218-748-11	s RESISTOR, CHIP 220K 1/16W(1608)
R19	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R20	1-218-704-11	s RESISTOR, CHIP 3.3K 1/16W(1608)
R21	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)
R22	1-218-709-11	s RESISTOR, CHIP 5.1K 1/16W
R23	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R24	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R25	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)

CN-2078 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-146-A	o MOUNTED CIRCUIT BOARD, CN-2078
CN101	1-793-074-31	o CONNECTOR, BOARD TO BOARD 30P
CN102	1-793-074-31	o CONNECTOR, BOARD TO BOARD 30P

CN-2085 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-341-A	o MOUNTED CIRCUIT BOARD, CN-2085
CN1	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P
CN2	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P

CN-2140 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8327-358-A	o MOUNTED CIRCUIT BOARD, CN-2140
CN1	1-766-235-11	s HOUSING, CONNECTOR(FPC.FFC)26P
R1	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
RB1	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB2	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB3	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB4	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB5	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB6	1-239-409-11	s RESISTOR NETWORK 47 (1608)

CO-38 BOARD

*1: Board No. suffix 13 -

*a: Lot No. 0C2 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-246-A	o MOUNTED CIRCUIT BOARD, CO-38
1pc	3-610-569-01	o HOLDER, G-IN
1pc	3-680-249-02	o SPACER, V-OUT
2pcs	3-694-181-01	s AROCK PRECISION +P2.6 TYPE 1
CN1	1-766-381-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-566-757-11	s PIN, CONNECTOR (PC BOARD) 2P
CN3	1-764-080-21	s PIN, CONNECTOR (PC BOARD) 8P
CN4	1-766-696-11	o CONNECTOR, ROUND TYPE 8P
FB1	*a 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB2	*a 1-414-864-11	s INDUCTOR, MICRO (CHIP TYPE)
	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB3	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB4	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB5	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB6	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB7	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB8	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB9	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012
FB10	*1 1-414-772-11	s INDUCTOR, MICRO (CHIP TYPE) 2012

CP-361 BOARD

Ref. No.
or Q'ty Part No. SP Description

1pc	A-8325-179-A	o MOUNTED CIRCUIT BOARD, CP-361
1pc	3-603-713-01	o HOLDER SWITCH
1pc	3-729-013-41	s SCREW(M1.4X3.5), WASHERHEAD(+P)
2pcs	3-884-053-00	s O-RING (RBR)
C1	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C6	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-764-079-21	s PIN, CONNECTOR (PC BOARD) 4P
IC1	8-759-561-69	s IC PCF8574TS-T
IC2	8-759-561-69	s IC PCF8574TS-T
R1	1-216-699-11	s RESISTOR, CHIP 100K 1/10W(2012)
R2	1-216-699-11	s RESISTOR, CHIP 100K 1/10W(2012)
R3	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R4	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R5	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R6	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R7	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R8	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R9	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R10	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R11	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R12	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R13	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R14	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
R15	1-216-651-11	s RESISTOR, CHIP 1K 1/10W(2012)
RB1	1-239-389-11	s RESISTOR, NETWORK 47K (1608)
RB2	1-239-389-11	s RESISTOR, NETWORK 47K (1608)
RB3	1-239-389-11	s RESISTOR, NETWORK 47K (1608)
RB4	1-239-389-11	s RESISTOR, NETWORK 47K (1608)
S1	1-762-001-11	s SWITCH, TOGGLE
S2	1-762-000-11	s SWITCH, TOGGLE
S3	1-762-000-11	s SWITCH, TOGGLE
S4	1-762-000-11	s SWITCH, TOGGLE
S5	1-762-489-11	s SWITCH, TOGGLE
S6	1-762-019-11	s SWITCH, TOGGLE
S8	1-762-019-11	s SWITCH, TOGGLE

CTL-10 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8263-156-A	o MOUNTED CIRCUIT BOARD, CTL-10
C1	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C2	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C3	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C4	1-104-552-11	s CAP,CHIP FILM 0.012MF
C5	1-104-563-11	s CAPACITOR, CHIP FILM 0.1MF
C6	1-104-752-11	s CAPACITOR TANTALUM 33MF/6.3V
C7	1-104-752-11	s CAPACITOR TANTALUM 33MF/6.3V
C8	1-164-816-11	s CAPACITOR,CERAMIC 220PF/50V CH
C9	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C10	1-109-898-11	s CAPACITOR,CHIP CERAMIC 18000PF
C11	1-109-897-11	s CAPACITOR,CHIP CERAMIC 0.015MF
CN1	1-691-591-11	o PIN,CONNECTOR (8P) (SMD) (1.5MM)
CN2	1-580-055-21	o PIN, CONNECTOR 2P
CN3	1-569-775-21	o PIN, CONNECTOR 5P
CN4	1-580-056-21	o PIN,CONNECTOR 3P
IC1	8-759-530-05	s IC TC4053BFT (EL.N)
IC2	8-759-710-28	s IC NJM4565M-A
IC3	8-759-669-49	s IC LM2903PW (R)
Q1	8-729-117-32	s TRANSISTOR 2SC4177
Q2	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
R1	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R3	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R4	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R5	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R6	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R7	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R8	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R9	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R10	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R11	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R12	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R13	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R14	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R15	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R16	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R17	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R18	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R19	1-216-847-11	s RESISTOR, CHIP 150K 1/16W 1608
R20	1-216-847-11	s RESISTOR, CHIP 150K 1/16W 1608

CUE-2 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8263-157-A	o MOUNTED CIRCUIT BOARD, CUE-2
C1	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C3	1-135-070-00	s CAPACITOR TANTALUM 0.1MF/35V
C4	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C5	1-107-499-11	s CAPACITOR, CHIP FILM 0.0039MF
C6	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C7	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C8	1-163-139-00	s CAPACITOR,CHIP CERAMIC 820PF
C9	1-109-899-11	s CAPACITOR,CHIP CERAMIC 330PF
C10	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C11	1-135-076-21	s CAPACITOR,TANTALUM 1.0MF/35V
C12	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C13	1-104-551-11	s CAPACITOR FILM 0.01MF/16V 2125
C14	1-135-202-21	s CAPACITOR TANTALUM 22MF/4V
C15	1-135-076-21	s CAPACITOR,TANTALUM 1.0MF/35V
C16	1-162-959-11	s CAPACITOR,CERAMIC 330PF/50V SL
C17	1-135-076-21	s CAPACITOR,TANTALUM 1.0MF/35V
C18	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C19	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C20	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C21	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C22	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C23	1-135-167-21	s CAPACITOR,CHIP TANTALUM 68MF
C24	1-135-167-21	s CAPACITOR,CHIP TANTALUM 68MF
C25	1-163-809-11	s CAPACITOR,CHIP CERAMIC 0.047MF
C26	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C27	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C28	1-162-959-11	s CAPACITOR,CERAMIC 330PF/50V SL
C29	1-135-164-21	s CAPACITOR TANTALUM 22MF/20V
C30	1-109-900-11	s CAPACITOR, CHIP CERAMIC 470PF
C31	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C32	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C33	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C34	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
CN1	1-760-388-11	o CONNECTOR PIN (SMD) 9 PIN
CN2	1-695-320-21	o PIN, CONNECTOR(1.5MM)SMD 2P
CN3	1-580-055-21	o PIN, CONNECTOR 2P
CT1	1-426-884-11	s TRANSFORMER, BIAS OSCILLATION
CV1	1-141-365-11	s CAPACITOR, TRIMMER (50PF)
D1	8-719-941-86	s DIODE DAN202U
D2	8-719-941-86	s DIODE DAN202U
IC1	8-759-710-28	s IC NJM4565M-A
IC2	8-759-710-28	s IC NJM4565M-A
IC3	8-759-710-28	s IC NJM4565M-A
IC4	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC5	8-759-523-78	s IC TC74VHC00FT(EL)
L1	1-408-797-11	s CHIP INDUCTOR 470UH (4532)
L2	1-408-785-21	s CHIP INDUCTOR 47UH (4532)
LV1	1-410-853-21	s COIL, VARIABLE
Q1	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q2	8-729-209-07	s TRANSISTOR 2SC4213-B
Q3	8-729-105-37	s TRANSISTOR 2SC3360
Q4	8-729-105-37	s TRANSISTOR 2SC3360
Q5	8-729-105-37	s TRANSISTOR 2SC3360

(CUE-2 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q6	8-729-105-37	s TRANSISTOR 2SC3360
Q7	8-729-209-07	s TRANSISTOR 2SC4213-B
Q8	8-729-209-07	s TRANSISTOR 2SC4213-B
Q9	8-729-105-08	s TRANSISTOR 2SA1330-06
Q10	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q11	8-729-824-34	s TRANSISTOR 2SJ187
Q12	8-729-209-07	s TRANSISTOR 2SC4213-B
Q13	8-729-209-07	s TRANSISTOR 2SC4213-B
R1	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R2	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R4	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R5	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R6	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R7	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R9	1-218-726-11	s RESISTOR,CHIP 27K 1/16W(1608)
R10	1-218-730-11	s RESISTOR METAL FILM CHIP 39K
R11	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R12	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R13	1-218-722-11	s RESISTOR,CHIP 18K 1/16W(1608)
R14	1-218-726-11	s RESISTOR,CHIP 27K 1/16W(1608)
R15	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R16	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R17	1-216-855-11	s RESISTOR,CHIP 680K 1/16W(1608)
R18	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R19	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R20	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R21	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R22	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R23	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R24	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R25	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R26	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R27	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R28	1-216-850-11	s RESISTOR,CHIP 270K 1/16W(1608)
R29	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R30	1-218-702-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R31	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R32	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R33	1-218-678-11	s RESISTOR,CHIP 270 1/16W(1608)
R34	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R35	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R36	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R37	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R38	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R39	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R40	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R41	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R42	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R43	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R44	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R45	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R46	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R47	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
RV1	1-241-263-11	s RESISTOR ADJ 5K (CERMET)
RV2	1-241-266-11	s RESISTOR ADJ 50K (CERMET)
RV3	1-241-263-11	s RESISTOR ADJ 5K (CERMET)
RV4	1-241-263-11	s RESISTOR ADJ 5K (CERMET)

DA-148 BOARD

*1: Board No. suffix 12 -

*a: Lot No. 911
 *b: Lot No. 912 -
 *c: Lot No. 911 - 084
 *d: Lot No. 085 -
 *e: Lot No. 153 - 285
 *f: Lot No. 291 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-353-A	o MOUNTED CIRCUIT BOARD, DA-148
1pc	3-626-769-01	o PLATE(DA), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
4pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C2	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C7	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C8	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C9	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C10	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C11	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C12	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C13	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C14	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C15	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C16	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C17	1-135-333-11	s CAPACITOR TANTALUM 1MF/16V
C18	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C21	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C23	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C24	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C25	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C26	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C28	1-119-751-11	s CAPACITOR, TANTALUM 22MF/16V
C36	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C37	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C38	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C39	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C40	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C41	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C42	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C43	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C44	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C100	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C105	1-162-995-11	s CAPACITOR, CERAMIC 0.022MF/50V
C106	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C107	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C108	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C109	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C200	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C203	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C204	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C205	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C206	1-162-995-11 s	CAPACITOR, CERAMIC 0.022MF/50V
C207	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C208	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C209	1-162-905-11 s	CAPACITOR, CERAMIC 1PF/50V (CK)
C210	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C300	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C302	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C303	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C304	1-162-995-11 s	CAPACITOR, CERAMIC 0.022MF/50V
C305	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C306	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C307	1-162-905-11 s	CAPACITOR, CERAMIC 1PF/50V (CK)
C308	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C400	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C401	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C402	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C403	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C404	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C405	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C406	1-104-851-11 s	CAPACITOR, TANTALUM 10MF/10V
C407	1-162-995-11 s	CAPACITOR, CERAMIC 0.022MF/50V
C408	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C409	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C410	1-162-905-11 s	CAPACITOR, CERAMIC 1PF/50V (CK)
C411	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C500	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C501	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C502	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C503	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C504	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C505	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C506	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C507	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C508	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C509	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C511	1-162-995-11 s	CAPACITOR, CERAMIC 0.022MF/50V
C512	1-162-995-11 s	CAPACITOR, CERAMIC 0.022MF/50V
C513	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C514	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C515	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C516	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C517	1-162-905-11 s	CAPACITOR, CERAMIC 1PF/50V (CK)
C518	1-162-905-11 s	CAPACITOR, CERAMIC 1PF/50V (CK)
C519	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C520	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C601	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C602	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C603	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C604	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C605	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C606	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C610	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C611	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C612	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C613	1-104-851-11 s	CAPACITOR, TANTALUM 10MF/10V

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C614	1-104-851-11 s	CAPACITOR, TANTALUM 10MF/10V
C701	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C702	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C703	1-104-851-11 s	CAPACITOR, TANTALUM 10MF/10V
C704	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
CN2	1-770-449-21 o	CONNECTOR, BOARD TO BOARD 70P
CN5	1-695-453-11 s	CONNECTOR, BOARD TO BOARD 50P
DL401	1-416-703-11 s	DELAY LINE
DL501	1-416-703-11 s	DELAY LINE
FB1	1-412-390-21 s	MICRO INDUCTOR (CHIP) 21A05
FB3	1-412-390-21 s	MICRO INDUCTOR (CHIP) 21A05
FL100	1-234-537-21 s	FILTER, LOW PASS (SMD)
FL200	1-234-537-21 s	FILTER, LOW PASS (SMD)
FL300	1-234-537-21 s	FILTER, LOW PASS (SMD)
FL400	1-234-537-21 s	FILTER, LOW PASS (SMD)
FL500	1-233-996-11 s	FILTER, LOW PASS
FL501	1-233-996-11 s	FILTER, LOW PASS
IC1	8-759-559-32 s	IC 74LCX821MTCX
IC2	8-759-559-32 s	IC 74LCX821MTCX
IC3	8-759-559-32 s	IC 74LCX821MTCX
IC4	8-759-559-32 s	IC 74LCX821MTCX
IC5	8-759-559-32 s	IC 74LCX821MTCX
IC7	8-759-575-64 s	IC NC7S204P5
IC8	8-759-466-55 s	IC 74LCX74MTCX
IC9	8-759-669-72 s	IC TL064CPWR
IC10	8-759-058-62 s	IC TC7S08FU-TE85R
IC11	8-759-058-54 s	IC TC7S00FU-TE85R
IC12	8-759-185-42 s	IC LM4040AIM3-2.5
IC13	8-759-466-55 s	IC 74LCX74MTCX
IC14	8-759-660-97 s	IC NC7S200P5
IC17	8-759-547-49 s	IC CDC509PWR
IC100	8-759-656-74 s	IC ADV7127KRU140
IC101	8-759-054-61 s	IC CLC505AJE
IC200	8-759-656-74 s	IC ADV7127KRU140
IC201	8-759-054-61 s	IC CLC505AJE
IC211	8-759-669-45 s	IC TL062CPWR-12
IC231	8-759-669-45 s	IC TL062CPWR-12
IC251	8-759-669-45 s	IC TL062CPWR-12
IC300	8-759-656-74 s	IC ADV7127KRU140
IC301	8-759-054-61 s	IC CLC505AJE
IC400	8-759-656-74 s	IC ADV7127KRU140
IC401	8-759-054-61 s	IC CLC505AJE
IC500	8-759-656-75 s	IC ADV7127KRU50-REEL
IC501	8-759-656-75 s	IC ADV7127KRU50-REEL
IC502	8-759-054-61 s	IC CLC505AJE
IC503	8-759-054-61 s	IC CLC505AJE
IC601	8-759-523-02 s	IC TC74HC4053AFT (EL)
IC602	8-759-054-61 s	IC CLC505AJE
IC603	8-759-523-02 s	IC TC74HC4053AFT (EL)
IC604	8-759-054-61 s	IC CLC505AJE
IC605	8-759-523-02 s	IC TC74HC4053AFT (EL)
IC606	8-759-054-61 s	IC CLC505AJE
IC701	8-759-064-36 s	IC MB88346BPV
IC702	8-759-562-40 s	IC CAT24WC02J-TE13
L1	1-412-026-11 s	INDUCTOR, CHIP 1UH (3225)
L2	1-412-026-11 s	INDUCTOR, CHIP 1UH (3225)

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L3	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L100	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L400	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
Q1	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q2	8-729-117-16	s TRANSISTOR 2SA1611M6
Q3	8-729-117-32	s TRANSISTOR 2SC4177
Q4	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q7	8-729-117-32	s TRANSISTOR 2SC4177
Q8	8-729-820-86	s TRANSISTOR 2SB1121-ST
R1	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R2	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R3	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R4	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R5	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R6	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R7	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R8	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R9	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R10	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R11	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R12	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R13	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R14	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R15	*f 1-218-644-11	s RESISTOR,CHIP 10 1/16W
R16	*e 1-218-644-11	s RESISTOR,CHIP 10 1/16W
R17	*c 1-218-644-11	s RESISTOR,CHIP 10 1/16W
R20	*c 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R21	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R22	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R23	*d 1-218-644-11	s RESISTOR,CHIP 10 1/16W
R24	*c 1-218-644-11	s RESISTOR,CHIP 10 1/16W
R33	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R35	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R37	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R39	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R40	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R41	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R43	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R44	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R47	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R48	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R50	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R51	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R61	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R66	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R67	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R68	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R69	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R70	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R71	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R100	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R101	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R102	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R103	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R104	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R105	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R106	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R107	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R108	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R109	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R110	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R111	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R112	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R113	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R117	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R118	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R119	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R120	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R121	1-218-674-11	s RESISTOR,CHIP 180 1/16W (1608)
R122	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R123	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R124	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R125	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R200	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R202	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R203	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R204	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R205	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R206	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R207	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R208	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R209	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R210	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R211	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R212	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R213	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R217	1-218-655-91	s RESISTOR,CHIP 30 1/16W(1608)
R218	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R219	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R220	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R221	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R222	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R223	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R224	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R225	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R300	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R302	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R303	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R304	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R305	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R306	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R307	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R308	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R309	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R310	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R311	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R312	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R313	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R317	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R318	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R319	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R320	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R321	1-218-674-11	s RESISTOR,CHIP 180 1/16W (1608)
R322	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R323	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R324	1-218-744-11	s RESISTOR,CHIP 150K 1/16W

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R325	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R400	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R403	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R404	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R405	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R406	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R407	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R408	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R409	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R410	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R411	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R412	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R413	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R414	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R418	1-218-655-91	s RESISTOR,CHIP 30 1/16W(1608)
R419	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R420	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R421	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R422	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R423	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R424	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R425	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R426	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R434	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R500	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R501	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R502	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R503	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R504	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R505	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R506	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R507	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R508	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R509	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R510	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R511	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R512	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R513	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R514	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R515	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R516	1-218-648-11	s RESISTOR CHIP 15 1/16W(1608)
R517	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R518	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R519	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R520	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R521	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R522	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R523	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R524	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R525	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R526	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R527	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R530	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R531	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R532	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R533	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R534	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R535	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R536	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R537	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R538	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R539	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)
R540	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R541	*b 1-218-691-11	s RESISTOR,CHIP 910 1/16W (1608)
	*a 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R542	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R543	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R544	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R545	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R546	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R547	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R601	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R602	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R603	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R604	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R605	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R606	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R607	1-218-687-11	s RESISTOR CHIP 620 1/16W (1608)
R608	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R609	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R610	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R611	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R612	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R613	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R614	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R615	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R616	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R617	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R618	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R619	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R620	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R621	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R622	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R623	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R624	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R625	1-218-687-11	s RESISTOR CHIP 620 1/16W (1608)
R626	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R627	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R701	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R702	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R703	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R704	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R705	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R706	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R707	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R708	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R709	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R710	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R711	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R712	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
RB1	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB2	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB3	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB4	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB5	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB6	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB7	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB8	1-236-907-11	s RESISTOR BLOCK 100K (1608)

(DA-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB9	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB10	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB11	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB12	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB13	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB14	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB15	*c 1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RV501	1-241-259-41 s	RESISTOR, ADJUSTMENT, CERMET 200

DEC-95 BOARD

Ref. No. or Q'ty	Part No.	SP Description
2pcs	A-8316-494-A o	MOUNTED CIRCUIT BOARD, DEC-95
6pcs	3-729-061-01 s	SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-724-753-01 o	RING, PULL
1pc	3-610-534-03 o	PLATE (DEC), ORNAMENTAL
C1	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-126-412-11 s	CAPACITOR, ELECT 220MF/4V (CHIP)
C9	1-126-392-11 s	CAPACITOR, CHIP ELECT 100MF/6.3V
C11	1-126-392-11 s	CAPACITOR, CHIP ELECT 100MF/6.3V
C12	1-164-227-11 s	CAPACITOR, CERAMIC 0.022MF/25V
C13	1-164-227-11 s	CAPACITOR, CERAMIC 0.022MF/25V
C14	1-165-176-11 s	CAPACITOR, CERAMIC 47000PF/16V
C15	1-165-176-11 s	CAPACITOR, CERAMIC 47000PF/16V
C16	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C17	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C18	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C19	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C20	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C21	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C22	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C23	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C24	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C26	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C28	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C29	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C30	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C31	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C32	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C33	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C35	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C36	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C37	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C39	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C40	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C42	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C43	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C44	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C45	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C46	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C47	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C48	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C49	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C50	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C51	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C52	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C54	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C55	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C57	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C59	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C60	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C61	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C62	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C63	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C64	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C65	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F

(DEC-95 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C66	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C68	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C69	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C70	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C71	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C72	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C74	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C75	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V F
C76	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C78	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C79	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C80	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C82	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C83	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C85	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C86	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C87	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C88	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C89	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C90	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C91	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C93	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C94	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C95	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C96	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C100	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN2	1-695-223-21	o PIN, CONNECTOR (SMD) 10P
CN3	1-580-055-21	o PIN, CONNECTOR 2P
D1	8-719-938-72	s DIODE SB01-05CP (RECTI)
D2	8-719-938-72	s DIODE SB01-05CP (RECTI)
D3	8-719-938-72	s DIODE SB01-05CP (RECTI)
FL1	1-117-193-11	s CAPACITOR, 3 TERMINAL 1.5MF/50V
FL3	1-117-193-11	s CAPACITOR, 3 TERMINAL 1.5MF/50V
IC1	8-759-386-25	s IC 74LCX245MTCX
IC2	8-759-386-25	s IC 74LCX245MTCX
IC3	8-729-024-50	s TRANSISTOR SI9936DY
IC4	8-729-024-50	s TRANSISTOR SI9936DY
IC5	8-759-386-25	s IC 74LCX245MTCX
IC6	8-759-386-25	s IC 74LCX245MTCX
IC7	8-759-389-26	s IC 74LCX08MTCX
IC8	8-759-386-28	s IC 74LCX00MTCX
IC9	8-759-386-25	s IC 74LCX245MTCX
IC11	8-759-663-74	s IC HY57V161610DTC-7TR
IC12	8-759-386-25	s IC 74LCX245MTCX
IC13	8-759-386-25	s IC 74LCX245MTCX
IC14	8-759-498-89	s IC CXD9020CR
IC15	8-759-663-74	s IC HY57V161610DTC-7TR
IC16	8-759-386-26	s IC 74LCX574MTCX
IC17	8-759-663-74	s IC HY57V161610DTC-7TR
IC18	8-759-386-26	s IC 74LCX574MTCX
Q1	8-729-029-14	s TRANSISTOR DTC144EUA-T106

(DEC-95 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q2	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q3	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q4	8-729-029-14	s TRANSISTOR DTC144EUA-T106
R1	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R2	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R3	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R4	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R5	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R8	1-216-296-91	s CONDUCTOR, CHIP (3216)
R9	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R10	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R11	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R12	1-218-680-11	s RESISTOR, CHIP 330 1/16W(1608)
R13	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R14	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R16	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R18	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R19	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R20	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R21	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R22	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R23	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R24	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R26	1-216-296-91	s CONDUCTOR, CHIP (3216)
R27	1-218-718-11	s RESISTOR, CHIP 12K 1/16W (1608)
R29	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R31	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R35	1-216-296-91	s CONDUCTOR, CHIP (3216)
R36	1-218-675-11	s RESISTOR, CHIP 200 1/16W (1608)
R37	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R38	1-218-724-11	s RESISTOR, CHIP 22K 1/16W(1608)
R39	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R40	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R41	1-218-724-11	s RESISTOR, CHIP 22K 1/16W(1608)
R42	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R43	1-218-704-11	s RESISTOR, CHIP 3.3K 1/16W(1608)
R44	1-218-704-11	s RESISTOR, CHIP 3.3K 1/16W(1608)
R45	1-218-661-11	s RESISTOR, CHIP 51 1/16W (1608)
R46	1-218-675-11	s RESISTOR, CHIP 200 1/16W (1608)
R47	1-216-296-91	s CONDUCTOR, CHIP (3216)
R48	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R49	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R50	1-218-661-11	s RESISTOR, CHIP 51 1/16W (1608)
R51	1-218-661-11	s RESISTOR, CHIP 51 1/16W (1608)
R52	1-218-661-11	s RESISTOR, CHIP 51 1/16W (1608)
R53	1-218-661-11	s RESISTOR, CHIP 51 1/16W (1608)
R54	1-218-661-11	s RESISTOR, CHIP 51 1/16W (1608)
R55	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R56	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R57	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R58	1-218-740-11	s RESISTOR, CHIP 100K 1/16W(1608)
R59	1-218-718-11	s RESISTOR, CHIP 12K 1/16W (1608)
R60	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R61	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R62	1-216-296-91	s CONDUCTOR, CHIP (3216)
R63	1-216-296-91	s CONDUCTOR, CHIP (3216)
R64	1-218-675-11	s RESISTOR, CHIP 200 1/16W (1608)
R65	1-216-296-91	s CONDUCTOR, CHIP (3216)

(DEC-95 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R66	1-218-675-11 s	RESISTOR,CHIP 200 1/16W (1608)
R67	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R68	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R69	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R71	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R73	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R74	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R100	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R101	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R102	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R103	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R104	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R105	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R106	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
R107	1-218-661-11 s	RESISTOR,CHIP 51 1/16W (1608)
RB1	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB2	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB3	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB4	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB6	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB7	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB8	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB10	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB11	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB14	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB15	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB16	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB17	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB20	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB21	1-239-409-11 s	RESISTOR NETWORK 47 (1608)
RB23	1-239-409-11 s	RESISTOR NETWORK 47 (1608)

DPR-152 BOARD SUFFIX -12

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-355-A o	MOUNTED CIRCUIT BOARD, DPR-152
1pc	3-626-780-01 o	PLATE(DPR), ORNAMENTAL
4pcs	3-729-061-01 s	SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C3	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C5	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C6	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C8	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C9	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C11	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C14	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C15	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C16	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C19	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C20	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C21	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C23	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C24	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C25	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C27	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C28	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C29	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C30	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C31	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C32	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C33	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C34	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C37	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C39	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C41	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C42	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C43	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C44	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C45	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C46	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C47	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C48	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C49	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C50	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C52	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C53	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C54	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C57	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C58	1-127-707-11 s	CAPACITOR,POLYPYRROLE 150MF
C60	1-113-991-11 s	CAPACITOR TANTALUM 33MF/16V
C61	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C62	1-127-707-11 s	CAPACITOR,POLYPYRROLE 150MF
C64	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C65	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C66	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C68	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C69	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C75	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-152 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C76	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C77	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C78	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C79	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C100	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C101	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C106	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C108	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C109	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C111	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C112	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C115	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C117	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C119	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C120	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C126	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C127	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C128	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C129	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C130	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C131	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C133	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C134	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C135	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C136	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C137	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C138	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C139	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C140	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C141	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C142	1-107-685-11	s CAPACITOR TANTALUM 15MF/6.3V
C143	1-107-685-11	s CAPACITOR TANTALUM 15MF/6.3V
C144	1-107-685-11	s CAPACITOR TANTALUM 15MF/6.3V
C145	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C146	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C147	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C148	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C149	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C150	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C151	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C152	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C153	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C154	1-107-823-11	s CAPACITOR,CERAMIC 0.47MF/16V
C155	1-107-823-11	s CAPACITOR,CERAMIC 0.47MF/16V
CN2	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
CN3	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
CN5	1-770-139-11	o CONNECTOR 70P
FB2	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB3	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05

(DPR-152 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
FB4	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB5	1-469-324-21	s FERRITE, EMI (SMD)
FB6	1-469-324-21	s FERRITE, EMI (SMD)
FB7	1-469-324-21	s FERRITE, EMI (SMD)
FB9	1-469-324-21	s FERRITE, EMI (SMD)
FB11	1-469-324-21	s FERRITE, EMI (SMD)
FL10	1-233-997-11	s FILTER,LOW PASS
IC1	8-759-656-77	o IC CXD9064R
IC3	8-759-386-26	s IC 74LCX574MTCX
IC4	8-759-386-26	s IC 74LCX574MTCX
IC5	8-759-386-26	s IC 74LCX574MTCX
IC6	8-759-031-84	s IC SC7S04F
IC7	8-759-058-62	s IC TC7S08FU-TE85R
IC8	8-759-031-84	s IC SC7S04F
IC9	8-759-547-49	s IC CDC509PWR
IC10	8-759-547-49	s IC CDC509PWR
IC14	8-759-075-53	s IC LM35DM
IC20	8-759-386-26	s IC 74LCX574MTCX
IC21	8-759-386-26	s IC 74LCX574MTCX
IC22	8-759-386-26	s IC 74LCX574MTCX
IC51	8-759-559-32	s IC 74LCX821MTCX
IC52	8-759-386-26	s IC 74LCX574MTCX
IC54	8-752-375-98	s IC CXD2315Q
IC55	8-759-637-57	s IC CLC450AJM5
IC57	8-759-466-57	s IC 74LCX157MTCX
IC58	8-759-559-32	s IC 74LCX821MTCX
IC59	8-759-559-32	s IC 74LCX821MTCX
IC61	8-759-466-55	s IC 74LCX74MTCX
IC62	8-759-599-93	s IC NC7SZ08P5
IC63	8-759-599-93	s IC NC7SZ08P5
IC64	8-759-599-93	s IC NC7SZ08P5
IC65	8-759-599-93	s IC NC7SZ08P5
L1	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L3	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L4	1-412-028-11	s INDUCTOR,CHIP 4.7UH (3225)
L5	1-412-028-11	s INDUCTOR,CHIP 4.7UH (3225)
R1	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R2	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R3	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R5	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R6	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R7	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R9	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R11	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R12	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R15	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R16	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R17	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R18	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R19	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R20	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R21	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R22	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R23	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R26	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R27	1-218-644-11	s RESISTOR,CHIP 10 1/16W

(DPR-152 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R28	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R29	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R30	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R33	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R34	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R35	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R36	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R37	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R39	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R40	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R41	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R42	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R43	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R44	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R46	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R47	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R48	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R49	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R50	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R53	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R56	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R57	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R58	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R59	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R70	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R71	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R74	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R75	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R76	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R81	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R84	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R204	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R207	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R208	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R209	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R210	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R211	1-218-664-11	s RESISTOR,CHIP 68 1/16W (1608)
R215	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R216	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R219	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R220	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R221	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R222	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R225	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R226	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R227	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R229	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R230	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R231	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R232	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R233	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R234	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R236	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R237	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R238	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R239	1-216-794-11	s RESISTOR,CHIP 5.6 1/16W 1608
R240	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R241	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)

(DPR-152 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R242	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R243	1-216-794-11	s RESISTOR,CHIP 5.6 1/16W 1608
R244	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R245	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R246	1-216-295-00	s CONDUCTOR, CHIP (2012)
R247	1-216-295-00	s CONDUCTOR, CHIP (2012)
R248	1-216-295-00	s CONDUCTOR, CHIP (2012)
RB1	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB2	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB3	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB4	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB5	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB6	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB7	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB8	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB9	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB10	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB11	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB12	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB13	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB14	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB15	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB16	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB21	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB22	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB23	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB24	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB25	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB30	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB31	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB32	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB33	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB34	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB35	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB36	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB42	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB48	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB49	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB50	1-233-936-11	s RESISTOR,NETWORK 10 (1608)
RB51	1-233-936-11	s RESISTOR,NETWORK 10 (1608)
RB52	1-233-936-11	s RESISTOR,NETWORK 10 (1608)
RB53	1-233-936-11	s RESISTOR,NETWORK 10 (1608)
RB71	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB72	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB73	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB74	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB84	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB85	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB86	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB87	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB88	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB89	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB90	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB91	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB92	1-236-907-11	s RESISTOR BLOCK 100K (1608)

DPR-152 BOARD SUFFIX -11

*a: Lot No. 911
*b: Lot No. 912 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-355-A	o MOUNTED CIRCUIT BOARD, DPR-152
1pc	3-626-780-01	o PLATE (DPR), ORNAMENTAL
4pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C2	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C9	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C12	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C13	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C14	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C15	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C16	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C17	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C18	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C19	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C20	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C21	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C22	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C23	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C24	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C25	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C26	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C27	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C28	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C29	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C30	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C31	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C32	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C33	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C34	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C35	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C36	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C37	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C38	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C39	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C40	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C41	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C42	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C43	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C44	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C45	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C46	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C47	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C48	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C49	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C50	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C52	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C53	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B

(DPR-152 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C54	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C57	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C58	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C60	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C61	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C62	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C63	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C64	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C65	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C66	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C68	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C69	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C75	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C76	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C77	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C78	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C79	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C100	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C108	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C109	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C111	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C112	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C114	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C115	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C117	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C119	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C120	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C126	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C127	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C128	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C129	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C130	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C131	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C133	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
CN2	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
CN3	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
CN5	1-770-139-11	o CONNECTOR 70P
FB2	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB3	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB4	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB5	1-469-324-21	s FERRITE, EMI (SMD)
FB6	1-469-324-21	s FERRITE, EMI (SMD)
FL10	1-233-997-11	s FILTER, LOW PASS
IC1	8-759-656-77	o IC CXD9064R
IC3	8-759-386-26	s IC 74LCX574MTCX
IC4	8-759-386-26	s IC 74LCX574MTCX
IC5	8-759-386-26	s IC 74LCX574MTCX
IC6	8-759-031-84	s IC SC7S04F

(DPR-152 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
IC7	8-759-058-62	s IC TC7S08FU-TE85R
IC8	8-759-031-84	s IC SC7S04F
IC9	8-759-547-49	s IC CDC509PWR
IC10	8-759-547-49	s IC CDC509PWR
IC11	8-759-386-26	s IC 74LCX574MTCX
IC14	8-759-075-53	s IC LM35DM
IC20	8-759-386-26	s IC 74LCX574MTCX
IC21	8-759-386-26	s IC 74LCX574MTCX
IC22	8-759-386-26	s IC 74LCX574MTCX
IC51	8-759-559-32	s IC 74LCX821MTCX
IC52	8-759-386-26	s IC 74LCX574MTCX
IC54	8-752-375-98	s IC CXD2315Q
IC55	8-759-637-57	s IC CLC450AJM5
IC57	8-759-466-57	s IC 74LCX157MTCX
IC58	8-759-559-32	s IC 74LCX821MTCX
IC59	8-759-559-32	s IC 74LCX821MTCX
IC61	8-759-466-55	s IC 74LCX74MTCX
IC62	8-759-599-93	s IC NC7SZ08P5
IC63	8-759-599-93	s IC NC7SZ08P5
IC64	8-759-599-93	s IC NC7SZ08P5
L1	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L3	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
R1	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R2	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R3	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R4	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R5	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R6	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R7	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R9	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R11	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R12	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R15	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R16	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R17	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R18	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R19	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R20	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R21	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R22	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R23	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R26	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R27	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R28	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R29	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R30	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R33	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R34	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R35	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R36	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R37	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R39	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R40	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R41	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R42	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R43	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R44	1-218-644-11	s RESISTOR,CHIP 10 1/16W

(DPR-152 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R46	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R47	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R48	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R49	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R50	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R51	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R52	*a 1-218-644-11	s RESISTOR,CHIP 10 1/16W
R53	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R55	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R56	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R57	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R58	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R59	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R70	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R71	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R74	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R75	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R76	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R81	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R84	*b 1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R104	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R204	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R207	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R210	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R211	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R215	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R216	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R219	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R220	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R221	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R222	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R225	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R226	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R227	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R229	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R230	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R231	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R232	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R233	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R234	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
RB1	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB2	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB3	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB4	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB5	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB6	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB7	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB8	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB9	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB10	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB11	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB12	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB13	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB14	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB15	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB16	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB21	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB22	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB23	1-236-907-11	s RESISTOR BLOCK 100K (1608)

(DPR-152 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
RB24	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB25	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB30	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB31	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB32	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB33	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB34	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB35	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB36	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB42	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB48	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB49	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB71	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB72	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB73	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB74	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB84	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB85	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB86	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB87	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB88	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB89	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB90	1-239-621-11	s NETWORK RESISTOR 22 (1608)

DPR-157 BOARD

*1: Board No. suffix 12 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-505-A	s MOUNTED CIRCUIT BOARD, DPR-157
C3	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C9	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C12	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C21	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C22	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C23	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C24	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C25	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C26	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C27	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C28	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C32	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C33	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN1	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P
CN2	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
IC2	8-759-082-61	s IC TC4W53FU
IC3	8-759-082-61	s IC TC4W53FU
IC4	8-759-082-61	s IC TC4W53FU
IC5	8-759-660-22	s IC SN74HCT04APWR
IC6	8-759-669-72	s IC TL064CPWR
L1	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L2	1-412-026-11	s INDUCTOR, CHIP 1UH (3225)
L3	1-412-029-11	s CHIP INDUCTOR 10UH (3225)
R7	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R8	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R9	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R10	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R11	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R12	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R13	1-218-716-11	s RESISTOR, CHIP 10K 1/16W (1608)
R14	1-218-716-11	s RESISTOR, CHIP 10K 1/16W (1608)
R15	1-218-716-11	s RESISTOR, CHIP 10K 1/16W (1608)
R19	1-218-700-11	s RESISTOR, CHIP 2.2K 1/16W (1608)
R20	1-218-700-11	s RESISTOR, CHIP 2.2K 1/16W (1608)
R21	1-218-700-11	s RESISTOR, CHIP 2.2K 1/16W (1608)
R25	1-218-652-11	s RESISTOR, CHIP 22 1/16W (1608)
R26	1-218-652-11	s RESISTOR, CHIP 22 1/16W (1608)
R27	1-218-652-11	s RESISTOR, CHIP 22 1/16W (1608)
R28	1-218-740-11	s RESISTOR, CHIP 100K 1/16W (1608)
R29	1-218-740-11	s RESISTOR, CHIP 100K 1/16W (1608)
R30	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R31	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R32	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R33	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R34	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R35	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R36	1-218-644-11	s RESISTOR, CHIP 10 1/16W

(DPR-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R37	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R38 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R39 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R40	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R41	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R42	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R43	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R44 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R45 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R46 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R47 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R48 *1	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608

DPR-227 BOARD

*a: Lot No. 2A3 - 2B4
*b: Lot No. 2C1 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8345-181-A	s MOUNTED CIRCUIT BOARD, DPR-227
1pc	3-626-780-01	o PLATE (DPR), ORNAMENTAL
4pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-610-508-03	o TABLE, CLAMPER
1pc	3-610-554-01	o SHEET, THERMAL CONVECTION
1pc	3-612-297-01	o INSULATOR (DPR)
1pc	3-626-754-01	o CLAMPER, HB
1pc	3-626-783-02	o LABEL, CAUTION
1pc	3-629-815-01	o PIN(M2)
1pc	3-675-965-01	s SPACER (DIA 2.6X2)
1pc	3-697-580-01	o SHEET, CUSHION
1pc	3-724-753-01	o RING, PULL
1pc	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	7-621-773-86	s SCREW +B2.6X4
2pcs	7-688-001-12	s WASHER W2, MIDDLE
C1	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C6	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C7	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C9	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C10	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C14	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C15	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C16	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C17	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C19	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C20	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C21	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C23	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C24	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C25	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C27	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C28	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C29	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C30	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C31	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C32	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C33	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C34	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C35	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C36	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C37	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C39	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C41	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C42	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C43	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C44	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C45	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C46	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C47	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V

(DPR-227 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C48	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C49	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C50	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C52	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C53	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C54	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C57	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C58	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C60	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C61	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C62	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C64	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C65	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C66	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C68	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C69	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C75	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C76	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C77	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C78	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C79	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C100	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C101	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C103	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C104	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C105	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C106	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C108	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C109	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C111	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C112	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C114	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C115	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C117	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C119	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C120	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C125	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C126	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C127	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C128	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C129	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C130	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C131	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C133	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C142	1-107-685-11	s CAPACITOR TANTALUM 15MF/6.3V
C143	1-107-685-11	s CAPACITOR TANTALUM 15MF/6.3V
C144	1-107-685-11	s CAPACITOR TANTALUM 15MF/6.3V
C145	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C146	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C147	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C148	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C149	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C150	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C151	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C152	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C153	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V

(DPR-227 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
CN2	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
CN3	1-770-449-21	o CONNECTOR, BOARD TO BOARD 70P
FB1	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB2	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB3	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB4	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB5	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB6	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB7	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB8	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB10	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB15	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FB16	1-469-324-21	s FERRITE, EMI (SMD) 4.7UH
FL10	1-233-997-11	s FILTER,LOW PASS
IC1	8-759-656-77	o IC CXD9064R
IC3	8-759-386-26	s IC 74LCX574MTCX
IC4	8-759-386-26	s IC 74LCX574MTCX
IC5	8-759-386-26	s IC 74LCX574MTCX
IC7	8-759-058-62	s IC TC7S08FU-TE85R
IC8	8-759-031-84	s IC SC7S04F
IC9	8-759-547-49	s IC CDC509PWR
IC10	8-759-547-49	s IC CDC509PWR
IC12	8-759-678-06	s IC CAT24WC02JI-TE13
IC13	8-759-561-69	s IC PCF8574TS-T
IC14	8-759-075-53	s IC LM35DM
IC21	8-759-559-32	s IC 74LCX821MTCX
IC22	8-759-559-32	s IC 74LCX821MTCX
IC51	8-759-559-32	s IC 74LCX821MTCX
IC52	8-759-386-26	s IC 74LCX574MTCX
IC54	8-752-375-98	s IC CXD2315Q
IC55	8-759-637-57	s IC CLC450AJM5
IC57	8-759-466-57	s IC 74LCX157MTCX
IC58	8-759-559-32	s IC 74LCX821MTCX
IC59	8-759-559-32	s IC 74LCX821MTCX
IC60	6-700-403-01	s IC SN74CBTLV16210VR
IC61	8-759-466-55	s IC 74LCX74MTCX
IC62	8-759-031-84	s IC SC7S04F
IC63	8-759-599-93	s IC NC7SZ08P5
IC64	8-759-599-93	s IC NC7SZ08P5
IC65	*b 8-759-599-93	s IC NC7SZ08P5
L1	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L3	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
R1	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R2	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R3	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R4	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R5	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R6	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R7	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R8	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R9	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R10	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R11	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R12	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R13	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R14	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)

(DPR-227 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R15	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R16	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R17	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R18	1-218-883-11	s RESISTOR,CHIP 33K 1/10W (1608)
R19	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R20	1-218-883-11	s RESISTOR,CHIP 33K 1/10W (1608)
R21	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R22	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R23	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R24	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R25	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R26	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R27	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R29	1-218-883-11	s RESISTOR,CHIP 33K 1/10W (1608)
R30	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R32	1-211-977-11	s RESISTOR,CHIP 22 1/10W (1608)
R33	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R34	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R35	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R36	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R37	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R38	1-211-986-11	s RESISTOR,CHIP 51 1/10W (1608)
R39	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R40	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R41	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R42	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R43	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R44	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R46	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R47	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R48	1-218-880-11	s RESISTOR,CHIP 24K 1/10W (1608)
R49	1-218-880-11	s RESISTOR,CHIP 24K 1/10W (1608)
R50	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R52	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R54	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R55	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R56	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R57	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R58	1-211-986-11	s RESISTOR,CHIP 51 1/10W (1608)
R59	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R60	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R61	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R70	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R71	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R73	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R74	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R75	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R76	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R81	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R82	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R84	1-211-985-11	s RESISTOR,CHIP 47 1/10W (1608)
R104	*a 1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R206	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R207	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R208	1-216-864-11	s CONDUCTOR,CHIP (1608)
R209	1-216-864-11	s CONDUCTOR,CHIP (1608)
R210	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R211	1-211-989-11	s RESISTOR,CHIP 68 1/10W (1608)
R215	1-218-883-11	s RESISTOR,CHIP 33K 1/10W (1608)

(DPR-227 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R216	1-216-864-11	s CONDUCTOR,CHIP (1608)
R219	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R220	1-218-835-11	s RESISTOR,CHIP 330 1/10W (1608)
R221	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R222	1-216-864-11	s CONDUCTOR,CHIP (1608)
R223	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R225	1-216-864-11	s CONDUCTOR,CHIP (1608)
R226	1-218-835-11	s RESISTOR,CHIP 330 1/10W (1608)
R227	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R229	1-218-847-11	s RESISTOR,CHIP 1K 1/10W (1608)
R230	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R231	1-216-864-11	s CONDUCTOR,CHIP (1608)
R232	1-216-864-11	s CONDUCTOR,CHIP (1608)
R233	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R234	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R235	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R236	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R237	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R239	1-216-864-11	s CONDUCTOR,CHIP (1608)
R241	1-216-864-11	s CONDUCTOR,CHIP (1608)
R243	1-216-864-11	s CONDUCTOR,CHIP (1608)
R244	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R245	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R246	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R247	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R248	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R249	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
RB1	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB2	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB3	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB4	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB5	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB6	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB7	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB8	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB9	1-233-575-11	s RES,CHIP NETWORK 22
RB10	1-233-575-11	s RES,CHIP NETWORK 22
RB11	1-233-575-11	s RES,CHIP NETWORK 22
RB12	1-233-575-11	s RES,CHIP NETWORK 22
RB13	1-233-575-11	s RES,CHIP NETWORK 22
RB14	1-233-575-11	s RES,CHIP NETWORK 22
RB15	1-233-575-11	s RES,CHIP NETWORK 22
RB16	1-233-575-11	s RES,CHIP NETWORK 22
RB17	1-233-575-11	s RES,CHIP NETWORK 22
RB18	1-233-575-11	s RES,CHIP NETWORK 22
RB19	1-233-575-11	s RES,CHIP NETWORK 22
RB20	1-233-575-11	s RES,CHIP NETWORK 22
RB21	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB22	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB23	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB24	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB25	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB26	1-233-575-11	s RES,CHIP NETWORK 22
RB30	1-233-575-11	s RES,CHIP NETWORK 22
RB31	1-233-575-11	s RES,CHIP NETWORK 22
RB32	1-233-575-11	s RES,CHIP NETWORK 22
RB33	1-233-575-11	s RES,CHIP NETWORK 22
RB34	1-233-575-11	s RES,CHIP NETWORK 22

(DPR-227 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB35	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB42	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB43	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB44	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB45	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB46	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB47	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB50	1-233-574-11	s RESISTOR,CHIP NETWORK 10
RB51	1-233-574-11	s RESISTOR,CHIP NETWORK 10
RB52	1-233-574-11	s RESISTOR,CHIP NETWORK 10
RB53	1-233-574-11	s RESISTOR,CHIP NETWORK 10
RB71	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB72	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB73	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB74	1-239-388-91	s NETWORK RESISTOR (CHIP) 68
RB84	1-233-575-11	s RES, CHIP NETWORK 22
RB85	1-233-575-11	s RES, CHIP NETWORK 22
RB86	1-233-575-11	s RES, CHIP NETWORK 22
RB87	1-233-575-11	s RES, CHIP NETWORK 22
RB88	1-233-575-11	s RES, CHIP NETWORK 22
RB89	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB90	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB91	1-233-810-21	s RES, NETWORK 100K (3216)
RB92	1-233-810-21	s RES, NETWORK 100K (3216)
RB101	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB102	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB103	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB104	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB105	1-233-576-11	s RESISTOR,CHIP NETWORK 100

DR-411 BOARD SUFFIX -14

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-348-B	s MOUNTED CIRCUIT BOARD, DR-411
C3	1-113-986-11	s CAPACITOR,TANTALUM 2.2MF/25V
C5	1-137-934-11	s CAPACITOR, CHIP TANTALUM 47MF
C6	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-113-986-11	s CAPACITOR,TANTALUM 2.2MF/25V
C11	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-127-562-11	s CAP,ELECT(SOLID)47MF/6.3V
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C15	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-113-986-11	s CAPACITOR,TANTALUM 2.2MF/25V
C18	1-107-886-11	s CAPACITOR ELECT 4700MF/16V(105
C19	1-113-986-11	s CAPACITOR,TANTALUM 2.2MF/25V
C20	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C21	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C27	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C28	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C29	1-115-339-11	s CAPACITOR,CERAMIC 0.1MF/50V
C30	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C33	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C40	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V
C41	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C43	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C44	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C45	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C47	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C48	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C49	1-104-919-11	s CAPACITOR,TANTALUM 10MF/25V
C50	1-104-919-11	s CAPACITOR,TANTALUM 10MF/25V
C52	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V
C53	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C55	1-104-919-11	s CAPACITOR,TANTALUM 10MF/25V
C56	1-104-919-11	s CAPACITOR,TANTALUM 10MF/25V
C57	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C65	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C66	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C70	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C71	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C72	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C73	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C74	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C75	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C80	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C81	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C103	1-115-339-11	s CAPACITOR,CERAMIC 0.1MF/50V
C104	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C105	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C106	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C107	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C108	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C109	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C110	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C111	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C112	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(DR-411 BOARD SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C115	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C116	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C117	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C118	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C119	1-104-920-11	s	CAPACITOR TANTALUM 4.7MF/35V
C120	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C121	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C122	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C123	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C124	1-137-689-91	s	CAPACITOR TANTALUM ELECT 47MF
C125	1-137-689-91	s	CAPACITOR TANTALUM ELECT 47MF
C126	1-127-517-11	s	CAPACITOR,ELECT 150MF/16V
C127	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C128	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C129	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C132	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C133	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C134	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C135	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C136	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C137	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C138	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C139	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C140	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C141	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C142	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C143	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C144	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C145	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C146	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C147	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C148	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
CN1	1-766-384-11	s	CONNECTOR, FPC (28P)
CN2	1-573-310-11	s	CONNECTOR,BOARD TO BOARD 20P
CN4	1-569-607-21	o	CONNECTOR, BOARD TO BOARD 24P
CN5	1-568-338-11	s	CONNECTOR, BOARD TO BOARD 24P
D1	8-719-210-43	s	DIODE EC10QS06
D3	8-719-059-52	s	DIODE MA3J14300LSO
D4	8-719-059-52	s	DIODE MA3J14300LSO
D7	8-719-059-51	s	DIODE MA3J142E0LSO
D8	8-719-059-51	s	DIODE MA3J142E0LSO
D101	8-719-043-70	s	DIODE MA6S121-(TX)
D102	8-719-043-70	s	DIODE MA6S121-(TX)
D103	8-719-043-70	s	DIODE MA6S121-(TX)
D104	8-719-043-70	s	DIODE MA6S121-(TX)
D105	8-719-043-70	s	DIODE MA6S121-(TX)
D106	8-719-043-70	s	DIODE MA6S121-(TX)
D107	8-719-043-70	s	DIODE MA6S121-(TX)
D108	8-719-043-70	s	DIODE MA6S121-(TX)
IC1	8-759-669-45	s	IC TL062CPWR-12
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
IC4	8-759-381-53	s	IC UPC814G2-E2
IC5	8-759-381-53	s	IC UPC814G2-E2
IC7	8-759-685-33	s	IC BU2500FV-E2
IC8	8-759-185-42	s	IC LM4040AIM3-2.5
IC9	8-759-669-72	s	IC TL064CPWR
IC12	8-759-058-58	s	IC TC7S04FU-TE85R

(DR-411 BOARD SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
IC13	8-759-058-64	s	IC TC7S32FU-TE85R
IC15	8-759-058-64	s	IC TC7S32FU-TE85R
IC16	8-759-058-58	s	IC TC7S04FU-TE85R
IC19	8-759-659-05	o	IC CXD9135R
IC20	8-759-082-58	s	IC TC7W08FU
IC21	8-759-058-58	s	IC TC7S04FU-TE85R
IC101	8-759-271-86	s	IC TC7SH04FU
IC102	8-759-271-86	s	IC TC7SH04FU
IC103	8-759-549-20	s	IC SN74LV541APWR
IC104	8-759-549-20	s	IC SN74LV541APWR
IC105	8-759-573-97	s	IC SN74LVC541APWR
IC106	8-759-573-97	s	IC SN74LVC541APWR
IC107	8-759-573-97	s	IC SN74LVC541APWR
IC108	8-759-573-97	s	IC SN74LVC541APWR
IC109	8-759-488-34	s	IC TLV2221CDBV2
IC110	8-759-564-49	s	IC TC7W53FU-TE12R
IC111	8-759-523-02	s	IC TC74HC4053AFT(EL)
L1	1-412-939-11	s	INDUCTOR 1.0UH (2520)
Q1	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q2	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q3	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q4	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q7	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q8	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q9	8-729-117-16	s	TRANSISTOR 2SA1611M6
Q10	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q11	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q12	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q13	8-729-106-60	s	TRANSISTOR 2SB1115A
Q14	8-729-421-71	s	TRANSISTOR 2SK620
Q15	8-729-117-32	s	TRANSISTOR 2SC4177
Q101	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q102	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q103	8-729-112-48	s	TRANSISTOR 2SA1462-T1Y33
Q104	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q105	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q106	8-729-112-48	s	TRANSISTOR 2SA1462-T1Y33
Q107	8-729-053-11	s	TRANSISTOR FDC6561AN
Q108	8-729-053-12	s	TRANSISTOR FDC6506P
Q109	8-729-053-12	s	TRANSISTOR FDC6506P
Q110	8-729-053-12	s	TRANSISTOR FDC6506P
Q111	8-729-053-12	s	TRANSISTOR FDC6506P
Q112	8-729-053-12	s	TRANSISTOR FDC6506P
Q113	8-729-053-12	s	TRANSISTOR FDC6506P
Q114	8-729-053-12	s	TRANSISTOR FDC6506P
Q115	8-729-053-12	s	TRANSISTOR FDC6506P
Q116	8-729-053-11	s	TRANSISTOR FDC6561AN
Q117	8-729-053-11	s	TRANSISTOR FDC6561AN
Q118	8-729-053-11	s	TRANSISTOR FDC6561AN
Q119	8-729-053-11	s	TRANSISTOR FDC6561AN
Q120	8-729-053-11	s	TRANSISTOR FDC6561AN
Q121	8-729-053-11	s	TRANSISTOR FDC6561AN
Q122	8-729-053-11	s	TRANSISTOR FDC6561AN
Q124	8-729-402-19	s	TRANSISTOR XN6501
Q125	8-729-402-78	s	TRANSISTOR XN6401
Q126	8-729-162-45	s	TRANSISTOR 2SB624-BV5
R1	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(DR-411 BOARD SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP Description
R2	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R3	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R4	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R5	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R6	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R7	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R8	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R17	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R18	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R19	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R20	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R21	1-218-856-11	s RESISTOR,CHIP 2.4K 1/10W(1608)
R22	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R23	1-218-831-11	s RESISTOR, CHIP 220 1/10W(1608)
R24	1-211-977-11	s RESISTOR,CHIP 22 1/10W (1608)
R25	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R27	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R30	1-218-873-11	s RESISTOR,CHIP 12K 1/10W (1608)
R31	1-218-875-11	s RESISTOR,CHIP 15K 1/10W (1608)
R34	1-218-831-11	s RESISTOR, CHIP 220 1/10W(1608)
R35	1-211-977-11	s RESISTOR,CHIP 22 1/10W (1608)
R41	1-249-386-11	s RES, CARBON 2.7 1/4W
R42	1-218-875-11	s RESISTOR,CHIP 15K 1/10W (1608)
R43	1-218-876-11	s RESISTOR,CHIP 16K 1/10W (1608)
R44	1-218-859-11	s RESISTOR,CHIP 3.3K 1/10W(1608)
R45	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R48	1-218-831-11	s RESISTOR, CHIP 220 1/10W(1608)
R49	1-211-977-11	s RESISTOR,CHIP 22 1/10W (1608)
R51	1-211-991-11	s RESISTOR,CHIP 82 1/10W (1608)
R52	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R53	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R54	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R55	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R56	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R57	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R58	1-218-887-11	s RESISTOR,CHIP 47K 1/10W (1608)
R59	1-218-857-11	s RESISTOR,CHIP 2.7K 1/10W(1608)
R64	1-218-875-11	s RESISTOR,CHIP 15K 1/10W (1608)
R65	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R66	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R67	1-218-881-11	s RESISTOR, CHIP 27K 1/10W(1608)
R68	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R69	1-218-881-11	s RESISTOR, CHIP 27K 1/10W(1608)
R70	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R71	1-218-881-11	s RESISTOR, CHIP 27K 1/10W(1608)
R72	1-218-864-11	s RESISTOR,CHIP 5.1K 1/10W(1608)
R73	1-218-864-11	s RESISTOR,CHIP 5.1K 1/10W(1608)
R74	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R75	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R76	1-218-855-11	s RESISTOR,CHIP 2.2K 1/10W(1608)
R77	1-211-977-11	s RESISTOR,CHIP 22 1/10W (1608)
R78	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R79	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R80	1-211-973-11	s RESISTOR,CHIP 15 1/10W (1608)
R81	1-211-973-11	s RESISTOR,CHIP 15 1/10W (1608)
R82	1-218-858-11	s RESISTOR, CHIP 3K 1/10W (1608)
R83	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R84	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R85	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)

(DR-411 BOARD SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP Description
R86	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R87	1-216-864-11	s CONDUCTOR, CHIP (1608)
R94	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R95	1-216-864-11	s CONDUCTOR, CHIP (1608)
R96	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R100	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R101	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R102	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R103	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R104	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R105	1-216-864-11	s CONDUCTOR, CHIP (1608)
R106	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R107	1-218-833-11	s RESISTOR,CHIP 270 1/10W (1608)
R109	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R110	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R111	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R112	1-216-864-11	s CONDUCTOR, CHIP (1608)
R113	1-218-863-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
R114	1-218-863-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
R115	1-218-863-11	s RESISTOR,CHIP 4.7K 1/10W(1608)
R116	1-216-864-11	s CONDUCTOR, CHIP (1608)
R117	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R118	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R119	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R201	1-218-853-11	s RESISTOR,CHIP 1.8K 1/10W(1608)
R202	1-218-853-11	s RESISTOR,CHIP 1.8K 1/10W(1608)
R203	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R204	1-218-853-11	s RESISTOR,CHIP 1.8K 1/10W(1608)
R205	1-218-853-11	s RESISTOR,CHIP 1.8K 1/10W(1608)
R206	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R211	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R212	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R213	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R214	1-218-865-11	s RESISTOR,CHIP 5.6K 1/10W(1608)
R215	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R217	1-216-793-11	s RESISTOR,CHIP 4.7 1/16W 1608
R218	1-216-793-11	s RESISTOR,CHIP 4.7 1/16W 1608
R219	1-216-864-11	s CONDUCTOR, CHIP (1608)
RB101	1-234-370-11	s RES, NETWORK 22X4 (1005)
RB102	1-234-370-11	s RES, NETWORK 22X4 (1005)
RB103	1-234-370-11	s RES, NETWORK 22X4 (1005)
RB104	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB105	1-234-381-21	s RES, NETWORK 100KX4 (1005)
RB106	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB107	1-234-381-21	s RES, NETWORK 100KX4 (1005)

DR-411 BOARD SUFFIX -13

*a: Lot No. 152 - 224, 261 -
*b: Lot No. 231 - 255

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-348-B	s MOUNTED CIRCUIT BOARD, DR-411
C3	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C5	1-110-569-11	s CAPACITOR,TANTALUM 47MF/6.3V
C6	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C9	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C11	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-127-562-11	s CAP,ELECT(SOLID)47MF/6.3V
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C15	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C18	1-107-886-11	s CAPACITOR ELECT 4700MF/16V(105
C19	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C20	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C21	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C27	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C28	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C29	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C30	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C31	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C33	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C40	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V
C41	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C43	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C44	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C45	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C47	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C48	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C49	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C50	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C52	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V
C53	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C55	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C56	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C57	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C65	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C66	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C70	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C71	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C72	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C73	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C74	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C75	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C80	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C81	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C103	1-115-339-11	s CAPACITOR,CERAMIC 0.1MF/50V
C104	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C105	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C106	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C107	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C108	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(DR-411 BOARD SUFFIX -13)

Ref. No. or Q'ty	Part No.	SP Description
C109	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C110	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C111	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C112	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C114	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C115	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C116	1-115-339-11	s CAPACITOR,CERAMIC 0.1MF/50V
C117	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C118	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C119	1-104-919-11	s CAPACITOR,TANTALUM 10MF/25V
C120	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C121	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C122	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C123	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C124	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C125	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C126	1-127-517-11	s CAPACITOR,ELECT 150MF/16V
C127	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C128	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C129	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C132	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C133	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C134	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C135	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C136	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C137	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C138	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C139	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C140	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C141	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C142	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C143	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C144	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C145	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C146	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C147	1-104-914-11	s CAPACITOR,TANTALUM 22MF/16V
C148	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
CN1	1-766-384-11	s CONNECTOR, FPC (28P)
CN2	1-573-310-11	s CONNECTOR,BOARD TO BOARD 20P
CN4	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN5	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
D1	8-719-210-43	s DIODE EC10QS06
D3	8-719-059-52	s DIODE MA3J14300LSO
D4	8-719-059-52	s DIODE MA3J14300LSO
D7	8-719-059-51	s DIODE MA3J142E0LSO
D8	8-719-059-51	s DIODE MA3J142E0LSO
D101	8-719-043-70	s DIODE MA6S121-(TX)
D102	8-719-043-70	s DIODE MA6S121-(TX)
D103	8-719-043-70	s DIODE MA6S121-(TX)
D104	8-719-043-70	s DIODE MA6S121-(TX)
D105	8-719-043-70	s DIODE MA6S121-(TX)
D106	8-719-043-70	s DIODE MA6S121-(TX)
D107	8-719-043-70	s DIODE MA6S121-(TX)
D108	8-719-043-70	s DIODE MA6S121-(TX)
IC1	8-759-669-45	s IC TL062CPWR-12
IC3	8-759-185-42	s IC LM4040AIM3-2.5
IC4	8-759-381-53	s IC UPC814G2-E2

(DR-411 BOARD SUFFIX -13)

Ref. No. or Q'ty	Part No.	SP Description
IC5	8-759-381-53	s IC UPC814G2-E2
IC7	8-759-064-36	s IC MB88346BPFV
IC8	8-759-185-42	s IC LM4040AIM3-2.5
IC9	8-759-669-72	s IC TL064CPWR
IC12	8-759-058-58	s IC TC7S04FU-TE85R
IC13	8-759-058-64	s IC TC7S32FU-TE85R
IC15	8-759-058-64	s IC TC7S32FU-TE85R
IC16	8-759-058-58	s IC TC7S04FU-TE85R
IC18	8-752-349-00	s IC CXD1260N
IC19	8-759-659-05	o IC CXD9135R
IC20	8-759-082-58	s IC TC7W08FU
IC21	8-759-058-58	s IC TC7S04FU-TE85R
IC101	8-759-271-86	s IC TC7SH04FU
IC102	8-759-271-86	s IC TC7SH04FU
IC103	8-759-524-50	s IC TC74VHC541FT(EL)
IC104	8-759-524-50	s IC TC74VHC541FT(EL)
IC105	8-759-475-53	s IC TC74LCX541FT(EL)
IC106	8-759-475-53	s IC TC74LCX541FT(EL)
IC107	8-759-475-53	s IC TC74LCX541FT(EL)
IC108	8-759-475-53	s IC TC74LCX541FT(EL)
IC109	8-759-488-34	s IC TLV2221CDBV2
L1	1-412-939-11	s INDUCTOR 1.0UH (2520)
Q1	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q2	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q3	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q4	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q7	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q8	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q9	8-729-117-16	s TRANSISTOR 2SA1611M6
Q10	8-729-049-93	s TRANSISTOR 2SD2098-T100R
Q11	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q12	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q13	8-729-106-60	s TRANSISTOR 2SB1115A
Q14	8-729-421-71	s TRANSISTOR 2SK620
Q15	8-729-117-32	s TRANSISTOR 2SC4177
Q101	8-729-140-47	s TRANSISTOR 2SC3735-L-B35
Q102	8-729-140-47	s TRANSISTOR 2SC3735-L-B35
Q103	8-729-112-65	s TRANSISTOR 2SA1462
Q104	8-729-140-47	s TRANSISTOR 2SC3735-L-B35
Q105	8-729-140-47	s TRANSISTOR 2SC3735-L-B35
Q106	8-729-112-65	s TRANSISTOR 2SA1462
Q107	8-729-053-11	s TRANSISTOR FDC6561AN
Q108	8-729-053-12	s TRANSISTOR FDC6506P
Q109	8-729-053-12	s TRANSISTOR FDC6506P
Q110	8-729-053-12	s TRANSISTOR FDC6506P
Q111	8-729-053-12	s TRANSISTOR FDC6506P
Q112	8-729-053-12	s TRANSISTOR FDC6506P
Q113	8-729-053-12	s TRANSISTOR FDC6506P
Q114	8-729-053-12	s TRANSISTOR FDC6506P
Q115	8-729-053-12	s TRANSISTOR FDC6506P
Q116	8-729-053-11	s TRANSISTOR FDC6561AN
Q117	8-729-053-11	s TRANSISTOR FDC6561AN
Q118	8-729-053-11	s TRANSISTOR FDC6561AN
Q119	8-729-053-11	s TRANSISTOR FDC6561AN
Q120	8-729-053-11	s TRANSISTOR FDC6561AN
Q121	8-729-053-11	s TRANSISTOR FDC6561AN
Q122	8-729-053-11	s TRANSISTOR FDC6561AN

(DR-411 BOARD SUFFIX -13)

Ref. No. or Q'ty	Part No.	SP Description
Q124	8-729-402-19	s TRANSISTOR XN6501
Q125	8-729-402-78	s TRANSISTOR XN6401
Q126	8-729-162-45	s TRANSISTOR 2SB624-BV5
R1	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R6	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R7	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R8	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R17	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R18	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R19	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R20	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R21	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R22	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R23	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R24	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R25	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R26	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R27	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R29	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R30	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R31	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R34	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R35	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R41	1-249-386-11	s RES, CARBON 2.7 1/4W
R42	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R43	1-218-721-11	s RESISTOR,CHIP 16K 1/16W(1608)
R44	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R45	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R48	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R49	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R51	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R52	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R53	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R54	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R55	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R56	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R57	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R58	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R59	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R64	*b 1-218-720-11	s RESISTOR,CHIP 15K 1/16W (1608)
*a	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R65	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R66	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R67	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R68	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R69	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R70	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R71	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R72	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R73	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R74	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R75	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R76	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R77	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R78	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)

(DR-411 BOARD SUFFIX -13)

Ref. No. or Q'ty	Part No.	SP Description
R79	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R80	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R81	1-218-648-11	s RESISTOR,CHIP 15 1/16W(1608)
R82	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R83	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R84	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R85	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R86	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R87	1-216-864-11	s CONDUCTOR, CHIP (1608)
R94	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R95	1-216-864-11	s CONDUCTOR, CHIP (1608)
R96	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R100	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R101	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R102	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R103	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R104	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R105	1-216-864-11	s CONDUCTOR, CHIP (1608)
R106	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R107	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R109	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R110	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R111	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R112	1-216-864-11	s CONDUCTOR, CHIP (1608)
R113	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R114	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R115	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R116	1-216-864-11	s CONDUCTOR, CHIP (1608)
R117	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R118	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R119	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R201	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R202	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R203	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R204	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R205	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R206	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R211	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R212	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R213	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R214	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R215	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
RB101	1-234-370-11	s RES, NETWORK 22X4 (1005)
RB102	1-234-370-11	s RES, NETWORK 22X4 (1005)
RB103	1-234-370-11	s RES, NETWORK 22X4 (1005)
RB104	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB105	1-234-381-21	s RES, NETWORK 100KX4 (1005)
RB106	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB107	1-234-381-21	s RES, NETWORK 100KX4 (1005)

DR-411 BOARD SUFFIX -11

*a: Lot No. 911 - 912
 *b: Lot No. 001 -
 *c: Lot No. 911 - 093
 *d: Lot No. 001 - 093
 *e: Lot No. 094 -

Ref. No.
 or Q'ty Part No. SP Description

1pc	A-8325-348-A	o MOUNTED CIRCUIT BOARD, DR-411
C3	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C5	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C9	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C11	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C12	*e 1-127-487-00	s CAPACITOR, ELECT 4.7MF/10V
	*c 1-127-562-11	s CAP, ELECT (SOLID) 47MF/6.3V
C13	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C14	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C15	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C17	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C18	1-107-886-11	s CAPACITOR ELECT 4700MF/16V(105
C19	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C20	1-127-518-11	s CAPACITOR, ELECT 100MF/16V
C21	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C24	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C25	1-104-915-11	s CAPACITOR, CHIP 2.2MF/20V
C26	1-127-518-11	s CAPACITOR, ELECT 100MF/16V
C27	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C28	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C29	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C30	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C31	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C32	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C33	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C34	1-104-915-11	s CAPACITOR, CHIP 2.2MF/20V
C35	1-127-518-11	s CAPACITOR, ELECT 100MF/16V
C36	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C37	1-104-915-11	s CAPACITOR, CHIP 2.2MF/20V
C38	1-127-518-11	s CAPACITOR, ELECT 100MF/16V
C39	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C40	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C41	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C42	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C43	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C44	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C45	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C46	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C47	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C48	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C49	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C50	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C51	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C52	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C53	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C55	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C56	1-113-981-11	s CAPACITOR TANTALUM 22MF/20V
C57	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C58	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B

(DR-411 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C59	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C60	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C61	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C62	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C63	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C64	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C65	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C66	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C68	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C70	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C71	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C72	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C73	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C74	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C75	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C80	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C81	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-766-384-11	s CONNECTOR, FPC (28P)
CN2	1-573-310-11	s CONNECTOR,BOARD TO BOARD 20P
CN4	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN5	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
D1	8-719-210-43	s DIODE EC10QS06
D3	8-719-059-52	s DIODE MA3J14300LSO
D4	8-719-059-52	s DIODE MA3J14300LSO
D7	8-719-059-51	s DIODE MA3J142E0LSO
D8	8-719-059-51	s DIODE MA3J142E0LSO
IC1	8-759-669-45	s IC TL062CPWR-12
IC3	8-759-185-42	s IC LM4040AIM3-2.5
IC4	8-759-381-53	s IC UPC814G2-E2
IC5	8-759-381-53	s IC UPC814G2-E2
IC6	8-759-565-11	s IC CXD9069Q
IC7	8-759-064-36	s IC MB88346BPFV
IC8	8-759-185-42	s IC LM4040AIM3-2.5
IC9	8-759-669-72	s IC TL064CPWR
IC10	8-759-565-11	s IC CXD9069Q
IC11	8-759-565-11	s IC CXD9069Q
IC12	8-759-058-58	s IC TC7S04FU-TE85R
IC13	8-759-058-64	s IC TC7S32FU-TE85R
IC15	8-759-058-64	s IC TC7S32FU-TE85R
IC16	8-759-058-58	s IC TC7S04FU-TE85R
IC18	8-752-349-00	s IC CXD1260N
IC19	8-759-659-05	o IC CXD9135R
IC20	8-759-082-58	s IC TC7W08FU
IC21	8-759-058-58	s IC TC7S04FU-TE85R
Q1	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q2	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q3	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q4	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q5	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q6	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q7	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q8	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q9	8-729-117-16	s TRANSISTOR 2SA1611M6
Q10	8-729-049-93	s TRANSISTOR 2SD2098-T100R
Q11	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q12	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q13	8-729-106-60	s TRANSISTOR 2SB1115A
Q14	8-729-421-71	s TRANSISTOR 2SK620

(DR-411 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
Q15	8-729-117-32	s TRANSISTOR 2SC4177
R1	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R2	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R3	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R6	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R7	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R8	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R17	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R18	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R19	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R20	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R21	1-218-701-11	s RESISTOR,CHIP 22K 1/16W(1608)
R22	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R23	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R24	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R25	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R26	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R27	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R29	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R30	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R31	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R34	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R35	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R37	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R38	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R41	1-249-386-11	s RES,CARBON 2.7 1/4W
R42	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R43	1-218-721-11	s RESISTOR,CHIP 16K 1/16W(1608)
R44	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R45	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R48	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R49	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R51	*e 1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
	*d 1-216-662-11	s RESISTOR,CHIP 56 1/16W (1608)
	*a 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R52	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R53	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R54	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R55	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R56	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R57	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R58	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R59	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R64	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R65	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R66	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R67	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R68	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R69	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R70	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R71	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R72	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R73	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R74	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R75	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R76	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)

(DR-411 BOARD SUFFIX -11)

Ref. No.

or Q'ty Part No. SP Description

R77	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R78	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R79	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R80	1-218-648-11	s	RESISTOR,CHIP 15 1/16W(1608)
R81	1-218-648-11	s	RESISTOR,CHIP 15 1/16W(1608)
R82	1-218-703-11	s	RESISTOR,CHIP 3.0K 1/16(1608)
R83	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R84	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R85	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R86	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R87	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R94	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R95	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R96	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R100	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R101	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R102	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R103	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R104	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R105	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R106	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R107	*b 1-218-687-11	s	RESISTOR,CHIP 620 1/16W (1608)
	*a 1-218-675-11	s	RESISTOR,CHIP 200 1/16W (1608)
R109	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R110	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R111	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R112	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R113	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R114	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R115	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R116	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R117	1-218-699-11	s	RESISTOR,CHIP 2.0K 1/16W(1608)
R118	1-218-699-11	s	RESISTOR,CHIP 2.0K 1/16W(1608)
R119	1-218-699-11	s	RESISTOR,CHIP 2.0K 1/16W(1608)

DU-68 BOARD

*a: Lot No. 073 - 085

Ref. No.

or Q'ty Part No. SP Description

1pc	A-8326-524-A	o	MOUNTED CIRCUIT BOARD, DU-68
C401	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN401	1-568-338-11	s	CONNECTOR, BOARD TO BOARD 24P
CN402	1-568-330-11	s	CONNECTOR,BOARD TO BOARD 6P
CN403	1-568-330-11	s	CONNECTOR,BOARD TO BOARD 6P
CN404	1-568-330-11	s	CONNECTOR,BOARD TO BOARD 6P
IC401	8-759-423-35	s	IC MC74ACT08MEL
IC402	8-759-423-35	s	IC MC74ACT08MEL
IC403	8-759-423-35	s	IC MC74ACT08MEL
IC404	8-759-423-36	s	IC MC74ACT125MEL
L401	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
L402	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
L403	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
L404	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
R401	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R402	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R403	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R404	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R405	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R406	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R407	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R408	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R409	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R410	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R411	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R412	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R413	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R414	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R415	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R416	*a 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R417	*a 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R418	1-218-644-11	s	RESISTOR,CHIP 10 1/16W

DU-19F BOARD

Ref. No.
or Q'ty Part No. SP Description

1pc A-8326-250-A o MOUNTED CIRCUIT BOARD, DU-19F

C401 1-104-851-11 s CAPACITOR,TANTALUM 10MF/10V
C402 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C403 1-104-851-11 s CAPACITOR,TANTALUM 10MF/10V
C404 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C405 1-104-851-11 s CAPACITOR,TANTALUM 10MF/10V

C406 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C407 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

CN401 1-568-338-11 s CONNECTOR, BOARD TO BOARD 24P
CN402 1-568-330-11 s CONNECTOR,BOARD TO BOARD 6P
CN403 1-568-330-11 s CONNECTOR,BOARD TO BOARD 6P
CN404 1-568-330-11 s CONNECTOR,BOARD TO BOARD 6P

IC401 8-759-423-35 s IC MC74ACT08MEL
IC402 8-759-423-35 s IC MC74ACT08MEL
IC403 8-759-423-35 s IC MC74ACT08MEL
IC404 8-759-423-36 s IC MC74ACT125MEL

L401 1-412-390-21 s MICRO INDUCTOR (CHIP) 21A05
L402 1-412-390-21 s MICRO INDUCTOR (CHIP) 21A05
L403 1-412-390-21 s MICRO INDUCTOR (CHIP) 21A05
L404 1-412-390-21 s MICRO INDUCTOR (CHIP) 21A05

R401 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R402 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R403 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R404 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R405 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)

R406 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R407 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R408 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R409 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R410 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)

R411 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R412 1-218-740-11 s RESISTOR,CHIP 100K 1/16W(1608)
R413 1-218-716-11 s RESISTOR,CHIP 10K 1/16W(1608)
R414 1-218-716-11 s RESISTOR,CHIP 10K 1/16W(1608)
R415 1-216-864-11 s RESISTOR,CHIP 0 1/16W (1608)

R418 1-216-864-11 s RESISTOR,CHIP 0 1/16W (1608)

EN-143 BOARD

*1: Board No. suffix 12 -

Ref. No.
or Q'ty Part No. SP Description

1pc A-8325-124-A o MOUNTED CIRCUIT BOARD, EN-143
6pcs 3-729-061-01 s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc 3-626-749-01 o PLATE (EN), ORNAMENTAL
1pc 3-724-753-01 o RING, PULL

C100 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C101 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C102 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C103 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C104 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C105 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C106 1-127-707-11 s CAPACITOR,POLYPYRROLE 150MF
C107 1-127-707-11 s CAPACITOR,POLYPYRROLE 150MF
C108 1-127-707-11 s CAPACITOR,POLYPYRROLE 150MF
C109 1-127-707-11 s CAPACITOR,POLYPYRROLE 150MF

C110 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C111 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C112 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C113 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C114 1-164-227-11 s CAPACITOR,CERAMIC 0.022MF/25V

C115 1-164-227-11 s CAPACITOR,CERAMIC 0.022MF/25V
C116 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C117 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C118 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C119 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C200 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C201 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C202 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C203 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C204 1-162-970-11 s CAPACITOR CERAMIC 0.01MF/25V B

C205 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C206 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C207 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C208 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C209 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C210 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C211 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C212 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C213 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C214 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C215 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C216 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C217 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C218 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C219 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C220 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C221 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C222 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C223 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C224 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C225 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C226 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C227 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C228 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C229 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C230 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
C231 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

(EN-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C232	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C300	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C310	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C314	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C324	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C325	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C326	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C327	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C328	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C329	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C330	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C332	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C334	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C336	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C338	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C340	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C341	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C342	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C343	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C344	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C400	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C401	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C402	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C403	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C404	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C405	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C406	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C407	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C408	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C409	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C410	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C411	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C412	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C413	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C414	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C416	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
D100	8-719-800-76	s	DIODE 1SS226
D102	8-719-938-72	s	DIODE SB01-05CP (RECTI)
D103	8-719-938-72	s	DIODE SB01-05CP (RECTI)
FB100	1-469-108-11	s	FERRITE, EMI (SMD)
FB101	1-469-108-11	s	FERRITE, EMI (SMD)

(EN-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB301	1-469-108-11	s	FERRITE, EMI (SMD)
FB302	1-469-108-11	s	FERRITE, EMI (SMD)
FB303	1-469-108-11	s	FERRITE, EMI (SMD)
FB304	1-469-108-11	s	FERRITE, EMI (SMD)
FB305	1-469-108-11	s	FERRITE, EMI (SMD)
FL100	1-117-193-11	s	CAPACITOR,3 TERMINAL 1.5MF/50V
FL101	1-117-193-11	s	CAPACITOR,3 TERMINAL 1.5MF/50V
FL102	1-117-193-11	s	CAPACITOR,3 TERMINAL 1.5MF/50V
IC100	8-759-456-26	s	IC 74LCX541MTCX
IC101	8-729-024-50	s	TRANSISTOR SI9936DY
IC102	8-759-386-25	s	IC 74LCX245MTCX
IC103	8-759-386-25	s	IC 74LCX245MTCX
IC104	8-759-456-26	s	IC 74LCX541MTCX
IC105	8-759-386-28	s	IC 74LCX00MTCX
IC106	8-759-386-26	s	IC 74LCX574MTCX
IC107	8-759-386-27	s	IC 74LCX04MTCX
IC108	8-759-389-30	s	IC 74LCX32MTCX
IC200	8-759-386-26	s	IC 74LCX574MTCX
IC201	8-759-386-26	s	IC 74LCX574MTCX
IC202	8-759-456-26	s	IC 74LCX541MTCX
IC203	8-759-456-24	s	IC 74LCX540MTCX
IC205	8-759-663-74	s	IC HY57V161610DTC-7TR
IC206	8-759-663-74	s	IC HY57V161610DTC-7TR
IC207	8-759-386-26	s	IC 74LCX574MTCX
IC300	8-759-456-26	s	IC 74LCX541MTCX
IC302	8-759-456-26	s	IC 74LCX541MTCX
IC303	8-759-466-57	s	IC 74LCX157MTCX
IC304	8-759-547-49	s	IC CDC509PWR
IC305	8-759-466-57	s	IC 74LCX157MTCX
IC306	8-759-456-26	s	IC 74LCX541MTCX
IC307	8-759-456-26	s	IC 74LCX541MTCX
IC308	8-759-466-55	s	IC 74LCX74MTCX
IC309	8-759-386-27	s	IC 74LCX04MTCX
IC310	8-759-389-31	s	IC 74LCX125MTCX
IC400	8-759-389-26	s	IC 74LCX08MTCX
IC401	8-759-386-27	s	IC 74LCX04MTCX
IC402	8-759-485-82	s	IC MC34182DR2
IC403	8-759-485-82	s	IC MC34182DR2
IC404	8-759-389-33	s	IC 74LCX244MTCX
Q100	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q101	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q400	8-729-928-40	s	TRANSISTOR DTA144WE-TL
Q401	8-729-928-40	s	TRANSISTOR DTA144WE-TL
Q402	8-729-928-40	s	TRANSISTOR DTA144WE-TL
R100	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R102	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R104	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R105	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R106	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R107	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R108	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R109	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R110	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R111	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R112	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R113	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R114	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R200	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)

(EN-143 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R201	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R202	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R203	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R204	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R205	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R206	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R207	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R208	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R209	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R210	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R211	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R213	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R214	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R215	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R216	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R217	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R218	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R219	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R221	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R300	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R301	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R302	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R303	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R304	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R305	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R306	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R307	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R312	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R313	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R314	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R315	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R316	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R317	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R318	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R320	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R322	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R323	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R324	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R325	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R326	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R327	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R328	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R329	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R330	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R331	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R332	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R334	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R335	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R337	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R338	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R339	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R340	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R341	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R342	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R344	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R345	*1 1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R346	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R347	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R400	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(EN-143 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R401	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R402	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R403	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R404	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R405	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R406	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R407	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R408	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R409	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R410	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R411	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R412	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R413	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R414	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R415	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R416	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R417	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R418	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R419	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R420	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R421	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R422	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R423	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R424	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R428	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R429	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R430	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R431	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R432	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
RB100	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB101	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB102	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB103	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB104	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB105	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB106	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB107	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB108	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB109	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB111	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB200	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB201	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB204	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB205	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB300	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB301	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB304	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB305	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB306	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB307	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB308	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB309	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB310	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB311	1-239-409-11	s RESISTOR NETWORK 47 (1608)
X400	1-781-671-11	s OSCILLATOR, CRYSTAL
X401	1-781-672-11	s OSCILLATOR, CRYSTAL
X402	1-767-694-11	s OSCILLATOR, CRYSTAL
X403	1-781-496-11	s OSCILLATOR, CRYSTAL

ENC-59 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-126-A	o MOUNTED CIRCUIT BOARD, ENC-59
6pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-626-748-01	o PLATE (ENC), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
C1	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C2	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C6	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C9	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C12	1-127-707-11	s CAPACITOR, POLYPYRROLE 150MF
C13	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C14	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C15	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C16	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C17	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C18	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C19	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C20	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C100	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C107	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C108	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C109	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C110	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C111	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C112	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C115	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C116	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C117	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C118	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C119	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C120	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C121	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C122	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C123	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C124	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C126	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C127	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C128	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C129	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C130	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C131	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C132	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C200	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(ENC-59 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C203	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C204	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C205	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C206	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C207	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C208	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C209	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C210	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C214	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C215	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C216	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C217	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C218	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C219	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C220	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C221	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C222	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C223	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C224	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C225	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C226	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C227	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C228	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C229	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C230	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C231	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C232	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C233	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C234	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C235	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C236	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C237	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C238	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C239	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C240	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C241	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C242	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C243	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C244	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C245	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C246	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C247	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN2	1-695-223-21	o PIN, CONNECTOR (SMD) 10P
CN3	1-695-223-21	o PIN, CONNECTOR (SMD) 10P
CN17	1-573-316-21	s CONNECTOR, BOARD TO BOARD 48P
D1	8-719-938-72	s DIODE SB01-05CP (RECTI)
D2	8-719-938-72	s DIODE SB01-05CP (RECTI)
FL1	1-117-193-11	s CAPACITOR, 3 TERMINAL 1.5MF/50V
FL2	1-117-193-11	s CAPACITOR, 3 TERMINAL 1.5MF/50V
IC1	8-759-386-25	s IC 74LCX245MTCX
IC2	8-729-024-50	s TRANSISTOR SI9936DY
IC3	8-729-024-50	s TRANSISTOR SI9936DY
IC4	8-759-386-25	s IC 74LCX245MTCX
IC5	8-759-386-25	s IC 74LCX245MTCX

(ENC-59 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC6	8-759-386-25	s IC 74LCX245MTCX
IC7	8-759-386-26	s IC 74LCX574MTCX
IC8	8-759-389-30	s IC 74LCX32MTCX
IC9	8-759-386-28	s IC 74LCX00MTCX
IC10	8-759-386-27	s IC 74LCX04MTCX
IC11	8-759-196-97	s IC TC7SH32FU (TE85R)
IC12	8-759-196-96	s IC TC7SH08FU (TE85R)
IC100	8-759-386-26	s IC 74LCX574MTCX
IC101	8-759-386-26	s IC 74LCX574MTCX
IC102	8-759-386-25	s IC 74LCX245MTCX
IC105	8-759-663-74	s IC HY57V161610DTC-7TR
IC106	8-759-663-74	s IC HY57V161610DTC-7TR
IC107	8-759-386-26	s IC 74LCX574MTCX
IC200	8-759-386-26	s IC 74LCX574MTCX
IC201	8-759-386-26	s IC 74LCX574MTCX
IC202	8-759-386-25	s IC 74LCX245MTCX
IC203	8-759-386-25	s IC 74LCX245MTCX
IC204	8-759-386-25	s IC 74LCX245MTCX
IC206	8-759-498-17	s IC CXD9015CR
IC207	8-759-663-74	s IC HY57V161610DTC-7TR
IC209	8-759-389-31	s IC 74LCX125MTCX
IC210	8-759-389-31	s IC 74LCX125MTCX
IC211	8-759-271-86	s IC TC7SH04FU
Q1	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q2	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q3	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q4	8-729-029-14	s TRANSISTOR DTC144EUA-T106
R1	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2	1-216-296-91	s CONDUCTOR, CHIP (3216)
R3	1-216-296-91	s CONDUCTOR, CHIP (3216)
R4	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R5	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R6	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R7	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R8	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R9	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R10	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R11	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R12	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R13	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R14	1-216-295-91	s CONDUCTOR, CHIP (2012)
R100	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R101	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R103	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R104	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R105	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R106	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R107	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R108	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R109	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R110	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R111	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R112	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R113	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R114	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R200	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R201	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R202	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)

(ENC-59 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R203	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R204	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R205	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R206	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R207	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R208	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R209	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R210	1-218-656-11	s RESISTOR,CHIP 33 1/16W (1608)
R211	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R212	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R213	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R214	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R215	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R216	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R217	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R218	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R219	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R220	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R221	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)
R222	1-218-667-11	s RESISTOR,CHIP 91 1/16W (1608)
R223	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R224	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R225	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R226	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R227	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R228	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R229	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R230	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R231	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R232	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
RB1	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB2	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB3	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB4	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB5	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB6	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB7	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB8	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB9	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB10	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB11	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB100	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB101	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB200	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB201	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB202	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB203	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB204	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB205	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB206	1-239-390-11	s RESISTOR,NETWORK 33 (1608)
RB207	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB208	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB209	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB210	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB211	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB212	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB213	1-239-409-11	s RESISTOR NETWORK 47 (1608)
X200	1-767-484-11	s OSCILLATOR, CRYSTAL

(ENC-59 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
X201	1-781-732-21	s OSCILLATOR, CRYSTAL
X202	1-767-483-11	s OSCILLATOR, CRYSTAL
X203	1-781-734-21	s OSCILLATOR, CRYSTAL
X204	1-781-733-21	s OSCILLATOR, CRYSTAL

EQ-89 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-128-A	o MOUNTED CIRCUIT BOARD, EQ-89
1pc	3-626-747-01	o PLATE(EQ), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
5pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
9pcs	7-627-553-37	s SCREW, PRECISION +P 2X3
1pc	7-628-253-00	s SCREW +PS 2X4 (EP-FE/ZNBK/CM2)
C1	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C2	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C3	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C100	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C107	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C108	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C109	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C110	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C111	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C112	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C113	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C115	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C116	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C117	1-164-392-11	s CAPACITOR, CERAMIC 390PF/50V CH
C118	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C119	1-164-739-11	s CAPACITOR, CERAMIC 560PF (1608)
C120	1-162-920-11	s CAPACITOR, CERAMIC 27PF/50V CH
C121	1-162-920-11	s CAPACITOR, CERAMIC 27PF/50V CH
C122	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C123	1-164-739-11	s CAPACITOR, CERAMIC 560PF (1608)
C124	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C125	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C126	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C127	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C128	1-164-379-11	s CAPACITOR, CERAMIC 43PF/50V CH
C129	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C130	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C131	1-164-460-11	s CAPACITOR, CERAMIC 62PF/50V
C132	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C133	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C134	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C135	1-115-412-11	s CAPACITOR, CERAMIC 680PF/25V CH
C136	1-115-412-11	s CAPACITOR, CERAMIC 680PF/25V CH
C137	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C138	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C139	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C140	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C142	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C143	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C144	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C145	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C146	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C426	1-164-505-11 s	CAPACITOR,CHIP CERAMIC 2.2MF
C427	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C428	1-164-379-11 s	CAPACITOR,CERAMIC 43PF/50V CH
C429	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C430	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C431	1-164-460-11 s	CAPACITOR, CERAMIC 62PF/50V
C432	1-164-505-11 s	CAPACITOR,CHIP CERAMIC 2.2MF
C433	1-164-217-11 s	CAPACITOR,CERAMIC 150PF/50V CH
C434	1-164-217-11 s	CAPACITOR,CERAMIC 150PF/50V CH
C435	1-115-412-11 s	CAPACITOR,CERAMIC 680PF/25V CH
C436	1-115-412-11 s	CAPACITOR,CERAMIC 680PF/25V CH
C437	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C438	1-164-227-11 s	CAPACITOR,CERAMIC 0.022MF/25V
C439	1-164-505-11 s	CAPACITOR,CHIP CERAMIC 2.2MF
C440	1-164-505-11 s	CAPACITOR,CHIP CERAMIC 2.2MF
C442	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C443	1-164-505-11 s	CAPACITOR,CHIP CERAMIC 2.2MF
C444	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C445	1-162-917-11 s	CAPACITOR,CERAMIC 15PF/50V CH
C446	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C500	1-125-837-11 s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C501	1-113-981-11 s	CAPACITOR TANTALUM 22MF/20V
C600	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C601	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C700	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C701	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C800	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C801	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-580-056-21 o	PIN,CONNECTOR 3P
CN2	1-580-056-21 o	PIN,CONNECTOR 3P
CN3	1-580-056-21 o	PIN,CONNECTOR 3P
CN4	1-580-056-21 o	PIN,CONNECTOR 3P
CN5	1-580-789-21 o	PIN,CONNECTOR (SMD) 6P
CN11	1-695-453-11 s	CONNECTOR,BOARD TO BOARD 50P
CV100	1-141-322-11 s	CAPACITOR,VAR,TRIMMER
CV200	1-141-322-11 s	CAPACITOR,VAR,TRIMMER
CV300	1-141-322-11 s	CAPACITOR,VAR,TRIMMER
CV400	1-141-322-11 s	CAPACITOR,VAR,TRIMMER
D100	8-719-941-23 s	DIODE DA204U
D101	8-719-820-61 s	DIODE 1SS294
D200	8-719-941-23 s	DIODE DA204U
D201	8-719-820-61 s	DIODE 1SS294
D300	8-719-941-23 s	DIODE DA204U
D301	8-719-820-61 s	DIODE 1SS294
D400	8-719-941-23 s	DIODE DA204U
D401	8-719-820-61 s	DIODE 1SS294
D501	8-719-941-23 s	DIODE DA204U
D600	6-500-331-01 s	DIODE RD3.9UM-T1B
D700	6-500-331-01 s	DIODE RD3.9UM-T1B
D800	6-500-331-01 s	DIODE RD3.9UM-T1B
D801	8-719-404-35 s	DIODE MA141WK
DL100	1-416-390-11 s	DELAY LINE
DL200	1-416-390-11 s	DELAY LINE
DL300	1-416-390-11 s	DELAY LINE
DL400	1-416-390-11 s	DELAY LINE
E501	1-535-757-11 s	CHIP, CHECKER (CONNECTOR)

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FL100	1-239-897-12 s	FILTER, EMI (SMD)
FL101	1-239-897-12 s	FILTER, EMI (SMD)
FL200	1-239-897-12 s	FILTER, EMI (SMD)
FL201	1-239-897-12 s	FILTER, EMI (SMD)
FL300	1-239-897-12 s	FILTER, EMI (SMD)
FL301	1-239-897-12 s	FILTER, EMI (SMD)
FL400	1-239-897-12 s	FILTER, EMI (SMD)
FL401	1-239-897-12 s	FILTER, EMI (SMD)
IC100	8-759-669-66 s	IC TLC272CPWR
IC101	8-759-669-66 s	IC TLC272CPWR
IC103	8-752-081-11 s	IC CXA3093Q
IC200	8-759-669-66 s	IC TLC272CPWR
IC201	8-759-669-66 s	IC TLC272CPWR
IC203	8-752-081-11 s	IC CXA3093Q
IC300	8-759-669-66 s	IC TLC272CPWR
IC301	8-759-669-66 s	IC TLC272CPWR
IC303	8-752-081-11 s	IC CXA3093Q
IC400	8-759-669-66 s	IC TLC272CPWR
IC401	8-759-669-66 s	IC TLC272CPWR
IC403	8-752-081-11 s	IC CXA3093Q
IC500	8-759-058-58 s	IC TC7S04FU-TE85R
IC501	8-759-082-59 s	IC TC7W32FU
IC502	8-759-058-62 s	IC TC7S08FU-TE85R
IC503	8-759-058-64 s	IC TC7S32FU-TE85R
IC504	8-759-209-57 s	IC TC4S69F
IC600	8-759-064-36 s	IC MB88346BPFV
IC700	8-759-064-36 s	IC MB88346BPFV
IC800	8-759-064-36 s	IC MB88346BPFV
IC801	8-759-234-20 s	IC TC7S08F
L1	1-424-643-11 s	COIL, CHOKE 10UH
L2	1-410-369-11 s	INDUCTOR,CHIP 1UH (3225)
L3	1-410-369-11 s	INDUCTOR,CHIP 1UH (3225)
L100	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L101	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L102	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L103	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L104	1-412-980-31 s	INDUCTOR (SMALL TYPE)
L105	1-412-980-31 s	INDUCTOR (SMALL TYPE)
L106	1-412-983-31 s	INDUCTOR (SMALL TYPE)
L200	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L201	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L202	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L203	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L204	1-412-980-31 s	INDUCTOR (SMALL TYPE)
L205	1-412-980-31 s	INDUCTOR (SMALL TYPE)
L206	1-412-983-31 s	INDUCTOR (SMALL TYPE)
L300	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L301	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L302	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L303	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L304	1-412-980-31 s	INDUCTOR (SMALL TYPE)
L305	1-412-980-31 s	INDUCTOR (SMALL TYPE)
L306	1-412-983-31 s	INDUCTOR (SMALL TYPE)
L400	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L401	1-412-977-31 s	INDUCTOR, SMALL TYPE 0.68UH
L402	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L403	1-412-979-21 s	INDUCTOR (SMALL TYPE)
L404	1-412-980-31 s	INDUCTOR (SMALL TYPE)

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L405	1-412-980-31	s INDUCTOR (SMALL TYPE)
L406	1-412-983-31	s INDUCTOR (SMALL TYPE)
Q100	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q101	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q102	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q103	8-729-929-02	s TRANSISTOR DTC124XE
Q104	8-729-929-02	s TRANSISTOR DTC124XE
Q105	8-729-118-58	s TRANSISTOR 2SK852-X4
Q200	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q201	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q202	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q203	8-729-929-02	s TRANSISTOR DTC124XE
Q204	8-729-929-02	s TRANSISTOR DTC124XE
Q205	8-729-118-58	s TRANSISTOR 2SK852-X4
Q300	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q301	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q302	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q303	8-729-929-02	s TRANSISTOR DTC124XE
Q304	8-729-929-02	s TRANSISTOR DTC124XE
Q305	8-729-118-58	s TRANSISTOR 2SK852-X4
Q400	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q401	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q402	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q403	8-729-929-02	s TRANSISTOR DTC124XE
Q404	8-729-929-02	s TRANSISTOR DTC124XE
Q405	8-729-118-58	s TRANSISTOR 2SK852-X4
Q500	8-729-928-49	s TRANSISTOR DTA124XE-TL
Q501	8-729-929-02	s TRANSISTOR DTC124XE
Q502	8-729-045-28	s TRANSISTOR SI4532DY-T1
Q504	8-729-928-49	s TRANSISTOR DTA124XE-TL
Q505	8-729-929-02	s TRANSISTOR DTC124XE
Q506	8-729-045-28	s TRANSISTOR SI4532DY-T1
Q508	8-729-824-34	s TRANSISTOR 2SJ187
Q509	8-729-928-36	s TRANSISTOR DTA114EE
Q510	8-729-928-90	s TRANSISTOR DTC114EE
Q511	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
R100	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R101	1-218-664-11	s RESISTOR,CHIP 68 1/16W (1608)
R102	1-218-664-11	s RESISTOR,CHIP 68 1/16W (1608)
R103	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R105	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R106	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R107	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R108	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R109	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R110	1-216-796-11	s RESISTOR,CHIP 8.2 1/16W 1608
R111	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R113	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R114	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R115	1-216-796-11	s RESISTOR,CHIP 8.2 1/16W 1608
R117	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R118	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R119	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R120	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R121	1-218-678-11	s RESISTOR CHIP 270 1/16W (1608)
R122	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R123	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R124	1-218-678-11	s RESISTOR CHIP 270 1/16W (1608)

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R126	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R127	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R128	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R129	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R130	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R131	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R132	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R133	1-218-693-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R134	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R135	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R137	1-218-673-11	s RESISTOR CHIP 160 1/16W (1608)
R139	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R140	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R141	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R142	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R143	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R144	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R145	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R147	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R148	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R149	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R150	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R151	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R152	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R153	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R154	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R155	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R156	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R157	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R158	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R160	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R161	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R162	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R163	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R164	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R165	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R166	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R167	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R168	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R169	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R170	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R200	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R201	1-218-664-11	s RESISTOR,CHIP 68 1/16W (1608)
R202	1-218-664-11	s RESISTOR,CHIP 68 1/16W (1608)
R203	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R205	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R206	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R207	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R208	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R209	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R210	1-216-796-11	s RESISTOR,CHIP 8.2 1/16W 1608
R211	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R213	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R214	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R215	1-216-796-11	s RESISTOR,CHIP 8.2 1/16W 1608
R217	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R218	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R219	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R220	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R411	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R413	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R414	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R415	1-216-796-11	s RESISTOR,CHIP 8.2 1/16W 1608
R417	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R418	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R419	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R420	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R421	1-218-678-11	s RESISTOR,CHIP 270 1/16W (1608)
R422	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R423	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R424	1-218-678-11	s RESISTOR,CHIP 270 1/16W (1608)
R426	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R427	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R428	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R429	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R430	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R431	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R432	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R433	1-218-693-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R434	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R435	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R437	1-218-673-11	s RESISTOR,CHIP 160 1/16W (1608)
R439	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R440	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R441	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R442	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R443	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R444	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R445	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R447	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R448	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R449	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R450	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R451	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R452	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R453	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R454	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R455	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R456	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R457	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R458	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R460	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R461	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R462	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R463	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R464	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R465	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R466	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R467	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R468	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R469	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R470	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R500	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R501	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R502	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R503	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R504	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R505	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R506	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R507	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R508	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R509	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R510	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R511	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R512	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R513	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R514	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R515	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R516	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R517	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R518	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R520	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R521	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R522	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R523	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R600	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R601	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R602	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R603	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R604	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R605	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R607	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R608	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R609	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R610	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R611	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R613	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R614	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R615	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R616	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R617	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R619	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R620	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R621	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R622	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R623	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R700	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R701	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R702	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R703	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R704	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R705	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R707	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R708	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R709	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R710	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R711	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R713	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R714	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R715	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R716	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R717	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R719	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R720	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R721	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R722	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R723	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W

(EQ-89 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R800	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R801	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R802	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R803	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R804	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R806	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R807	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R808	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R809	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R810	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
RB100	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB200	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB300	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB400	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB500	1-239-419-11	s NETWORK RESISTOR 470 (1608)
RB600	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB800	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RV102	1-241-257-11	s RES, ADJ, CERMET 50
RV202	1-241-257-11	s RES, ADJ, CERMET 50
RV302	1-241-257-11	s RES, ADJ, CERMET 50
RV402	1-241-257-11	s RES, ADJ, CERMET 50
TP101	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP202	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP301	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP302	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP401	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP402	1-535-757-11	s CHIP, CHECKER (CONNECTOR)

HN-243 BOARD

*a: Lot No. 911 - 221

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8316-499-A	o MOUNTED CIRCUIT BOARD, HN-243
5pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-610-599-01	o PLATE (HN-243), ORNAMENTAL
1pc	3-680-489-01	o BRACKET, HN
C1	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C3	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C5	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C6	1-104-553-11	s CAPACITOR FILM 0.015MF/16V
C7	1-135-201-11	s CAPACITOR, CHIP TANTAL 10MF/4V
C8	1-135-201-11	s CAPACITOR, CHIP TANTAL 10MF/4V
C9	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C10	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C11	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C12	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C13	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C14	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C15	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C16	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C17	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C18	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C19	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C20	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C21	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C22	1-162-995-11	s CAPACITOR, CERAMIC 0.022MF/50V
C23	1-162-995-11	s CAPACITOR, CERAMIC 0.022MF/50V
C24	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C25	*a 1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C26	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C27	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C28	1-162-916-11	s CAPACITOR, CERAMIC 12PF/50V CH
C29	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C30	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C31	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C32	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C33	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C34	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C35	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C36	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C37	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C38	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C39	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C40	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C44	1-164-505-11	s CAPACITOR, CHIP CERAMIC 2.2MF
C47	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C55	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C63	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C64	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C65	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C66	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C67	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C81	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C82	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C83	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(HN-243 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C85	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C86	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C87	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C88	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C90	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C91	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C92	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C93	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C95	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C96	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C97	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C98	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C100	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-750-933-21	o PIN, CONNECTOR (PC BOARD) 12P
CN2	1-580-538-11	o PIN, CONNECTOR (PC BOARD) 18P
CN4	1-691-591-11	o PIN,CONNECTOR (8P) (SMD) (1.5MM)
CN5	1-573-806-21	s PIN,CONNECTOR (6P) (SMD) (1.5MM)
CN6	1-766-383-11	o PIN, CONNECTOR (12P) (SMD) 1.5MM
CN7	1-691-551-11	o PIN, CONNECTOR (SMD) 8P
CN8	1-573-290-21	s PIN,CONNECTOR (4P) (SMD) (1.5MM)
CN10	1-691-591-11	o PIN,CONNECTOR (8P) (SMD) (1.5MM)
CN11	1-766-376-11	o PIN, CONNECTOR (1.5MM) (SMD) 9P
CN12	1-691-550-11	s PIN,CONNECTOR (3P) (SMD) (1.5MM)
CN14	1-766-376-11	o PIN, CONNECTOR (1.5MM) (SMD) 9P
CT1	1-424-511-11	s TRANSFORMER,FE
D1	8-719-026-39	s LED CL-150UR-CD
D2	8-719-026-39	s LED CL-150UR-CD
D3	8-719-026-39	s LED CL-150UR-CD
D4	8-719-026-39	s LED CL-150UR-CD
D5	8-719-026-39	s LED CL-150UR-CD
D6	8-719-026-39	s LED CL-150UR-CD
D7	8-719-106-88	s DIODE RD15M-B1
D8	8-719-941-86	s DIODE DAN202U
D9	8-719-029-57	s ZENER DIODE RD2.4UH-T1
IC1	8-759-176-42	s IC X25040SIC7000
IC2	8-759-530-05	s IC TC4053BFT (EL.N)
IC3	8-759-710-28	s IC NJM4565M-A
IC4	8-759-669-49	s IC LM2903PW (R)
IC5	8-759-209-15	s IC TC4SU69F
IC6	8-759-058-58	s IC TC7S04FU-TE85R
IC7	8-759-523-94	s IC TC74VHC32FT (EL)
IC8	8-759-058-62	s IC TC7S08FU-TE85R
IC9	8-759-112-53	s IC UPC1663G
IC11	8-759-271-18	s IC NJM1496V
IC13	8-759-669-66	s IC TLC272CPWR
IC14	8-759-112-53	s IC UPC1663G
IC15	8-759-112-53	s IC UPC1663G
IC16	8-759-112-53	s IC UPC1663G
IC17	8-759-112-53	s IC UPC1663G
L1	1-424-642-11	s COIL, CHOKE 47UH
L2	1-424-642-11	s COIL, CHOKE 47UH
L3	1-424-642-11	s COIL, CHOKE 47UH
Q1	8-729-118-56	s TRANSISTOR 2SK852-X2
Q2	8-729-020-93	s TRANSISTOR 2SC2982C-TE12L
Q3	8-729-117-32	s TRANSISTOR 2SC4177
Q4	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q5	8-729-028-91	s TRANSISTOR DTA144EUA-T106

(HN-243 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q6	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q7	8-729-824-34	s TRANSISTOR 2SJ187
Q8	8-729-209-07	s TRANSISTOR 2SC4213-B
Q9	8-729-209-07	s TRANSISTOR 2SC4213-B
Q10	8-729-928-40	s TRANSISTOR DTA144WE-TL
Q11	8-729-928-40	s TRANSISTOR DTA144WE-TL
Q12	8-729-928-93	s TRANSISTOR DTC144WE
Q13	8-729-045-28	s TRANSISTOR SI4532DY-T1
Q14	8-729-928-40	s TRANSISTOR DTA144WE-TL
Q15	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q16	9-910-999-30	s HANDLED BY TOKYO PROD.GP
Q17	8-729-029-08	s TRANSISTOR DTC124XUA-T106
Q18	8-729-029-06	s TRANSISTOR DTC124EUA-T106
Q19	8-729-045-28	s TRANSISTOR SI4532DY-T1
R1	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R2	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R3	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R4	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R5	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R6	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R7	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R8	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R9	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R10	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R11	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R12	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R13	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R14	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R15	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R16	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R17	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R18	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R19	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R20	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R21	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R22	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R23	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R24	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R25	1-216-852-11	s RESISTOR,CHIP 390K 1/16W 1608
R26	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R27	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R28	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R29	1-216-298-00	s RESISTOR,CHIP 2.2 1/10(2012)
R30	1-216-298-00	s RESISTOR,CHIP 2.2 1/10(2012)
R31	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R32	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R33	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R34	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R35	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R36	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R37	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R39	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R40	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R41	1-218-683-11	s RESISTOR CHIP 430 1/16W (1608)
R42	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R43	1-216-822-11	s RESISTOR, CHIP 1.2K 1/16W 1608
R44	1-216-822-11	s RESISTOR, CHIP 1.2K 1/16W 1608
R45	1-216-832-11	s RESISTOR,CHIP 8.2K 1/16W 1608

(HN-243 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R46	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R47	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R48	1-216-824-11	s RESISTOR, CHIP 1.8K 1/16W 1608
R49	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R50	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R51	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R52	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R53	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R54	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R55	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R56	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R57	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R58	1-218-681-11	s RESISTOR CHIP 360 1/16W (1608)
R59	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W
R60	1-218-711-11	s RESISTOR,METAL 6.2K 1/16W
R61	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R62	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R63	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R64	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R65	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R66	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R67	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R68	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R69	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R70	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R76	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R77	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R80	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R81	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R82	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R83	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R84	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R85	1-218-705-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R86	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R87	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R88	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R90	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R91	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R92	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R93	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R94	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R95	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R96	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R98	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R99	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R100	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R101	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R102	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R103	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R104	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R106	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R107	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R108	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R109	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R110	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R111	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R112	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R114	1-216-795-11	s RESISTOR,CHIP 6.8 1/16W(1608)
R115	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)

(HN-243 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R116	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R117	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
RB1	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB2	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB3	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RV1	1-241-267-11	s RESISTOR ADJ 100K (CERMET)
S1	1-692-881-41	s SWITCH, SLIDE
S2	1-692-032-21	s SWITCH, TACTILE (HORIZONTAL)
S3	1-692-032-21	s SWITCH, TACTILE (HORIZONTAL)
S4	1-571-275-31	s SWITCH,SLIDE (1-1-2)

HP-90 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8316-519-A	o MOUNTED CIRCUIT BOARD, HP-90
C1	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C2	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C3	1-128-057-11	s CAPACITOR,ELECT 330MF/6.3V
C4	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
CN1	1-764-079-21	s PIN, CONNECTOR (PC BOARD) 4P
D1	8-719-938-75	s DIODE SB05-05CP (RECTI)
D2	8-719-938-75	s DIODE SB05-05CP (RECTI)
FL1	1-239-895-11	s FILTER, EMI (SMD)
J1	1-507-980-41	s JACK
L1	1-412-171-11	s MICRO INDUCTOR 0.56UH
L2	1-410-389-31	s INDUCTOR,CHIP 47UH (3225)
R1	1-216-005-00	s RESISTOR,CHIP 15 1/10W(2012)
R2	1-216-005-00	s RESISTOR,CHIP 15 1/10W(2012)

IF-819 BOARD

*a: Lot No. 911
 *b: Lot No. 912 -
 *c: Lot No. 003 -
 *d: Lot No. 911 - 211
 *e: Lot No. 212 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-860-A	o MOUNTED CIRCUIT BOARD, IF-819
3pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-626-767-01	o PLATE (IF), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
3pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C104	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C107	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C108	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C109	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C111	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C113	1-104-915-11	s CAPACITOR, CHIP 2.2MF/20V
C114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C115	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C116	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C117	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C118	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C119	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C120	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C121	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C122	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C123	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C124	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C126	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C200	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C203	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C204	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C205	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C206	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C207	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C208	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C209	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C210	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C211	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C214	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C300	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C302	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C303	*c 1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C400	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C401	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C402	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C403	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C404	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH

(IF-819 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C405	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C406	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C407	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C408	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C409	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C410	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C411	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C500	1-104-920-11	s CAPACITOR TANTALUM 4.7MF/35V
C501	1-104-920-11	s CAPACITOR TANTALUM 4.7MF/35V
C502	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C503	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C504	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C505	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C506	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C507	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C508	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C509	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C510	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C511	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C512	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C513	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C514	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C515	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C516	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C517	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C518	1-104-919-11	s CAPACITOR, TANTALUM 10MF/25V
C519	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C520	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C521	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C522	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C523	1-104-914-11	s CAPACITOR, TANTALUM 22MF/16V
C524	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C525	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C526	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C527	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C528	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C529	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C530	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C531	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C532	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C533	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
CN9	1-793-059-11	o CONNECTOR, BOARD TO BOARD 24P
CN300	1-764-093-21	o PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-820-41	s DIODE 1SS302
D500	8-719-059-59	s DIODE MA3J74200LSO
D501	8-719-059-59	s DIODE MA3J74200LSO
D502	8-719-059-59	s DIODE MA3J74200LSO
D503	8-719-422-23	s DIODE MA8047
D504	8-719-059-59	s DIODE MA3J74200LSO
D505	8-719-059-59	s DIODE MA3J74200LSO
D506	8-719-820-41	s DIODE 1SS302
FB100	*b 1-469-324-21	s FERRITE, EMI (SMD)
IC100	8-759-563-84	s IC HD6437043AP00F
IC101	8-759-491-49	s IC TC74VHCT240AFT (EL)
IC102	8-759-389-32	s IC 74LX240MTCX
IC103	8-759-523-01	s IC TC74HC4052AFT (EL)
IC104	8-759-491-50	s IC TC74VHCT244AFT (EL)

(IF-819 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC105	8-759-389-33	s IC 74LCX244MTCX
IC106	8-759-082-57	s IC TC7W04FU
IC107	8-759-083-94	s IC TC7W74FU
IC108	8-759-918-65	s IC TL7700CPS
IC109	8-759-491-48	s IC TC74VHCT138AFT(EL)
IC110	8-759-491-48	s IC TC74VHCT138AFT(EL)
IC111	8-759-196-97	s IC TC7SH32FU (TE85R)
IC112	8-759-386-25	s IC 74LCX245MTCX
IC113	8-759-389-33	s IC 74LCX244MTCX
IC114	8-759-182-95	s IC HD151015T
IC115	8-759-491-50	s IC TC74VHCT244AFT(EL)
IC200	8-759-641-62	s IC TC55V2161FTI-85L
IC201	8-759-389-26	s IC 74LCX08MTCX
IC204	8-759-182-95	s IC HD151015T
IC205	8-759-491-50	s IC TC74VHCT244AFT(EL)
IC206	*e 6-701-645-01	s IC STK14C88-N45I (TE-L)
	*d 8-759-571-46	s IC STK14C88-N45I
IC207	8-759-641-62	s IC TC55V2161FTI-85L
IC208	8-759-389-26	s IC 74LCX08MTCX
IC209	8-759-271-86	s IC TC7SH04FU
IC210	8-759-082-59	s IC TC7W32FU
IC211	8-759-689-92	o IC MBM29LV160BE-90TN
IC300	8-759-058-56	s IC TC7S02FU(TE85R)
IC301	8-759-584-32	s IC MB86189PFV-G-BND-ER
IC302	8-759-154-60	s IC UPD71055GB-10-3B4
IC303	8-759-058-56	s IC TC7S02FU(TE85R)
IC400	8-759-594-17	o IC CXD9093R
IC401	8-759-058-56	s IC TC7S02FU(TE85R)
IC402	8-759-386-27	s IC 74LCX04MTCX
IC403	8-759-082-58	s IC TC7W08FU
IC404	8-759-082-58	s IC TC7W08FU
IC405	8-759-092-81	s IC SN75158PS
IC500	8-759-669-72	s IC TL064CPWR
IC501	8-759-669-65	s IC TLC27M4CPWR-12
IC502	8-759-660-48	s IC MAX525BCAP-TG068
IC503	8-759-669-72	s IC TL064CPWR
IC504	8-759-185-42	s IC LM4040AIM3-2.5
IC505	8-759-185-42	s IC LM4040AIM3-2.5
L2	1-412-032-11	s INDUCTOR CHIP 100UH (3225)
L500	1-412-029-11	s CHIP INDUCTOR 10UH (3225)
L501	1-412-029-11	s CHIP INDUCTOR 10UH (3225)
L502	1-412-029-11	s CHIP INDUCTOR 10UH (3225)
L503	*a 1-412-029-11	s CHIP INDUCTOR 10UH (3225)
L504	1-412-029-11	s CHIP INDUCTOR 10UH (3225)
PH400	8-749-014-35	s IC HCPL-0630-500
Q100	6-550-000-01	s TRANSISTOR IMH2A-T110
Q300	8-729-907-00	s TRANSISTOR DTC114EU
Q301	8-729-141-48	s TRANSISTOR 2SB624-BV345
Q302	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q303	6-550-000-01	s TRANSISTOR IMH2A-T110
Q304	6-550-000-01	s TRANSISTOR IMH2A-T110
Q500	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q501	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q502	8-729-117-32	s TRANSISTOR 2SC4177
Q503	8-729-117-32	s TRANSISTOR 2SC4177
Q504	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q505	8-729-820-86	s TRANSISTOR 2SB1121-ST

(IF-819 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q506	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q507	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q508	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q509	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q510	6-550-000-01	s TRANSISTOR IMH2A-T110
Q512	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q513	8-729-143-07	s TRANSISTOR 2SA1610-Y33
R108	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R109	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R110	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R111	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R112	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R113	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R114	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R115	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R116	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R117	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R119	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R120	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R121	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R124	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R125	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R126	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R127	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R128	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R129	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R130	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R131	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R132	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R134	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R135	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R136	1-218-737-11	s RESISTOR,CHIP 75K 1/16W
R137	1-218-737-11	s RESISTOR,CHIP 75K 1/16W
R138	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R140	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R141	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R142	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R143	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R144	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R145	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R149	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R150	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R151	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R152	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R153	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R154	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R155	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R156	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R157	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R158	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R159	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R160	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R161	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R162	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R163	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R164	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R165	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R166	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)

(IF-819 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R167	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R168	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R169	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R170	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R171	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R172	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R173	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R200	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R201	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R202	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R203	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R205	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R206	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R207	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R300	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R301	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R302	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R303	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R304	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R305	1-218-656-11	s RESISTOR,CHIP 33 1/16W (1608)
R306	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R308	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R309	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R310	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R311	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R312	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R313	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R314	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R315	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R316	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R317	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R318	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R319	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R320	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R321	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R322	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R323	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R324	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R325	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R326	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R331	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R332	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R333	1-218-726-11	s RESISTOR,CHIP 27K 1/16W (1608)
R334	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R335	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R336	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R401	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R402	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R403	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R404	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R405	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R406	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R407	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R408	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R409	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R410	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R412	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R413	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R414	1-218-644-11	s RESISTOR,CHIP 10 1/16W

(IF-819 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R415	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R500	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R501	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R502	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R503	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R504	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R505	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R506	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R507	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R508	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R509	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R510	1-218-730-11	s RESISTOR METAL FILM CHIP 39K
R511	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R512	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R513	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R514	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R515	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R516	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R517	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R518	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R519	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R520	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R525	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R528	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R529	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R530	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R531	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R532	1-216-789-11	s RESISTOR,CHIP 2.2 1/16W(1608)
R533	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R534	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R535	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R536	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R537	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R538	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R539	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R540	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R541	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R542	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R543	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R544	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R545	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R546	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R547	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R548	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R549	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R550	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R551	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R552	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R553	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R554	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R555	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R556	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R557	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R558	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R559	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R560	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R561	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R562	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R563	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(IF-819 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R564	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R565	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R566	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R567	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R568	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R569	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R570	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R571	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R572	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R573	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R574	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R575	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R576	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R577	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R578	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R579	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R580	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R581	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R582	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R583	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R584	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R585	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R586	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
RB100	*b 1-239-303-11	s RESISTOR ARRAY,CHIP 1K
	*a 1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB101	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB102	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB103	*b 1-236-904-11	s RESISTOR NETWORK 1K (1608)
	*a 1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB200	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB201	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB202	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB203	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB204	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB205	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB300	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB301	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB302	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RB303	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RB304	1-236-907-11	s RESISTOR BLOCK 100K (1608)
S300	1-692-270-41	s SWITCH, SLIDE
X100	1-760-139-11	s VIBRATOR, CRYSTAL
X400	1-767-204-21	s VIBRATOR, CRYSTAL

KY-293 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	1-652-769-12	o PRINTED WIRING BOARD, KY-293
CN150	1-766-382-11	o PIN, CONNECTOR (10P) (SMD) (1.5M
D101	8-719-026-39	s LED CL-150UR-CD
D102	8-719-026-39	s LED CL-150UR-CD
D103	8-719-026-39	s LED CL-150UR-CD
R101	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R102	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R103	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
S101	1-572-725-11	s SWITCH,TACTILE
S102	1-572-725-11	s SWITCH,TACTILE
S103	1-572-725-11	s SWITCH,TACTILE
S104	1-572-725-11	s SWITCH,TACTILE
S105	1-572-725-11	s SWITCH,TACTILE

MA-92 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8316-735-A	o MOUNTED CIRCUIT BOARD, MA-92
C1	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C2	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C3	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C4	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C5	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C6	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C7	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C8	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C9	1-126-795-11	s CAPACITOR, ELECT 10MF/50V
C10	1-126-795-11	s CAPACITOR, ELECT 10MF/50V
C11	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C12	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-126-795-11	s CAPACITOR, ELECT 10MF/50V
C15	1-126-795-11	s CAPACITOR, ELECT 10MF/50V
C16	1-126-795-11	s CAPACITOR, ELECT 10MF/50V
C17	1-126-795-11	s CAPACITOR, ELECT 10MF/50V
C18	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C19	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C20	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C21	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C22	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C23	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C24	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C25	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C26	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C27	1-162-995-11	s CAPACITOR,CERAMIC 0.022MF/50V
C28	1-162-995-11	s CAPACITOR,CERAMIC 0.022MF/50V
C29	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C30	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C31	1-111-253-11	s CAPACITOR TANTALUM 100MF/6.3V
C32	1-111-253-11	s CAPACITOR TANTALUM 100MF/6.3V
CN1	1-764-091-11	o PIN, CONNECTOR (PC BOARD) 6P
CN2	1-506-490-11	o PIN, CONNECTOR 11P
CN3	1-695-889-21	s PIN, CONNECTOR (PC BOARD) 10P
CN4	1-764-079-21	s PIN, CONNECTOR (PC BOARD) 4P
D1	8-719-800-76	s DIODE 1SS226
D2	8-719-800-76	s DIODE 1SS226
D3	8-719-800-76	s DIODE 1SS226
D4	8-719-800-76	s DIODE 1SS226
IC1	8-759-175-04	s IC PCF8574T-T
IC2	8-759-700-84	s IC NJM2041MD
IC3	8-759-700-84	s IC NJM2041MD
L1	1-412-137-11	s INDUCTOR,MICRO 10UH
L2	1-412-137-11	s INDUCTOR,MICRO 10UH
L3	1-412-137-11	s INDUCTOR,MICRO 10UH
L4	1-412-137-11	s INDUCTOR,MICRO 10UH
Q1	8-729-271-31	s TRANSISTOR 2SC2713-G
Q2	8-729-271-31	s TRANSISTOR 2SC2713-G
Q3	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q4	8-729-820-86	s TRANSISTOR 2SB1121-ST
R1	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R2	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R5	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(MA-92 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R6	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R7	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R8	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R9	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R10	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R11	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R12	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R13	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R14	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R15	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R16	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R17	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R18	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R19	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R20	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R21	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R22	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R23	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R24	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R25	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R26	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R27	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R28	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R29	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R30	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

MB-877 BOARD

*a: Lot No. 911 - 091, 232 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-131-A	o MOUNTED CIRCUIT BOARD, MB-877
51pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C2	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C12	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C13	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
CN1	1-691-845-11	o CONNECTOR (SQUARE TYPE) 50P
CN2	1-691-845-11	o CONNECTOR (SQUARE TYPE) 50P
CN3	1-691-845-11	o CONNECTOR (SQUARE TYPE) 50P
CN5	1-691-845-11	o CONNECTOR (SQUARE TYPE) 50P
CN11	1-691-845-11	o CONNECTOR (SQUARE TYPE) 50P
CN30	1-568-361-21	s CONNECTOR, BOARD TO BOARD 24P
CN31	1-766-384-11	s CONNECTOR, FPC (28P)
CN32	1-695-320-21	o PIN, CONNECTOR (1.5MM) SMD 2P
CN33	1-750-934-21	o PIN, CONNECTOR (PC BOARD) 20P
CN34	1-695-890-11	o PIN, CONNECTOR (PC BOARD) 12P
CN36	1-764-079-21	s PIN, CONNECTOR (PC BOARD) 4P
CN37	1-695-889-21	s PIN, CONNECTOR (PC BOARD) 10P
CN38	1-695-890-11	o PIN, CONNECTOR (PC BOARD) 12P
CN40	1-766-384-11	s CONNECTOR, FPC (28P)
CN41	1-766-384-11	s CONNECTOR, FPC (28P)
CN42	1-766-384-11	s CONNECTOR, FPC (28P)
CN44	1-695-455-11	s CONNECTOR, BOARD TO BOARD 50P
CN45	1-764-093-21	o PIN, CONNECTOR (PC BOARD) 8P
CN46	1-750-933-21	o PIN, CONNECTOR (PC BOARD) 12P
CN48	1-695-480-21	o PIN, CONNECTOR (PC BOARD) 2P
CN50	1-766-382-11	o PIN, CONNECTOR (10P) (SMD) (1.5MM)
CN51	1-764-078-11	s PIN, CONNECTOR (PC BOARD) 3P
CN52	1-691-550-11	s PIN, CONNECTOR (3P) (SMD) (1.5MM)
CN53	*a 1-766-235-11	s HOUSING, CONNECTOR (FPC, FPC) 26P
CN54	1-766-235-11	s HOUSING, CONNECTOR (FPC, FPC) 26P
CN55	1-695-480-21	o PIN, CONNECTOR (PC BOARD) 2P
CN56	1-764-079-21	s PIN, CONNECTOR (PC BOARD) 4P
CN57	1-695-210-21	o PIN, CONNECTOR (PC BOARD) 15P
CN101	1-766-235-11	s HOUSING, CONNECTOR (FPC, FPC) 26P
CN102	1-573-290-21	s PIN, CONNECTOR (4P) (SMD) (1.5MM)
CN108	1-764-095-11	o PIN, CONNECTOR (PC BOARD) 10P
CN109	1-750-635-21	o PIN, CONNECTOR (PC BOARD) 5P
L1	1-410-389-31	s INDUCTOR, CHIP 47UH (3225)
L2	1-410-389-31	s INDUCTOR, CHIP 47UH (3225)
L3	1-410-389-31	s INDUCTOR, CHIP 47UH (3225)
R1	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R2	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R3	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R4	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R5	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)

PA-238 BOARD SUFFIX -12

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-347-A	s MOUNTED CIRCUIT BOARD, PA-238
C1	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-127-562-11	s CAP, ELECT (SOLID) 47MF/6.3V
C6	1-127-562-11	s CAP, ELECT (SOLID) 47MF/6.3V
C7	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C8	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C9	1-137-689-91	s CAPACITOR, TANTALUM ELECT 47MF
C10	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C11	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C12	1-137-703-91	s CAPACITOR, TANTALUM 1MF (3216)
C13	1-137-703-91	s CAPACITOR, TANTALUM 1MF (3216)
C14	1-137-703-91	s CAPACITOR, TANTALUM 1MF (3216)
C15	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C16	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C17	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C18	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C19	1-137-703-91	s CAPACITOR, TANTALUM 1MF (3216)
C21	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C22	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C23	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C24	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C25	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C26	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C28	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C29	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C30	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C31	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C32	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C33	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C34	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C35	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C36	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C37	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C38	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C39	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C40	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C41	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C47	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C48	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C49	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C50	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C51	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C52	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C53	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C55	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C56	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C57	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C58	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C59	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C60	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C61	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C62	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C63	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C64	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C65	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C66	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C67	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(PA-238 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
C68	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C69	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C70	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C71	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C72	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C73	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C74	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C75	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C76	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C77	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C78	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C79	1-135-870-91	s CAPACITOR, TANTALUM 2.2/16V
C83	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C84	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C85	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C86	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C87	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C88	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C89	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C90	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C91	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C92	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C93	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C94	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C95	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C96	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C97	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C98	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C99	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C100	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C103	1-137-689-91	s CAPACITOR TANTALUM ELECT 47MF
C104	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C111	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C112	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C113	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C190	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C191	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C192	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C193	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C201	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C203	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C204	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C205	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C206	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C210	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C211	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C220	1-137-703-91	s CAPACITOR, TANTALUM 1MF(3216)
C221	1-137-703-91	s CAPACITOR, TANTALUM 1MF(3216)
C222	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C223	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C224	1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C225	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C226	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
CN1	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN2	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P

(PA-238 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
CN3	1-568-361-21	s CONNECTOR, BOARD TO BOARD 24P
CN4	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN5	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN6	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN7	1-568-353-21	o CONNECTOR, BOARD TO BOARD 6P
CN8	1-568-353-21	o CONNECTOR, BOARD TO BOARD 6P
CN9	1-568-353-21	o CONNECTOR, BOARD TO BOARD 6P
D1	8-719-421-27	s DIODE MA728
DL101	1-406-742-11	s DELAY LINE
DL103	1-406-743-11	s DELAY LINE
DL106	1-406-743-11	s DELAY LINE
DL109	1-406-742-11	s DELAY LINE
DL111	1-406-743-11	s DELAY LINE
DL201	1-406-742-11	s DELAY LINE
DL203	1-406-743-11	s DELAY LINE
DL206	1-406-743-11	s DELAY LINE
DL209	1-406-742-11	s DELAY LINE
DL210	1-415-886-11	s DELAY LINE
DL211	1-406-743-11	s DELAY LINE
DL301	1-406-742-11	s DELAY LINE
DL303	1-406-743-11	s DELAY LINE
DL306	1-406-743-11	s DELAY LINE
DL309	1-406-742-11	s DELAY LINE
DL311	1-406-743-11	s DELAY LINE
FB101	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB201	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB301	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
IC1	8-759-185-42	s IC LM4040AIM3-2.5
IC2	8-759-381-53	s IC UPC814G2-E2
IC3	8-759-523-02	s IC TC74HC4053AFT(EL)
IC4	8-759-669-72	s IC TL064CPWR
IC5	8-759-485-79	s IC TC7SET08FU (TE85L)
IC6	8-759-054-61	s IC CLC505AJE
IC7	8-759-054-61	s IC CLC505AJE
IC8	8-759-054-61	s IC CLC505AJE
IC9	8-759-054-61	s IC CLC505AJE
IC10	8-759-054-61	s IC CLC505AJE
IC11	8-759-054-61	s IC CLC505AJE
IC15	8-759-054-61	s IC CLC505AJE
IC16	8-759-054-61	s IC CLC505AJE
IC17	8-759-054-61	s IC CLC505AJE
IC19	8-759-058-64	s IC TC7S32FU-TE85R
IC20	8-759-058-58	s IC TC7S04FU-TE85R
IC21	8-759-058-64	s IC TC7S32FU-TE85R
IC22	8-759-058-62	s IC TC7S08FU-TE85R
IC23	8-759-564-49	s IC TC7W53FU-TE12R
Q1	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q2	8-729-117-32	s TRANSISTOR 2SC4177
Q3	8-729-117-16	s TRANSISTOR 2SA1611M6
Q4	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q9	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q10	8-729-143-07	s TRANSISTOR 2SA1610-Y33
R1	1-211-986-11	s RESISTOR, CHIP 51 1/10W (1608)
R2	1-211-986-11	s RESISTOR, CHIP 51 1/10W (1608)
R3	1-211-986-11	s RESISTOR, CHIP 51 1/10W (1608)
R4	1-211-986-11	s RESISTOR, CHIP 51 1/10W (1608)

(PA-238 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP	Description
R65	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/10W(1608)
R66	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/10W(1608)
R67	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R68	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R69	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R70	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R71	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R72	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R73	1-218-892-11	s	RESISTOR,CHIP 75K 1/10W (1608)
R74	1-218-892-11	s	RESISTOR,CHIP 75K 1/10W (1608)
R75	1-218-892-11	s	RESISTOR,CHIP 75K 1/10W (1608)
R76	1-218-892-11	s	RESISTOR,CHIP 75K 1/10W (1608)
R77	1-218-892-11	s	RESISTOR,CHIP 75K 1/10W (1608)
R78	1-218-892-11	s	RESISTOR,CHIP 75K 1/10W (1608)
R79	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R80	1-218-834-11	s	RESISTOR,CHIP 300 1/10W (1608)
R81	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R82	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R83	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R84	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R85	1-218-834-11	s	RESISTOR,CHIP 300 1/10W (1608)
R86	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R87	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R88	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R89	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R90	1-218-834-11	s	RESISTOR,CHIP 300 1/10W (1608)
R91	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R92	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R93	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R94	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R95	1-218-834-11	s	RESISTOR,CHIP 300 1/10W (1608)
R96	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R97	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R98	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R99	1-218-834-11	s	RESISTOR,CHIP 300 1/10W (1608)
R100	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R101	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R102	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R103	1-218-834-11	s	RESISTOR,CHIP 300 1/10W (1608)
R104	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R105	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R106	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R107	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R108	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R109	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R110	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R111	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R112	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R113	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R114	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R115	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R116	1-218-884-11	s	RESISTOR,CHIP 36K 1/10W (1608)
R117	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R118	1-218-884-11	s	RESISTOR,CHIP 36K 1/10W (1608)
R119	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R120	1-218-884-11	s	RESISTOR,CHIP 36K 1/10W (1608)
R121	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R122	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R123	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)

(PA-238 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R124	1-216-864-11	s CONDUCTOR, CHIP (1608)
R130	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R131	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R132	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R133	1-216-864-11	s CONDUCTOR, CHIP (1608)
R134	1-216-864-11	s CONDUCTOR, CHIP (1608)
R135	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R136	1-218-884-11	s RESISTOR,CHIP 36K 1/10W (1608)
R137	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R138	1-218-884-11	s RESISTOR,CHIP 36K 1/10W (1608)
R139	1-218-884-11	s RESISTOR,CHIP 36K 1/10W (1608)
R140	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R141	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R142	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R143	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R144	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R145	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R146	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R147	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R148	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R149	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R150	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R151	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R152	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R153	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R154	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R155	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R156	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R157	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R158	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R159	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R160	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R161	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R162	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R163	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
R164	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R190	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R191	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R192	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R193	1-218-899-11	s RESISTOR,CHIP 150K 1/10W(1608)
R194	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R201	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R202	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R203	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R204	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R205	1-218-899-11	s RESISTOR,CHIP 150K 1/10W(1608)
R206	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R207	1-218-823-11	s RESISTOR,CHIP 100 1/10W (1608)
R208	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R209	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R210	1-218-899-11	s RESISTOR,CHIP 150K 1/10W(1608)
R221	1-218-891-11	s RESISTOR,CHIP 68K 1/10W (1608)
R222	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R223	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R225	1-218-891-11	s RESISTOR,CHIP 68K 1/10W (1608)
R226	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R227	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R229	1-218-891-11	s RESISTOR,CHIP 68K 1/10W (1608)
R230	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)

(PA-238 BOARD SUFFIX -12)

Ref. No. or Q'ty	Part No.	SP Description
R231	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R232	1-216-864-11	s CONDUCTOR, CHIP (1608)
R233	1-211-969-11	s RESISTOR,CHIP 10 1/10W (1608)
R234	1-218-883-11	s RESISTOR,CHIP 33K 1/10W (1608)
R235	1-218-854-11	s RESISTOR,CHIP 2K 1/10W (1608)
R236	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R237	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R238	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R239	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R240	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R241	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R242	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R243	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R244	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R245	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R246	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R247	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R248	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R249	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R250	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
RV101	1-225-787-21	s RES, ADJ, CERMET 500
RV102	1-225-792-21	s RES, ADJ, CERMET 10K
RV201	1-225-787-21	s RES, ADJ, CERMET 500
RV202	1-225-792-21	s RES, ADJ, CERMET 10K
RV301	1-225-787-21	s RES, ADJ, CERMET 500
RV302	1-225-792-21	s RES, ADJ, CERMET 10K

PA-238 BOARD SUFFIX -11

*a: Lot No. 911 - 912
*b: Lot No. 001 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-347-A	o MOUNTED CIRCUIT BOARD, PA-238
C1	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-127-562-11	s CAP,ELECT(SOLID)47MF/6.3V
C6	1-127-562-11	s CAP,ELECT(SOLID)47MF/6.3V
C7	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C8	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C9	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C10	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C11	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C12	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C13	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C14	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C15	1-164-677-11	s CAPACITOR,CERAMIC 0.033MF/16V
C16	1-164-677-11	s CAPACITOR,CERAMIC 0.033MF/16V
C17	1-164-677-11	s CAPACITOR,CERAMIC 0.033MF/16V
C18	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C19	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C21	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C22	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C23	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C24	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C25	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C26	1-135-201-11	s CAPACITOR,CHIP TANTAL 10MF/4V
C28	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C29	*b 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C30	*b 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C31	*b 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C32	*b 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C33	*b 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C34	*b 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C35	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C36	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C37	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C38	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C39	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C40	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C47	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C48	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C49	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C50	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C51	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C52	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C53	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C55	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C56	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C57	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C58	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C59	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C60	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C61	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C62	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C63	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C64	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C65	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F

(PA-238 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
C66	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C67	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C68	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C69	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C70	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C71	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C72	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C73	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C74	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C75	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C76	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C77	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C78	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C79	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C83	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C84	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C85	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C86	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C87	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C88	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C89	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C90	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C91	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C92	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C93	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C94	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C95	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C96	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C97	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C98	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C99	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C100	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C103	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C104	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C111	1-162-918-11	s CAPACITOR,CERAMIC 18PF/50V CH
C112	1-162-918-11	s CAPACITOR,CERAMIC 18PF/50V CH
C113	1-162-918-11	s CAPACITOR,CERAMIC 18PF/50V CH
C190	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C191	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C192	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C193	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C201	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C204	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C210	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C211	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C220	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C221	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C222	1-162-908-11	s CAPACITOR,CERAMIC 3PF/50V 1608
C223	1-162-908-11	s CAPACITOR,CERAMIC 3PF/50V 1608
C224	1-162-908-11	s CAPACITOR,CERAMIC 3PF/50V 1608
C225	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C226	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH

(PA-238 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
CN1	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN2	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN3	1-568-361-21	s CONNECTOR, BOARD TO BOARD 24P
CN4	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN5	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN6	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN7	1-568-353-21	o CONNECTOR, BOARD TO BOARD 6P
CN8	1-568-353-21	o CONNECTOR, BOARD TO BOARD 6P
CN9	1-568-353-21	o CONNECTOR, BOARD TO BOARD 6P
D1	8-719-421-27	s DIODE MA728
DL101	1-406-742-11	s DELAY LINE
DL103	1-406-743-11	s DELAY LINE
DL106	1-406-743-11	s DELAY LINE
DL109	1-406-742-11	s DELAY LINE
DL111	1-406-743-11	s DELAY LINE
DL201	1-406-742-11	s DELAY LINE
DL203	1-406-743-11	s DELAY LINE
DL206	1-406-743-11	s DELAY LINE
DL209	1-406-742-11	s DELAY LINE
DL210	1-415-886-11	s DELAY LINE
DL211	1-406-743-11	s DELAY LINE
DL301	1-406-742-11	s DELAY LINE
DL303	1-406-743-11	s DELAY LINE
DL306	1-406-743-11	s DELAY LINE
DL309	1-406-742-11	s DELAY LINE
DL311	1-406-743-11	s DELAY LINE
FB101	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB201	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
FB301	1-412-390-21	s MICRO INDUCTOR (CHIP) 21A05
IC1	8-759-185-42	s IC LM4040AIM3-2.5
IC2	8-759-381-53	s IC UPC814G2-E2
IC3	8-759-523-02	s IC TC74HC4053AFT(EL)
IC4	8-759-669-72	s IC TL064CPWR
IC5	8-759-485-79	s IC TC7SET08FU (TE85L)
IC6	8-759-054-61	s IC CLC505AJE
IC7	8-759-054-61	s IC CLC505AJE
IC8	8-759-054-61	s IC CLC505AJE
IC9	8-759-054-61	s IC CLC505AJE
IC10	8-759-054-61	s IC CLC505AJE
IC11	8-759-054-61	s IC CLC505AJE
IC15	8-759-054-61	s IC CLC505AJE
IC16	8-759-054-61	s IC CLC505AJE
IC17	8-759-054-61	s IC CLC505AJE
IC19	8-759-058-64	s IC TC7S32FU-TE85R
IC20	8-759-058-58	s IC TC7S04FU-TE85R
IC21	8-759-058-64	s IC TC7S32FU-TE85R
IC22	8-759-058-62	s IC TC7S08FU-TE85R
IC23	8-759-564-49	s IC TC7W53FU-TE12R
Q1	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q2	8-729-117-32	s TRANSISTOR 2SC4177
Q3	8-729-117-16	s TRANSISTOR 2SA1611M6
Q4	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q9	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q10	8-729-143-07	s TRANSISTOR 2SA1610-Y33
R1	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R2	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)

(PA-238 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R3	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R4	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R5	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R6	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R7	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R8	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R9	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R10	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R11	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R13	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R14	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R15	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R16	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R17	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R18	*b 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
	*a 1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R19	*b 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
	*a 1-218-681-11	s RESISTOR,CHIP 360 1/16W (1608)
R20	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R21	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R22	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R23	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R24	1-216-855-11	s RESISTOR,CHIP 680K 1/16W 1608
R25	1-216-855-11	s RESISTOR,CHIP 680K 1/16W 1608
R26	1-216-855-11	s RESISTOR,CHIP 680K 1/16W 1608
R27	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R28	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R29	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R30	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R31	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R32	1-218-658-11	s RESISTOR,CHIP 39 1/16W (1608)
R33	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R34	1-218-658-11	s RESISTOR,CHIP 39 1/16W (1608)
R35	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R36	1-218-658-11	s RESISTOR,CHIP 39 1/16W (1608)
R37	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R38	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R39	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R40	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R41	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R42	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R43	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R44	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R45	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R46	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R47	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R48	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R49	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R50	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R51	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R52	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R53	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R54	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R55	*b 1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R56	*b 1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R57	*b 1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R58	*b 1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R59	*b 1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R60	*b 1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)

(PA-238 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP	Description		
R120	1-218-729-11	s	RESISTOR,CHIP	36K	1/16W(1608)
R121	1-218-740-11	s	RESISTOR,CHIP	100K	1/16W(1608)
R122	1-218-740-11	s	RESISTOR,CHIP	100K	1/16W(1608)
R123	1-218-740-11	s	RESISTOR,CHIP	100K	1/16W(1608)
R124	*b 1-216-864-11	s	RESISTOR,CHIP	0	1/16W (1608)
	*a 1-216-789-11	s	RESISTOR,CHIP	2.2	1/16W(1608)
R130	1-218-740-11	s	RESISTOR,CHIP	100K	1/16W(1608)
R131	1-218-740-11	s	RESISTOR,CHIP	100K	1/16W(1608)
R132	1-218-740-11	s	RESISTOR,CHIP	100K	1/16W(1608)
R133	*b 1-216-864-11	s	RESISTOR,CHIP	0	1/16W (1608)
	*a 1-216-789-11	s	RESISTOR,CHIP	2.2	1/16W(1608)
R134	*b 1-216-864-11	s	RESISTOR,CHIP	0	1/16W (1608)
	*a 1-216-789-11	s	RESISTOR,CHIP	2.2	1/16W(1608)
R135	1-218-716-11	s	RESISTOR,CHIP	10K	1/16W(1608)
R136	1-218-729-11	s	RESISTOR,CHIP	36K	1/16W(1608)
R137	1-218-716-11	s	RESISTOR,CHIP	10K	1/16W(1608)
R138	1-218-729-11	s	RESISTOR,CHIP	36K	1/16W(1608)
R139	1-218-729-11	s	RESISTOR,CHIP	36K	1/16W(1608)
R140	1-218-716-11	s	RESISTOR,CHIP	10K	1/16W(1608)
R141	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R142	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R143	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R144	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R145	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R146	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R147	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R148	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R149	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R150	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R151	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R152	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R153	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R154	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R155	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R156	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R157	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R158	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R159	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R160	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R161	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R162	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R163	1-218-682-11	s	RESISTOR,CHIP	390	1/16W (1608)
R164	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R190	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R191	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R192	1-218-692-11	s	RESISTOR,CHIP	1.0K	1/16W(1608)
R193	1-218-746-11	s	RESISTOR,CHIP	180K	1/16W
R194	1-218-692-11	s	RESISTOR,CHIP	1.0K	1/16W(1608)
R201	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R202	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R203	1-218-692-11	s	RESISTOR,CHIP	1.0K	1/16W(1608)
R204	1-218-692-11	s	RESISTOR,CHIP	1.0K	1/16W(1608)
R205	1-218-746-11	s	RESISTOR,CHIP	180K	1/16W
R206	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R207	1-218-668-11	s	RESISTOR,CHIP	100	1/16W (1608)
R208	1-218-692-11	s	RESISTOR,CHIP	1.0K	1/16W(1608)
R209	1-218-692-11	s	RESISTOR,CHIP	1.0K	1/16W(1608)
R210	1-218-746-11	s	RESISTOR,CHIP	180K	1/16W
R221	1-218-736-11	s	RESISTOR,CHIP	68K	1/16W(1608)

(PA-238 BOARD SUFFIX -11)

Ref. No. or Q'ty	Part No.	SP Description
R222	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R223	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R225	1-218-736-11	s RESISTOR,CHIP 68K 1/16W(1608)
R226	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R227	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R229	1-218-736-11	s RESISTOR,CHIP 68K 1/16W(1608)
R230	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R231	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R232	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R233	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R234	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R235	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R236	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R237	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R238	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R239	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R240	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R241	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R242	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R243	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R244	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R245	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R246	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R247	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R248	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R249	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R250	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
RV101	1-225-787-21	s RES, ADJ, CERMET 500
RV102	1-225-792-21	s RES, ADJ, CERMET 10K
RV201	1-225-787-21	s RES, ADJ, CERMET 500
RV202	1-225-792-21	s RES, ADJ, CERMET 10K
RV301	1-225-787-21	s RES, ADJ, CERMET 500
RV302	1-225-792-21	s RES, ADJ, CERMET 10K

PS-569 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-147-A	o MOUNTED CIRCUIT BOARD, PS-569
C1	1-104-760-11	s CAPACITOR CERAMIC 0.047MF/50V
C2	1-128-548-11	s CAPACITOR,ELECT 4700MF/25V
C4	1-128-548-11	s CAPACITOR,ELECT 4700MF/25V
C5	1-104-760-11	s CAPACITOR CERAMIC 0.047MF/50V
CB1	Δ 1-533-481-11	s BREAKER, CIRCUIT
CN101	1-564-706-11	o PIN,CONNECTOR (4P)
CN102	1-564-708-11	o PIN,CONNECTOR (6P)
CN103	1-564-704-11	s PIN,CONNECTOR (2P)
CN104	1-564-209-00	o PIN HEADER,STRAIGHT 10P
D1	8-719-801-78	s DIODE 1SS184
D2	8-719-023-54	s DIODE EA60QC06-F
F1	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
IC1	8-759-277-86	o IC LTC1155CS8-E2
Q1	8-729-028-73	s TRANSISTOR DTA114EUA-T106
Q2	8-729-907-00	s TRANSISTOR DTC114EU
Q3	8-729-028-73	s TRANSISTOR DTA114EUA-T106
Q4	8-729-046-11	s TRANSISTOR SI4420DY-T1
Q5	8-729-046-11	s TRANSISTOR SI4420DY-T1
Q6	8-729-046-11	s TRANSISTOR SI4420DY-T1
Q7	8-729-046-11	s TRANSISTOR SI4420DY-T1
Q8	8-729-028-73	s TRANSISTOR DTA114EUA-T106
Q9	8-729-028-73	s TRANSISTOR DTA114EUA-T106
R1	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R2	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R3	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)

RE-139F BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-104-478-11	s CAPACITOR TANTALUM 10MF/35V
C2	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C100	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C101	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C102	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C103	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C104	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C105	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C106	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C107	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C300	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C301	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C303	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C304	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C305	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C307	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C308	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C500	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C501	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C502	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C503	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C504	1-115-185-11	s CAP CERAMIC 0.033MF/50V(2012)
C505	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C506	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C507	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C700	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C701	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C702	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C703	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C704	1-104-760-11	s CAPACITOR CERAMIC 0.047MF/50V
C705	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C706	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C707	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C708	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C709	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
CN1	1-573-337-11	o CONNECTOR, BOARD TO BOARD 18P
CN2	1-573-337-11	o CONNECTOR, BOARD TO BOARD 18P
D700	8-719-800-76	s DIODE 1SS226
IC100	8-759-669-64	s IC TL1451ACPWR-12
IC300	8-759-669-64	s IC TL1451ACPWR-12
IC500	8-759-669-64	s IC TL1451ACPWR-12
IC700	8-759-669-64	s IC TL1451ACPWR-12
Q100	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q101	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q300	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q302	1-801-806-11	s TRANSISTOR DTC144EAK
Q500	8-729-027-38	s TRANSISTOR DTA144EAK-T146
Q501	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q502	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q700	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q701	8-729-027-44	s TRANSISTOR DTC114TKA-T146
R2	1-216-659-11	s RESISTOR, CHIP 2.2K 1/10W(2012)
R100	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R101	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R102	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R103	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R104	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)

(RE-139F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R105	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R106	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R107	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R108	1-216-667-11	s RESISTOR, CHIP 4.7K 1/10W(2012)
R109	1-216-667-11	s RESISTOR, CHIP 4.7K 1/10W(2012)
R110	1-218-760-11	s RESISTOR, CHIP 220K 1/10W(2012)
R111	1-218-760-11	s RESISTOR, CHIP 220K 1/10W(2012)
R112	1-216-627-11	s RESISTOR, CHIP 100 1/10W (2012)
R113	1-211-999-11	s RESISTOR, METAL FILM CHIP 9.1K
R114	1-216-679-11	s RESISTOR, CHIP 15K 1/10W (2012)
R115	1-216-648-11	s RESISTOR, CHIP 750 1/10W (2012)
R116	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R117	1-216-675-11	s RESISTOR, CHIP 10K 1/10W(2012)
R118	1-216-653-11	s RESISTOR, CHIP 1.2K 1/10W(2012)
R302	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R303	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R304	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R305	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R308	1-216-643-11	s RESISTOR, CHIP 470 1/10W (2012)
R309	1-216-681-11	s RESISTOR, CHIP 18K 1/10W (2012)
R310	1-216-667-11	s RESISTOR, CHIP 4.7K 1/10W(2012)
R312	1-218-760-11	s RESISTOR, CHIP 220K 1/10W(2012)
R314	1-216-627-11	s RESISTOR, CHIP 100 1/10W (2012)
R315	1-211-998-11	s RESISTOR, METAL FILM CHIP 4.7K
R316	1-211-997-11	s RESISTOR, METAL FILM CHIP 3.0K
R317	1-219-710-11	s RESISTOR, METAL CHIP 100 1/16W
R500	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R501	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R502	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R503	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R504	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R505	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R506	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R507	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R508	1-216-679-11	s RESISTOR, CHIP 15K 1/10W (2012)
R509	1-216-627-11	s RESISTOR, CHIP 100 1/10W (2012)
R510	1-218-758-11	s RESISTOR, CHIP 180K 1/10W(2012)
R511	1-216-295-91	s CONDUCTOR, CHIP (2012)
R512	1-216-667-11	s RESISTOR, CHIP 4.7K 1/10W(2012)
R513	1-216-639-11	s RESISTOR, CHIP 330 1/10W (2012)
R514	1-216-684-91	s RESISTOR, CHIP 24K 1/10W
R515	1-216-664-11	s RESISTOR, CHIP 3.6K 1/10W(2125)
R516	1-216-649-11	s RESISTOR, CHIP 820 1/10W (2012)
R700	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R701	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R702	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R703	1-218-367-11	s RESISTOR, METAL FILM CHIP 10K
R704	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R705	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R706	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R707	1-216-691-11	s RESISTOR, CHIP 47K 1/10W(2012)
R708	1-216-675-11	s RESISTOR, CHIP 10K 1/10W(2012)
R709	1-216-659-11	s RESISTOR, CHIP 2.2K 1/10W(2012)
R710	1-218-760-11	s RESISTOR, CHIP 220K 1/10W(2012)
R711	1-218-760-11	s RESISTOR, CHIP 220K 1/10W(2012)
R712	1-216-627-11	s RESISTOR, CHIP 100 1/10W (2012)
R713	1-219-717-11	s RESISTOR, METAL CHIP 18K 1/16W
R714	1-219-716-11	s RESISTOR, METAL CHIP 5.6K 1/16W
R715	1-211-995-11	s RESISTOR, METAL FILM CHIP 330

(RE-139F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R716	1-211-994-11	s RESISTOR, METAL FILM CHIP 120
R717	1-211-998-11	s RESISTOR, METAL FILM CHIP 4.7K
R718	1-219-218-11	s RESISTOR, METAL FILM CHIP 24K
R719	1-216-667-11	s RESISTOR, CHIP 4.7K 1/10W(2012)
R720	1-216-295-91	s CONDUCTOR, CHIP (2012)

RE-140F BOARD

Ref. No. or Q'ty	Part No.	SP Description
3pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
4pcs	9-911-840-99	s CHEET, RUBBER (RBR)
C1	1-127-513-00	s CAPACITOR, ELECT 15MF/25V
C2	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C3	1-126-155-11	s CAPACITOR, ELECT 100MF/6.3V
C4	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C5	1-104-919-11	s CAPACITOR, TANTALUM 10MF/25V
C6	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C7	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C8	1-163-009-11	s CAPACITOR, CERAMIC 1000PF/50V
C100	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C101	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C102	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C103	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C104	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C105	1-113-577-11	s CAPACITOR, ELECT 47MF/16V
C106	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C107	1-111-034-11	s CAPACITOR, ELECT 220MF/16V(105C
C200	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C201	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C202	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C203	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C204	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C205	1-113-577-11	s CAPACITOR, ELECT 47MF/16V
C206	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C207	1-111-034-11	s CAPACITOR, ELECT 220MF/16V(105C
C300	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C301	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C302	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C303	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C304	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C305	1-113-577-11	s CAPACITOR, ELECT 47MF/16V
C306	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C307	1-111-034-11	s CAPACITOR, ELECT 220MF/16V(105C
C500	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C501	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C502	1-111-134-11	s CAPACITOR ELECT 27MF/63V
C503	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C504	1-111-134-11	s CAPACITOR ELECT 27MF/63V
C600	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C601	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C602	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C603	1-113-577-11	s CAPACITOR, ELECT 47MF/16V
C604	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C605	1-111-032-11	s CAPACITOR, ELECT 120MF/16V(105)
C700	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C701	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C702	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C703	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C704	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C705	1-113-577-11	s CAPACITOR, ELECT 47MF/16V
C706	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C707	1-111-034-11	s CAPACITOR, ELECT 220MF/16V(105C
C800	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
C801	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C802	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C803	1-127-512-00	s CAPACITOR, ELECT 10MF/25V
C804	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V

(RE-140F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C805	1-113-577-11	s CAPACITOR,ELECT 47MF/16V
C806	1-115-339-11	s CAPACITOR,CERAMIC 0.1MF/50V
C807	1-111-034-11	s CAPACITOR,ELECT 220MF/16V(105C
C808	1-115-339-11	s CAPACITOR,CERAMIC 0.1MF/50V
CN1	1-573-309-11	o CONNECTOR, BOARD TO BOARD 18P
CN2	1-573-309-11	o CONNECTOR, BOARD TO BOARD 18P
CN4	1-695-223-21	o PIN,CONNECTOR (SMD) 10P
D1	8-719-800-76	s DIODE 1S2226
D2	8-719-104-34	s DIODE 1S2836
D3	8-719-104-34	s DIODE 1S2836
D4	8-719-104-34	s DIODE 1S2836
D6	8-719-104-34	s DIODE 1S2836
D7	8-719-104-34	s DIODE 1S2836
D100	8-719-938-75	s DIODE SB05-05CP (RECTI)
D101	8-719-938-75	s DIODE SB05-05CP (RECTI)
D200	8-719-938-75	s DIODE SB05-05CP (RECTI)
D201	8-719-938-75	s DIODE SB05-05CP (RECTI)
D300	8-719-938-75	s DIODE SB05-05CP (RECTI)
D301	8-719-938-75	s DIODE SB05-05CP (RECTI)
D500	8-719-989-93	s DIODE SB01-15CP
D600	8-719-048-17	s DIODE MBR5130LT3
D700	8-719-938-75	s DIODE SB05-05CP (RECTI)
D701	8-719-938-75	s DIODE SB05-05CP (RECTI)
D800	8-719-938-75	s DIODE SB05-05CP (RECTI)
D801	8-719-938-75	s DIODE SB05-05CP (RECTI)
IC1	8-759-710-88	s IC NJM431U
IC2	8-759-560-89	s IC MB3761PF-ER
L100	1-409-579-11	s COIL, CHOKE 8.2UH
L101	1-411-967-11	s COIL, CHOKE 33UH
L102	1-421-459-21	s COIL,CHOKE
L200	1-409-579-11	s COIL, CHOKE 8.2UH
L201	1-409-721-11	s COIL, CHOKE 42UH
L202	1-424-667-11	s COIL, CHOKE 1UH
L300	1-409-579-11	s COIL, CHOKE 8.2UH
L301	1-411-967-11	s COIL, CHOKE 33UH
L302	1-421-459-21	s COIL,CHOKE
L500	1-409-579-11	s COIL, CHOKE 8.2UH
L501	1-424-642-11	s COIL, CHOKE 47UH
L600	1-409-579-11	s COIL, CHOKE 8.2UH
L601	1-424-642-11	s COIL, CHOKE 47UH
L602	1-409-579-11	s COIL, CHOKE 8.2UH
L700	1-409-579-11	s COIL, CHOKE 8.2UH
L701	1-409-721-11	s COIL, CHOKE 42UH
L702	1-421-459-21	s COIL,CHOKE
L800	1-409-579-11	s COIL, CHOKE 8.2UH
L801	1-411-967-11	s COIL, CHOKE 33UH
L802	1-421-459-21	s COIL,CHOKE
Q1	8-729-118-56	s TRANSISTOR 2SK852-X2
Q2	8-729-027-38	s TRANSISTOR DTA144EAK-T146
Q3	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q4	8-729-216-22	s TRANSISTOR 2SA1162-G
Q5	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q7	8-729-216-22	s TRANSISTOR 2SA1162-G
Q8	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q100	8-729-012-35	s TRANSISTOR 2SK711-BL
Q101	8-729-120-28	s TRANSISTOR 2SC1623-L5L6

(RE-140F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q102	8-729-112-65	s TRANSISTOR 2SA1462
Q103	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q104	8-729-041-86	s TRANSISTOR SI4412DY-T1
Q200	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q201	8-729-112-65	s TRANSISTOR 2SA1462
Q202	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q203	8-729-041-86	s TRANSISTOR SI4412DY-T1
Q300	8-729-012-35	s TRANSISTOR 2SK711-BL
Q301	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q302	8-729-112-65	s TRANSISTOR 2SA1462
Q303	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q304	8-729-041-86	s TRANSISTOR SI4412DY-T1
Q500	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q501	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q502	8-729-112-65	s TRANSISTOR 2SA1462
Q503	8-729-040-83	s TRANSISTOR SI4450DY-T1
Q504	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q600	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q601	8-729-112-65	s TRANSISTOR 2SA1462
Q602	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q700	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q701	8-729-112-65	s TRANSISTOR 2SA1462
Q702	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q703	8-729-041-86	s TRANSISTOR SI4412DY-T1
Q704	8-729-012-35	s TRANSISTOR 2SK711-BL
Q800	8-729-012-35	s TRANSISTOR 2SK711-BL
Q801	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q802	8-729-112-65	s TRANSISTOR 2SA1462
Q803	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q804	8-729-041-86	s TRANSISTOR SI4412DY-T1
Q805	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
R1	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R2	1-216-686-11	s RESISTOR,CHIP 30K 1/10W
R3	1-216-674-11	s RESISTOR,CHIP 9.1K 1/10W(2012)
R4	1-216-696-11	s RESISTOR,CHIP 75K 1/10W(2012)
R5	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R6	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R7	1-216-686-11	s RESISTOR,CHIP 30K 1/10W
R8	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R9	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R10	1-218-768-11	s RESISTOR,CHIP 470K 1/10W(2012)
R11	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R12	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R13	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R14	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R15	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R100	1-216-623-11	s RESISTOR,CHIP 68 1/10W(2012)
R101	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R102	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R103	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R104	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R105	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R106	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R107	1-216-295-91	s CONDUCTOR, CHIP (2012)
R108	1-216-695-11	s RESISTOR,CHIP 68K 1/10W(2012)
R200	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R201	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R202	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)

(RE-140F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R203	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R204	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R205	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R206	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R207	1-216-295-91	s CONDUCTOR, CHIP (2012)
R208	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R300	1-216-623-11	s RESISTOR,CHIP 68 1/10W(2012)
R301	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R302	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R303	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R304	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R305	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R306	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R307	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R308	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R500	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R501	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R502	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R503	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R504	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R505	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R506	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R507	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R508	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R509	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R600	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R601	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R602	1-216-690-11	s RESISTOR,CHIP 43K 1/10W(2012)
R603	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R700	1-216-623-11	s RESISTOR,CHIP 68 1/10W(2012)
R701	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R702	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R703	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R704	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R705	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R706	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R707	1-216-684-91	s RESISTOR,CHIP 24K 1/10W
R708	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R800	1-216-623-11	s RESISTOR,CHIP 68 1/10W(2012)
R801	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R802	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R803	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R804	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R805	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R806	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R807	1-216-687-11	s RESISTOR,CHIP 33K 1/10W (2012)
R808	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R809	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)

RE-145F BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-417-A	o MOUNTED CIRCUIT BOARD, RE-145F
1pc	2-095-203-01	s CUSHION
1pc	3-679-662-01	o RING,PULL
3pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C2	1-104-919-11	s CAPACITOR,TANTALUM 10MF/25V
C3	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C5	1-111-066-11	s CAPACITOR,ELECT 820MF/25V 105
C6	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C100	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C101	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C102	1-135-180-21	s CAPACITOR TANTALUM 3.3MF/10V
C103	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C104	1-104-760-11	s CAPACITOR CERAMIC 0.047MF/50V
C105	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C107	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C108	1-163-017-00	s CAPACITOR,CHIP CERAMIC 4700PF
C109	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C111	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C112	1-127-513-00	s CAPACITOR,ELECT 15MF/25V
C113	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C114	1-113-577-11	s CAPACITOR,ELECT 47MF/16V
C115	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C116	1-111-034-11	s CAPACITOR,ELECT 220MF/16V(105C
C150	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C152	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C153	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C154	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C155	1-113-577-11	s CAPACITOR,ELECT 47MF/16V
C156	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C157	1-111-034-11	s CAPACITOR,ELECT 220MF/16V(105C
C158	1-164-492-11	s CAPACITOR,CHIP CERAMIC 0.15MF
C200	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C201	1-127-513-00	s CAPACITOR,ELECT 15MF/25V
C202	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C203	1-113-577-11	s CAPACITOR,ELECT 47MF/16V
C204	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C205	1-111-032-11	s CAPACITOR,ELECT 120MF/16V(105)
C252	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C253	1-113-577-11	s CAPACITOR,ELECT 47MF/16V
C254	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C255	1-111-032-11	s CAPACITOR,ELECT 120MF/16V(105)
C300	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C301	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C302	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C304	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C305	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C306	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C307	1-113-579-11	s CAPACITOR,ELECT(SOLID)22MF/25V
C308	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C309	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C310	1-127-513-00	s CAPACITOR,ELECT 15MF/25V
C311	1-111-134-11	s CAPACITOR ELECT 27MF/63V
C312	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C313	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V

(RE-145F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C314	1-111-056-11	s CAPACITOR,ELECT 82MF/25V (105C)
C315	1-111-110-11	s CAPACITOR ELECT 39MF/50V(105C)
C316	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C317	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C318	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C319	1-163-017-00	s CAPACITOR,CHIP CERAMIC 4700PF
C320	1-111-056-11	s CAPACITOR,ELECT 82MF/25V (105C)
C321	1-111-110-11	s CAPACITOR ELECT 39MF/50V(105C)
CN1	1-695-453-11	s CONNECTOR,BOARD TO BOARD 50P
D1	8-719-800-76	s DIODE 1SS226
D100	8-719-938-75	s DIODE SB05-05CP (RECTI)
D101	8-719-938-75	s DIODE SB05-05CP (RECTI)
D102	8-719-104-34	s DIODE 1S2836
D150	8-719-938-75	s DIODE SB05-05CP (RECTI)
D151	8-719-938-75	s DIODE SB05-05CP (RECTI)
D200	8-719-938-75	s DIODE SB05-05CP (RECTI)
D201	8-719-104-34	s DIODE 1S2836
D250	8-719-048-17	s DIODE MERS130LT3
D300	8-719-210-43	s DIODE EC10QS06
D301	8-719-989-93	s DIODE SB01-15CP
D302	8-719-104-34	s DIODE 1S2836
D303	8-719-059-86	s DIODE RD18UM-T1B3
IC100	8-759-669-64	s IC TL1451ACPWR-12
IC300	8-759-669-64	s IC TL1451ACPWR-12
IC301	8-759-510-71	s IC BA10358F-E2
L100	1-409-579-11	s COIL, CHOKE 8.2UH
L101	1-424-642-11	s COIL, CHOKE 47UH
L102	1-409-579-11	s COIL, CHOKE 8.2UH
L103	1-421-459-21	s COIL,CHOKE
L151	1-409-722-11	s COIL, CHOKE 220UH
L152	1-409-579-11	s COIL, CHOKE 8.2UH
L200	1-409-579-11	s COIL, CHOKE 8.2UH
L201	1-424-642-11	s COIL, CHOKE 47UH
L202	1-409-579-11	s COIL, CHOKE 8.2UH
L252	1-409-579-11	s COIL, CHOKE 8.2UH
L300	1-424-667-11	s COIL, CHOKE 1UH
L301	1-409-579-11	s COIL, CHOKE 8.2UH
Q100	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q101	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q102	8-729-027-38	s TRANSISTOR DTA144EAK-T146
Q103	8-729-117-32	s TRANSISTOR 2SC4177
Q104	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q105	8-729-040-75	s TRANSISTOR SI4953DY
Q106	8-729-024-50	s TRANSISTOR SI9936DY
Q151	8-729-117-32	s TRANSISTOR 2SC4177
Q152	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q155	8-729-117-32	s TRANSISTOR 2SC4177
Q200	8-729-117-32	s TRANSISTOR 2SC4177
Q201	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q202	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q253	8-729-117-32	s TRANSISTOR 2SC4177
Q300	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q301	8-729-117-32	s TRANSISTOR 2SC4177
Q302	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q303	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q304	8-729-027-44	s TRANSISTOR DTC114TKA-T146
Q305	8-729-027-38	s TRANSISTOR DTA144EAK-T146

(RE-145F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q306	8-729-012-35	s TRANSISTOR 2SK711-BL
Q307	8-729-035-51	s TRANSISTOR 2SJ325
Q308	8-729-106-60	s TRANSISTOR 2SB1115A
Q309	1-801-806-11	s TRANSISTOR DTC144EAK
R2	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R100	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R101	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R102	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R103	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R104	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R105	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R106	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R107	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R108	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R109	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R110	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R111	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R112	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R113	1-219-216-11	s RESISTOR, METAL FILM CHIP 12K
R114	1-216-662-11	s RESISTOR,CHIP 3K 1/10W (2012)
R115	1-216-646-11	s RESISTOR,CHIP 620 1/10W (2012)
R116	1-216-634-11	s RESISTOR,CHIP 200 1/10W(2012)
R117	1-216-666-11	s RESISTOR,CHIP 4.3K 1/10W(2012)
R118	1-216-684-91	s RESISTOR,CHIP 24K 1/10W
R119	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R120	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R121	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R122	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R123	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R124	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R125	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R126	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R127	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R128	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R150	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R151	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R152	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R153	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R154	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R155	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R156	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R157	1-216-692-11	s RESISTOR CHIP 51K 1/10W (2012)
R158	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R159	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R200	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R201	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R202	1-216-693-11	s RESISTOR CHIP 56K 1/10W (2012)
R203	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R252	1-216-695-11	s RESISTOR,CHIP 68K 1/10W(2012)
R253	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R254	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R300	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R301	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R302	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R303	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R304	1-216-665-11	s RESISTOR,CHIP 3.9K 1/10W(2012)
R306	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R307	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R308	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)

(RE-145F BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R309	1-216-295-91	s CONDUCTOR, CHIP (2012)
R310	1-216-623-11	s RESISTOR,CHIP 68 1/10W(2012)
R311	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R312	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R313	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R314	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R315	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R316	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R317	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R318	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R319	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R321	1-216-295-91	s CONDUCTOR, CHIP (2012)
R322	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R323	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R324	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R325	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R326	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R327	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R328	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R329	1-216-680-11	s RESISTOR CHIP 16K 1/10W (2012)
R330	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R331	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R332	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R333	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R334	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R335	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R336	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R337	1-216-295-91	s CONDUCTOR, CHIP (2012)
R338	1-216-695-11	s RESISTOR,CHIP 68K 1/10W(2012)
R339	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R340	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R341	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R342	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
T300	1-433-945-12	s TRANSFORMER, CONVERTER

RPR-13 BOARD

*a: Lot No. 911 - 033
*b: Lot No. 034 -

Ref. No. or Q'ty	Part No.	SP Description
C1	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C2	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C4	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C5	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C6	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C7	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C9	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C10	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C12	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
CN1	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P
CN2	1-580-756-21	o PIN, CONNECTOR 7P
D1	8-719-026-39	s LED CL-150UR-CD
IC1	8-759-661-00	s IC ISPLSI2192VE-100LT128
IC2	8-759-271-86	s IC TC7SH04FU
R2	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R3	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R4	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R5	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R6	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R7	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R8	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R9	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R10	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R12	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R13	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R14	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R15	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R16	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R17	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R18	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R19	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R20	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R21	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
RB5	1-239-436-11	s RESISTOR, NETWORK 33K (1608)
RB6	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB7	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB8	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB9	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB10	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB11	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB12	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB13	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB14	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB15	*b 1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB16	*b 1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB17	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB18	*a 1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB19	*a 1-239-409-11	s RESISTOR NETWORK 47 (1608)
S1	1-692-270-41	s SWITCH, SLIDE

SE-275 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8310-898-B	o MOUNTED CIRCUIT BOARD, SE-275
1pc	3-679-714-02	o HOLDER, SENSOR (A)
1pc	3-679-715-01	o HOLDER, SENSOR (B)
1pc	X-3678-171-1	o PIN ASSY, DETECTION (POM)
1pc	X-3679-461-1	o PIN ASSY (REC), DETECTION
4pcs	X-3678-171-1	o PIN ASSY, DETECTION (POM)
5pcs	3-687-087-01	o WASHER
C1	1-164-146-11	s CAPACITOR, CERAMIC 3300PF/50V
C2	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C5	1-164-816-11	s CAPACITOR, CERAMIC 220PF/50V CH
C6	1-164-146-11	s CAPACITOR, CERAMIC 3300PF/50V
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
CN1	1-764-007-11	o PIN, CONNECTOR (SMD) 12P
CN2	1-580-789-21	o PIN, CONNECTOR (SMD) 6P
CN3	1-695-320-21	o PIN, CONNECTOR (1.5MM) SMD 2P
CN4	1-695-320-21	o PIN, CONNECTOR (1.5MM) SMD 2P
CN5	1-695-320-21	o PIN, CONNECTOR (1.5MM) SMD 2P
IC1	8-759-805-32	s IC LA7205M
IC2	8-759-669-49	s IC LM2903PW (R)
PD1	8-719-948-58	s PHOTO SENSOR GP2S07B
PD2	8-719-948-58	s PHOTO SENSOR GP2S07B
PD3	8-719-948-58	s PHOTO SENSOR GP2S07B
PD4	8-719-948-58	s PHOTO SENSOR GP2S07B
PD5	8-719-948-58	s PHOTO SENSOR GP2S07B
PD6	8-719-948-58	s PHOTO SENSOR GP2S07B
PD7	8-749-010-00	s PHOTO INTERRUPTER GP1S33
Q1	8-729-117-32	s TRANSISTOR 2SC4177
Q2	8-729-117-32	s TRANSISTOR 2SC4177
Q3	8-729-117-32	s TRANSISTOR 2SC4177
Q4	8-729-117-32	s TRANSISTOR 2SC4177
Q5	8-729-117-32	s TRANSISTOR 2SC4177
Q6	8-729-117-32	s TRANSISTOR 2SC4177
Q7	8-729-117-32	s TRANSISTOR 2SC4177
R1	1-216-818-11	s RESISTOR, CHIP 560 1/16W 1608
R2	1-216-818-11	s RESISTOR, CHIP 560 1/16W 1608
R3	1-216-814-11	s RESISTOR, CHIP 270 1/16W 1608
R4	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R5	1-216-838-11	s RESISTOR CHIP 27K 1/16W (1608)
R6	1-216-838-11	s RESISTOR CHIP 27K 1/16W (1608)
R10	1-216-831-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R11	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R12	1-216-820-11	s RESISTOR, CHIP 820 1/16W 1608
R13	1-216-840-11	s RESISTOR, CHIP 39K 1/16W 1608
R14	1-218-852-11	s RESISTOR, CHIP 1.6K 1/16W (1608)
R15	1-216-847-11	s RESISTOR, CHIP 150K 1/16W 1608
R16	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
RB1	1-239-446-11	s NETWORK, RESISTOR 330K (1608)
RB2	1-239-446-11	s NETWORK, RESISTOR 330K (1608)
S1	1-572-719-11	s SWITCH, PUSH (1 KEY)
S2	1-572-719-11	s SWITCH, PUSH (1 KEY)
S3	1-572-719-11	s SWITCH, PUSH (1 KEY)
S4	1-572-719-11	s SWITCH, PUSH (1 KEY)
S5	1-572-719-11	s SWITCH, PUSH (1 KEY)

(SE-275 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S6	1-572-719-11	s SWITCH, PUSH (1 KEY)

SG-267 BOARD

*1: Board No. suffix 12 -

*a: Lot No. 911 - 0B3
*b: Lot No. 0B4 - 152
*c: Lot No. 911 - 002
*d: Lot No. 003 -
*e: Lot No. 911 - 285
*f: Lot No. 291 -

Ref. No.
or Q'ty Part No. SP Description

1pc A-8325-354-A o MOUNTED CIRCUIT BOARD, SG-267
1pc 3-626-771-01 o PLATE(SG), ORNAMENTAL
1pc 3-724-753-01 o RING, PULL
6pcs 3-729-061-01 s SCREW (M2X4.5) (TYPE 1) (STEEL)

C1 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C2 1-104-852-11 s CAPACITOR, TANTALUM 22MF/10V
C3 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C4 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C5 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C6 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C7 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C8 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C10 1-104-913-11 s CAPACITOR, TANTALUM 10MF/16V
C11 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V

C12 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V
C13 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C14 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C15 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V
C16 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V

C17 1-104-852-11 s CAPACITOR, TANTALUM 22MF/10V
C18 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C19 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V
C20 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V
C21 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V

C22 1-164-230-11 s CAPACITOR, CERAMIC 220PF/50V
C23 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C24 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C25 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C26 *1 1-135-214-21 s CAPACITOR TANTAL 4.7MF/20V

*b 1-131-351-00 s CAPACITOR TANTALUM 4.7MF/35V
*a 1-135-214-21 s CAPACITOR TANTAL 4.7MF/20V

C27 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C28 1-162-924-11 s CAPACITOR, CERAMIC 56PF/50V CH
C29 1-135-177-21 s CAPACITOR TANTALUM 1MF/25V
C30 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C31 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C32 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C33 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C34 1-162-970-11 s CAPACITOR CERAMIC 0.01MF/25V B
C35 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C36 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V

C37 1-162-970-11 s CAPACITOR CERAMIC 0.01MF/25V B
C38 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C39 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C40 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C41 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C43 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C44 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C45 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C46 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C47 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

(SG-267 BOARD)

Ref. No.
or Q'ty Part No. SP Description

C48 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C49 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C50 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C51 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C52 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C53 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C54 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C55 1-162-915-11 s CAPACITOR, CERAMIC 10PF/50V CH
C56 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C57 1-104-913-11 s CAPACITOR, TANTALUM 10MF/16V

C58 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C59 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C60 1-135-177-21 s CAPACITOR TANTALUM 1MF/25V
C61 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V
C62 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V

C63 1-104-852-11 s CAPACITOR, TANTALUM 22MF/10V
C64 1-104-852-11 s CAPACITOR, TANTALUM 22MF/10V
C65 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C66 1-135-177-21 s CAPACITOR TANTALUM 1MF/25V
C67 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH

C68 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V
C69 1-135-177-21 s CAPACITOR TANTALUM 1MF/25V
C70 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C71 1-113-682-11 s CAPACITOR, TANTALUM 33MF/10V
C72 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V

C73 1-113-682-11 s CAPACITOR, TANTALUM 33MF/10V
C74 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C80 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V
C81 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V
C82 1-164-346-11 s CAPACITOR CHIP CERAMIC 1MF/16V

C84 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C85 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C86 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C87 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C88 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C89 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C90 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C92 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C93 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C94 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C95 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C96 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C97 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C98 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C99 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F

C100 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V
C102 1-164-156-11 s CAPACITOR, CERAMIC 0.1MF/25V F
C103 1-162-927-11 s CAPACITOR, CERAMIC 100PF/50V CH
C104 1-107-686-11 s CAPACITOR, TANTALUM 4.7MF/16V
C105 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V

C106 1-104-851-11 s CAPACITOR, TANTALUM 10MF/10V

D1 8-719-820-41 s DIODE 1S9302
D3 8-719-059-52 s DIODE MA3J14300LSO
D4 8-719-059-52 s DIODE MA3J14300LSO
D5 8-719-421-27 s DIODE MA728

FB1 1-412-390-21 s MICRO INDUCTOR (CHIP) 21A05
FB2 1-412-390-21 s MICRO INDUCTOR (CHIP) 21A05

(SG-267 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC4	8-759-669-72	s IC TL064CPWR
IC5	8-759-185-42	s IC LM4040AIM3-2.5
IC8	8-759-054-61	s IC CLC505AJE
IC9	8-759-054-61	s IC CLC505AJE
IC11	8-759-929-21	s IC TLC27L2CPS
IC12	8-759-523-04	s IC TC74HC4538AFT
IC13	8-759-389-26	s IC 74LCX08MTCX
IC14	8-759-660-18	s IC SN74HC74APWR
IC15	8-759-523-02	s IC TC74HC4053AFT (EL)
IC16	8-759-491-45	s IC TC74VHCT00AFT (EL)
IC17	8-759-271-84	s IC TC7SH02FU
IC18	8-759-523-02	s IC TC74HC4053AFT (EL)
IC19	8-759-669-45	s IC TL062CPWR-12
IC20	8-759-669-75	s IC TLC2932IPWR
IC21	8-759-980-44	s IC TL712CPS
IC22	8-759-669-45	s IC TL062CPWR-12
IC24	8-759-560-34	s IC DS90LV032ATMX
IC25	8-759-661-16	s IC CDC536DBR
IC26	*f 8-759-466-56	s IC 74LCX86MTCX
	*e 8-759-523-96	s IC TC74VHC86FT (EL)
IC28	8-759-051-49	s IC SN74HCT541APW (R)
IC29	8-759-386-26	s IC 74LCX574MTCX
IC30	8-759-660-48	s IC MAX525BCAP-TG068
IC31	8-759-533-95	s IC UPD6466GS-515
IC32	8-759-386-26	s IC 74LCX574MTCX
IC33	8-759-054-61	s IC CLC505AJE
IC34	8-759-386-26	s IC 74LCX574MTCX
IC35	8-759-054-61	s IC CLC505AJE
IC36	8-759-996-82	s IC MSM82C55A-2GS
IC37	8-759-996-82	s IC MSM82C55A-2GS
IC38	8-759-562-40	s IC CAT24WC02J-TE13
IC46	8-759-659-04	o IC CXD9122R
IC47	8-759-599-93	s IC NC7SZ08P5
L1	1-412-030-11	s INDUCTOR,CHIP 22UH (3225)
L2	1-412-030-11	s INDUCTOR,CHIP 22UH (3225)
L3	1-412-030-11	s INDUCTOR,CHIP 22UH (3225)
L4	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L5	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L6	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L7	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
Q4	8-729-928-27	s TRANSISTOR DTA144EE
Q5	8-729-928-81	s TRANSISTOR DTC144EE
Q6	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q7	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q8	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q9	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q10	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q11	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q27	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q28	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q29	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q30	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q31	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q32	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q33	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q34	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q36	8-729-024-50	s TRANSISTOR SI9936DY
Q37	8-729-040-75	s TRANSISTOR SI4953DY

(SG-267 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R2	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R3	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R4	1-218-666-11	s RESISTOR,CHIP 82 1/16W (1608)
R5	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R6	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R7	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R8	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R9	*d 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
	*c 1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R10	*d 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
	*c 1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R11	*d 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
	*c 1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R12	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R13	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R14	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R15	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R16	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R17	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R18	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R19	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R20	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R21	1-218-736-11	s RESISTOR,CHIP 68K 1/16W(1608)
R22	1-218-736-11	s RESISTOR,CHIP 68K 1/16W(1608)
R23	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R24	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R25	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R26	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R27	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R29	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R30	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R31	1-218-712-11	s RESISTOR,METAL 6.8K 1/16W
R34	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R35	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R36	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R37	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R39	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R40	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R41	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R42	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R43	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R44	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R45	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R46	1-218-737-11	s RESISTOR,CHIP 75K 1/16W
R47	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R48	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R49	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R50	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R51	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R52	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R53	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R54	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R55	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R56	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R57	1-218-752-11	s RESISTOR,CHIP 330K 1/16W(1608)
R58	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R59	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(SG-267 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R60	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R62	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R63	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R64	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R65	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R66	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R67	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R68	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R69	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R71	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R72	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R73	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R74	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R75	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R76	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R77	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R79	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R80	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R81	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R82	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R84	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R85	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R86	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R87	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R88	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R89	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R90	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R91	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R92	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R93	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R94	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R95	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R96	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R97	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R98	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R99	1-218-661-11	s RESISTOR,CHIP 51 1/16W (1608)
R100	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R101	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R102	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R103	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R104	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R105	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R106	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R107	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R108	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R109	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R110	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R111	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R112	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R113	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R114	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R115	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R116	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R117	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R118	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R119	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R120	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R121	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R122	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)

(SG-267 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R125	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R126	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R129	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R130	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R131	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R136	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R137	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R138	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R139	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R140	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R141	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R142	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R143	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R145	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R146	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R148	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R149	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R150	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R151	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R152	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R153	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R154	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R156	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R157	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R158	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R161	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R162	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R163	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R164	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R165	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R166	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R167	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R168	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R169	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R170	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R171	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R172	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R173	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R174	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R176	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R177	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R178	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R179	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R180	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R181	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R182	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R183	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R184	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R185	1-218-722-11	s RESISTOR, CHIP 18K 1/16W 1608
R186	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R187	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R188	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R189	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R190	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R191	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R192	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R193	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R194	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R195	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)

(SG-267 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R196	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R197	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R198	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R199	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R200	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R201	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R202	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R206	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
RB1	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB2	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB4	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB5	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB9	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB10	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB11	1-239-711-11	s NETWORK, RESISTOR 0 (1608)

SH-74 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-399-A	s MOUNTED CIRCUIT BOARD, SH-74
C1	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C3	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C4	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C9	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C11	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C12	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C15	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C16	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C17	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C18	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C19	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C20	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C21	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C22	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C23	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C24	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C25	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C26	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C27	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C28	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C29	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C30	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C31	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C32	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C33	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C34	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C35	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C36	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C37	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C38	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C39	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C40	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C41	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C42	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C43	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C44	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C45	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C46	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C47	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C48	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C49	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C50	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C51	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C52	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C53	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C54	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C55	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C56	1-162-963-11	s CAPACITOR,CERAMIC 680PF/50V(B)
C57	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F

(SH-74 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C58	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C59	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C60	1-162-963-11	s CAPACITOR, CERAMIC 680PF/50V(B)
C61	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C63	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C64	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C65	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C104	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C107	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C108	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C109	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C110	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C111	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
CN1	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN2	1-568-338-11	s CONNECTOR, BOARD TO BOARD 24P
CN3	1-784-435-11	o CONNECTOR, BOARD TO BOARD 30P
IC1	8-759-523-02	s IC TC74HC4053AFT(EL)
IC2	8-759-195-81	s IC TC7S86FU
IC3	8-759-195-81	s IC TC7S86FU
IC4	8-759-185-42	s IC LM4040AIM3-2.5
IC5	8-759-669-45	s IC TL062CPWR-12
IC6	8-759-523-02	s IC TC74HC4053AFT(EL)
IC7	8-759-523-02	s IC TC74HC4053AFT(EL)
IC8	8-759-669-72	s IC TL064CPWR
IC9	8-759-669-72	s IC TL064CPWR
IC10	8-759-669-72	s IC TL064CPWR
IC11	8-759-669-72	s IC TL064CPWR
IC12	8-759-064-36	s IC MB88346BPFV
IC13	8-759-064-36	s IC MB88346BPFV
IC14	8-759-523-02	s IC TC74HC4053AFT(EL)
IC15	8-759-669-72	s IC TL064CPWR
IC16	8-759-064-36	s IC MB88346BPFV
IC17	8-759-064-36	s IC MB88346BPFV
IC18	8-759-523-02	s IC TC74HC4053AFT(EL)
IC19	8-759-669-72	s IC TL064CPWR
IC20	8-759-669-74	s IC TL084CPWR-12
IC21	8-759-669-74	s IC TL084CPWR-12
IC22	8-759-058-54	s IC TC7S00FU-TE85R
IC23	8-759-058-54	s IC TC7S00FU-TE85R
IC24	8-759-523-02	s IC TC74HC4053AFT(EL)
IC25	8-759-523-02	s IC TC74HC4053AFT(EL)
IC101	8-759-054-61	s IC CLC505AJE
IC102	8-759-054-61	s IC CLC505AJE
IC103	8-759-054-61	s IC CLC505AJE
IC104	8-759-082-60	s IC TC7S66FU
Q1	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q2	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q3	8-729-014-93	s TRANSISTOR 2SB1440S-TX
Q4	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
R1	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R2	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R3	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R4	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)

(SH-74 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R5	1-218-871-11	s RESISTOR, CHIP 10K 1/10W (1608)
R6	1-218-854-11	s RESISTOR, CHIP 2K 1/10W (1608)
R7	1-218-865-11	s RESISTOR, CHIP 5.6K 1/10W(1608)
R8	1-218-865-11	s RESISTOR, CHIP 5.6K 1/10W(1608)
R9	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R10	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R11	1-218-848-11	s RESISTOR, CHIP 1.1K 1/10W(1608)
R12	1-218-865-11	s RESISTOR, CHIP 5.6K 1/10W(1608)
R13	1-218-867-11	s RESISTOR, CHIP 6.8K 1/10W(1608)
R14	1-216-857-11	s RESISTOR, CHIP 1M 1/10W(1608)
R15	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R16	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R17	1-218-859-11	s RESISTOR, CHIP 3.3K 1/10W(1608)
R18	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R19	1-218-830-11	s RESISTOR, CHIP 200 1/10W (1608)
R20	1-218-830-11	s RESISTOR, CHIP 200 1/10W (1608)
R21	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R22	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R23	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R24	1-216-853-11	s RESISTOR, CHIP 470K 1/16W(1608)
R25	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R26	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R27	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R28	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R29	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R30	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R31	1-218-902-11	s RESISTOR, CHIP 200K 1/10W(1608)
R32	1-218-903-11	s RESISTOR, CHIP 220K 1/10W(1608)
R33	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R34	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R35	1-216-863-11	s RESISTOR, CHIP 3.3M 1/16W 1608
R36	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R37	1-218-871-11	s RESISTOR, CHIP 10K 1/10W (1608)
R38	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R39	1-216-853-11	s RESISTOR, CHIP 470K 1/16W(1608)
R40	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R41	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R42	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R43	1-218-823-11	s RESISTOR, CHIP 100 1/10W (1608)
R44	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R45	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R46	1-218-871-11	s RESISTOR, CHIP 10K 1/10W (1608)
R47	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R48	1-218-870-11	s RESISTOR, CHIP 9.1K 1/10W(1608)
R49	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R50	1-218-887-11	s RESISTOR, CHIP 47K 1/10W (1608)
R51	1-218-823-11	s RESISTOR, CHIP 100 1/10W (1608)
R52	1-218-823-11	s RESISTOR, CHIP 100 1/10W (1608)
R53	1-218-871-11	s RESISTOR, CHIP 10K 1/10W (1608)
R54	1-218-885-11	s RESISTOR, CHIP 39K 1/10W (1608)
R55	1-218-871-11	s RESISTOR, CHIP 10K 1/10W (1608)
R56	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R57	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R58	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R59	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R60	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R61	1-218-888-11	s RESISTOR, CHIP 51K 1/10W (1608)
R62	1-218-895-11	s RESISTOR, CHIP 100K 1/10W(1608)
R63	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)

(SH-74 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R64	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R65	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R66	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R67	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R68	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R69	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R70	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R71	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R72	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R73	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R74	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R75	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R76	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R77	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R78	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R79	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R80	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R81	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R82	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R83	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R84	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R85	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R86	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R87	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R88	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R89	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R90	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R91	1-218-882-11	s RESISTOR, CHIP 30K 1/10W(1608)
R92	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R93	1-218-888-11	s RESISTOR,CHIP 51K 1/10W (1608)
R94	1-218-892-11	s RESISTOR,CHIP 75K 1/10W (1608)
R95	1-218-880-11	s RESISTOR,CHIP 24K 1/10W (1608)
R96	1-218-892-11	s RESISTOR,CHIP 75K 1/10W (1608)
R97	1-218-880-11	s RESISTOR,CHIP 24K 1/10W (1608)
R98	1-218-892-11	s RESISTOR,CHIP 75K 1/10W (1608)
R99	1-218-880-11	s RESISTOR,CHIP 24K 1/10W (1608)
R100	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R101	1-218-886-11	s RESISTOR,CHIP 43K 1/10W (1608)
R102	1-218-886-11	s RESISTOR,CHIP 43K 1/10W (1608)
R103	1-218-886-11	s RESISTOR,CHIP 43K 1/10W (1608)
R104	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R105	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R106	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R107	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R108	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R109	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R110	1-218-888-11	s RESISTOR,CHIP 51K 1/10W (1608)
R111	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R112	1-218-888-11	s RESISTOR,CHIP 51K 1/10W (1608)
R113	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R114	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R115	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R116	1-218-846-11	s RESISTOR,CHIP 910 1/10W (1608)
R117	1-218-849-11	s RESISTOR,CHIP 1.2K 1/10W(1608)
R118	1-218-901-11	s RESISTOR,CHIP 180K 1/10W(1608)
R119	1-211-986-11	s RESISTOR,CHIP 51 1/10W (1608)
R120	1-218-846-11	s RESISTOR,CHIP 910 1/10W (1608)
R121	1-218-849-11	s RESISTOR,CHIP 1.2K 1/10W(1608)
R122	1-218-901-11	s RESISTOR,CHIP 180K 1/10W(1608)

(SH-74 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R123	1-211-986-11	s RESISTOR,CHIP 51 1/10W (1608)
R124	1-218-846-11	s RESISTOR,CHIP 910 1/10W (1608)
R125	1-218-849-11	s RESISTOR,CHIP 1.2K 1/10W(1608)
R126	1-218-901-11	s RESISTOR,CHIP 180K 1/10W(1608)
R127	1-211-986-11	s RESISTOR,CHIP 51 1/10W (1608)
R129	1-216-864-11	s CONDUCTOR, CHIP (1608)
R130	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
RV101	1-241-260-11	s RESISTOR ADJ 500 (CERMET)
RV102	1-241-260-11	s RESISTOR ADJ 500 (CERMET)
RV103	1-241-260-11	s RESISTOR ADJ 500 (CERMET)

SV-218 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-134-A	o MOUNTED CIRCUIT BOARD, SV-218
1pc	8-759-537-83	s IC MBM29F400BC-70PFTN
1pc	3-626-798-01	o PLATE(SV), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
6pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C2	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C3	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C4	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C5	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C6	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C7	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C8	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C9	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C10	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C11	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C12	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C13	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C14	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C15	1-135-201-11	s CAPACITOR, CHIP TANTAL 10MF/4V
C16	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C17	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C18	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C19	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C20	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C21	1-162-958-11	s CAPACITOR, CERAMIC 270PF/50V SL
C22	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C23	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C24	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C25	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C26	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C27	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C28	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C29	1-128-400-11	s CAPACITOR, ELECT 47MF/25V
C30	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C31	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C32	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C33	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C34	1-162-958-11	s CAPACITOR, CERAMIC 270PF/50V SL
C35	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C36	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C37	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C38	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C39	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C40	1-128-400-11	s CAPACITOR, ELECT 47MF/25V
C41	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C50	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C51	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C52	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C53	1-107-417-11	s CAPACITOR ERECT 33MF/25V(105C)
C54	1-126-404-11	s CAPACITOR, ELECT 4.7MF/50V(CHIP)
C55	1-107-417-11	s CAPACITOR ERECT 33MF/25V(105C)
C56	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C57	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C58	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C59	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C60	1-162-920-11	s CAPACITOR, CERAMIC 27PF/50V CH
C61	1-162-920-11	s CAPACITOR, CERAMIC 27PF/50V CH
C62	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B

(SV-218 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C63	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C64	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C65	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C66	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C67	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C68	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C69	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN1	1-580-057-11	o PIN, CONNECTOR 4P
CN102	1-793-062-31	o CONNECTOR, BOARD TO BOARD 30P
D1	8-719-048-17	s DIODE MBRS130LT3
D2	8-719-048-17	s DIODE MBRS130LT3
D3	8-719-989-03	s DIODE DAN222
D4	8-719-026-39	s LED CL-150UR-CD
D5	8-719-026-39	s LED CL-150UR-CD
D6	8-719-106-52	s DIODE RD10M-B1
IC1	8-759-668-58	s IC MC68336GCFT20
IC2	6-801-824-01	s IC 29F400B-SV218-IC2-V1.06
IC3	8-759-532-02	s IC CY62256LL-70ZC-T2
IC4	8-759-532-02	s IC CY62256LL-70ZC-T2
IC5	8-759-348-79	s IC TE7751
IC6	8-759-276-89	s IC BA6285FP (E2)
IC7	8-759-255-49	s IC DS1267E-10-TE1
IC8	8-759-524-50	s IC TC74VHC541FT (EL)
IC9	8-759-524-28	s IC TC74VHC245FT (EL)
IC11	8-759-075-97	s IC LM358PW
IC12	8-759-075-97	s IC LM358PW
IC13	8-759-669-49	s IC LM2903PW (R)
IC14	8-759-669-49	s IC LM2903PW (R)
IC15	8-759-075-97	s IC LM358PW
IC16	8-759-669-49	s IC LM2903PW (R)
IC17	8-759-075-97	s IC LM358PW
IC18	8-759-075-97	s IC LM358PW
IC19	8-759-989-91	s IC TL7705ACPS
IC21	8-759-670-98	s IC LT1460CCMS8-5
IC23	8-759-592-44	s IC TC7SZ04FU(TB85R)
L1	1-409-722-11	s COIL, CHOKE 220UH
L2	1-409-722-11	s COIL, CHOKE 220UH
L3	1-424-642-11	s COIL, CHOKE 47UH
Q1	8-729-028-97	s TRANSISTOR DTC114TUA-T106
Q2	8-729-117-32	s TRANSISTOR 2SC4177
Q3	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q5	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q6	8-729-028-97	s TRANSISTOR DTC114TUA-T106
Q7	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q8	8-729-028-97	s TRANSISTOR DTC114TUA-T106
Q9	8-729-117-32	s TRANSISTOR 2SC4177
Q10	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q11	8-729-040-75	s TRANSISTOR SI4953DY
Q12	8-729-117-32	s TRANSISTOR 2SC4177
Q13	8-729-118-56	s TRANSISTOR 2SK852-X2
Q14	8-729-117-32	s TRANSISTOR 2SC4177
R1	1-218-720-11	s RESISTOR, CHIP 15K 1/16W(1608)
R2	1-218-720-11	s RESISTOR, CHIP 15K 1/16W(1608)
R3	1-218-720-11	s RESISTOR, CHIP 15K 1/16W(1608)
R4	1-218-720-11	s RESISTOR, CHIP 15K 1/16W(1608)
R5	1-218-724-11	s RESISTOR, CHIP 22K 1/16W(1608)

(SV-218 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R6	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R7	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R8	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R9	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R10	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R11	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R12	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R13	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R14	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R15	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R16	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R17	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R18	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R19	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R20	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R21	1-218-729-11	s RESISTOR,CHIP 36K 1/16W(1608)
R22	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R23	1-218-721-11	s RESISTOR,CHIP 16K 1/16W(1608)
R24	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R25	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R26	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R27	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R28	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R29	1-218-738-11	s RESISTOR,CHIP 82K 1/16W(1608)
R30	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R31	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R32	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R33	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R34	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R35	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R36	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R37	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R38	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R39	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R40	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R41	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R42	1-218-236-91	s RESISTOR,CHIP 1 1/4W
R43	1-218-236-91	s RESISTOR,CHIP 1 1/4W
R44	1-218-236-91	s RESISTOR,CHIP 1 1/4W
R45	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R46	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R47	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R48	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R49	1-218-739-11	s RESISTOR,CHIP 91K 1/16W(1608)
R50	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R51	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R52	1-218-726-11	s RESISTOR,CHIP 27K 1/16W (1608)
R53	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R54	1-218-744-11	s RESISTOR,CHIP 150K 1/16W
R55	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R56	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R57	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R58	1-218-738-11	s RESISTOR,CHIP 82K 1/16W(1608)
R59	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R60	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R61	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R62	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R63	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R64	1-218-744-11	s RESISTOR,CHIP 150K 1/16W

(SV-218 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R65	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R70	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R71	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R72	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R73	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R74	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R75	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R76	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R77	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R78	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R80	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R81	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R82	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R83	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R84	1-218-722-11	s RESISTOR,CHIP 18K 1/16W 1608
R85	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R86	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R87	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R88	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R89	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R90	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R91	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R92	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R93	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R94	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R95	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R96	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R97	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R98	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R99	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R100	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R101	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R102	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R103	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R104	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R105	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R106	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R107	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R108	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R109	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R110	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R111	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R112	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R113	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R114	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R115	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R116	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R117	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R118	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R119	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R120	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R121	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R122	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R123	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R124	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R125	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R126	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R127	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R128	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(SV-218 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R129	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R130	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R131	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R132	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R133	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R134	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R135	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R136	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R137	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R138	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R139	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R140	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R141	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R142	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R143	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R144	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R145	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R146	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R147	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R148	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R149	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R150	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R151	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R152	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R153	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R154	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R155	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R156	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R157	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R158	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R159	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R160	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R161	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R162	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R163	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R164	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R165	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R166	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R167	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R168	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R169	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R170	1-218-672-11	s RESISTOR,CHIP 150 1/16W(1608)
R171	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R172	1-218-748-11	s RESISTOR,CHIP 220K 1/16W(1608)
R173	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R174	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R175	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R176	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R177	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R178	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R179	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R180	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R181	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R182	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
S1	1-692-270-41	s SWITCH, SLIDE
X1	1-579-661-21	s OSCILLATOR,CRYSTAL

SW-1032 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-160-A	o MOUNTED CIRCUIT BOARD, SW-1032
2pcs	3-670-095-01	o HOLDER, LED
CN1	1-764-088-11	o PIN, CONNECTOR (PC BOARD) 3P
D1	8-719-032-78	s LED GL3UR8
D2	8-719-032-78	s LED GL3UR8
R1	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R2	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R3	1-216-295-91	s CONDUCTOR, CHIP (2012)
S1	1-570-608-11	s SWITCH,TOGGLE

SW-911 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8316-548-B	o MOUNTED CIRCUIT BOARD, SW-911
CN1	1-569-735-11	s CONNECTOR 11P (SOCKET)
S1	1-554-396-00	s SWITCH,TOGGLE
S2	1-554-395-00	s SWITCH,TOGGLE
S3	1-570-282-21	s SWITCH, KEY BOARD

SW-912 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8316-549-B	o MOUNTED CIRCUIT BOARD, SW-912
S1	1-473-315-21	s ENCODER, ROTARY

SY-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-136-A	o MOUNTED CIRCUIT BOARD, SY-285
1pc	8-759-537-83	s IC M6M29F400BC-70PFTN
1pc	3-626-799-01	o PLATE(SY), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
6pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C1	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C2	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C9	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C10	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C11	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C200	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C201	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN1	1-580-057-11	o PIN, CONNECTOR 4P
CN101	1-793-062-31	o CONNECTOR, BOARD TO BOARD 30P
CN110	1-793-059-11	o CONNECTOR, BOARD TO BOARD 24P
D1	8-719-989-03	s DIODE DAN222
D2	8-719-026-39	s LED CL-150UR-CD
D3	8-719-026-39	s LED CL-150UR-CD
IC1	8-759-652-46	s IC MC68332GCPV16
IC2	6-802-953-01	s IC 29F400B-SY285-IC2-V1.19
IC3	8-759-532-02	s IC CY62256LL-70ZC-T2
IC4	8-759-532-02	s IC CY62256LL-70ZC-T2
IC5	8-759-348-79	s IC TE7751
IC6	8-759-167-82	s IC M66220FP (200D)
IC7	8-759-524-50	s IC TC74VHC541FT (EL)
IC8	8-759-491-51	s IC TC74VHCT245AFT (EL)
IC9	8-759-524-50	s IC TC74VHC541FT (EL)
IC10	8-759-491-51	s IC TC74VHCT245AFT (EL)
IC11	8-759-524-07	s IC TC74VHC138FT (EL)
IC12	8-759-523-95	s IC TC74VHC74FT (EL)
IC13	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC14	8-759-524-04	s IC TC74VHC125FT (EL)
IC15	8-759-989-91	s IC TL7705ACPS
IC16	8-759-594-17	o IC CXD9093R
IC17	8-759-082-59	s IC TC7W32FU
IC18	8-759-524-04	s IC TC74VHC125FT (EL)
IC19	8-759-524-50	s IC TC74VHC541FT (EL)
IC20	8-759-524-28	s IC TC74VHC245FT (EL)
IC21	8-759-524-50	s IC TC74VHC541FT (EL)
IC22	8-759-058-62	s IC TC7S08FU-TE85R
IC24	8-759-167-82	s IC M66220FP (200D)
IC25	8-759-497-44	s IC TC7WH125FU (TE12R)
IC26	8-759-497-44	s IC TC7WH125FU (TE12R)
IC30	8-759-175-77	s IC CXD8384Q
IC31	8-759-668-73	s IC M66250FP
IC32	8-759-530-31	s IC TC74VHC4040FT (EL)
R1	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R2	1-218-670-11	s RESISTOR, CHIP 120 1/16W (1608)
R3	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R4	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R5	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)

(SY-285 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R6	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R7	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R8	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R9	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R11	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R12	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R13	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R14	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R15	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R23	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R24	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R25	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R26	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R27	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R28	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R29	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R30	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R31	1-218-732-11	s RESISTOR, CHIP 47K 1/16W(1608)
R32	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R33	1-219-570-11	s RESISTOR, CHIP 10M 1/16W
R34	1-218-752-11	s RESISTOR, CHIP 330K 1/16W(1608)
R35	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R36	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R37	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R38	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R39	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R40	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R41	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R42	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R43	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R44	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R45	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R46	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R47	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R48	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R49	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R50	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R51	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R52	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R53	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R54	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R55	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R56	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R57	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R58	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R59	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R60	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R61	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R62	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R63	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R64	1-218-668-11	s RESISTOR, CHIP 100 1/16W (1608)
R65	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R66	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R67	1-218-644-11	s RESISTOR, CHIP 10 1/16W
R68	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R69	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R70	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R71	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R72	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W(1608)

(SY-285 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R73	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R74	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R75	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R76	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R77	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R78	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R79	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R80	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R81	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R82	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R83	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R84	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R85	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R86	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R87	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R88	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R89	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R90	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R91	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R92	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R93	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R94	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R95	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R96	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R97	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R98	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R99	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R100	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R101	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R102	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R103	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R104	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R105	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R106	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R107	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R108	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R109	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R110	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R113	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R114	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R116	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R117	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R118	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R119	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R120	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R202	1-218-686-11 s	RESISTOR,CHIP 560 1/16W (1608)
R203	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R204	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R205	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R206	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R207	1-216-861-11 s	RESISTOR,CHIP 2.2M 1/16W 1608
R208	1-218-692-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R209	1-218-748-11 s	RESISTOR,CHIP 220K 1/16W(1608)
S1	1-572-005-11 s	SWITCH,TACTIL(REFLOW TYPE)
S2	1-692-270-41 s	SWITCH, SLIDE
X1	1-760-622-21 s	VIBRATOR, CRYSTAL
X200	1-579-993-21 s	VIBRATOR, CERAMIC

TG-213 BOARD SUFFIX -13

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-351-A s	MOUNTED CIRCUIT BOARD, TG-213
C1	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-162-915-11 s	CAPACITOR,CERAMIC 10PF/50V CH
C3	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C4	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C5	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C7	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C9	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C11	1-127-564-11 s	CAPACITOR ELECT 150MF/6.3V
C12	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C13	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C15	1-162-915-11 s	CAPACITOR,CERAMIC 10PF/50V CH
C20	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C22	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C23	1-127-564-11 s	CAPACITOR ELECT 150MF/6.3V
C24	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C25	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C26	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C27	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C28	1-127-564-11 s	CAPACITOR ELECT 150MF/6.3V
C29	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C30	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C31	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C32	1-164-230-11 s	CAPACITOR,CERAMIC 220PF/50V
C33	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C34	1-162-919-11 s	CAPACITOR,CERAMIC 22PF/50V CH
C37	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C38	1-137-703-91 s	CAPACITOR, TANTALUM 1MF(3216)
C39	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C40	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C41	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C42	1-137-934-11 s	CAPACITOR, CHIP TANTALUM 47MF
CN1	1-569-607-21 o	CONNECTOR, BOARD TO BOARD 24P
CN2	1-569-607-21 o	CONNECTOR, BOARD TO BOARD 24P
D1	8-719-421-27 s	DIODE MA728
D2	8-719-421-27 s	DIODE MA728
IC1	8-759-669-45 s	IC TL062CPWR-12
IC2	8-759-381-53 s	IC UPC814G2-E2
IC3	8-759-195-81 s	IC TC7S86FU
IC4	8-759-195-81 s	IC TC7S86FU
IC5	8-759-185-42 s	IC LM4040AIM3-2.5
IC7	8-759-560-33 s	IC DS90LV031ATMX
IC8	8-759-389-31 s	IC 74LCX125MTCX
IC9	8-759-195-81 s	IC TC7S86FU
IC10	8-759-058-58 s	IC TC7S04FU-TE85R
IC15	8-759-659-05 o	IC CXD9135R
L1	1-410-737-31 s	INDUCTOR,CHIP 0.47UH (3225)
Q1	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q2	8-729-014-93 s	TRANSISTOR 2SB1440S-TX
Q3	8-729-117-16 s	TRANSISTOR 2SA1611M6
Q4	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q5	8-729-014-93 s	TRANSISTOR 2SB1440S-TX
Q6	8-729-117-16 s	TRANSISTOR 2SA1611M6

(TG-213 BOARD SUFFIX -13)

Ref. No. or Q'ty	Part No.	SP Description
R1	1-218-854-11	s RESISTOR,CHIP 2K 1/10W (1608)
R2	1-218-856-11	s RESISTOR,CHIP 2.4K 1/10W(1608)
R3	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R4	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R5	1-218-841-11	s RESISTOR,CHIP 560 1/10W (1608)
R6	1-218-879-11	s RESISTOR,CHIP 22K 1/10W (1608)
R8	1-216-864-11	s CONDUCTOR, CHIP (1608)
R9	1-216-864-11	s CONDUCTOR, CHIP (1608)
R10	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R11	1-218-854-11	s RESISTOR,CHIP 2K 1/10W (1608)
R12	1-218-860-11	s RESISTOR,CHIP 3.6K 1/10W(1608)
R14	1-218-861-11	s RESISTOR,CHIP 3.9K 1/10W(1608)
R16	1-218-852-11	s RESISTOR,CHIP 1.6K 1/10W(1608)
R17	1-218-868-11	s RESISTOR,CHIP 7.5K 1/10W(1608)
R23	1-218-847-11	s RESISTOR, CHIP 1K 1/10W (1608)
R24	1-211-977-11	s RESISTOR,CHIP 22 1/10W (1608)
R27	1-218-860-11	s RESISTOR,CHIP 3.6K 1/10W(1608)
R28	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R29	1-216-864-11	s CONDUCTOR, CHIP (1608)
R30	1-216-864-11	s CONDUCTOR, CHIP (1608)
R33	1-218-861-11	s RESISTOR,CHIP 3.9K 1/10W(1608)
R34	1-216-864-11	s CONDUCTOR, CHIP (1608)
R35	1-216-864-11	s CONDUCTOR, CHIP (1608)
R36	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R37	1-218-859-11	s RESISTOR,CHIP 3.3K 1/10W(1608)
R38	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R39	1-218-884-11	s RESISTOR,CHIP 36K 1/10W (1608)
R42	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R43	1-218-878-11	s RESISTOR,CHIP 20K 1/10W (1608)
R44	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R45	1-218-871-11	s RESISTOR,CHIP 10K 1/10W (1608)
R52	1-216-864-11	s CONDUCTOR, CHIP (1608)
R53	1-218-897-11	s RESISTOR,CHIP 120K 1/10W(1608)
R54	1-218-895-11	s RESISTOR,CHIP 100K 1/10W(1608)
R58	1-216-864-11	s CONDUCTOR, CHIP (1608)
R62	1-216-864-11	s CONDUCTOR, CHIP (1608)
R64	1-216-864-11	s CONDUCTOR, CHIP (1608)
R67	1-218-839-11	s RESISTOR,CHIP 470 1/10W (1608)
R68	1-218-840-11	s RESISTOR,CHIP 510 1/10W (1608)
R69	1-216-864-11	s CONDUCTOR, CHIP (1608)
R70	1-216-864-11	s CONDUCTOR, CHIP (1608)
R71	1-216-864-11	s CONDUCTOR, CHIP (1608)
R72	1-216-864-11	s CONDUCTOR, CHIP (1608)
R73	1-216-864-11	s CONDUCTOR, CHIP (1608)
R74	1-216-864-11	s CONDUCTOR, CHIP (1608)
R79	1-216-864-11	s CONDUCTOR, CHIP (1608)
R90	1-218-837-11	s RESISTOR,CHIP 390 1/10W (1608)
X1	1-781-830-11	s OSCILLATOR, CRYSTAL
X2	1-781-831-11	s OSCILLATOR, CRYSTAL

TG-213 BOARD SUFFIX -11 AND -12

*a: Lot No. 911 - 912
 *b: Lot No. 001 -
 *c: Lot No. 081 -
 *d: Lot No. 001 - 133

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-351-A	o MOUNTED CIRCUIT BOARD, TG-213
C1	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C3	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C4	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C5	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C7	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C9	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C11	1-127-564-11	s CAPACITOR ELECT 150MF/6.3V
C12	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C15	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C20	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C22	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C23	1-127-564-11	s CAPACITOR ELECT 150MF/6.3V
C24	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C25	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C26	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C27	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C28	1-127-564-11	s CAPACITOR ELECT 150MF/6.3V
C29	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C30	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C31	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C32	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V
C33	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C34	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C37	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C38	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C39	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C40	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C41	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C42	*c 1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
CN1	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
CN2	1-569-607-21	o CONNECTOR, BOARD TO BOARD 24P
D1	8-719-421-27	s DIODE MA728
D2	8-719-421-27	s DIODE MA728
IC1	8-759-669-45	s IC TL062CPWR-12
IC2	8-759-381-53	s IC UPC814G2-E2
IC3	8-759-195-81	s IC TC7S86FU
IC4	8-759-195-81	s IC TC7S86FU
IC5	8-759-185-42	s IC LM4040AIM3-2.5
IC7	8-759-560-33	s IC DS90LV031ATMX
IC8	8-759-389-31	s IC 74LCX125MTCX
IC9	8-759-195-81	s IC TC7S86FU
IC10	8-759-058-58	s IC TC7S04FU-TE85R
IC15	8-759-659-05	o IC CXD9135R
L1	1-410-737-31	s INDUCTOR,CHIP 0.47UH (3225)
Q1	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q2	8-729-820-86	s TRANSISTOR 2SB1121-ST

(TG-213 BOARD SUFFIX -11 AND -12)

Ref. No. or Q'ty	Part No.	SP Description
Q3	8-729-117-16	s TRANSISTOR 2SA1611M6
Q4	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q5	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q6	8-729-117-16	s TRANSISTOR 2SA1611M6
R1	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R2	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R3	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R4	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R5	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R6	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R8	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R9	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R10	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R11	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R12	1-218-705-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R14	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R16	*b 1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
	*a 1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R17	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R23	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R24	1-218-652-11	s RESISTOR,CHIP 22 1/16W (1608)
R27	1-218-705-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R28	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R29	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R30	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R33	1-218-706-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R34	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R35	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R36	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R37	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R38	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R39	1-218-729-11	s RESISTOR,CHIP 36K 1/16W(1608)
R42	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R43	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R44	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R45	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R52	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R53	1-218-742-11	s RESISTOR,METAL 120K 1/16
R54	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R56	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R58	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R62	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R64	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R65	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R67	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R68	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R69	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R70	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R71	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R72	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R73	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R74	*d 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R90	*b 1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
X1	1-781-830-11	s OSCILLATOR, CRYSTAL
X2	1-781-831-11	s OSCILLATOR, CRYSTAL

VA-195 BOARD

*a: Lot No. 911 - 912, 2A1 -
 *b: Lot No. 911
 *c: Lot No. 911 - 002
 *d: Lot No. 003 -
 *e: Lot No. 081 -
 *f: Lot No. 911 - 2A2
 *g: Lot No. 2A3 -

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-359-A	o MOUNTED CIRCUIT BOARD, VA-195
3pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-626-768-01	o PLATE(VA), ORNAMENTAL
1pc	3-724-753-01	o RING, PULL
2pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
C2	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C3	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C4	1-164-739-11	s CAPACITOR CERAMIC 560PF (1608)
C5	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-135-208-11	s CAPACITOR TANTALUM 1MF/10V
C7	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C8	1-162-905-11	s CAPACITOR,CERAMIC 1PF/50V (CK)
C9	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C10	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C11	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C12	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C15	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C16	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C103	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C104	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C105	*e 1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
	*b 1-162-908-11	s CAPACITOR,CERAMIC 3PF/50V 1608
C106	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C107	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C108	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C109	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C110	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C111	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C112	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C117	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C118	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C119	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C120	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C121	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C122	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C123	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C124	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C125	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C126	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C127	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C128	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C129	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C130	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C131	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C132	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C133	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C134	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C135	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C136	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C137	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C138	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C139	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C140	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C141	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C203	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C204	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C205	*e 1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
	*b 1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C206	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C207	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C208	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C209	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C210	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C211	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C214	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C215	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C216	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C217	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C218	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C219	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C220	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C221	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C222	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C223	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C224	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C225	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C226	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C227	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C228	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C229	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C230	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C231	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C232	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C233	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C234	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C235	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C236	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C238	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C239	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C240	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C241	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C302	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C303	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C304	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C305	*e 1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
	*b 1-162-908-11	s CAPACITOR, CERAMIC 3PF/50V 1608
C306	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C307	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C308	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C309	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C310	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C311	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C312	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C313	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C314	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C315	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C317	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C318	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C319	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C320	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C321	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C322	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C323	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C324	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C325	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C326	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C327	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C328	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C329	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C330	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C331	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C332	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C333	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C334	1-162-905-11	s CAPACITOR, CERAMIC 1PF/50V (CK)
C335	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C336	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C337	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C338	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C339	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C340	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C341	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C342	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
CN2	1-695-453-11	s CONNECTOR, BOARD TO BOARD 50P
DL102	1-416-347-11	s DELAY LINE
DL202	1-416-347-11	s DELAY LINE
DL302	1-416-347-11	s DELAY LINE
FL101	1-233-943-11	s FILTER, LOW PASS
FL201	1-233-943-11	s FILTER, LOW PASS
FL301	1-233-943-11	s FILTER, LOW PASS
IC1	8-759-562-40	s IC CAT24WC02J-TE13
IC2	8-759-195-81	s IC TC7S86FU
IC3	8-759-523-02	s IC TC74HC4053AFT(EL)
IC4	8-759-058-58	s IC TC7S04FU-TE85R
IC5	8-759-054-61	s IC CLC505AJE
IC6	8-759-054-61	s IC CLC505AJE
IC7	8-759-064-36	s IC MB88346BPFV
IC9	8-759-523-02	s IC TC74HC4053AFT(EL)
IC11	8-759-147-84	s IC CXD8072Q
IC12	8-759-185-42	s IC LM4040AIM3-2.5
IC13	8-759-669-45	s IC TL062CPWR-12
IC101	8-759-054-61	s IC CLC505AJE
IC102	8-759-523-02	s IC TC74HC4053AFT(EL)
IC103	8-759-669-45	s IC TL062CPWR-12
IC104	8-759-058-58	s IC TC7S04FU-TE85R
IC105	8-759-058-58	s IC TC7S04FU-TE85R
IC106	8-759-054-61	s IC CLC505AJE
IC107	8-759-669-45	s IC TL062CPWR-12

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC108	8-759-058-54	s IC TC7S00FU-TE85R
IC109	8-752-052-73	s IC CXA1451M
IC110	8-759-485-84	s IC MC1495DR2
IC111	8-759-054-61	s IC CLC505AJE
IC112	8-759-669-73	s IC TL082CPWR
IC201	8-759-054-61	s IC CLC505AJE
IC202	8-759-523-02	s IC TC74HC4053AFT (EL)
IC203	8-759-669-45	s IC TL062CPWR-12
IC204	8-759-058-58	s IC TC7S04FU-TE85R
IC205	8-759-054-61	s IC CLC505AJE
IC206	8-759-669-45	s IC TL062CPWR-12
IC207	8-759-058-54	s IC TC7S00FU-TE85R
IC208	8-752-052-73	s IC CXA1451M
IC209	8-759-485-84	s IC MC1495DR2
IC210	8-759-054-61	s IC CLC505AJE
IC212	8-759-669-73	s IC TL082CPWR
IC301	8-759-054-61	s IC CLC505AJE
IC302	8-759-523-02	s IC TC74HC4053AFT (EL)
IC303	8-759-669-45	s IC TL062CPWR-12
IC304	8-759-058-58	s IC TC7S04FU-TE85R
IC305	8-759-054-61	s IC CLC505AJE
IC306	8-759-669-45	s IC TL062CPWR-12
IC307	8-759-058-54	s IC TC7S00FU-TE85R
IC308	8-752-052-73	s IC CXA1451M
IC309	8-759-485-84	s IC MC1495DR2
IC310	8-759-054-61	s IC CLC505AJE
IC312	8-759-669-73	s IC TL082CPWR
IC313	8-759-058-62	s IC TC7S08FU-TE85R
IC314	8-759-660-48	s IC MAX525BCAP-TG068
IC315	8-759-669-45	s IC TL062CPWR-12
Q1	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q2	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q3	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q4	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q5	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q6	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q7	8-729-928-36	s TRANSISTOR DTA114EE
Q8	8-729-928-36	s TRANSISTOR DTA114EE
Q9	8-729-928-36	s TRANSISTOR DTA114EE
Q10	8-729-928-36	s TRANSISTOR DTA114EE
Q11	8-729-928-90	s TRANSISTOR DTC114EE
Q12	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q13	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q14	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q15	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q16	8-729-928-27	s TRANSISTOR DTA114EE
Q17	8-729-928-81	s TRANSISTOR DTC114EE
Q18	8-729-045-28	s TRANSISTOR SI4532DY-T1
Q101	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q102	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q103	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q104	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q105	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q106	8-769-401-67	s TRANSISTOR 3SK163-1
Q107	8-769-401-67	s TRANSISTOR 3SK163-1
Q108	8-769-401-67	s TRANSISTOR 3SK163-1
Q109	8-769-401-67	s TRANSISTOR 3SK163-1
Q110	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q111	8-729-143-07	s TRANSISTOR 2SA1610-Y33

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q201	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q202	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q203	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q204	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q205	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q206	8-769-401-67	s TRANSISTOR 3SK163-1
Q207	8-769-401-67	s TRANSISTOR 3SK163-1
Q208	8-769-401-67	s TRANSISTOR 3SK163-1
Q209	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q210	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q301	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q302	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q303	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q304	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q305	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q306	8-769-401-67	s TRANSISTOR 3SK163-1
Q307	8-769-401-67	s TRANSISTOR 3SK163-1
Q308	8-769-401-67	s TRANSISTOR 3SK163-1
Q309	8-769-401-67	s TRANSISTOR 3SK163-1
Q310	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q311	8-729-143-07	s TRANSISTOR 2SA1610-Y33
R1	*f 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R2	*a 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R3	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R5	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R6	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R7	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R8	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R9	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R10	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R11	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R12	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R13	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R14	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R15	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R16	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R17	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R18	1-218-719-11	s RESISTOR,METAL 13K 1/16
R19	1-218-726-11	s RESISTOR CHIP 27K 1/16W (1608)
R20	1-218-714-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R21	1-218-678-11	s RESISTOR CHIP 270 1/16W (1608)
R22	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R23	1-218-703-11	s RESISTOR,CHIP 3.0K 1/16(1608)
R24	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R25	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R26	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R27	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R28	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R29	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R30	1-218-735-11	s RESISTOR CHIP 62K 1/16W(1608)
R31	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R32	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R33	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R34	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R35	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R36	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R37	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R38	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R39	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R40	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R41	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R42	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R43	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R44	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R45	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R46	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R48	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R49	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R50	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R52	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R53	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R54	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R55	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R56	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R57	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R58	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R59	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R60	1-218-718-11	s RESISTOR CHIP 12K 1/16W (1608)
R61	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R62	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R63	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R64	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R65	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R66	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R67	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R68	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R69	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R100	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R101	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R102	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R103	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R104	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R105	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R106	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R107	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R108	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R109	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R110	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R111	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R112	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R113	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R114	1-218-717-11	s RESISTOR,CHIP 11K 1/16W (1608)
R115	1-218-707-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R116	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R117	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R118	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R119	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R120	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R121	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R122	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R123	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R124	1-218-733-11	s RESISTOR,CHIP 51K 1/16W (1608)
R125	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R126	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R127	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R128	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R129	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R130	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R131	1-218-746-11	s RESISTOR,CHIP 180K 1/16W
R132	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R133	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R134	1-218-734-11	s RESISTOR,CHIP 56K 1/16W(1608)
R135	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R136	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R137	1-218-687-11	s RESISTOR CHIP 620 1/16W (1608)
R138	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R139	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R140	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)
R141	1-218-747-11	s RESISTOR,METAL 200K 1/16(1608)
R142	1-218-735-11	s RESISTOR CHIP 62K 1/16W(1608)
R143	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R144	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R145	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R146	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R147	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R148	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R149	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R150	1-218-723-11	s RESISTOR,CHIP 20K 1/16W(1608)
R151	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R152	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R153	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R154	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R155	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R156	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R157	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R158	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R159	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R160	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R161	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R162	1-218-702-11	s RESISTOR CHIP 2.7K 1/16W(1608)
R163	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R164	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R165	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R166	1-218-686-11	s RESISTOR CHIP 560 1/16W (1608)
R167	1-218-725-11	s RESISTOR,CHIP 24K 1/16W(1608)
R168	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R169	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R170	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R171	1-218-644-11	s RESISTOR,CHIP 10 1/16W
R172	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R173	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R174	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R175	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R200	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R201	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R202	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R203	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R204	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R205	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R206	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R207	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R208	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R209	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R210	1-218-698-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R211	1-218-713-11	s RESISTOR,METAL 7.5K 1/16W
R212	1-218-697-11	s RESISTOR,CHIP 1.6K 1/16W(1608)

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R213	1-218-702-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R214	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R215	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R216	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R217	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R218	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R219	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R220	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R221	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R222	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R223	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R224	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R225	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R226	1-218-746-11	s	RESISTOR,CHIP 180K 1/16W
R227	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R228	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R229	1-218-734-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R230	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R231	1-218-686-11	s	RESISTOR,CHIP 560 1/16W (1608)
R232	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R233	1-218-687-11	s	RESISTOR,CHIP 620 1/16W (1608)
R234	1-218-701-11	s	RESISTOR,CHIP 2.4K 1/16W(1608)
R235	1-218-674-11	s	RESISTOR,CHIP 180 1/16W (1608)
R236	1-218-747-11	s	RESISTOR,METAL 200K 1/16(1608)
R237	1-218-735-11	s	RESISTOR,CHIP 62K 1/16W(1608)
R238	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R239	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R240	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R241	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R242	1-218-685-11	s	RESISTOR,CHIP 510 1/16W
R243	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R244	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R245	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R246	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R247	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R248	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R249	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R250	1-218-727-11	s	RESISTOR,CHIP 30K 1/16W(1608)
R251	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R252	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R253	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R254	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R255	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R256	1-218-709-11	s	RESISTOR,CHIP 5.1K 1/16W
R257	1-218-702-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R258	1-218-710-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R259	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R260	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R261	1-218-686-11	s	RESISTOR,CHIP 560 1/16W (1608)
R262	1-218-725-11	s	RESISTOR,CHIP 24K 1/16W(1608)
R263	1-218-727-11	s	RESISTOR,CHIP 30K 1/16W(1608)
R264	1-218-699-11	s	RESISTOR,CHIP 2.0K 1/16W(1608)
R265	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R266	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R272	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R273	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R274	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R275	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(16 8)
R300	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R301	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R302	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R303	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R304	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R305	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R306	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R307	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R308	1-218-701-11	s	RESISTOR,CHIP 2.4K 1/16W(1608)
R309	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R310	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R311	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R312	1-218-697-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R313	1-218-702-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R314	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R315	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R316	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R317	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R318	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R319	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R320	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R321	1-218-689-11	s	RESISTOR,CHIP 750 1/16W (1608)
R322	1-218-733-11	s	RESISTOR,CHIP 51K 1/16W (1608)
R323	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R324	1-218-733-11	s	RESISTOR,CHIP 51K 1/16W (1608)
R325	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R326	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R327	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R328	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R329	*d 1-218-709-11	s	RESISTOR,CHIP 5.1K 1/16W
*c	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R330	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R331	1-218-746-11	s	RESISTOR,CHIP 180K 1/16W
R332	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R333	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R334	1-218-734-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R335	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R336	1-218-686-11	s	RESISTOR,CHIP 560 1/16W (1608)
R337	1-218-687-11	s	RESISTOR,CHIP 620 1/16W (1608)
R338	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R339	1-218-701-11	s	RESISTOR,CHIP 2.4K 1/16W(1608)
R340	1-218-674-11	s	RESISTOR,CHIP 180 1/16W (1608)
R341	1-218-747-11	s	RESISTOR,METAL 200K 1/16(1608)
R342	1-218-735-11	s	RESISTOR,CHIP 62K 1/16W(1608)
R343	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R344	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R345	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R346	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R347	1-218-685-11	s	RESISTOR,CHIP 510 1/16W
R348	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R349	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R350	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R351	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R352	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R353	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R354	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R355	1-218-727-11	s	RESISTOR,CHIP 30K 1/16W(1608)
R356	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R357	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R358	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(VA-195 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R359	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R360	1-218-676-11 s	RESISTOR,CHIP 220 1/16W(1608)
R361	1-218-709-11 s	RESISTOR,CHIP 5.1K 1/16W
R362	1-218-702-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R363	1-218-710-11 s	RESISTOR,CHIP 5.6K 1/16W(1608)
R364	1-218-682-11 s	RESISTOR,CHIP 390 1/16W (1608)
R365	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R366	1-218-686-11 s	RESISTOR,CHIP 560 1/16W (1608)
R367	1-218-725-11 s	RESISTOR,CHIP 24K 1/16W(1608)
R368	1-218-727-11 s	RESISTOR,CHIP 30K 1/16W(1608)
R369	1-218-699-11 s	RESISTOR,CHIP 2.0K 1/16W(1608)
R370	1-218-745-11 s	RESISTOR,CHIP 160K 1/16W(1608)
R371	1-218-644-11 s	RESISTOR,CHIP 10 1/16W
R372	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R373	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R374	1-218-713-11 s	RESISTOR,METAL 7.5K 1/16W
R375	1-218-704-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R376	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R377	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R378	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R379	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R380	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R381	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R382	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R383	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R384	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R385	1-218-716-11 s	RESISTOR,CHIP 10K 1/16W(1608)
R386	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R387	1-218-668-11 s	RESISTOR,CHIP 100 1/16W (1608)
R388	*g 1-218-740-11 s	RESISTOR,CHIP 100K 1/16W (1608)
R389	*g 1-218-740-11 s	RESISTOR,CHIP 100K 1/16W (1608)

VDA-51 BOARD

*1: Board No. suffix 12 -

*a: Lot No. 911 - 912

*b: Lot No. 001 -

*c: Lot No. 911

*d: Lot No. 912 -

*e: Lot No. 034 - 0B3

*f: Lot No. 0B4 - 1A1

*g: Lot No. 911 - 1A1

*h: Lot No. 912 - 263

*i: Lot No. 911 - 2A2

*j: Lot No. 2A3 -

Ref. No.
or Q'ty Part No. SP Description

1pc A-8325-357-A o MOUNTED CIRCUIT BOARD, VDA-51
 3pcs 3-729-061-01 s SCREW (M2X4.5) (TYPE 1) (STEEL)
 1pc 3-626-770-01 o PLATE(VDA), ORNAMENTAL
 1pc 3-724-753-01 o RING, PULL
 3pcs 3-729-061-01 s SCREW (M2X4.5) (TYPE 1) (STEEL)

C1 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C2 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C3 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C4 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C5 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F

C6 1-164-230-11 s CAPACITOR,CERAMIC 220PF/50V
 C7 1-164-230-11 s CAPACITOR,CERAMIC 220PF/50V
 C8 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C9 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C10 1-113-682-11 s CAPACITOR,TANTALUM 33MF/10V

C11 1-113-682-11 s CAPACITOR,TANTALUM 33MF/10V
 C12 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C13 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C14 1-162-915-11 s CAPACITOR,CERAMIC 10PF/50V CH
 C15 1-162-915-11 s CAPACITOR,CERAMIC 10PF/50V CH

C16 1-135-177-21 s CAPACITOR TANTALUM 1MF/25V
 C17 1-135-177-21 s CAPACITOR TANTALUM 1MF/25V
 C18 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C19 1-162-915-11 s CAPACITOR,CERAMIC 10PF/50V CH
 C20 1-162-915-11 s CAPACITOR,CERAMIC 10PF/50V CH

C21 1-162-915-11 s CAPACITOR,CERAMIC 10PF/50V CH
 C30 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH
 C31 *b 1-164-230-11 s CAPACITOR,CERAMIC 220PF/50V
 C100 1-104-851-11 s CAPACITOR,TANTALUM 10MF/10V
 C101 1-104-851-11 s CAPACITOR,TANTALUM 10MF/10V

C102 *d 1-162-969-11 s CAPACITOR,CERAMIC 6800PF/25V B
 *c 1-164-227-11 s CAPACITOR,CERAMIC 0.022MF/25V
 C103 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C104 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C105 *h 1-162-908-11 s CAPACITOR,CERAMIC 3PF/50V 1608
 *c 1-162-905-11 s CAPACITOR,CERAMIC 1PF/50V (CK)
 C106 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH

C107 1-164-227-11 s CAPACITOR,CERAMIC 0.022MF/25V
 C108 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C109 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C110 1-162-905-11 s CAPACITOR,CERAMIC 1PF/50V (CK)
 C111 1-162-927-11 s CAPACITOR,CERAMIC 100PF/50V CH

C112 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C113 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C114 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C115 1-164-156-11 s CAPACITOR,CERAMIC 0.1MF/25V F
 C116 1-162-905-11 s CAPACITOR,CERAMIC 1PF/50V (CK)

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C605	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C606	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C608	1-162-905-11	s CAPACITOR,CERAMIC 1PF/50V (CK)
C609	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C700	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C701	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C702	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C706	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C707	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C708	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C709	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C712	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
D400	8-719-059-52	s DIODE MA3J14300LSO
D401	8-719-059-52	s DIODE MA3J14300LSO
D500	8-719-421-27	s DIODE MA728
D501	8-719-421-27	s DIODE MA728
D502	8-719-421-27	s DIODE MA728
FL101 *c	1-234-537-21	s FILTER, LOW PASS (SMD)
FL102 *g	1-234-537-21	s FILTER, LOW PASS (SMD)
FL201 *c	1-234-537-21	s FILTER, LOW PASS (SMD)
FL202 *g	1-233-996-11	s FILTER,LOW PASS
FL301 *c	1-234-537-21	s FILTER, LOW PASS (SMD)
FL302 *g	1-233-996-11	s FILTER,LOW PASS
FL601	1-233-996-11	s FILTER,LOW PASS
FL602	1-233-996-11	s FILTER,LOW PASS
IC1	8-759-058-62	s IC TC7S08FU-TE85R
IC2	8-759-659-96	s IC SN74HC08APWR
IC3	8-759-058-54	s IC TC7S00FU-TE85R
IC4	8-759-058-62	s IC TC7S08FU-TE85R
IC5	8-759-058-64	s IC TC7S32FU-TE85R
IC6	8-759-058-64	s IC TC7S32FU-TE85R
IC7	8-759-669-45	s IC TL062CPWR-12
IC8	8-759-058-62	s IC TC7S08FU-TE85R
IC9	8-759-058-62	s IC TC7S08FU-TE85R
IC10	8-759-185-42	s IC LM4040AIM3-2.5
IC11	8-759-058-62	s IC TC7S08FU-TE85R
IC12	8-759-058-62	s IC TC7S08FU-TE85R
IC101	8-759-054-61	s IC CLC505AJE
IC102	8-759-054-61	s IC CLC505AJE
IC103	8-759-523-02	s IC TC74HC4053AFT(EL)
IC104	8-759-054-61	s IC CLC505AJE
IC105	8-759-054-61	s IC CLC505AJE
IC106	8-759-054-61	s IC CLC505AJE
IC201	8-759-054-61	s IC CLC505AJE
IC202	8-759-054-61	s IC CLC505AJE
IC203	8-759-523-02	s IC TC74HC4053AFT(EL)
IC204	8-759-054-61	s IC CLC505AJE
IC205	8-759-054-61	s IC CLC505AJE
IC301	8-759-054-61	s IC CLC505AJE
IC302	8-759-054-61	s IC CLC505AJE
IC303	8-759-523-02	s IC TC74HC4053AFT(EL)
IC304	8-759-054-61	s IC CLC505AJE
IC305	8-759-054-61	s IC CLC505AJE
IC401	8-759-054-61	s IC CLC505AJE
IC402	8-759-523-02	s IC TC74HC4053AFT(EL)
IC403	8-759-669-45	s IC TL062CPWR-12

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC404	8-759-271-18	s IC NJM1496V
IC405	8-759-054-61	s IC CLC505AJE
IC406	8-759-054-61	s IC CLC505AJE
IC501	8-759-054-61	s IC CLC505AJE
IC502	8-759-054-61	s IC CLC505AJE
IC503	8-759-523-02	s IC TC74HC4053AFT(EL)
IC505	8-759-523-02	s IC TC74HC4053AFT(EL)
IC601	8-759-523-02	s IC TC74HC4053AFT(EL)
IC602	8-759-054-61	s IC CLC505AJE
IC603	8-759-054-61	s IC CLC505AJE
IC701	8-759-529-76	s IC TC74VHC595FT(EL)
IC702	8-759-529-76	s IC TC74VHC595FT(EL)
IC703	8-759-562-40	s IC CAT24WC02J-TE13
IC704	8-759-057-06	s IC PCF8591T
IC705	8-759-058-62	s IC TC7S08FU-TE85R
IC706	8-759-058-62	s IC TC7S08FU-TE85R
IC707	8-759-058-62	s IC TC7S08FU-TE85R
L100	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L101	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L501	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L502	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L503	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
L504	1-412-026-11	s INDUCTOR,CHIP 1UH (3225)
Q1	8-729-820-86	s TRANSISTOR 2SB1121-ST
Q2	8-729-120-21	s TRANSISTOR 2SD1614-T1XL
Q3	8-729-117-32	s TRANSISTOR 2SC4177
Q4	8-729-117-16	s TRANSISTOR 2SA1611M6
Q101	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q102	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q201	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q202	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q301	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q302	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q400	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q401	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q402	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q403	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q404	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q405	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q406	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q500	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q501	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q502	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q503	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q504	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q505	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q506	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q507	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q508	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q509	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q510	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q511	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q512	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q701	8-729-928-27	s TRANSISTOR DTA144EE
Q702	8-729-928-81	s TRANSISTOR DTC144EE
Q704	8-729-045-28	s TRANSISTOR SI4532DY-T1
R1	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R2	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R3	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4	1-218-699-11	s RESISTOR,CHIP 2.0K 1/16W(1608)
R5	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R6	1-218-695-11	s RESISTOR,CHIP 1.3K 1/16W(1608)
R7	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R8	1-218-702-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R9	1-218-690-11	s RESISTOR,CHIP 820 1/16W (1608)
R10	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R11	1-218-675-11	s RESISTOR,CHIP 200 1/16W(1608)
R12	1-218-675-11	s RESISTOR,CHIP 200 1/16W (1608)
R13	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R14	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R15	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R16	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R17	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R18	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R19	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R20	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R21	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R22	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R23	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R24	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R25	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R26	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R27	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R28	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R29	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R30	1-218-701-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R31	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R32	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R33	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R34	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R36	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R37	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R39	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R40	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R41	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R42	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R44	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R45	1-218-728-11	s RESISTOR,CHIP 33K 1/16W
R46	1-218-670-11	s RESISTOR,CHIP 120 1/16W (1608)
R100	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R101	*d 1-218-644-11	s RESISTOR,CHIP 10 1/16W
	*c 1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R102	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R103	1-218-667-11	s RESISTOR,CHIP 91 1/16W (1608)
R104	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R105	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R106	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R107	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R108	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R109	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R110	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R111	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R112	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R113	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R114	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R115	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R117	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R118	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R119	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R120	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R121	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R122	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R123	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R124	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R125	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R126	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R127	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R128	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R129	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R130	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R131	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R132	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R133	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R134	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R135	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R136	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R137	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R138	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R139	1-218-709-11	s RESISTOR,CHIP 5.1K 1/16W
R200	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R201	*d 1-218-644-11	s RESISTOR,CHIP 10 1/16W
	*c 1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R202	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R203	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R204	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R205	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R206	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R207	1-218-679-91	s RESISTOR,CHIP 300 1/16W
R208	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R209	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R210	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R211	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R212	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R213	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R214	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R215	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R217	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R218	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R219	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R220	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R221	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R222	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R223	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R224	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R225	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R226	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R227	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R228	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R229	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R230	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R231	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R232	1-218-665-11	s RESISTOR,CHIP 75 1/16W (1608)
R233	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R234	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R300	1-218-679-91	s	RESISTOR,CHIP 300 1/16W
R301	*d 1-218-644-11	s	RESISTOR,CHIP 10 1/16W
	*c 1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R302	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R303	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R304	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R305	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R306	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R307	1-218-679-91	s	RESISTOR,CHIP 300 1/16W
R308	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R309	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R310	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R311	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R312	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R313	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R314	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R315	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R317	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R318	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R319	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R320	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R321	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R322	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R323	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R324	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R325	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R326	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R327	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R328	1-218-685-11	s	RESISTOR,CHIP 510 1/16W
R329	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R330	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R331	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R332	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R333	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R334	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R400	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R401	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R402	1-218-691-11	s	RESISTOR,CHIP 910 1/16W (1608)
R403	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R404	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R405	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R406	1-218-658-11	s	RESISTOR,CHIP 39 1/16W (1608)
R407	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R408	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R409	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R410	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R411	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R412	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R413	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R414	1-218-675-11	s	RESISTOR,CHIP 200 1/16W (1608)
R415	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R416	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K
R417	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R418	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R419	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R420	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R421	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R422	1-218-683-11	s	RESISTOR CHIP 430 1/16W (1608)
R423	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R424	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R425	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R426	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R427	1-218-651-11	s	RESISTOR,CHIP 20 1/16W (1608)
R428	1-218-699-11	s	RESISTOR,CHIP 2.0K 1/16W(1608)
R429	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R430	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K
R431	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R432	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R433	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R434	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R435	1-218-651-11	s	RESISTOR,CHIP 20 1/16W (1608)
R436	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R437	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R438	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R439	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R440	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R441	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R442	*j 1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
	*i 1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R443	*j 1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
	*i 1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R444	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R445	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R446	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R500	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R501	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R502	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R503	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R504	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R505	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R506	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R509	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R510	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R511	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R512	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R513	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R514	1-218-745-11	s	RESISTOR,CHIP 160K 1/16W(1608)
R515	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R516	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R517	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R518	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R519	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R520	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R521	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R522	*g 1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R523	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R524	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R525	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R526	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R527	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R528	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R529	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R530	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R531	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R532	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R533	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R534	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R535	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)

(VDA-51 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R536	1-218-696-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R537	1-218-702-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R538	1-218-750-11	s RESISTOR,CHIP 270K 1/16W(1608)
R539	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R540	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R541	1-218-656-11	s RESISTOR,CHIP 33 1/16W (1608)
R542	1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R543	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R544	1-218-730-11	s RESISTOR,METAL FILM CHIP 39K
R545	*1 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
	*f 1-218-717-11	s RESISTOR,CHIP 11K 1/16W (1608)
	*e 1-218-724-11	s RESISTOR,CHIP 22K 1/16W(1608)
R600	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R601	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R602	1-218-694-11	s RESISTOR,CHIP 1.2K1/16W(1608)
R603	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R604	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R605	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R606	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R607	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R608	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R609	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R610	1-218-669-11	s RESISTOR,CHIP 110 1/16W (1608)
R611	*a 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R612	1-218-669-11	s RESISTOR,CHIP 110 1/16W (1608)
R613	1-218-667-11	s RESISTOR,CHIP 91 1/16W (1608)
R630	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R700	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R701	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R702	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R703	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R704	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R705	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R706	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R707	1-218-740-11	s RESISTOR,CHIP 100K 1/16W(1608)
R708	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R709	1-218-685-11	s RESISTOR,CHIP 510 1/16W
R710	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R711	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R712	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R713	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R714	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R715	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R716	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R717	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R718	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R719	1-218-708-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R720	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R721	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R722	*b 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
	*a 1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R723	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R724	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R725	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R726	*1 1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
RV2	1-225-788-21	s RES, ADJ, CERMET 1K
RV3	1-225-787-21	s RES, ADJ, CERMET 500
RV4	*1 1-225-788-21	s RES, ADJ, CERMET 1K

VN-12 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-140-A	o MOUNTED CIRCUIT BOARD, VN-12
6pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1) (STEEL)
1pc	3-724-753-01	o RING, PULL
1pc	3-626-750-01	o PLATE (VN), ORNAMENTAL
C100	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-127-708-11	s CAP, POLYPYRROLE 100MF
C103	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C106	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C107	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C108	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C109	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C110	1-164-227-11	s CAPACITOR,CERAMIC 0.022MF/25V
C111	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C112	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C116	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C117	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C119	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C120	1-127-707-11	s CAPACITOR,POLYPYRROLE 150MF
C200	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C201	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C208	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C211	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C213	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C214	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C215	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C216	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C217	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C218	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C219	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C220	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C221	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C222	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C223	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C224	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C225	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C226	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C227	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C228	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C229	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C230	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C231	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C232	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C233	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F

(VN-12 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C234	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C235	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C236	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C237	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C238	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C239	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C240	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C241	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C242	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C243	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C244	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C245	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C247	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C248	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C249	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C250	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C251	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C252	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C253	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C254	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C255	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C256	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C257	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C258	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C259	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C260	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C261	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C262	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C263	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C264	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C265	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C266	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C267	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C268	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C269	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C270	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C271	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C272	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C273	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C274	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C275	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C276	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C277	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
D100	8-719-800-76 s	DIODE 1SS226
D101	8-719-938-72 s	DIODE SB01-05CP (RECTI)
D102	8-719-938-72 s	DIODE SB01-05CP (RECTI)
FB100	1-469-108-11 s	FERRITE, EMI (SMD)
FB200	1-469-108-11 s	FERRITE, EMI (SMD)
FL100	1-117-193-11 s	CAPACITOR, 3 TERMINAL 1.5MF/50V
FL101	1-117-193-11 s	CAPACITOR, 3 TERMINAL 1.5MF/50V
FL102	1-117-193-11 s	CAPACITOR, 3 TERMINAL 1.5MF/50V
IC100	8-759-456-26 s	IC 74LCX541MTCX
IC101	8-759-386-26 s	IC 74LCX574MTCX
IC102	8-759-386-25 s	IC 74LCX245MTCX
IC103	8-759-456-26 s	IC 74LCX541MTCX
IC104	8-729-024-50 s	TRANSISTOR SI9936DY
IC105	8-759-386-28 s	IC 74LCX00MTCX

(VN-12 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC106	8-729-024-50 s	TRANSISTOR SI9936DY
IC107	8-759-386-27 s	IC 74LCX04MTCX
IC108	8-759-389-30 s	IC 74LCX32MTCX
IC200	8-759-386-26 s	IC 74LCX574MTCX
IC201	8-759-386-26 s	IC 74LCX574MTCX
IC202	8-759-386-26 s	IC 74LCX574MTCX
IC204	8-759-663-74 s	IC HY57V161610DTC-7TR
IC205	8-759-663-74 s	IC HY57V161610DTC-7TR
IC206	8-759-386-26 s	IC 74LCX574MTCX
IC207	8-759-386-26 s	IC 74LCX574MTCX
IC208	8-759-386-26 s	IC 74LCX574MTCX
IC209	8-759-547-49 s	IC CDC509PWR
IC210	8-759-492-32 s	IC CXD9014BR
IC211	8-759-386-26 s	IC 74LCX574MTCX
IC212	8-759-386-26 s	IC 74LCX574MTCX
IC213	8-759-386-26 s	IC 74LCX574MTCX
IC214	8-759-196-97 s	IC TC7SH32FU (TB85R)
Q100	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q101	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q102	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
R100	1-218-740-11 s	RESISTOR, CHIP 100K 1/16W (1608)
R101	1-218-740-11 s	RESISTOR, CHIP 100K 1/16W (1608)
R102	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R103	1-218-716-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R104	1-218-680-11 s	RESISTOR, CHIP 330 1/16W (1608)
R105	1-216-864-11 s	RESISTOR, CHIP 0 1/16W (1608)
R106	1-218-740-11 s	RESISTOR, CHIP 100K 1/16W (1608)
R107	1-216-864-11 s	RESISTOR, CHIP 0 1/16W (1608)
R109	1-218-680-11 s	RESISTOR, CHIP 330 1/16W (1608)
R110	1-218-716-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R111	1-218-656-11 s	RESISTOR, CHIP 33 1/16W (1608)
R112	1-218-656-11 s	RESISTOR, CHIP 33 1/16W (1608)
R113	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R114	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R115	1-218-680-11 s	RESISTOR, CHIP 330 1/16W (1608)
R116	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R117	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R118	1-218-716-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R119	1-218-692-11 s	RESISTOR, CHIP 1.0K 1/16W (1608)
R120	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R121	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R200	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R201	1-218-718-11 s	RESISTOR, CHIP 12K 1/16W (1608)
R202	1-218-716-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R203	1-218-680-11 s	RESISTOR, CHIP 330 1/16W (1608)
R204	1-218-675-11 s	RESISTOR, CHIP 200 1/16W (1608)
R205	1-218-675-11 s	RESISTOR, CHIP 200 1/16W (1608)
R206	1-218-692-11 s	RESISTOR, CHIP 1.0K 1/16W (1608)
R207	1-216-864-11 s	RESISTOR, CHIP 0 1/16W (1608)
R208	1-218-692-11 s	RESISTOR, CHIP 1.0K 1/16W (1608)
R209	1-218-716-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R210	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R211	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)
R212	1-216-864-11 s	RESISTOR, CHIP 0 1/16W (1608)
R213	1-218-718-11 s	RESISTOR, CHIP 12K 1/16W (1608)
R214	1-218-716-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R215	1-218-732-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R216	1-218-660-91 s	RESISTOR, CHIP 47 1/16W (1608)

(VN-12 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R217	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R218	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R219	1-218-660-91	s RESISTOR,CHIP 47 1/16W (1608)
R220	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R222	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R223	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R224	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R225	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R226	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R227	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R228	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R230	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R231	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R232	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R233	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R234	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R235	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
RB100	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB101	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB102	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB103	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB104	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB105	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB106	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB107	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB108	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB109	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB200	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB201	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB202	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB203	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB204	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB205	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB206	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB207	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB208	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB209	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB210	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB211	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB212	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB213	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB214	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB215	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB216	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB217	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB218	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB219	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB220	1-239-409-11	s RESISTOR NETWORK 47 (1608)

VR-175 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-652-770-13	o PRINTED WIRING BOARD, VR-175
C100	1-163-063-91	s CAPACITOR CHIP CERAMIC 0.022MF
CN10	1-750-159-21	o CONNECTOR, PPC (5P)
CN15	1-569-775-21	o PIN, CONNECTOR 5P
CN16	1-691-551-11	o PIN, CONNECTOR (SMD) 8P
R100	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R101	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R102	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R103	1-216-295-91	s CONDUCTOR, CHIP (2012)
RV100	1-223-684-11	s RESISTOR, VAR, CARBON 5K
RV101	1-223-684-11	s RESISTOR, VAR, CARBON 5K
RV102	1-237-032-11	s RESISTOR,ADJ,CERMET 500
S100	1-570-834-11	s SWITCH,SLIDE (2-2-3)

1-4. Parts List for Frame

PARTS LIST FOR FRAME

*a: Serial No. 10001 - 10275, 10306 - 10335
 *b: Serial No. 10276 - 10305, 10336 - 90001 -
 *c: Serial No. 10366 -
 *d: Serial No. 10001 - 11097
 *e: Serial No. 11098 -
 *f: Serial No. 10001 - 11294
 *g: Serial No. 12001 -

Ref. No. or Q'ty	Part No.	SP Description
FAN1	1-698-775-11 s	FAN, DC (FAN ASSY)
FAN2	1-698-131-31 s	MOTOR, FAN DC (FAN ASSY, REAR)
FB3	*b 1-500-112-11 s	BEAD, FERRITE
FB4	*b 1-500-112-11 s	BEAD, FERRITE
FB5	*b 1-543-824-11 s	CORE, TROIDAL
FB9	*b 1-543-936-11 s	CORE (FPC)
FB10	*b 1-500-051-21 s	BEAD, FERRITE (WITH CASE)
FB11	*b 1-500-249-11 s	BEAD, FERRITE (CASE)
HC1	8-825-779-72 s	CTL HEAD, PS244-21D (ENTRANCE HEAD ASSY)
HE1	X-3605-885-1 s	HEAD ASSY, FE EF291-21A (ENTRANCE HEAD ASSY)
HRP1	8-825-779-61 s	HEAD, AU PS244-2103L (CUE HEAD ASSY)
HS1	1-543-316-21 s	HEAD, SENSING (TAPE TOP)
HS2	1-543-316-21 s	HEAD, SENSING (TAPE END)
SE1	1-810-599-11 s	SENSOR, DEW CONDENSATION (MECHANICAL DEC ASSY)
SP1	1-503-293-00 s	SPEAKER 36 mm
M1	8-835-440-01 s	MOTOR, LOADING (DN20-Q7Z1B) (GEAR BLOCK ASSY)
M2	8-835-534-01 s	MOTOR, DC SCV-0702A/J-N (MECHANICAL DECK ASSY)
HN001	- - -	HARNESS, SUB (MIC) (TO CN1/MA-92 BOARD)
1pc	1-695-212-11 o	HOUSING 6P
6pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30 (TO CN2/CN-1642 BOARD)
1pc	1-695-212-11 o	HOUSING 6P
6pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30
HN002	1-958-073-12 o	HARNESS, SUB (LENS) (TO CN38/MB-877 BOARD)
1pc	1-695-892-11 o	HOUSING 12P
12pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30 (TO LENS CONNECTOR)
CN001	1-695-841-12 s	CONNECTOR (ROUND TYPE) (R-F) 12P
HN003	1-790-445-11 s	WIRE, FLEXIBLE CARD 28P (FROM CN31/MB-877 BOARD TO CN1/DR-411 BOARD)
HN004	- - -	HARNESS, SUB (CNTL) (TO CN4/MA-92 BOARD)
1pc	1-764-194-11 o	HOUSING 4P
4pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30 (TO CN36/MB-877 BOARD)
1pc	1-764-194-11 o	HOUSING 4P
4pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30

(PARTS LIST FOR FRAME)

Ref. No. or Q'ty	Part No.	SP Description
HN005	- - -	HARNESS, SUB (MA) (TO CN3/MA-92 BOARD)
1pc	1-695-891-11 o	HOUSING 10P
10pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30 (TO CN37/MB-877 BOARD)
1pc	1-695-891-11 o	HOUSING 10P
10pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30
HN006	- - -	HARNESS, SUB (VF) (TO CN33/MB-877 BOARD)
1pc	1-580-586-11 o	HOUSING, LY 20P
3pcs	1-573-176-11 o	CONTACT, FEMALE AWG22-26
14pcs	1-580-599-11 o	TERMINAL, SOLDERLESS (TO VF CONNECTOR)
FB1	*c 1-543-298-11 s	BEAD, FERRITE
FB2	*c 1-543-298-11 s	BEAD, FERRITE
CN002	1-565-051-21 o	CONNECTOR, CIRCULAR 20P, FEMALE
4pcs	1-164-152-11 s	CAP, CERAMIC 22PF SL
16pcs	1-164-154-11 s	CAP, CERAMIC 1000PF X
HN007	1-953-432-11 o	HARNESS, SUB (KY-MB50) (FROM CN50/MB-877 BOARD TO CN150/KY-293 BOARD)
HN008	- - -	HARNESS, SUB (MB-EQ) (TO CN1/EQ-89 BOARD)
1pc	1-569-618-11 o	HOUSING 3P
3pcs	1-565-977-11 s	CONTACT, FEMALE AWG 28-32 (TO CN2/EQ-89 BOARD)
1pc	1-569-618-11 o	HOUSING 3P
3pcs	1-565-977-11 s	CONTACT, FEMALE AWG 28-32 (TO CN3/EQ-89 BOARD)
1pc	1-569-618-11 o	HOUSING 3P
3pcs	1-565-977-11 s	CONTACT, FEMALE AWG 28-32 (TO CN4/EQ-89 BOARD)
1pc	1-569-618-11 o	HOUSING 3P
3pcs	1-565-977-11 s	CONTACT, FEMALE AWG 28-32 (TO CN34/MB-877 BOARD)
1pc	1-695-892-11 o	HOUSING 12P
12pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30
HN009	1-959-006-12 o	HARNESS, SUB (MB-PSW) (FROM CN32/MB-877 BOARD TO POWER SW)
HN010	*g 1-782-987-13 s	CABLE, FLEXIBLE FLAT (26P) (FROM CN53/MB-877 BOARD TO CN2/CN-2024 BOARD)
	*f 1-757-539-11 s	WIRE, FLEXIBLE CARD 26P (FROM CN1/CN-2140 BOARD TO CN2/CN-2024 BOARD)
HN011	1-782-986-13 s	WIRE, FLEXIBLE CARD 26P (FROM CN54/MB-877 BOARD TO CN1/CN-2024 BOARD)
HN012	- - -	HARNESS, SUB (HP) (TO CN1/HP-90 BOARD)
1pc	1-764-194-11 o	HOUSING 4P
4pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30 (TO CN56/MB-877 BOARD)
1pc	1-764-194-11 o	HOUSING 4P
4pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30
HN013	1-960-467-11 o	HARNESS, SUB (MB-SW) (TO CN1/SW-1032 BOARD)
1pc	1-764-193-11 o	HOUSING 3P
3pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30 (TO CN51/MB-877 BOARD)
1pc	1-764-193-11 o	HOUSING 3P
3pcs	1-695-215-11 o	CONTACT, FEMALE AWG26-30

(PARTS LIST FOR FRAME)

Ref. No. or Q'ty	Part No.	SP Description
HN014	- - -	HARNESSES (CCM)
	(TO CN4/RE-140 BOARD)	
1pc	1-569-520-11	o HOUSING, CONNECTOR 10P
10pcs	1-565-977-11	s CONTACT, FEMALE AWG 28-32
	(TO CN1/CCM-33 BOARD)	
1pc	1-569-520-11	o HOUSING, CONNECTOR 10P
10pcs	1-565-977-11	s CONTACT, FEMALE AWG 28-32
HN015	1-953-434-11	o HARNESSES, SUB (TC6-VR16)
	(FROM CN16/VR-175 BOARD TO CN6/APR-55 BOARD)	
HN016	1-960-468-11	o HARNESSES, SUB (MS-IF)
	(FROM CN300/IF-819 BOARD TO CN1/CN-2043 BOARD)	
HN017	1-757-843-11	s WIRE, FLEXIBLE CARD 28P
	(FROM CN140/MB-877 BOARD TO CN40/APR-55 BOARD)	
HN018	*e 1-783-703-11	s WIRE, FLAT TYPE (28 CORE)
	*d 1-757-843-11	s WIRE, FLEXIBLE CARD 28P
	(FROM CN141/MB-877 BOARD TO CN41/APR-55 BOARD)	
HN019	1-757-843-11	s WIRE, FLEXIBLE CARD 28P
	(FROM CN142/MB-877 BOARD TO CN42/APR-55 BOARD)	
HN020	- - -	HARNESSES, SUB (MB-APR)
	(FROM CN108/MB-877 BOARD)	
1pc	1-695-891-11	o HOUSING, CONNECTOR 10P
10pcs	1-695-215-11	o TERMINAL, SOLDERLESS
	(FROM CN10/APR-55 BOARD)	
1pc	1-695-891-11	o HOUSING, CONNECTOR 10P
10pcs	1-695-215-11	o TERMINAL, SOLDERLESS
HN021	- - -	HARNESSES, SUB (TC7-SPEAKER)
	(FROM CN7/APR-55 BOARD TO SPEAKER)	
1pc	1-569-617-11	s HOUSING 2P
2pcs	1-565-977-11	s CONTACT, FEMALE AWG28-32
HN022	1-960-466-11	o HARNESSES, SUB (CP-TC)
	(TO CN1/CP-361 BOARD)	
1pc	1-764-194-11	o HOUSING 4P
4pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30
	(TO CN5/APR-55 BOARD)	
1pc	1-764-194-11	o HOUSING 4P
4pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30
HN101	1-960-464-11	o HARNESSES, SUB (DC IN2)
	(TO CN102/PS-569 BOARD)	
1pc	1-562-256-00	o HOUSING 6P
6pcs	1-562-260-11	o CONTACT, SOCKET
	(TO DC IN CONNECTOR)	
CN003	1-564-603-31	s CONNECTOR, XLR(WITH SW) 4P, MALE
FB6	1-543-157-11	s BEAD, FERRITE
HN102	*b - - -	HARNESSES, SUB (WITH DC OUT L)
	*a - - -	HARNESSES, SUB (DC OUT)
	(TO CN103/PS-569 BOARD)	
1pc	1-562-252-00	o HOUSING 2P
2pcs	1-562-260-11	o CONTACT, SOCKET
	(TO DC OUT 12V CONNECTOR)	
C1	*b 1-162-889-11	s CAPACITOR, CERAMIC 680PF 50V
C2	*b 1-162-889-11	s CAPACITOR, CERAMIC 680PF 50V
L3	*b 1-408-591-11	s MICRO INDUCTOR 1UH
L4	*b 1-408-591-11	s MICRO INDUCTOR 1UH
1pc	*b 7-623-507-01	s EARTH LUG 2.6
CN004	1-565-072-12	s CONNECTOR, 4P, FEMALE

(PARTS LIST FOR FRAME)

Ref. No. or Q'ty	Part No.	SP Description
HN103	- - -	HARNESSES, SUB (PS101-CN10)
	(TO CN10/CN-2025 BOARD)	
1pc	1-562-254-00	o HOUSING 4P
4pcs	1-562-260-11	o CONTACT, SOCKET
	(TO CN101/PS-569 BOARD)	
1pc	1-562-254-00	o HOUSING 4P
4pcs	1-562-260-11	o CONTACT, SOCKET
HN104	*b 1-961-054-12	o HARNESSES, SUB (BAT-CN20(L))
	*a 1-958-070-11	o HARNESSES, SUB (BAT-CN20)
	(TO CN20/CN-2025 BOARD)	
FB7	1-543-157-11	s BEAD, FERRITE
L1	*b 1-419-977-11	s COIL, CHOKE 14UH
L2	*b 1-419-977-11	s COIL, CHOKE 14UH
1pc	1-562-254-00	o HOUSING 4P
4pcs	1-562-260-11	o CONTACT, SOCKET
	(TO CN52/MB-877 BOARD)	
FB8	1-543-157-11	s BEAD, FERRITE
1pc	1-569-618-11	o HOUSING 3P
3pcs	1-565-977-11	s CONTACT, FEMALE AWG 28-32
	(TO BATTERY)	
CN005	1-766-377-13	s CONNECTOR, BATTERY
HN105	- - -	HARNESSES, SUB (PS104-MB46)
	(TO CN46/MB-877 BOARD)	
1pc	1-580-582-11	o HOUSING, 12P
12pcs	1-573-176-11	o CONTACT, FEMALE AWG22-26
	(TO CN104/PS-569 BOARD)	
1pc	1-562-258-00	o HOUSING 10P
10pcs	1-562-260-11	o CONTACT, SOCKET
HN106	- - -	HARNESSES, SUB (REMOTE)
	(TO CN3/CO-38 BOARD)	
1pc	1-764-196-11	o HOUSING 8P
8pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30
	(TO CN45/MB-877 BOARD)	
1pc	1-764-196-11	o HOUSING 8P
8pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30
HN107	1-958-066-11	o HARNESSES, SUB (CO2-CN2)
	(FROM CN2/CN-2025 BOARD TO CN2/CO-38 BOARD)	
HN108	1-953-424-11	o HARNESSES, SUB (SE2-HN5)
	(FROM CN5/HN-243 BOARD TO CN2/SE-275 BOARD)	
HN109	1-953-425-11	o HARNESSES, SUB (SE1-HN6)
	(FROM CN6/HN-243 BOARD TO CN1/SE-275 BOARD)	
HN110	1-953-414-11	o HARNESSES, SUB (END-SE3)
	(FROM CN3/SE-275 BOARD TO TAPE END SENSOR (HS2))	
HN111	1-953-415-11	o HARNESSES, SUB (TOP-SE4)
	(FROM CN4/SE-275 BOARD TO TAPE TOP SENSOR (HS1))	
HN112	1-953-423-11	o HARNESSES, SUB (CTL1-HN4)
	(FROM CN4/HN-243 BOARD TO CN1/CTL-10 BOARD)	
HN113	1-953-412-11	o HARNESSES, SUB (CTL-HEAD)
	(FROM CN2/CTL-10 BOARD TO CTL HEAD)	
HN114	1-953-411-11	o HARNESSES, SUB (FE-HEAD)
	(FROM CN4/CTL-10 BOARD TO FULL ERASE HEAD)	
HN115	1-953-426-11	o HARNESSES, SUB (SR1-HN8)
	(FROM CN8/HN-243 BOARD TO CN1/SR-56 BOARD (DRUM ASSY))	
HN116	1-960-465-11	o HARNESSES, SUB (DR1-HN2)
	(FROM CN2/HN-243 BOARD TO CN1/DR-335 BOARD (DRUM ASSY))	
HN117	1-953-408-12	o HARNESSES, SUB (DR2-HN1)
	(FROM CN1/HN-243 BOARD TO CN2/DR-335 BOARD (DRUM ASSY))	

1-5. Packing Materials & Supplied Accessories

(PARTS LIST FOR FRAME)

Ref. No. or Q'ty	Part No.	SP Description
HN118	1-953-420-12	o HARNESS, SUB (DR3-HN10) (FROM CN10/HN-243 BOARD TO CN3/DR-335 BOARD (DRUM ASSY))
HN119	1-953-427-11	o HARNESS, SUB (CUE1-HN11) (FROM CN11/HN-243 BOARD TO CN1/CUE-2 BOARD)
HN120	1-953-416-11	o HARNESS, SUB (TM-CUE3) (FROM CN3/CUE-2 BOARD TO LOADING MOTOR)
HN121	1-953-413-11	o HARNESS, SUB (CUE HEAD-CUE2) (FROM CN2/CUE-2 BOARD TO AUDIO R/P HEAD)
HN122	1-953-417-11	o HARNESS, SUB (TC HEAD-HN12) (FROM CN12/HN-243 BOARD TO TC HEAD)
HN123	1-953-435-11	o HARNESS, SUB (CAP-HN14) (FROM CN14/HN-243 BOARD TO CAPSTAN MOTOR)
HN201	- - -	(FROM CN2/BI-145 (R) BOARD)
1pc	1-695-212-21	o HOUSING 6P
6pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30 (FROM CN10/NR-68 BOARD)
1pc	1-695-212-21	o HOUSING 6P
6pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30
HN202	- - -	(FROM CN2/BI-145 (G) BOARD)
1pc	1-695-212-21	o HOUSING 6P
6pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30 (FROM CN20/NR-68 BOARD)
1pc	1-695-212-21	o HOUSING 6P
6pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30
HN203	- - -	(FROM CN2/BI-145 (B) BOARD)
1pc	1-695-212-21	o HOUSING 6P
6pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30 (FROM CN30/NR-68 BOARD)
1pc	1-695-212-21	o HOUSING 6P
6pcs	1-695-215-11	o CONTACT, FEMALE AWG26-30

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-542-295-12	s MICROPHONE
1pc	3-179-882-01	o SPACER, MICROPHONE
1pc	3-680-582-01	o HOLDER(B), MICROPHONE
1pc	3-725-262-03	s COVER, RAIN
1pc	A-6772-374-C	s BELT ASSY, SHOULDER (PLA)

1-6. Optional Fixtures

Part No. SP Description

J-6001-820-A o DRUM ECCENTRICITY GAUGE (3)
J-6001-830-A o DRUM ECCENTRICITY GAUGE (2)
J-6029-140-A o PATTERN BOX PTB-500
J-6035-070-A o IC EXTRACTION TOOL
J-6080-840-A o MIRROR (SMALL ROUND SHAPE)

J-6087-000-A o DRUM ECCENTRICITY GAUGE (5)
J-6152-450-A o WIRE CLEARANCE CHECK GAUGE
J-6309-350-A o BOARD EXTRACTION TOOL
J-6322-420-A o TAPE GUIDE ADJUSTMENT SCREWDRIVER
J-6322-420-3 o BIT (0.89 ACROSS)

J-6323-530-A o STOP WASHER INSERTION TOOL
J-6323-750-A o MB DUMMY TOOL
J-6323-890-A o FWD BACK TENSION MEASURING CASSETTE
J-6324-150-A o REEL TABLE HEIGHT GAUGE
J-6324-170-A o CASSETTE REFERENCE PLATE (1)

J-6325-110-A o TORQUE SCREWDRIVER BIT (M1.4)
J-6325-380-A o TORQUE SCREWDRIVER BIT (M2)
J-6325-400-A o TORQUE SCREWDRIVER (3 kg)
J-6325-530-A o UPPER DRUM ECCENTRICITY ADJUSTMENT TOOL (6)
J-6326-120-A o HEXAGONAL BIT (D=1.5 mm)

J-6394-080-A o GRAY SCALE CHART
J-6420-260-A o EXTENSION BOARD EX-410
J-6420-900-A o MB CONVERSION BOARD
J-6510-070-A o TP TOOL
J-6510-110-A o RS-232C INTERFACE CABLE(For J)

J-6510-120-A o RS-232C INTERFACE CABLE(For UC)
J-6510-150-A o RF ENVELOPE TOOL
3-184-527-01 o CLEANING CLOTH
7-432-950-03 o COATING-SELANT TSE-392W
7-651-000-11 o SONY GREASE (SGL-801)

7-661-018-18 o OIL (NT-68)
7-700-736-05 o HEXAGON WRENCH (D=1.5 mm)
7-700-736-06 o HEXAGON WRENCH (D=0.89 mm)
8-960-076-01 o ALIGNMENT TAPE HR5-1A
8-960-076-11 o ALIGNMENT TAPE HR2-1A

9-919-573-01 o HEAD CLEANING LIQUID

Section 2

Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.

For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section.

However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.

In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled "Semiconductor Pin Assignments" (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.

The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.

Pin assignments and block diagrams are based on the IC manufacturer's data book.

本機に使用されている半導体型名の一覧を下記に示します。索引中、ページが記載されている半導体は、本章の該当ページを参照してください。ただし、互換性のない型名を併記している場合がありますので、部品を交換するときは、Spare Partsの章を参照してください。

また、ID番号が記載されている半導体は、別途発行の "Semiconductor Pin Assignments" CD-ROM版 (ソニー部品番号: 9-968-546-xx) を参照してください。

半導体型名またはID番号から検索ができます。

マニュアルまたはCD-ROMに掲載されている半導体は、それぞれの機能を等価的に表わしたものです。

外観やインデックスマークの表示方法が実物と異なる場合があります。

ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE	Page or ID No.
1S2836	DC001-02
1S2836-T1	DC001-02
1S2837-T1	DC001-03
1SS123-T1	DC001-01
1SS184	DC001-03
1SS226	DC001-01
1SS294	DC001-06
1SS294-TE85L	DC001-06
1SS301-TE85L	DC001-03
1SS302	DC001-01
1SS302-TE85L	DC001-01
DA204U	DC001-01
DA204UT106	DC001-01
DAN202U	DC001-03
DAN202UT106	DC001-03
DAN222	DC001-03
DAN222-TL	DC001-03
DAP202U	DC001-02
DAP202UT106	DC001-02
EA60QC06-TE16F2	DC015-01
EC10QS-06	DC007-01
EC10QS-06-TE12L	DC007-01
HN1D03FU-TE85R	DC005-05
MA141WK	DC001-03
MA3J142E0LSO	DC001-03
MA3J14300LSO	DC001-01
MA3J74200LSO	DC001-01
MA728	DC008-01
MA728-TX	DC008-01
MA8047	DC008-04
MA8047-TX	DC008-04
MBRS130LT3	DC013-01

DIODE	Page or ID No.
RD10M-B1	DC001-04
RD10M-T1B1	DC001-04
RD15M-B1	DC001-04
RD15M-T1B1	DC001-04
RD18UM-T1B3	DC008-04
RD2.4M-B	DC001-04
RD2.4M-T1B	DC001-04
RD2.4UH-T1	DC008-04
RD3.9UH-T1	DC008-04
RD4.3SB-T1	DC008-04
RD4.3UH-T1	DC008-04
SB01-05CP	DC001-06
SB01-05CP-TB	DC001-06
SB01-15CP	DC001-06
SB01-15CP-TB	DC001-06
SB05-05CP	DC001-16
SB05-05CP-TB	DC001-16

Index

TRANSISTOR	Page or ID No.
2SA1162G	TC001-01
2SA1314C-TE12L	TC002-01
2SA1330-06	TC001-01
2SA1330-T106	TC001-01
2SA1462	TC001-01
2SA1462-T1Y33Y34	TC001-01
2SA1610-T1Y33	TC001-01
2SA1610-Y33	TC001-01
2SA1611-M5M6	TC001-01
2SA1611-M6	TC001-01
2SA1611-T1M7	TC001-01
2SA1611T1-M5M6	TC001-01
2SA1688-4-SONY-TL	TC001-01
2SA812-T1-M5M6	TC001-01
2SB1114-T1ZL	TC002-01
2SB1115-T1YL	TC002-01
2SB1115A-YQ	TC002-01
2SB1121-ST	TC002-01
2SB624-BV345	TC001-01
2SB624T1-BV345	TC001-01
2SC1623-L5L6	TC001-02
2SC1623-T1-L5L6	TC001-02
2SC2713-G	TC001-02
2SC2713G-TE85L	TC001-02
2SC2982C-TE12L	TC002-02
2SC3360-N16	TC001-02
2SC3360-T1N16	TC001-02
2SC4116-YG	TC001-02
2SC4116YG-TE85L	TC001-02
2SC4176-B34	TC001-02
2SC4176-B35	TC001-02
2SC4176-T1B35	TC001-02
2SC4176T1B33B34B35	TC001-02
2SC4177-L6	TC001-02
2SC4177-T1L5L6	TC001-02
2SC4207-YGRTE85L	TC008-11
2SC4213-B	TC001-02
2SC4213B-TE85L	TC001-02
2SC5008	TC001-02
2SC5008-T1	TC001-02
2SD1614-T1XL	TC002-02
2SD1624-T	TC002-02
2SD1624-T-TD	TC002-02
2SD2098-T100R	TC002-02
2SJ187	TC002-06
2SJ187-TD	TC002-06
2SJ325	TC010-05
2SK508-K51	TC001-05
2SK508-T1K51	TC001-05
2SK620	TC001-07
2SK620-TX	TC001-07
2SK711-BL	TC001-05
2SK711-BL/V-TE85L	TC001-05
2SK852-T1X2	TC001-05
2SK852-T1X4	TC001-05
2SK852-X2	TC001-05
2SK852-X4	TC001-05
3SK163-1	TC003-01
3SK163-1-T7	TC003-01

TRANSISTOR	Page or ID No.
DTA114EE	TC001-04
DTA114EE-TL	TC001-04
DTA114EUA	TC001-04
DTA114EUA-T106	TC001-04
DTA123JUA-T106	TC001-04
DTA124EUA-T106	TC001-04
DTA124XE-TL	TC001-04
DTA144EE	TC001-04
DTA144EE-TL	TC001-04
DTA144EKA-T146	TC001-04
DTA144EUA-T106	TC001-04
DTA144WE	TC001-04
DTA144WE-TL	TC001-04
DTC114EE	TC001-03
DTC114EE-TL	TC001-03
DTC114EUA-T106	TC001-03
DTC114TKA-T146	TC001-03
DTC114TUA-T106	TC001-03
DTC124EUA-T106	TC001-03
DTC124XE	TC001-03
DTC124XE-TL	TC001-03
DTC144EE	TC001-03
DTC144EE-TL	TC001-03
DTC144EKA	TC001-03
DTC144EKA-T146	TC001-03
DTC144EUA-T106	TC001-03
DTC144WE	TC001-03
DTC144WE-TL	TC001-03
HN1C01FU-TE85R	TC006-03
IMH2	TC005-08
IMH2-T110	TC005-08
SI4412DY-T1	TC012-06
SI4420DY-T1	TC012-06
SI4450DY-T1	TC012-06
SI4532DY-T1	TC012-03
SI4953DY-T1	TC012-02
SI6542DQ-T1	TC013-03
SI6542DQ-TL	TC013-03
SI9435DY-T1	TC012-04
SI9936DY	TC012-01
SI9936DY-T1	TC012-01
XP4501-TXE	TC006-03

IC	Page or ID No.
74LCX00MTCX	TC74HC00P
74LCX04MTCX	TC74HC04P
74LCX08MTCX	TC74HC08P
74LCX125MTCX	MC74HC125N
74LCX157MTCX	TC74HC157P
74LCX240MTCX	TC74HC240P
74LCX244MTCX	TC74HC244P
74LCX245MTCX	TC74HC245P
74LCX32MTCX	TC74HC32P
74LCX540MTCX	MC74HC540N
74LCX541MTCX	MC74HC541N
74LCX574MTCX	TC74HC574P
74LCX646MTCX	2-6
74LCX74MTCX	TC74HC74P
74LCX821MTCX	V74ACT821
AD9432BST-80	2-6
ADV7127KRU140	2-7
ADV7127KRU50-REEL	2-7
AK5352-VF-E2	AK5352-VF-E2
AK9813AF-E2	AK9813AF-E2
AT27C512R-12JC	AT27C512R-15JC
BA10358F-E2	RC4558
BA6285FP-E2	BA6285FP
CAT24WC02J-TE13	2-7
CDC509PWR	CDC509PWR
CDC536DBR	2-7
CLC450AJM5	AD8055ART-REEL7
CLC505AJE	CLC505AJE
CLC505AJE-T	CLC505AJE
CXA1451M	CXA1451M
CXA1451M-TH	CXA1451M
CXA3093Q	CXA3093Q
CXD1260N	CXD1260N
CXD206-114R	CXD206-114R
CXD2315Q	CXD2306Q
CXD8072Q	CXD8072Q
CXD8384Q	CXD8384Q
CXD8753Q	CXD8753Q
CXD9014BR	CXD9014AR
CXD9015CR	CXD9015BR
CXD9016AR	CXD9016AR
CXD9017BR	CXD9017BR
CXD9019AR	CXD9019AR
CXD9020CR	CXD9020BR
CXD9064R	2-8
CXD9069Q	CXD9069Q
CXD9080GB	2-8
CXD9093R	CXD9093R
CXD9107R	CXD9107R
CXD9122R	2-9
CXD9123R	2-9
CXD9135R	2-10
DS1267E-10-TE1	2-10
DS90LV031ATMX	DS90LV031
DS90LV032ATMX	DS90LV032

IC	Page or ID No.
EPC2LC20	EPC2LC20
EPF10K30ATC144-3(03)	EPF10K20TC144-3
HD151015T	HD151015T
HD151015TEL	HD151015T
HD6437043AP00F	HD6437043AP00F
IDT71V124S15Y-TL	HM62W8127HJP-27
ISPLSI2192VE-100LT128	ISPLSI2192VE-100LT128
KM416S1020CT-G10T	KM416S1020BT-G10T
LA7205M	LA7205M
LA7205M-TE-L	LA7205M
LC35256DT-70-TLM	CXK58257ATM
LF353M	RC4558
LF353M-FL63	RC4558
LM2903PW-E05	UA393DC
LM311M-FL63	LM311P
LM311PS	LM311P
LM358PW	RC4558
LM358PW-E05	RC4558
LM35DM	LM35DM
LM4040AIM3-2.5	LM4040BIM3
LT1431CS8	LT1431CS8-E1
LT1460CCMS8-5	2-10
LTC1155CS8-E2	2-11
M48T18-100MH1TR	M48T18-100MH1TR
M5201FP	M5201P
M5201FP-600D	M5201P
M5222FP	M5222FP
M5222FP-E1	M5222FP
M66220FP-200D	M66220FP-200D
M66250FP	2-10
MAX525BCAP-TG068	2-11
MB3761PF-ER	MB3761PF
MB86189PFV-G-BND-ER	MB86189PFV-G-BND-ER
MB88346BPFV	MB88346APF
MB88346BPFV-EF	MB88346APF
MBM29F400BC-70PFTN	MBM29F400BA-12PF
MBM29LV160B-90PFTN	MBM29LV160B-90PFTN
MBM29LV160B-90PTFN	MBM29LV160B-90PTFN
MC1495DR2	MC1495L
MC34182DR2	RC4558
MC68332GCPV16	MC68332GCPV16
MC68336GCFT20	2-12
MC74ACT08MEL	TC74HC08P
MC74ACT125MEL	MC74HC125N
MC74HC4052F	MC74HC4052N
MC74HC4052FEL	MC74HC4052N
MSM82C55A-2GS	MSM82C55A-5GS
MSM82C55A-2GS-VK	MSM82C55A-5GS
NC7SZ00P5	TC7S00F
NC7SZ04P5	TC7S04F
NC7SZ08P5	TC7S08F
NJM1496V-TE2	MC1496P
NJM2041M-D	RC4558


Index

IC	Page or ID No.	IC	Page or ID No.
NJM2041M-D(TE2)	RC4558	TC74VHCT541AFT(EL)	MC74HC541N
NJM386M(TE2)	NJM386D-E	TC7S00FU(TE85R)	TC7S00F
NJM431U	NJM431U	TC7S02FU(TE85R)	TC4S01F
NJM431U-TE1	NJM431U	TC7S04F(TE85R)	TC7S04F
NJM4556AM-TE2	RC4558	TC7S04FU(TE85R)	TC7S04F
NJM4565M-A	RC4558	TC7S08F	TC7S08F
NJM4565M-A(TE2)	RC4558	TC7S08F(TE85R)	TC7S08F
NJM5532M(TE2)	RC4558	TC7S08FU(TE85R)	TC7S08F
PCF8574T-T	PCF8574T	TC7S32FU(TE85R)	TC7S32F
PCF8574TS-T	2-11	TC7S66FU	SC14S66F
PCF8591T	PCF8591T	TC7S66FU(TE85R)	SC14S66F
PCM1716E-BT2	PCM1716E-BT2	TC7S86FU	TC7S86FU
S-81230SGUP-DQB-T1	S-81225AG-RH	TC7S86FU(TE85R)	TC7S86FU
SC7S04F	TC7S04F	TC7SET08FU(TE85R)	TC7S08F
SN74HC08APW-E05	TC74HC08P	TC7SH02FU	TC4S01F
SN74HC08APW-E20	TC74HC08P	TC7SH02FU-TE85R	TC4S01F
SN74HC74APW-E05	TC74HC74P	TC7SH04FU	TC7S04F
SN74HC74APW-E20	TC74HC74P	TC7SH04FU-TE85R	TC7S04F
SN74HCT04APW-E20	TC74HC04P	TC7SH08FU-TE85R	TC7S08F
SN74HCT541APWR	MC74HC541N	TC7SH32FU-TE85R	TC7S32F
SN75158PS	SN75158P	TC7SZ04FU(TE85R)	TC7S04F
SN75158PSR	SN75158P	TC7W04FU	TC7W04F
STK14C88-N45I	STK14C88-N45I	TC7W04FU(TE12R)	TC7W04F
TC4053BFT(EL,N)	MC74HC4053F	TC7W08FU	TC7W08F
TC4S69F	TC7S04F	TC7W08FU(TE12R)	TC7W08F
TC4S69F(TE85R)	TC7S04F	TC7W32FU	TC7W32FU
TC4SU69F	TC7S04F	TC7W32FU(TE12R)	TC7W32FU
TC4SU69F(TE85R)	TC7S04F	TC7W53FU(TE12R)	TC4W53FU
TC4W53FU	TC4W53FU	TC7W74FU	TC7W74FU
TC4W53FU(TE12R)	TC4W53FU	TC7W74FU(TE12R)	TC7W74FU
TC55V2161FTI-85L	2-11	TC7WH125FU(TE12R)	TC7W125FU
TC74ACT04F-EL	TC74HC04P	TE7751	TE7751
TC74HC4052AFT(EL)	MC74HC4052N	TL062CPW	RC4558
TC74HC4053AFT(EL)	MC74HC4053F	TL062CPWR	RC4558
TC74HC4538AFT(EL)	MC74HC4538N	TL064CPW	XRA10324AF
TC74VHC00FT(EL)	TC74HC00P	TL064CPW-E05	XRA10324AF
TC74VHC04FT(EL)	TC74HC04P	TL072CPS	RC4558
TC74VHC08FT(EL)	TC74HC08P	TL072CPS-E20	RC4558
TC74VHC123AFT(EL)	TC74HC123P	TL082CPW-E05	RC4558
TC74VHC125FT(EL)	MC74HC125N	TL084CPW-E20	XRA10324AF
TC74VHC138FT(EL)	TC74HC138P	TL084CPWR	XRA10324AF
TC74VHC157FT(EL)	TC74HC157P	TL1451ACPW-E05	TL1451CNS
TC74VHC244FT(EL)	TC74HC244P	TL1451ACPWR	TL1451CNS
TC74VHC245FT(EL)	TC74HC245P	TL712CPS	TL712CP
TC74VHC32FT(EL)	TC74HC32P	TL712CPSR	TL712CP
TC74VHC4040FT(EL)	MC74HC4040N	TL7700CPS	TL7700CPS
TC74VHC541FT(EL)	MC74HC541N	TL7700CPS-E20	TL7700CPS
TC74VHC595FT(EL)	TC74HC595P	TL7705ACPS	TL7705CP
TC74VHC74FT(EL)	TC74HC74P	TL7705ACPSR	TL7705CP
TC74VHC86FT(EL)	TC74HC86P	TL7705CPS-B	TL7705CP
TC74VHCT00AFT(EL)	TC74HC00P	TL7705CPS-B-E20	TL7705CP
TC74VHCT04AFT(EL)	TC74HC04P	TLC272CPW-E05	RC4558
TC74VHCT138AFT(EL)	TC74HC138P	TLC27L2CPS	RC4558
TC74VHCT240AFT(EL)	TC74HC240P	TLC27L2CPSR	RC4558
TC74VHCT244AFT(EL)	TC74HC244P	TLC27M2CPW-E05	RC4558
TC74VHCT245AFT(EL)	TC74HC245P	TLC27M2CPWR	RC4558
		TLC27M4CPW	TLC27M4CN
		TLC27M4CPWR	TLC27M4CN
		TLC2932IPW-E20	TLC2932IPW

IC	Page or ID No.	LED	Page or ID No.
UPC1663G	UPC1663C	CL-150UR-CD-T	LC001-01
UPC1663G-E2	UPC1663C	CL-200HR-C-TSL	LC008-01
UPC358G2-E2	RC4558		
UPC814G2-E2	RC4558	GL3PR8T	LR002-01
UPD6466GS-515	UPD6466GS-502-E2	GL3UR8	LR002-01
UPD71055GB-10-3B4	UPD71055G		
X25040SIC7000	X25040SIC7000		
		OTHER	Page or ID No.
		GP1S33	MR010-08
		GP2S07B	MA013-01
		HCPL-0630-500	MA009-01
		M-30	MA007-02


IC

74LCX646MTCX (FSC)
BUS TRANSCEIVER/REGISTER WITH 3-STATE OUTPUTS
—TOP VIEW—

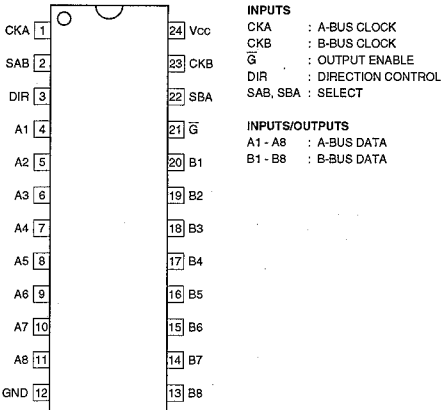


G	DIR	CKA	CKB	SAB	SBA	A1 - A8	B1 - B8	FUNCTION
x	x	1	x	x	x	INPUT	UNDEFINED	STORE A DATA
x	x	x	1	x	x	UNDEFINED	INPUT	STORE B DATA
1	x	1	x	1	x	INPUT	INPUT	STORE A & B DATA
0	0	x	x	x	0	INPUT	INPUT	HOLD DATA
0	0	x	x	x	0	OUTPUT	INPUT	TRANSFER B DATA TO A BUS
0	0	x	1	0	x	OUTPUT	INPUT	TRANSFER STORED B DATA TO A BUS
0	1	x	x	0	x	INPUT	OUTPUT	TRANSFER A DATA TO B BUS
0	1	1	0	x	1	INPUT	OUTPUT	TRANSFER STORED A DATA TO B BUS

0 : LOW LEVEL
1 : HIGH LEVEL
x : DON'T CARE

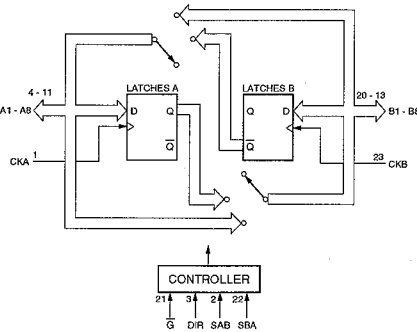

AD9432BST-80 (AD)
12-BIT A/D CONVERTER
—TOP VIEW—




PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	14	O	OR	27	O	D8	40	—	NC
2	—	Vcc	15	O	(MSB)D11	28	O	D2	41	—	NC
3	—	GND	16	O	D10	29	O	D1	42	—	NC
4	—	GND	17	O	D9	30	O	D0(LSB)	43	—	GND
5	—	Vcc	18	O	D8	31	—	D.GND	44	—	Vcc
6	—	Vcc	19	O	D7	32	—	Vcc	45	I	VREFIN
7	I	ENCODE	20	O	D6	33	—	GND	46	O	VREFOUT
8	I	ENCODE	21	—	D.GND	34	—	GND	47	—	Vcc
9	—	GND	22	—	Vcc	35	—	GND	48	—	GND
10	—	Vcc	23	—	Vcc	36	—	Vcc	49	I	AIN
11	—	GND	24	—	D.GND	37	—	Vcc	50	I	AIN
12	—	D.GND	25	O	D5	38	—	GND	51	—	GND
13	—	Vcc	26	O	D4	39	—	NC	52	—	Vcc

INPUTS
AIN : ANALOG INPUT - TRUE
AIN : ANALOG INPUT - COMPLEMENTARY
ENCODE : ENCODE CLOCK FOR ADC - COMPLEMENTARY
ENCODE : ENCODE CLOCK FOR ADC - TRUE (ADC SAMPLES ON RISING EDGE OF ENCODE)
VREFIN : REFERENCE INPUT FOR ADC (2.5 V TYPICAL)



OUTPUTS
D0 - D11 : DIGITAL OUTPUT
OR : OUT OF RANGE OUTPUT
VREFOUT : INTERNAL REFERENCE OUTPUT (2.5 V TYPICAL)

OTHER
NC : NO CONNECTION

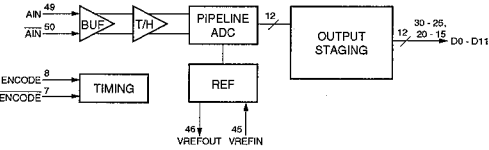


ADV7127KRU140 (AD)
ADV7127KRU50-REEL (AD)

10-BIT VIDEO D/A CONVERTER
—TOP VIEW—

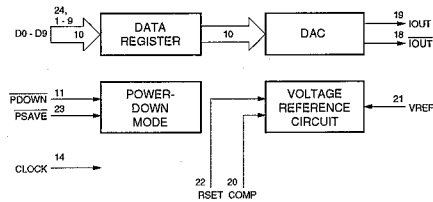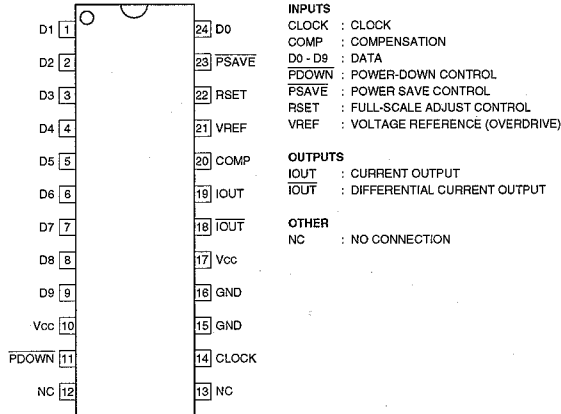

CDC536DBR (TI)


PHASE LOCK LOOP CLOCK DRIVER WITH 3 STATE OUTPUTS
—TOP VIEW—

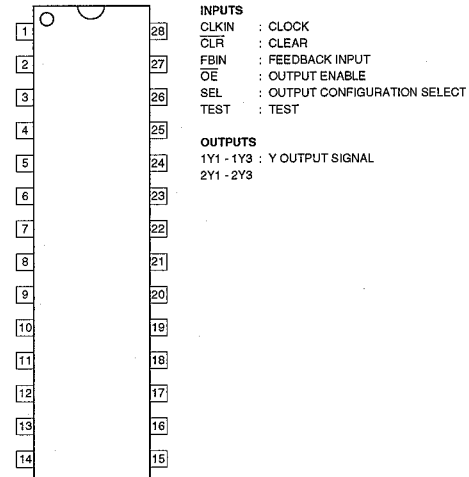

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	A.Vcc	8	—	Vcc	15	—	GND	22	O	2Y1
2	—	A.GND	9	—	GND	16	O	2Y3	23	—	Vcc
3	I	CLKIN	10	O	1Y2	17	—	Vcc	24	I	CLR
4	I	SEL	11	—	Vcc	18	—	GND	25	I	TEST
5	I	OE	12	—	GND	19	O	2Y2	26	I	FBIN
6	—	GND	13	O	1Y3	20	—	Vcc	27	—	A.GND
7	O	1Y1	14	—	Vcc	21	—	GND	28	—	A.Vcc


CAT24WC02J-TE13 (CATALYST)

SERIAL EEPROM
—TOP VIEW—

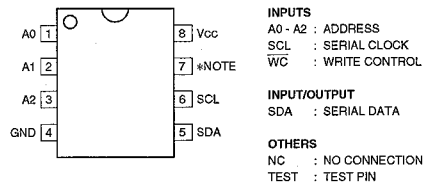

*NOTE :


TYPE	MEMORY	PIN 7
NM24C16	16 K	NC
X24C02	2 K	WC
S-24C02	2 K	WC
CAT24WC02	4 K	TEST
X24C04	4 K	TEST
X24C08	8 K	TEST

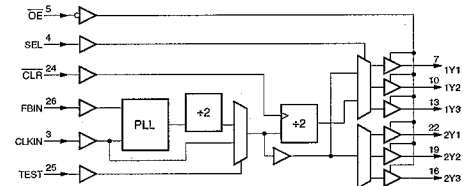

CXD9064R (SONY)

CAMERA VIDEO PROCESSOR

—TOP VIEW—

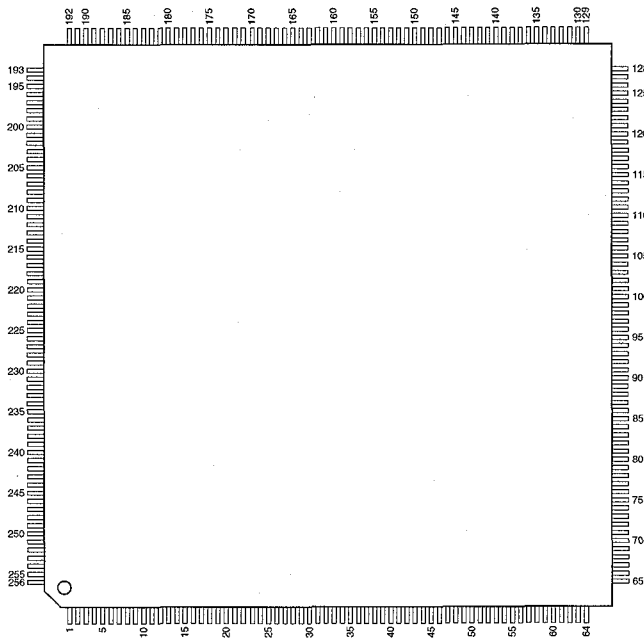


PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	65	—	Vcc	129	—	GND	193	—	Vcc
2	—	GND	66	—	Vcc	130	—	GND	194	—	Vcc
3	—	AMC	67	O	AFV1	131	I	RTEB	195	O	YO4
4	I	SCX	68	O	AFV0	132	I	RTIN	196	O	YO3
5	I	SMC	69	O	SKD	133	I	CLK2	197	O	YO2
6	I	SIN	70	O	BO9	134	I	TMOD0B	198	O	YO1
7	O	SOT	71	—	Vcc	135	I	TMOD1B	199	—	GND
8	—	Vcc	72	—	GND	136	I	TMOD2B	200	—	Vcc
9	I	CMN	73	O	BO8	137	O	TOU1B	201	O	YO0
10	I	CMP	74	O	BO7	138	I	F2	202	O	FBR0
11	I	HDI	75	O	BO6	139	I	H2	203	O	FBR8
12	I	VDI	76	O	BO5	140	—	Vcc	204	O	FBRG
13	—	GND	77	—	GND	141	O	VTR27	205	—	GND
14	I	CLK1	78	—	Vcc	142	O	VTR26	206	O	FBR5
15	I	TMOD0A	79	O	BO4	143	O	VTR25	207	O	FBR0
16	I	TMOD1A	80	O	BO3	144	—	GND	208	O	FBR5
17	I	TMOD2A	81	O	BO2	145	—	Vcc	209	—	Vcc
18	O	TOU1A	82	—	GND	146	O	VTR24	210	I	BI11
19	I	BLKG1	83	O	BO1	147	O	VTR23	211	I	BI10
20	I	PBLKG	84	O	BO0	148	O	VTR22	212	I	BI09
21	—	GND	85	—	GND	149	—	GND	213	—	GND
22	—	Vcc	86	—	Vcc	150	—	Vcc	214	—	Vcc
23	—	Vcc	87	—	Vcc	151	—	Vcc	215	—	Vcc
24	I	PRST	88	O	GO9	152	O	VTR21	216	I	BI08
25	I	RDB	89	O	GO8	153	O	VTR20	217	I	BI07
26	I	WRB	90	O	GO7	154	O	VTR17	218	I	BI06
27	I	CEB	91	O	GO6	155	—	GND	219	I	BI05
28	I	ADR1	92	—	GND	156	O	VTR16	220	I	BI04
29	I	ADR0	93	—	Vcc	157	O	VTR15	221	I	BI03
30	—	Vcc	94	O	GO5	158	O	VTR14	222	—	Vcc
31	—	GND	95	O	GO4	159	—	GND	223	—	GND
32	I/O	DIO7	96	O	GO3	160	—	Vcc	224	I	BI02
33	I/O	DIO6	97	O	GO2	161	O	VTR13	225	I	BI01
34	I/O	DIO5	98	—	GND	162	O	VTR12	226	I	BI00
35	I/O	DIO4	99	O	GO1	163	O	VTR11	227	I	GI11
36	—	GND	100	O	GO0	164	O	VTR10	228	I	GI10
37	I/O	DIO3	101	O	RO9	165	—	GND	229	I	GI09
38	I/O	DIO2	102	O	RO8	166	O	VTR9	230	I	GI08
39	I/O	DIO1	103	—	Vcc	167	O	HO	231	I	GI07
40	I/O	DIO0	104	O	RO7	168	O	FO	232	I	GI06
41	I	TEST1	105	O	RO6	169	—	Vcc	233	I	GI05
42	I	TEST0	106	—	Vcc	170	—	Vcc	234	—	Vcc
43	—	Vcc	107	—	Vcc	171	—	Vcc	235	—	Vcc
44	—	GND	108	—	GND	172	—	GND	236	—	GND
45	—	Vcc	109	O	RO5	173	O	PBR09	237	I	GI04
46	O	TDO	110	O	RO4	174	O	PBR08	238	I	GI03
47	I	TKC	111	O	RO3	175	O	PBR07	239	I	GI02
48	I	TDI	112	O	RO2	176	O	PBR06	240	I	GI01
49	I	TMS	113	—	GND	177	O	PBR05	241	I	GI00
50	I	TRST	114	—	Vcc	178	—	GND	242	I	RI11
51	—	GND	115	O	RO1	179	O	PBR04	243	I	RI10
52	—	Vcc	116	O	RO0	180	O	PBR03	244	I	RI09
53	O	AFV9	117	O	VFD7	181	O	PBR02	245	—	Vcc
54	O	AFV8	118	O	VFD6	182	O	PBR01	246	—	GND
55	O	AFV7	119	O	VFD5	183	O	PBR00	247	I	RI08
56	O	AFV6	120	—	GND	184	—	GND	248	I	RI07
57	—	GND	121	—	Vcc	185	—	Vcc	249	I	RI06
58	O	AFV5	122	O	VFD4	186	O	YO9	250	I	RI05
59	O	AFV4	123	O	VFD3	187	O	YO8	251	I	RI04
60	O	AFV3	124	O	VFD2	188	O	YO7	252	I	RI03
61	O	AFV2	125	O	VFD1	189	O	YO6	253	I	RI02
62	—	Vcc	126	O	VFD0	190	O	YO5	254	I	RI01
63	—	GND	127	—	Vcc	191	—	GND	255	I	RI00
64	—	GND	128	—	Vcc	192	—	GND	256	—	Vcc

CXD9080GB (SONY)


VIDEO FRAME SYNCHRONIZER

—BOTTOM VIEW—

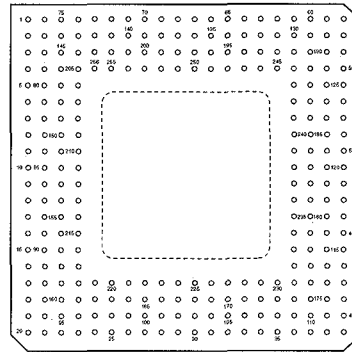


PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	65	O	MA5	129	I/O	MD32	193	I/O	MD27
2	I/O	MD58	66	O	MA8	130	I/O	MD26	194	I/O	MD33
3	I/O	MD54	67	—	GND	131	I/O	MD23	195	—	Vcc
4	I/O	MD50	68	O	IMCK	132	I/O	MD29	196	O	MA6
5	I/O	MD51	69	O	MA11	133	O	MA3	197	O	MA9
6	—	Vcc	70	O	RASK	134	O	MA4	198	O	MA2
7	I/O	MD61	71	O	DCM	135	O	MA7	199	O	MA0
8	I/O	MD65	72	—	Vcc	136	O	CKE	200	O	MA12
9	I/O	MD69	73	I/O	MD39	137	O	MA1	201	O	CASK
10	I/O	MD71	74	I/O	MD47	138	O	MA10	202	I/O	MD43
11	—	Vcc	75	I/O	MD42	139	O	CSX	203	I/O	MD46
12	I/O	HAD2	76	—	Vcc	140	O	WEX	204	I/O	MD38
13	—	GND	77	—	GND	141	I/O	MD37	205	—	GND
14	I/O	HAD3	78	—	Vcc	142	I/O	MD45	206	I/O	MD56
15	O	FSYNCVI OUT	79	I/O	MD52	143	I/O	MD44	207	—	Vcc
16	I	TDI	80	I/O	MD49	144	I/O	MD36	208	I/O	MD55
17	I	VINA0	81	—	GND	145	I/O	MD60	209	—	GND
18	I	HSTRBX	82	I/O	MD59	146	—	GND	210	—	Vcc
19	O	HSYNCVI OUT	83	I/O	MD63	147	I/O	MD48	211	—	Vcc
20	—	GND	84	I/O	MD67	148	I/O	MD53	212	—	GND
21	I	VINA1	85	I/O	MD68	149	I/O	MD57	213	—	Vcc
22	I	VINA4	86	I/O	MD70	150	I/O	MD82	214	—	GND
23	I	VINA7	87	I/O	HAD4	151	I/O	MD64	215	I	HCSX
24	I	VINA11	88	—	Vcc	152	I/O	MD66	216	—	Vcc
25	I	VINB2	89	I/O	HAD5	153	I/O	HAD0	217	O	TDO
26	I	VINB6	90	I	TRST	154	I/O	HAD6	218	—	GND
27	I	VINB9	91	I	FSYNC1	155	I/O	HAD1	219	I	VINA8
28	—	GND	92	I	HST1	156	I	VPDEA	220	—	Vcc
29	O	FBI2	93	I	TKC	157	I	HST0	221	I	VINB3
30	I	CLK1	94	I/O	HAD7	158	I	HSYNC1	222	—	GND
31	—	Vcc	95	I	VINA3	159	I	TMS	223	—	Vcc
32	—	GND	96	I	VINA6	160	I	VIN2	224	—	Vcc
33	—	Vcc	97	I	VINA10	161	I	VINA5	225	I	RSTX
34	I	MST	98	I	VINB1	162	I	VINA9	226	—	Vcc
35	O	VOU2A2	99	I	VINB5	163	I	VINB0	227	—	GND
36	O	VOU2A5	100	I	VINB8	164	I	VINB4	228	—	Vcc
37	O	VOU2A8	101	I	VINB11	165	I	VINB7	229	—	Vcc
38	I	XSM	102	—	Vcc	166	I	VINB10	230	—	GND
39	—	GND	103	O	FBI1	167	I	EXCHGIO	231	—	GND
40	O	VOU2A11	104	—	GND	168	I	CLK2	232	—	Vcc
41	O	VOU2A10	105	I	PLLS	169	I	SMCK	233	—	Vcc
42	O	VOU2B2	106	I	FSYNC2	170	—	GND	234	O	VOU2B8
43	O	VOU2B5	107	O	CLKVO OUT	171	I	XTST	235	—	GND
44	O	VOU2B7	108	O	VOU2A1	172	O	CLKVI OUT	236	—	Vcc
45	O	VOU2B11	109	O	VOU2A4	173	O	VOU2A6	237	—	Vcc
46	I/O	MSSYNC3	110	O	VOU2A7	174	O	VOU2A3	238	I/O	MD1
47	—	GND	111	—	Vcc	175	O	VOU2A8	239	—	Vcc
48	I/O	MD0	112	O	VOU2A9	176	O	VOU2B0	240	—	GND
49	I/O	MD3	113	O	VOU2B1	177	O	VOU2B3	241	I/O	MD17
50	I/O	MD5	114	O	VOU2B4	178	O	VOU2B6	242	—	Vcc
51	I/O	MD2	115	—	GND	179	O	VOU2B9	243	I/O	MD16
52	I/O	MD6	116	O	VOU2B10	180	I/O	MSSYNC0	244	—	GND
53	I/O	MD11	117	I/O	MSSYNC1	181	I/O	MSSYNC2	245	—	GND
54	I/O	MD15	118	I/O	MSSYNC5	182	I/O	MSSYNC4	246	—	Vcc
55	I/O	MD21	119	—	Vcc	183	—	GND	247	—	GND
56	—	Vcc	120	—	GND	184	I/O	MD9	248	—	GND
57	I/O	MD12	121	I/O	MD7	185	I/O	MD4	249	—	Vcc
58	—	GND	122	—	Vcc	186	I/O	MD13	250	—	Vcc
59	I/O	MD34	123	I/O	MD8	187	—	GND	251	—	GND
60	I/O	MD28	124	—	GND	188	I/O	MD20	252	—	Vcc
61	I/O	MD24	125	I/O	MD19	189	I/O	MD14	253	—	GND
62	I/O	MD25	126	I/O	MD18	190	I/O	MD35	254	I/O	MD41
63	I/O	MD31	127	—	Vcc	191	I/O	MD30	255	—	Vcc
64	—	Vcc	128	I/O	MD10	192	I/O	MD22	256	I/O	MD40

CXD9122R (SONY)

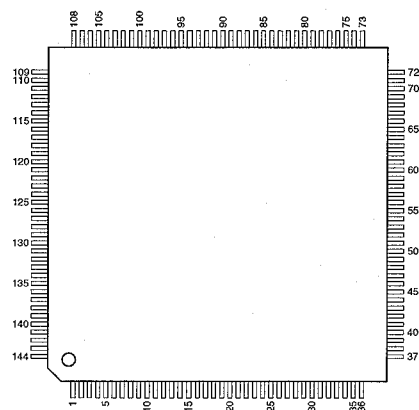SYNC GENERATOR
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	37	—	GND	73	—	Vcc	109	—	GND
2	I	MAKERH	38	—	GND	74	O	OPTIONH1	110	—	GND
3	I	MAKERF	39	O	CHRCCLK	75	O	OPTIONH2	111	I	CLK74A
4	I	SYNCH	40	O	CHRRD	76	O	OPTIONH3	112	I	CLK74B
5	I	SYNCF	41	O	CHRRD	77	O	OPTIONH4	113	I	CLK371
6	I	MTRIGON	42	O	CHRBCLK	78	O	OPTIONV1	114	I	HRST1
7	I	STRIGON	43	O	MOD43	79	O	OPTIONV2	115	I	HRST2
8	I	CPUMODE	44	O	MAKER	80	O	OPTIONV3	116	I	FRST1
9	I	A0	45	O	WINDOW	81	O	OPTIONV4	117	I	HRST2EN
10	I	A1	46	O	ZEBRA1	82	—	GND	118	I	BYPASS
11	I	A2	47	O	ZEBRA2	83	O	CVPHD	119	I	ON256
12	I	A3	48	—	GND	84	O	CVPV	120	O	CLK256A
13	I	A4	49	O	TESTLOW	85	O	CVPF	121	O	CLK256B
14	I	A5	50	O	TESTRI	86	O	CVPBLKG	122	O	CLK370
15	I	A6	51	O	TESTSAW	87	O	FILH	123	—	Vcc
16	I	A7	52	O	CHUCLP	88	O	FILF	124	I	HSINGLE
17	I	A8	53	O	SYSBLKG	89	—	Vcc	125	I	EXTHEN
18	I/O	D0	54	—	Vcc	90	O	OHBHRST	126	I	FRSTSEL
19	I/O	D1	55	O	SW0	91	O	OHBVD	127	I	FSINGLE
20	I/O	D2	56	O	SW1	92	O	OHBFRST	128	I	EXTFEN
21	I/O	D3	57	O	SW2	93	O	OHBBLKG	129	I	LDEN
22	I/O	D4	58	O	SW3	94	—	GND	130	I	LOOPOPEN
23	I/O	D5	59	O	SW4	95	O	REF1125	131	I	IN525 1125
24	I/O	D6	60	O	SW5	96	O	REF525	132	I	PAL NTSC
25	I/O	D7	61	O	SW6	97	O	OHBREF	133	I	CCUEXT
26	I	WRB	62	O	SW7	98	O	PLLREF	134	I	CCUF
27	I	REB	63	—	GND	99	O	PEDCLP	135	I	SMC
28	I	CSB	64	O	VTRH1	100	O	SYNCOE	136	I	AMC
29	O	HD1	65	O	VTRH2	101	—	GND	137	I	PROGINT
30	O	VD1	66	O	VTRF1	102	O	SYNC1U	138	I	EXTINTI
31	O	FIELD1	67	O	VTRF2	103	O	SYNC1D	139	O	EXTINTO
32	O	OPBCLP	68	O	VTRF3	104	O	SYNC2U	140	I	SYNC525
33	O	CAMBLKG1	69	O	COPROH	105	O	SYNC2D	141	I	SYNC1125
34	O	CAMBLKG2	70	O	COPROF	106	O	SYNC3U	142	I	POWRESET
35	O	AUDIOH	71	—	GND	107	O	SYNC3D	143	—	GND
36	—	Vcc	72	—	GND	108	—	Vcc	144	—	GND


CXD9123R (SONY)

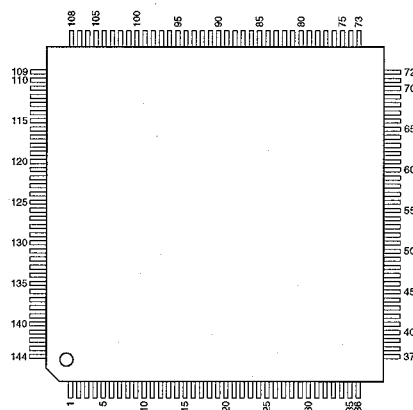DIGITAL VIDEO PROCESSOR
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	37	—	GND	73	—	Vcc	109	—	GND
2	O	RO11	38	—	GND	74	I	G10	110	—	GND
3	O	RO10	39	O	BO11	75	I	G11	111	I	CK74MI
4	O	RO9	40	O	BO10	76	I	G12	112	—	GND
5	O	RO8	41	O	BO9	77	I	G13	113	I	SCK
6	O	RO7	42	O	BO8	78	I	G14	114	I	HDI
7	O	RO6	43	O	BO7	79	I	G15	115	I	VD
8	—	GND	44	O	BO6	80	I	G16	116	I	CVPHDI
9	O	RO5	45	—	GND	81	I	G17	117	I	CVPBLI
10	O	RO4	46	O	BO5	82	I	G18	118	I	CVPFBI
11	O	RO3	47	O	BO4	83	I	G19	119	—	NC
12	O	RO2	48	O	BO3	84	I	G110	120	I	CVPVDI
13	O	RO1	49	O	BO2	85	I	G111	121	I	CVPFI
14	O	RO0	50	O	BO1	86	I	G112	122	—	NC
15	—	GND	51	O	BO0	87	I	G113	123	O	CVPBLO
16	O	P7	52	—	GND	88	—	NC	124	O	CVPFBO
17	—	Vcc	53	O	P6	89	—	Vcc	125	—	Vcc
18	—	Vcc	54	—	Vcc	90	—	Vcc	126	—	Vcc
19	I	SDATA	55	I	ODE1	91	I	PRST	127	O	CVPHDO
20	I	SCLOCK	56	I	ODE0	92	O	P5	128	O	CVPVDO
21	I	SLOAD	57	I	B10	93	—	GND	129	O	CVPFO
22	—	GND	58	I	B11	94	I	R10	130	O	ENO
23	O	GO11	59	I	B12	95	I	R11	131	O	LDO
24	O	GO10	60	I	B13	96	I	R12	132	O	CLRO
25	O	GO9	61	I	B14	97	I	R13	133	—	GND
26	O	GO8	62	I	B15	98	I	R14	134	I	AMC
27	O	GO7	63	I	B16	99	I	R15	135	I	SMC
28	O	GO6	64	I	B17	100	I	R16	136	O	P4
29	—	GND	65	I	B18	101	I	R17	137	I	SIN
30	O	GO5	66	I	B19	102	I	R18	138	O	P3
31	O	GO4	67	I	B110	103	I	R19	139	O	SOT
32	O	GO3	68	I	B111	104	I	R110	140	O	P2
33	O	GO2	69	I	B112	105	I	R111	141	O	P1
34	O	GO1	70	I	B113	106	I	R112	142	O	P0
35	O	GO0	71	—	GND	107	I	R113	143	—	GND
36	—	Vcc	72	—	GND	108	—	Vcc	144	—	GND

CXD9135R (SONY)


TIMING GENERATOR
—TOP VIEW—

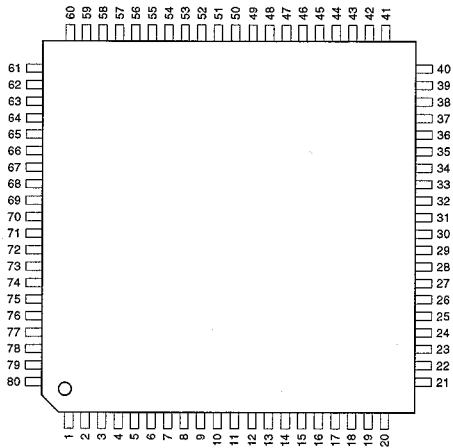

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	21	—	Vcc	41	—	GND	61	—	Vcc
2	O	N370	22	O	C59EN	42	O	VH2	62	O	ST3
3	O	P370	23	O	B59EN	43	O	VH1	63	O	ST2
4	I	RST2	24	O	AUX6	44	O	SMG	64	O	ST1
5	I	PGG11	25	O	AUX5	45	O	HHG	65	O	SUB
6	I	PGG21	26	O	AUX4	46	I	SSNORM	66	I	MODE1
7	I	PVS	27	O	AUX3	47	O	SSCAN	67	I	MODE2
8	I	SDATA	28	O	AUX2	48	O	IM4	68	I	MODE3
9	O	BLK10	29	I	SCLK	49	O	IM3	69	I	TESTSEL
10	I	SLOAD	30	I	MPX12GI	50	O	IM2	70	I	AMC
11	O	BLK20	31	I	MPX11GI	51	O	IM1	71	I	RST3
12	I	IMSTOP	32	O	MPXP37	52	I	HTIME	72	O	CLP
13	I	CLK60	33	I	SHPUO	53	O	SG2	73	I	SHPU1
14	I	CLK59	34	O	AUX1	54	O	SG1	74	I	HCLK
15	I	SMC	35	O	AUX0	55	O	ST8	75	I	HRST
16	I	IOSEL	36	O	MPXN37	56	O	ST7	76	I	SHG21
17	O	WSHON	37	I	MPX22GI	57	O	ST6	77	I	SHG11
18	O	CXDEN	38	I	MPX21GI	58	O	ST5	78	O	FIELD
19	I	RST1	39	O	PBLK	59	O	ST4	79	I	FRST
20	—	GND	40	—	Vcc	60	—	GND	80	—	Vcc



M66250FP (MITSUBISHI)

40K (5120 x 8)-BIT LINE MEMORY (FIFO/LIFO)
—TOP VIEW—

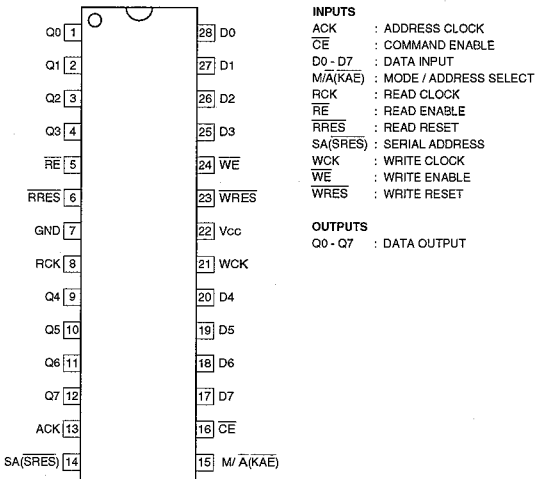


DS1267E-10-TE1 (DALLAS)

C-MOS 256RANKS DIGITAL-CODE SETTING PROGRAMMABLE RESISTOR
—TOP VIEW—

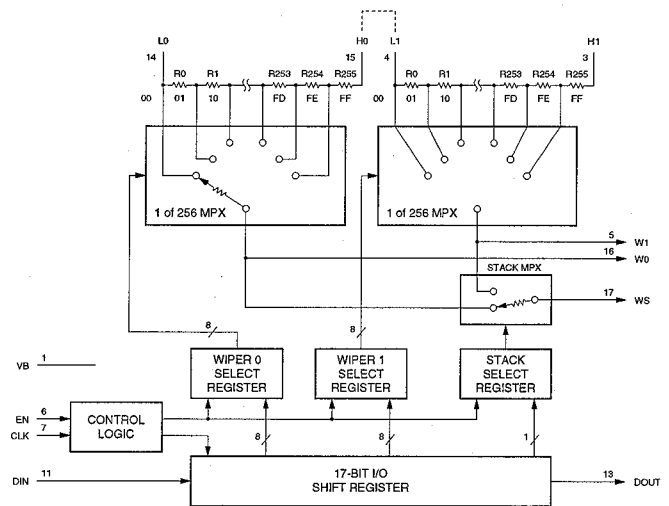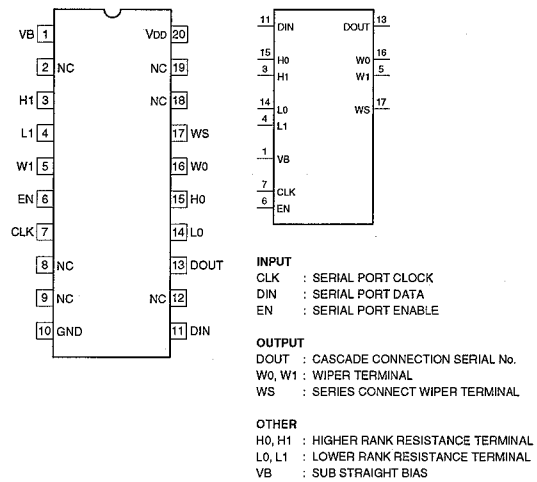


LT1460CCMS8-5 (LINEAR TECH)


VOLTAGE REFERENCE
—TOP VIEW—




LTC1155CS8-E2 (LINEAR TECH)

DUAL MOS FET DRIVER
—TOP VIEW—

DS1, DS2 : DRAIN SENSE INPUT
IN1, IN2 : INPUT
G1, G2 : GATE OUTPUT

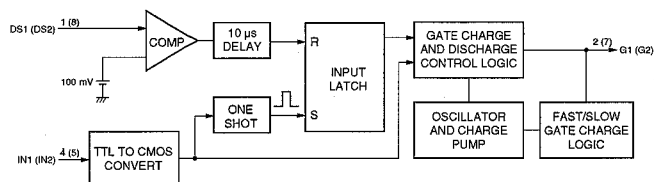


MAX525BCAP-TG068 (MAXIM)

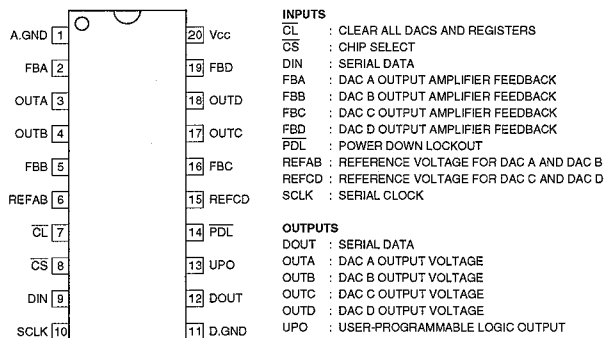
QUAD 12-BIT D/A CONVERTER
—TOP VIEW—

INPUTS
CL : CLEAR ALL DACS AND REGISTERS
CS : CHIP SELECT
DIN : SERIAL DATA
FBA : DAC A OUTPUT AMPLIFIER FEEDBACK
FBB : DAC B OUTPUT AMPLIFIER FEEDBACK
FBC : DAC C OUTPUT AMPLIFIER FEEDBACK
FBD : DAC D OUTPUT AMPLIFIER FEEDBACK
PDL : POWER DOWN LOCKOUT
REFAB : REFERENCE VOLTAGE FOR DAC A AND DAC B
REFCD : REFERENCE VOLTAGE FOR DAC C AND DAC D
SCLK : SERIAL CLOCK

OUTPUTS
DOUT : SERIAL DATA
OUTA : DAC A OUTPUT VOLTAGE
OUTB : DAC B OUTPUT VOLTAGE
OUTC : DAC C OUTPUT VOLTAGE
OUTD : DAC D OUTPUT VOLTAGE
UPO : USER PROGRAMMABLE LOGIC OUTPUT

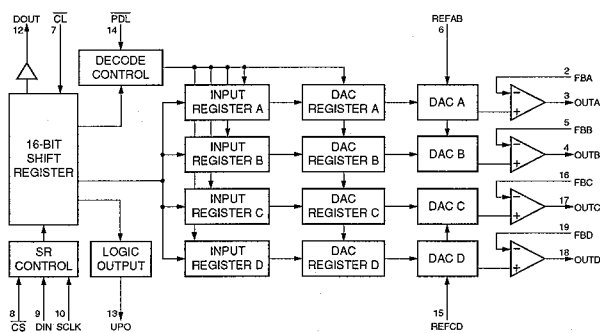

PCF8574TS-T (PHILIPS)

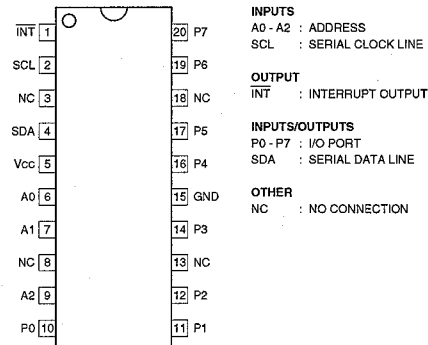
REMOTE 8-BIT I/O EXPANDER
—TOP VIEW—

INPUTS
A0 - A2 : ADDRESS
SCL : SERIAL CLOCK LINE


OUTPUT
INT : INTERRUPT OUTPUT

INPUTS/OUTPUTS
P0 - P7 : I/O PORT
SDA : SERIAL DATA LINE

OTHER
NC : NO CONNECTION

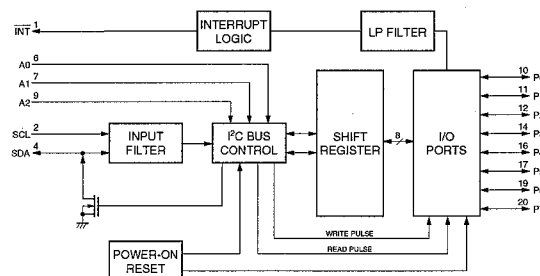

TC55V2161FTI-85L (TOSHIBA)

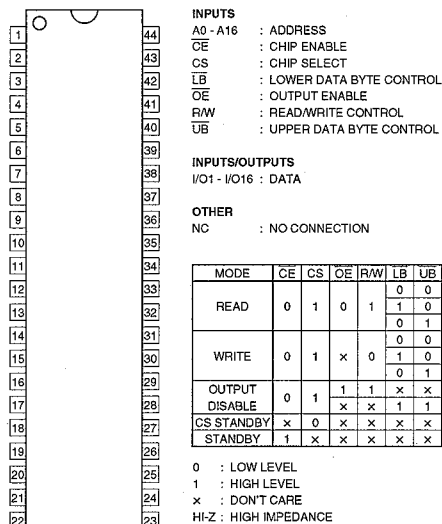2M (131072 x 16) -BIT SRAM
—TOP VIEW—

INPUTS
A0 - A16 : ADDRESS
CE : CHIP ENABLE
CS : CHIP SELECT
LB : LOWER DATA BYTE CONTROL
OE : OUTPUT ENABLE
R/W : READ/WRITE CONTROL
UB : UPPER DATA BYTE CONTROL

INPUTS/OUTPUTS
I/O1 - I/O16 : DATA

OTHER
NC : NO CONNECTION


MODE	CE	CS	OE	R/W	LB	UB	I/O1 - I/O8	I/O9 - I/O16
READ	0	1	0	1	0	0	OUT	OUT
					1	0	HI-Z	OUT
WRITE	0	1	x	0	0	0	IN	IN
					1	0	HI-Z	IN
OUTPUT DISAB	0	1	x	x	x	1	HI-Z	HI-Z
CS STANDBY	x	0	x	x	x	x	HI-Z	HI-Z
STANDBY	1	x	x	x	x	x	HI-Z	HI-Z

0 : LOW LEVEL
1 : HIGH LEVEL
x : DON'T CARE
HI-Z : HIGH IMPEDANCE

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	A4	12	—	GND	23	—	NC	34	—	GND
2	I	A3	13	I/O	I/O5	24	I	A11	35	I/O	I/O13
3	I	A2	14	I/O	I/O6	25	I	A10	36	I/O	I/O14
4	I	A1	15	I/O	I/O7	26	I	A9	37	I/O	I/O15
5	I	A0	16	I/O	I/O8	27	I	A8	38	I/O	I/O16
6	I	CE	17	I	R/W	28	I	CS	39	I	LB
7	I/O	I/O1	18	I	A15	29	I/O	I/O9	40	I	UB
8	I/O	I/O2	19	I	A14	30	I/O	I/O10	41	I	OE
9	I/O	I/O3	20	I	A13	31	I/O	I/O11	42	I	A7
10	I/O	I/O4	21	I	A12	32	I/O	I/O12	43	I	A6
11	—	Vcc	22	I	A16	33	—	Vcc	44	I	A5

MC68336GCFT20 (MOTOROLA)

32-BIT MICROCONTROLLER
—TOP VIEW—

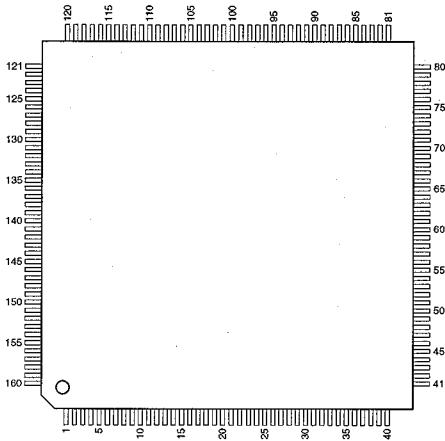

INPUTS

- AN0 - AN3, AN48 - AN59, : QADC ANALOG INPUT
- ANW, ANX, ANY, ANZ : AUTOVECTOR
- AVEC : BUS ERROR
- BERR : BUS GRANT ACKNOWLEDGE
- BGACK : BREAKPOINT
- BKPT : BUS REQUEST
- BR : CTM4 MODULUS CLOCK
- CTM2C : DATA AND SIZE ACKNOWLEDGE
- DSACK0, DSACK1 : DEVELOPMENTAL SERIAL IN, OUT, CLOCK
- DSCLK : QADC EXTERNAL TRIGGER
- ETRIG1, ETRIG2 : CRYSTAL OSCILLATOR
- EXTAL : QADC PORT B
- PQB0 - PQB7 : SCI RECEIVE DATA
- RXD : TPU CLOCK
- T2CLK : TPU I/O CHANNELS
- TSC : THREE-STATE CONTROL
- TSTME : TEST MODE ENABLE
- VRH, VRL : REFERENCE VOLTAGE
- XFC : EXTERNAL FILTER CAPACITOR


OUTPUTS

- AS : ADDRESS STROBE
- BG : BUS GRANT
- CLKOUT : SYSTEM CLOCK OUT
- CPWM5 - CPWM8 : CTM4 PWMS
- CS0 - CS10 : CHIP SELECTS
- CSBOOT : BOOT CHIP-SELECT
- DS : DATA STROBE
- DSI, DSO : DEVELOPMENTAL SERIAL IN, OUT, CLOCK
- ECLK : EXTERNAL BUS CLOCK
- FC0 - FC2 : FUNCTION CODES
- FREEZE : FREEZE
- IFETCH, IPIPE : INSTRUCTION PIPELINE
- PC0 - PC8 : PORT C
- QUOT : QUOTIENT OUT
- RAW : READ/WRITE
- RMC : READ-MODIFY-WRITE CYCLE
- SIZE : SIZE
- TPUCH0 - TPUCH15 : TPU I/O CHANNELS
- TXD : SCI TRANSMIT DATA
- XTAL : CRYSTAL OSCILLATOR

INPUTS/OUTPUTS

- ADDR0 - ADDR23 : ADDRESS BUS
- CTD3, CTD4, CTD9, CTD10 : CTM4 DOUBLE ACTION CHANNEL
- DATA0 - DATA15 : DATA BUS
- HALT : HALT
- IRQ1 - IRQ7 : INTERRUPT REQUEST
- MA0 - MA2 : QADC MULTIPLEXED ADDRESS
- MISO : MASTER IN, SLAVE OUT
- MODCLK : CLOCK MODE SELECT
- MOSI : MASTER OUT, SLAVE IN
- PC0 - PC3 : PERIPHERAL CHIP-SELECT
- PE0 - PE7 : PORT E
- PFO - PF7 : PORT F
- PQA0 - PQA7 : QADC PORT A
- PQS1 - PQS7 : PORT QS
- RESET : RESET
- SCK : QSPI SERIAL CLOCK
- SS : SLAVE SELECT

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	NC	41	I	AN51/PQB7	81	—	GND	121	—	GND
2	I	RXD	42	I	VRH	82	O	RAW	122	I/O	PC3/ADDR19/CS6
3	I/O	TXD/PQS7	43	I	VRL	83	I/O	PE7/SIZ1	123	I/O	PC4/ADDR20/CS7
4	I/O	PCS3/PQS6	44	—	A.GND	84	I/O	PE6/SIZ0	124	I/O	PC5/ADDR21/CS8
5	I/O	PCS2/PQS5	45	—	A.Vcc	85	I/O	PE5/AS	125	I/O	PC6/ADDR22/CS9
6	I/O	PCS1/PQS4	46	I/O	AN59/MA0/PQA0	86	I/O	PE4/DS	126	I/O	ADDR23/CS10/ECLK
7	I/O	PCS0/SS/PQS3	47	I/O	AN58/MA1/PQA1	87	I/O	PE3/RMC	127	I	T2CLK
8	I/O	SCK/PQS2	48	I/O	AN54/MA2/PQA2	88	I/O	PE2/AVEC	128	O	TPUCH15
9	I/O	MOSI/PQS1	49	I/O	AN55/ETRIG1/PQA3	89	I/O	PE1/DSACK1	129	O	TPUCH14
10	I/O	MISO/PQS0	50	I/O	AN56/ETRIG2/PQA4	90	I/O	PE0/DSACK0	130	O	TPUCH13
11	I/O	ADDR1	51	I/O	AN57/PQA5	91	I/O	ADDR0	131	—	Vcc
12	—	Vcc	52	I/O	AN58/PQA6	92	—	Vcc	132	O	TPUCH12
13	I/O	ADDR2	53	I/O	AN59/PQA7	93	I/O	DATA15	133	O	TPUCH11
14	I/O	ADDR3	54	—	GND	94	I/O	DATA14	134	—	GND
15	—	GND	55	O	XTAL	95	—	GND	135	—	VstBY
16	I/O	ADDR4	56	—	VDDSYN	96	I/O	DATA13	136	O	TPUCH10
17	I/O	ADDR5	57	I	EXTAL	97	I/O	DATA12	137	O	TPUCH9
18	I/O	ADDR6	58	—	GND	98	I/O	DATA11	138	O	TPUCH8
19	I/O	ADDR7	59	—	Vcc	99	I/O	DATA10	139	O	TPUCH7
20	—	GND	60	I	XFC	100	I/O	DATA9	140	—	Vcc
21	I/O	ADDR8	61	—	Vcc	101	—	GND	141	—	GND
22	I/O	ADDR9	62	—	GND	102	I/O	DATA8	142	O	TPUCH6
23	I/O	ADDR10	63	O	CLKOUT	103	I/O	DATA7	143	O	TPUCH5
24	I/O	ADDR11	64	O	IPIPE/DSO	104	I/O	DATA6	144	O	TPUCH4
25	I/O	ADDR12	65	O	IFETCH/DSI	105	I/O	DATA5	145	O	TPUCH3
26	I/O	ADDR13	66	O	FREEZE/QUOT	106	—	Vcc	146	—	Vcc
27	I/O	ADDR14	67	I	BKPT/DSCLK	107	I/O	DATA4	147	O	TPUCH2
28	I/O	ADDR15	68	I	TSTME/TSC	108	I/O	DATA3	148	O	TPUCH1
29	I/O	ADDR16	69	I/O	RESET	109	—	GND	149	—	GND
30	—	Vcc	70	I/O	HALT	110	I/O	DATA2	150	O	TPUCH0
31	I/O	ADDR17	71	I	BERR	111	I/O	DATA1	151	I/O	CTD10
32	I/O	ADDR18	72	I/O	PF7/IRQ7	112	I/O	DATA0	152	I/O	CTD9
33	—	GND	73	I/O	PF6/IRQ6	113	O	CSBOOT	153	O	CPWM8
34	I	AN0/ANW/PQB0	74	I/O	PF5/IRQ5	114	I/O	BR/CS0	154	O	CPWM7
35	I	AN1/ANX/PQB1	75	I/O	PF4/IRQ4	115	O	BG/CS1	155	O	CPWM6
36	I	AN2/ANY/PQB2	76	I/O	PF3/IRQ3	116	I/O	BGACK/CS2	156	O	CPWM5
37	I	AN3/ANZ/PQB3	77	I/O	PF2/IRQ2	117	O	FC0/CS3	157	I/O	CTD4
38	I	AN4/PQB4	78	I/O	PF1/IRQ1	118	O	PC1/FC1/CS4	158	I	CTD3
39	I	AN49/PQB5	79	I/O	PF0/MODCLK	119	O	PC2/FC2/CS5	159	I	CTM2C
40	I	AN50/PQB6	80	—	Vcc	120	—	Vcc	160	—	NC

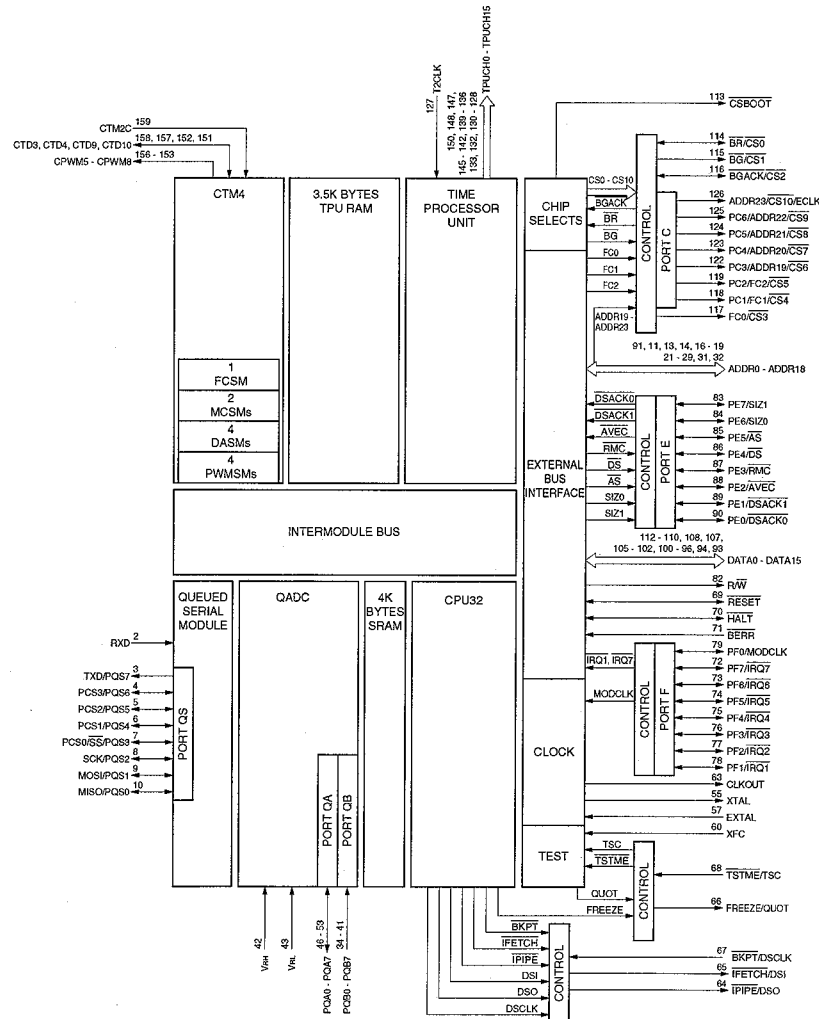


Section 3
Block Diagrams


Index Index

Index


No.	System	Board	Circuit function	Page
1		Overall	Camera block	3-2
2		Overall	VTR block	3-4
3		AD-167/171	Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter	3-7
4		DA-148	Post filter, D/A converter	3-6
5		DPR-152/227	SCVP (Digital processing), VFS (Frame rate converter)	3-9
		DPR-157	Digital processing	3-9
		RPR-13	Assistant board for VFS	3-9
6		DR-411	CCD driver, Timing generator	3-8
7		IF-819	System controller, Fan controller	3-10
8		PA-238	Pre-amp	3-11
		DU-68/19	Connector Board	3-11
9		RE-145F	Power supply, Regulator (CCD block)	3-12
10		SG-267	GEN lock, Timing pulse generator (CTG), Character generator	3-13
11		SH-74	Shading correction signal generator	3-14
12		TG-213	Timing generator	3-15
13		VA-195	Video amp, White gain, White shading compensator	3-16
14		VDA-51	Monitor out, VF out, Character mix, Marker mix, Zebra mix, Skin marker mix	3-17
15	Video Processing	DEC-95	ECC/BRR decoder	3-20
		EN-143	BRR encoder (B), Timing generator	3-18
		ENC-59	BRR encoder (A), ECC encoder	3-19
		VN-12	Concealment, FIL (Rate convert)	3-21
16	Audio Processing	APR-55	Audio processor	3-22
		CN-1642	Connector board for Camera mic	3-22
		CN-2025	Connector board for Audio IN/OUT & EXT DC IN/OUT	3-22
		CUE-2	CUE head amp	3-23
		HN-243	Harness, Erase head amp, TC head amp	3-23
		HP-90	Headphone	3-22
		MA-92	Camera mic amp	3-22
		VR-175	Memory card, Audio select switch, Alarm level, Monitor level	3-22
17	System Control	APR-55	Audio processor	3-24
		CN-2025	Connector board for Audio IN/OUT & EXT DC IN/OUT	3-25
		CN-2046	Connector board for Monitor OUT, EXT TC IN/OUT	3-25
		CO-38	Connector (Genlock IN, Remote)	3-25
		CP-361	Control panel	3-24
		HN-243	Harness, Erase head amp, TC head amp	3-25
		KY-293	Function key	3-24
		MA-92	Camera mic amp	3-24
		SW-911	VTR S/S switch, Shutter switch, ABB/AWB switch	3-24
		SW-912	Rotary encoder switch	3-24
		SY-285	System controller for VTR block, Timecode controller	3-25

No.	System	Board	Circuit function	Page
18	Servo Control	CTL-10	CTL head amp	3-27
		HN-243	Harness, Erase head amp, TC head amp	3-27
		SE-275	Tape sensor, DEW sensor	3-26
		SV-218	Servo controller	3-26
19	Power Supply	CO-38	Connector (Genlock IN, Remote)	3-28
		PS-569	Power supply, Circuit breaker	3-28
		RE-139F	Power supply, Regulator (VTR)	3-29
		RE-140F	Power supply, Regulator (VTR)	3-29
		RE-145F	Power supply, Regulator (CCD block)	3-29
20	RF Processing	EQ-89	RF equalizer	3-30
		HN-243	Harness, Erase head amp, TC head amp	3-31

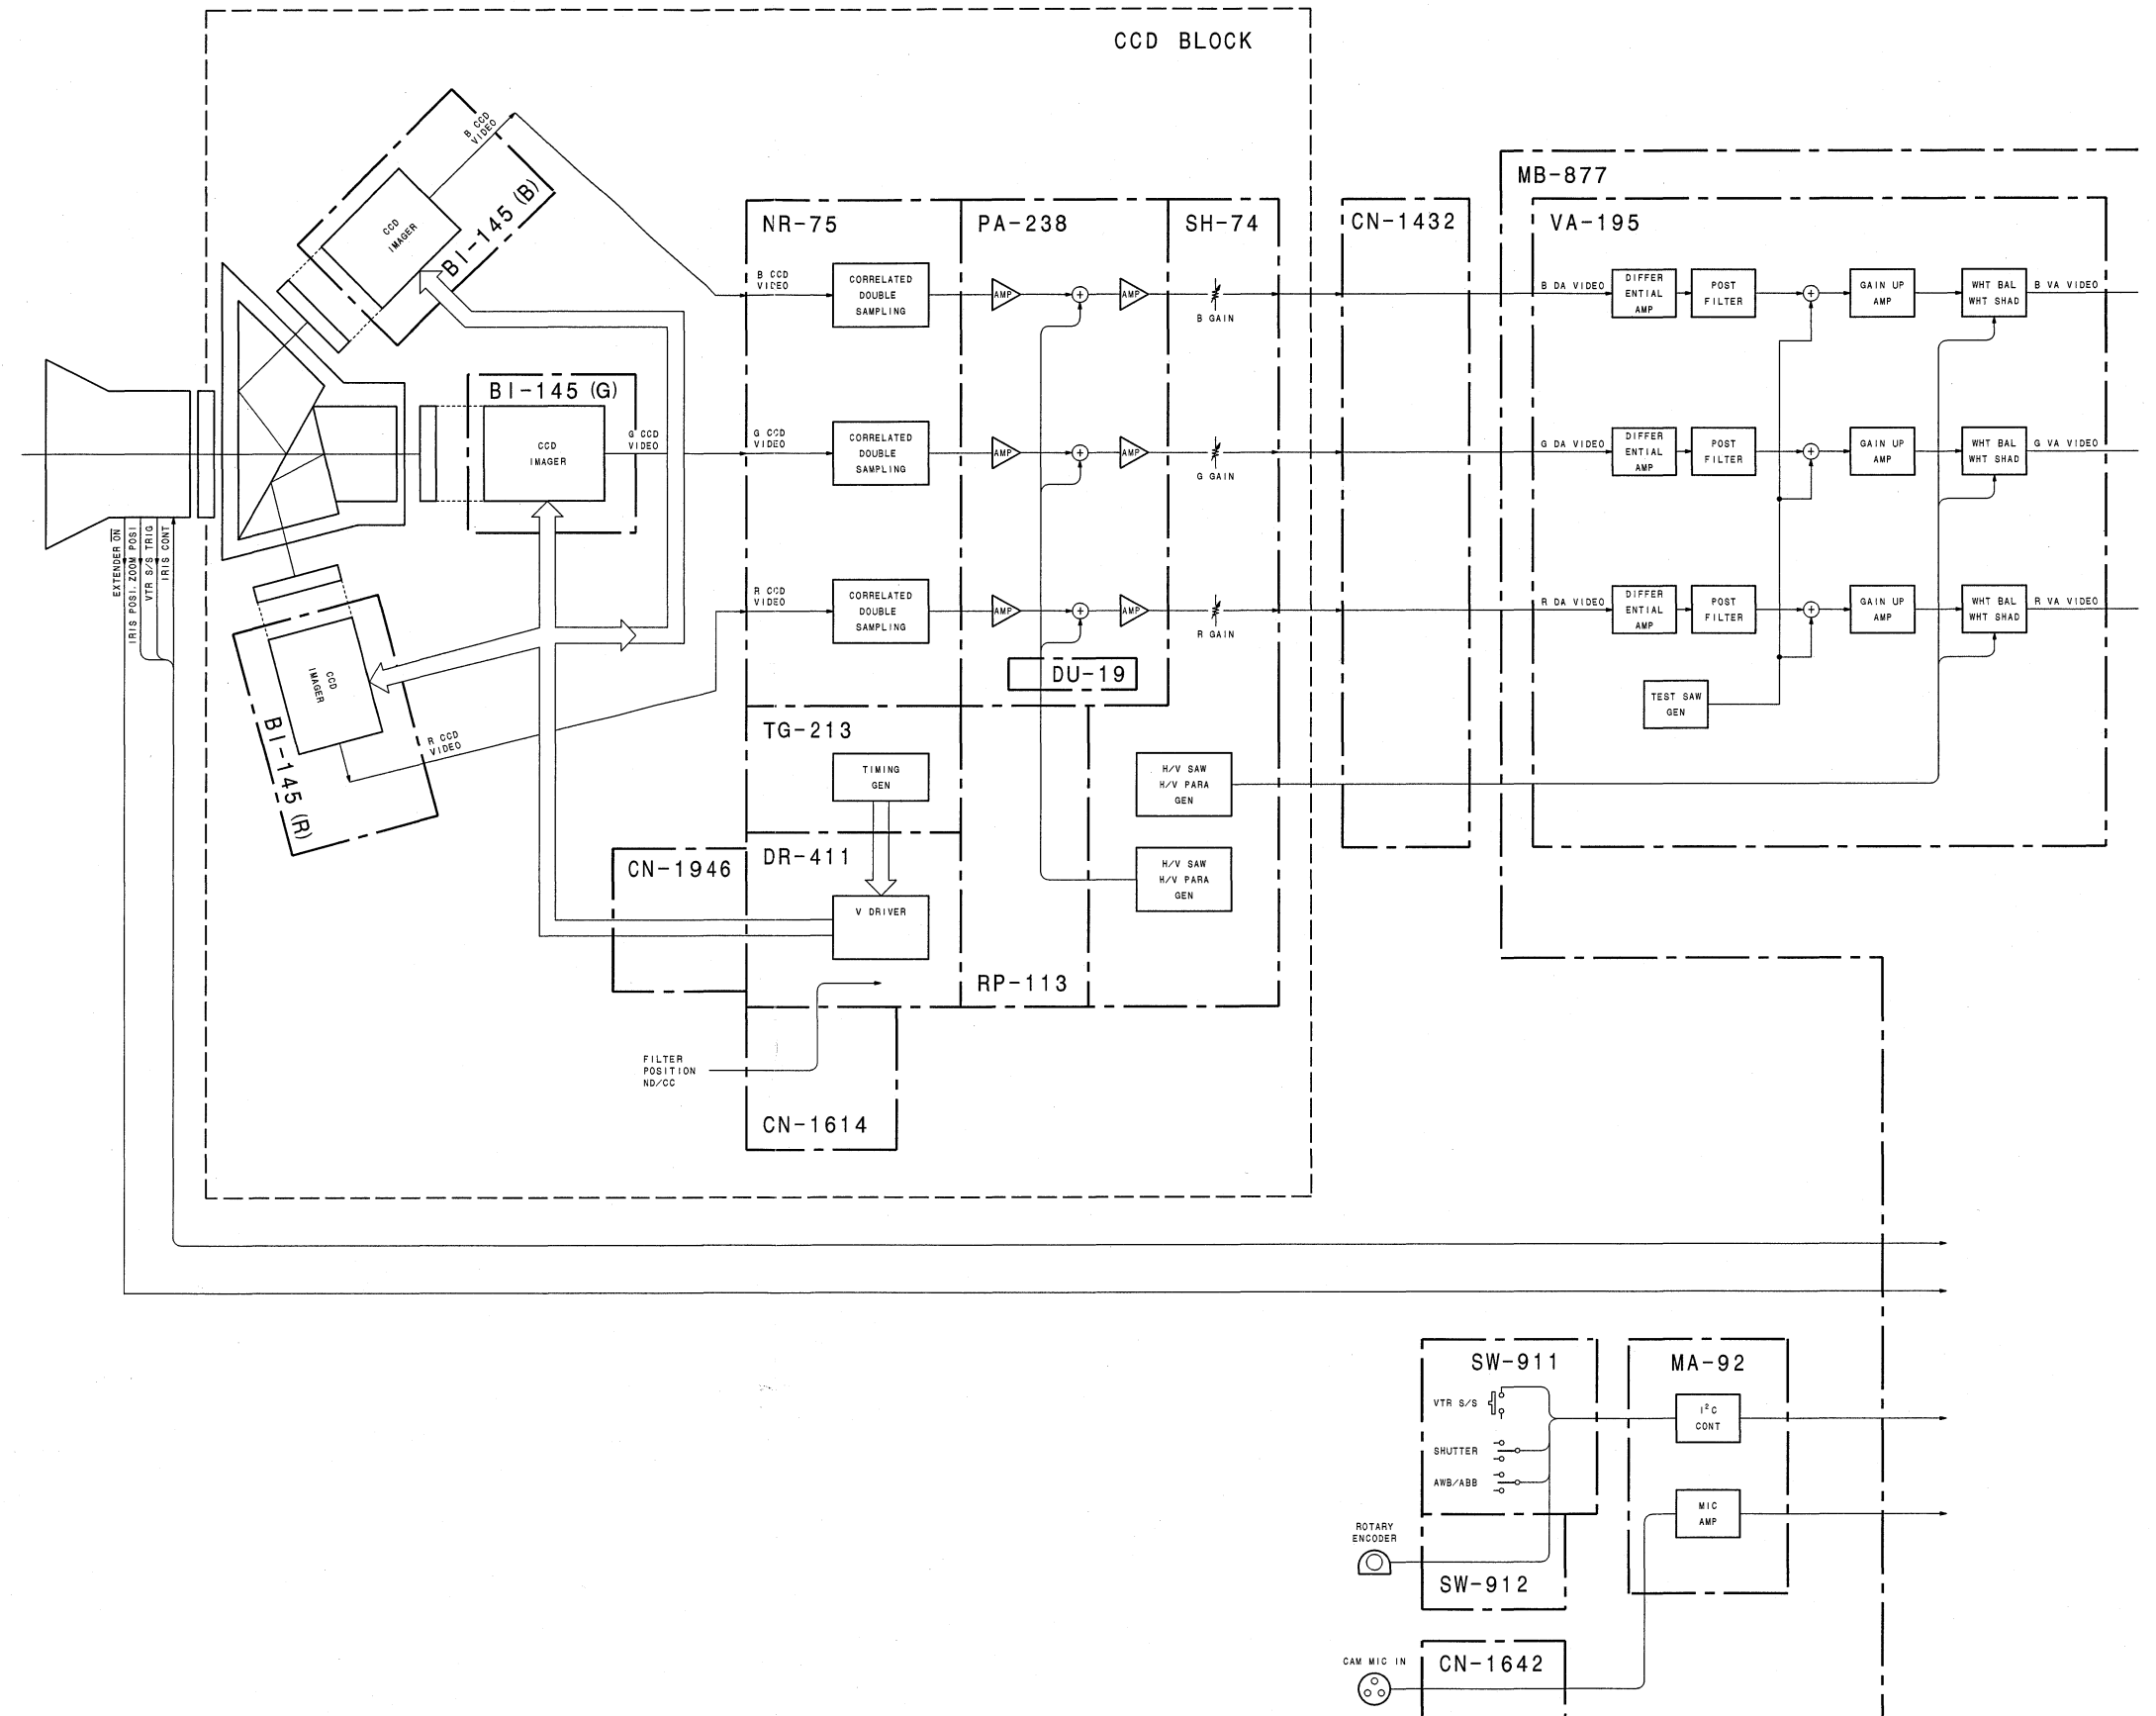


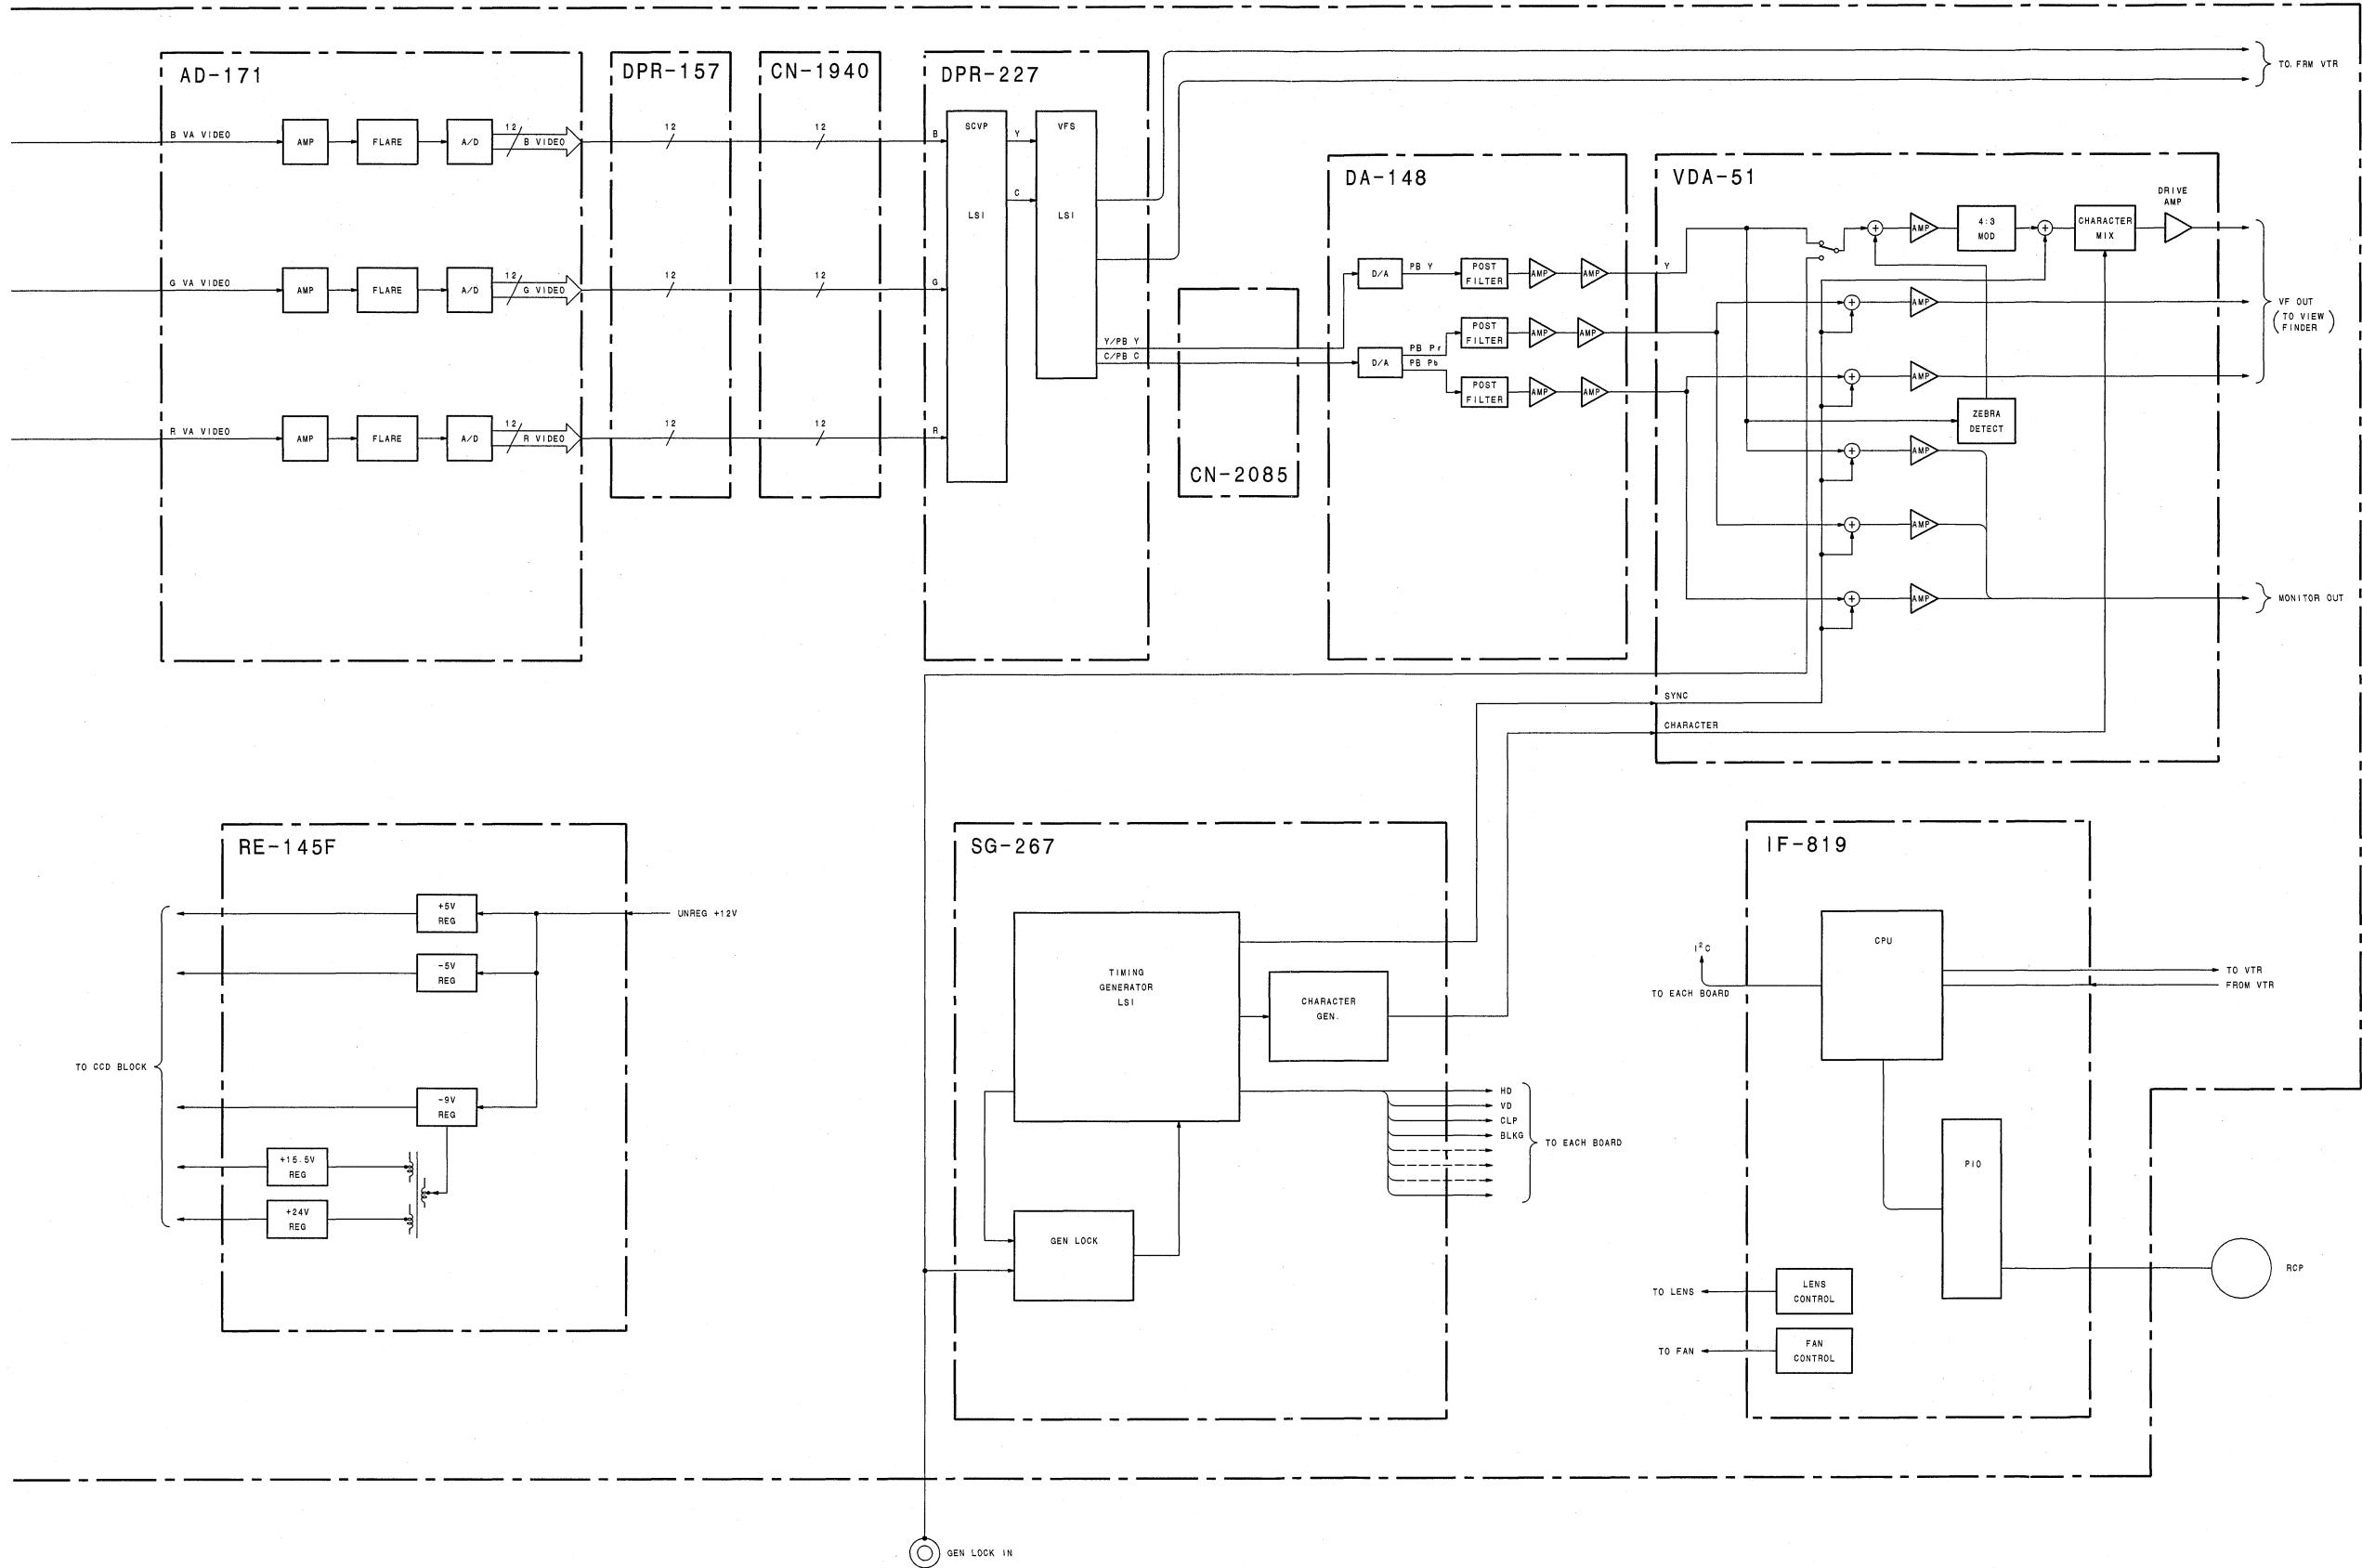


Overall Overall




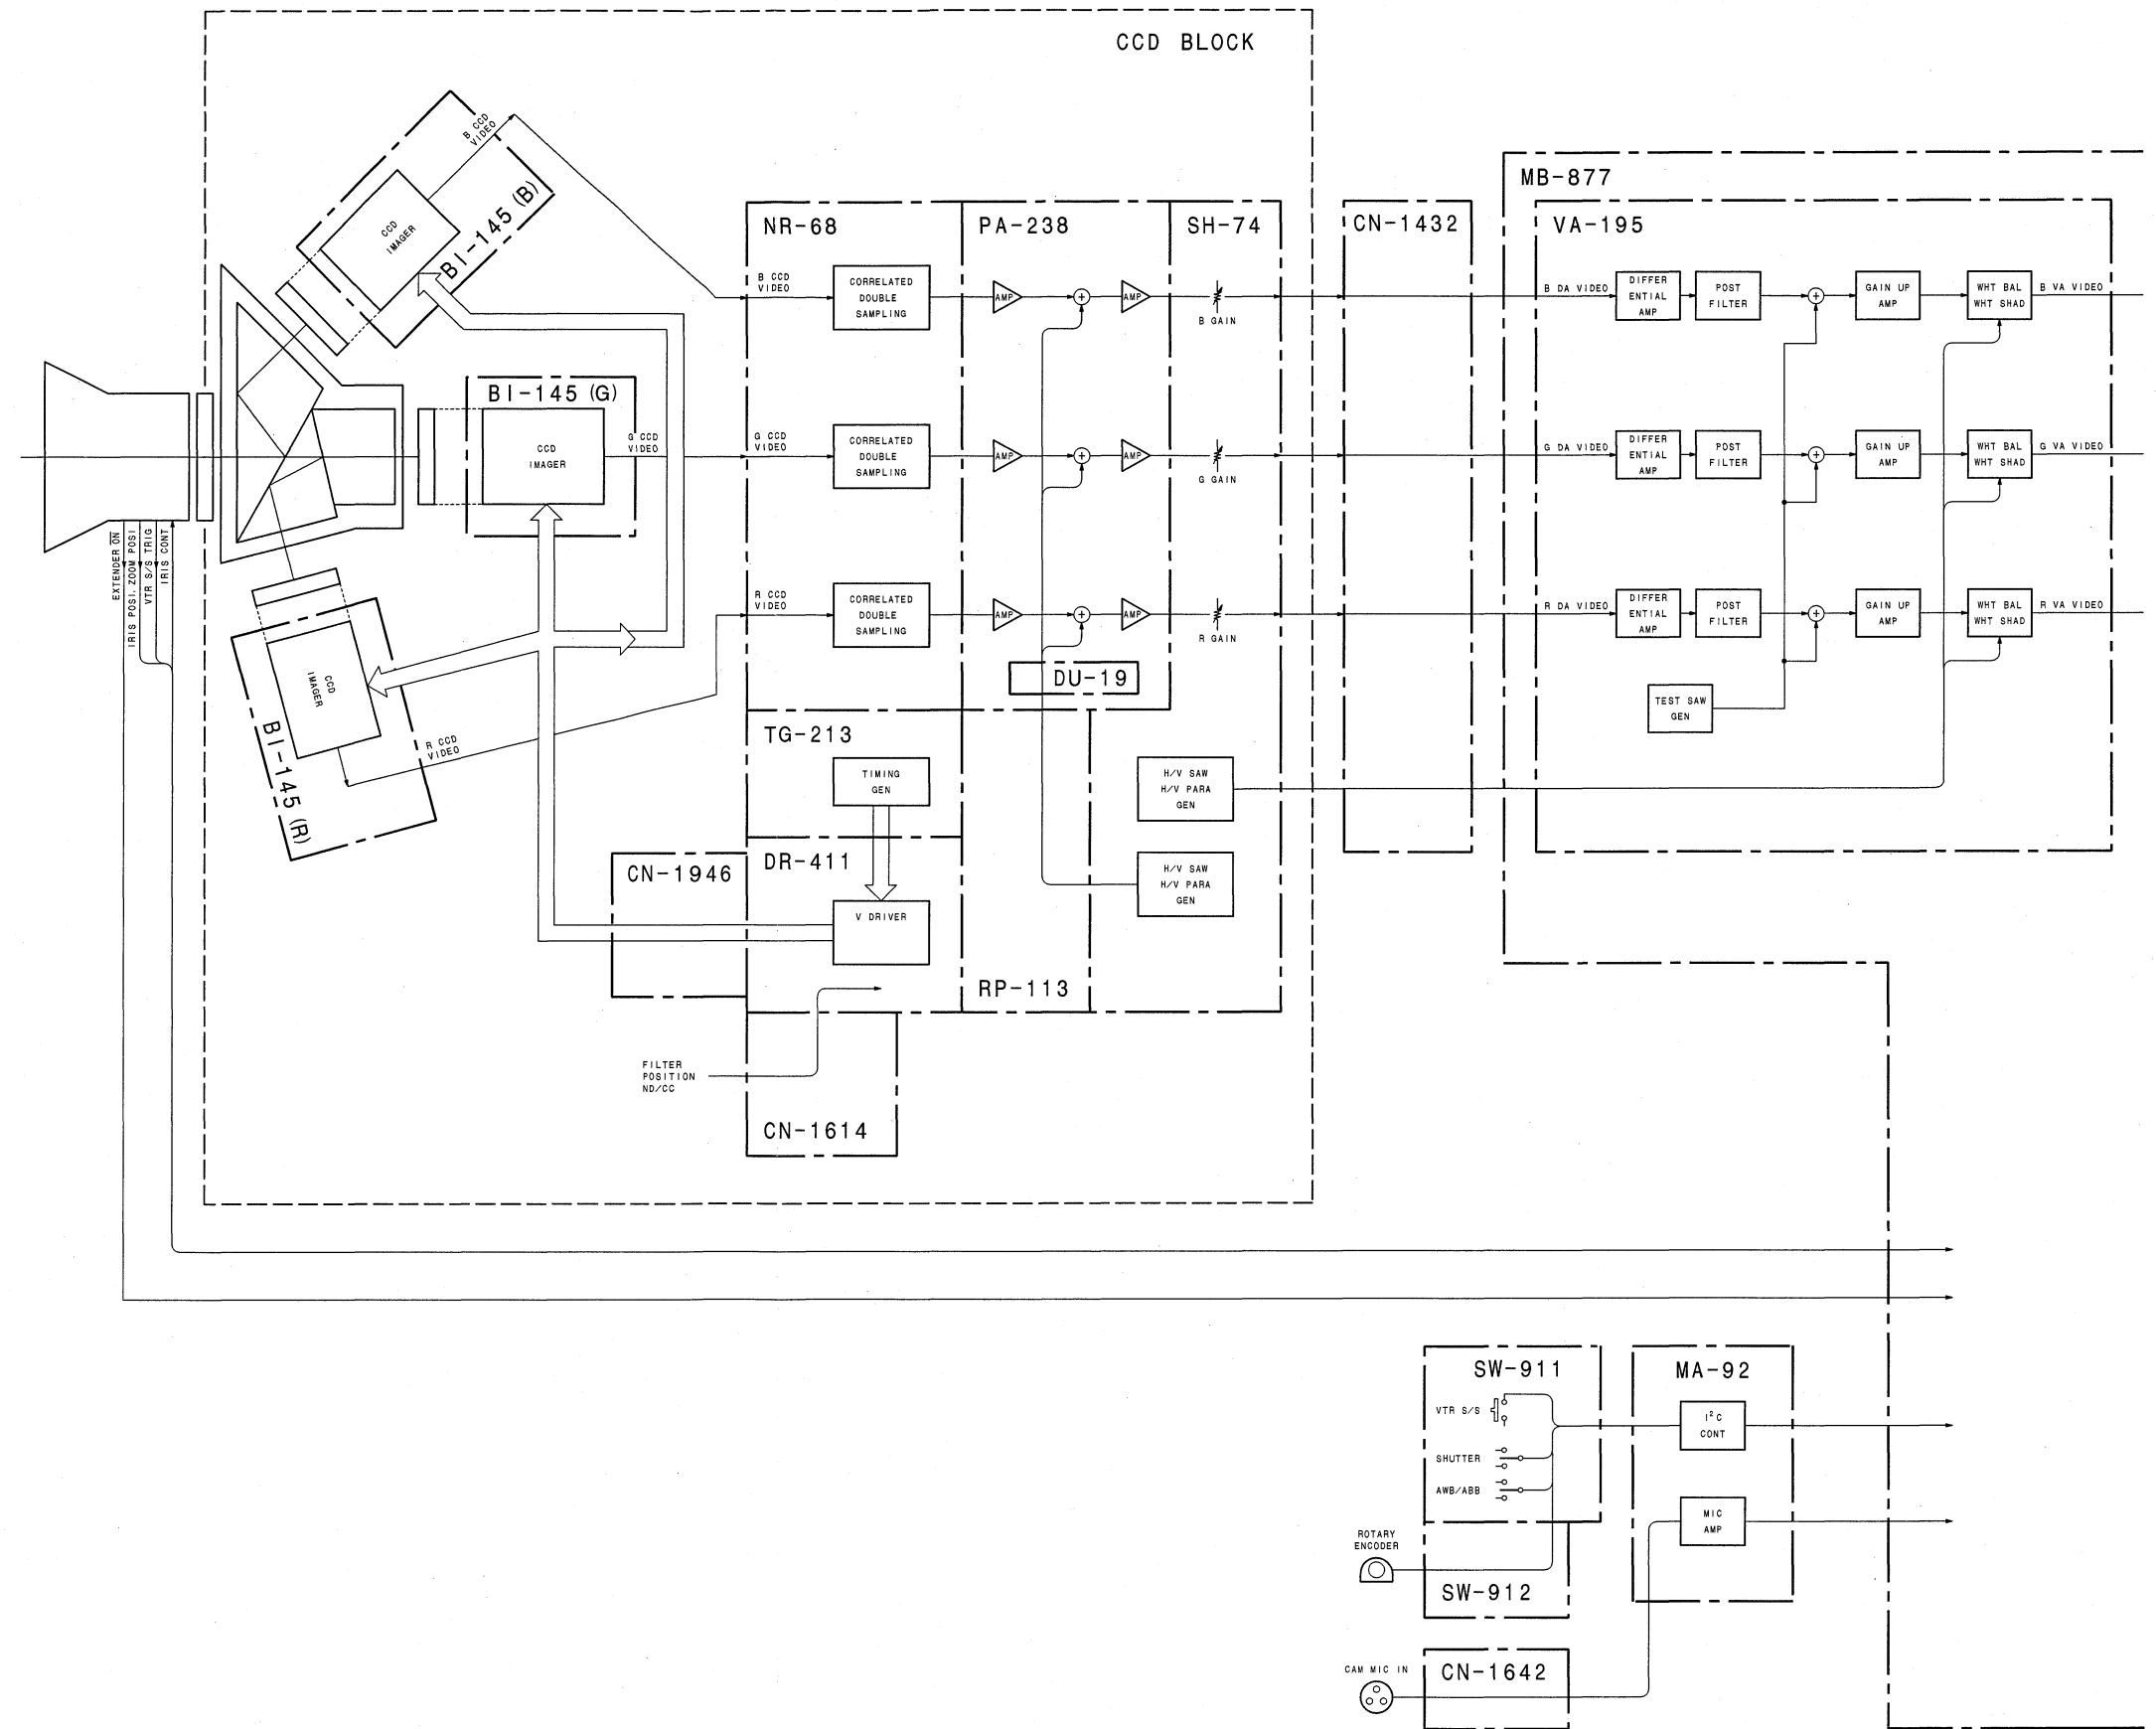



Overall Overall

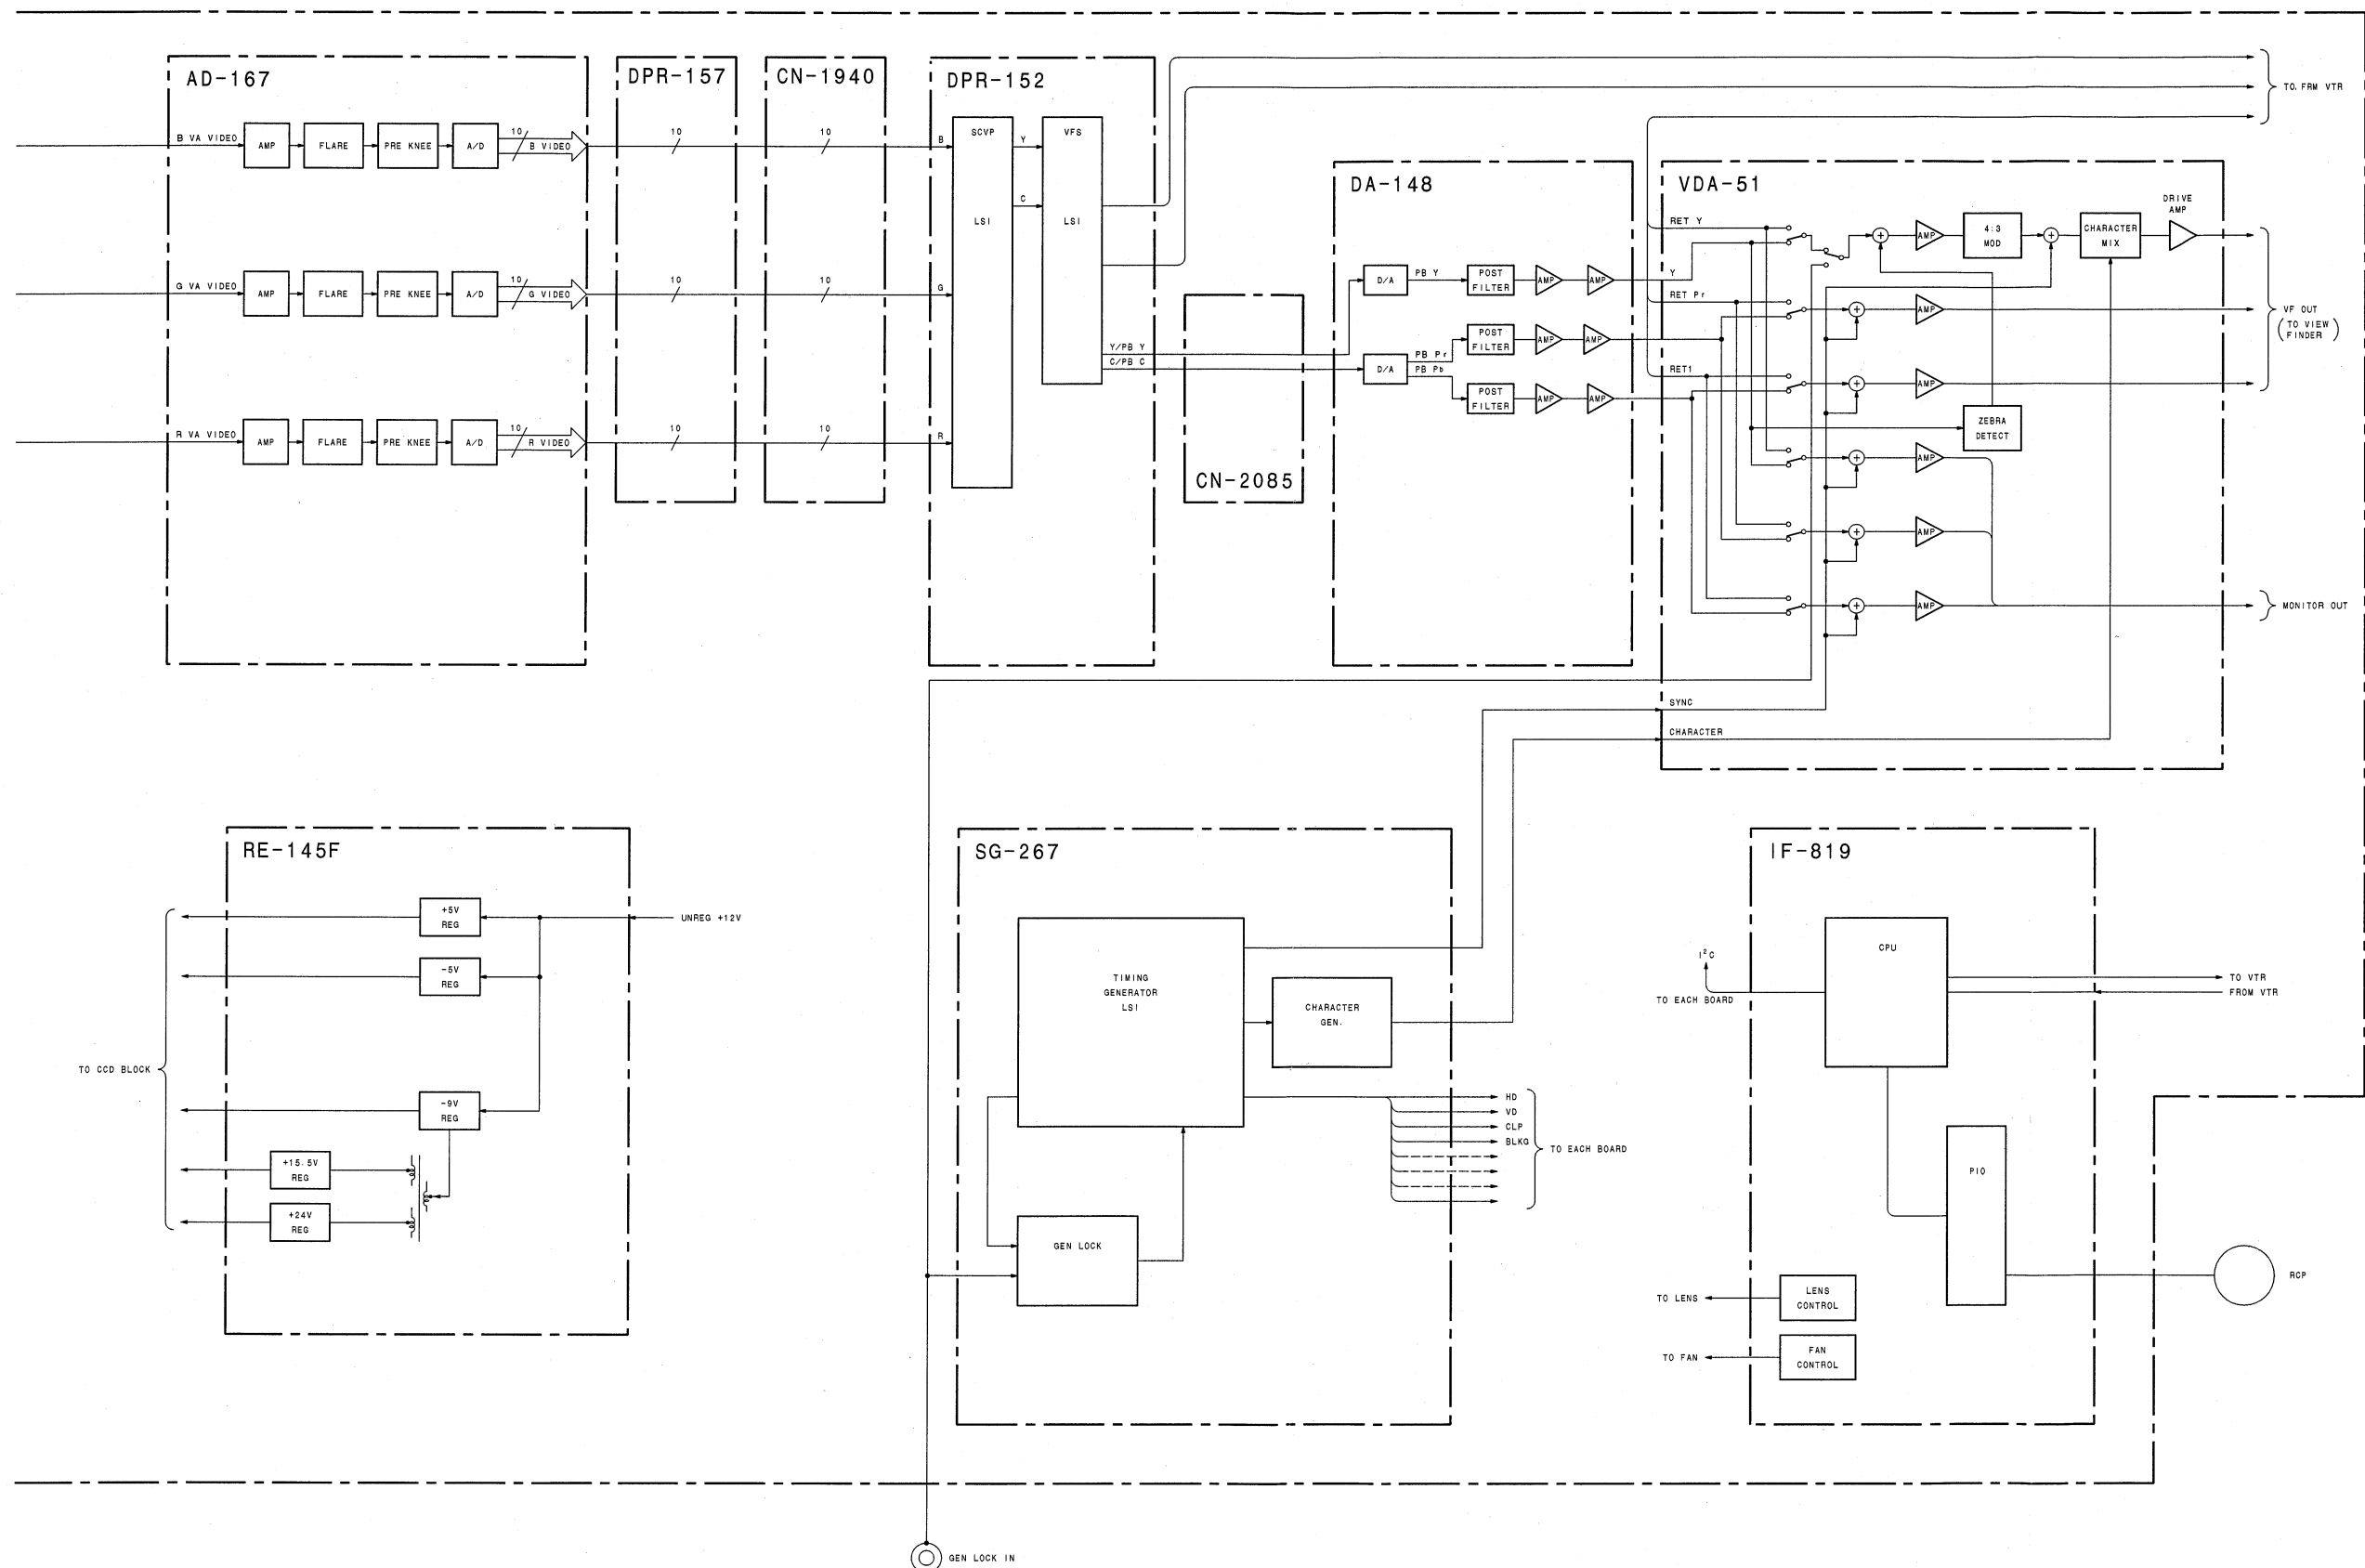


Camera block
Overall
LOT NO. 911-2A2

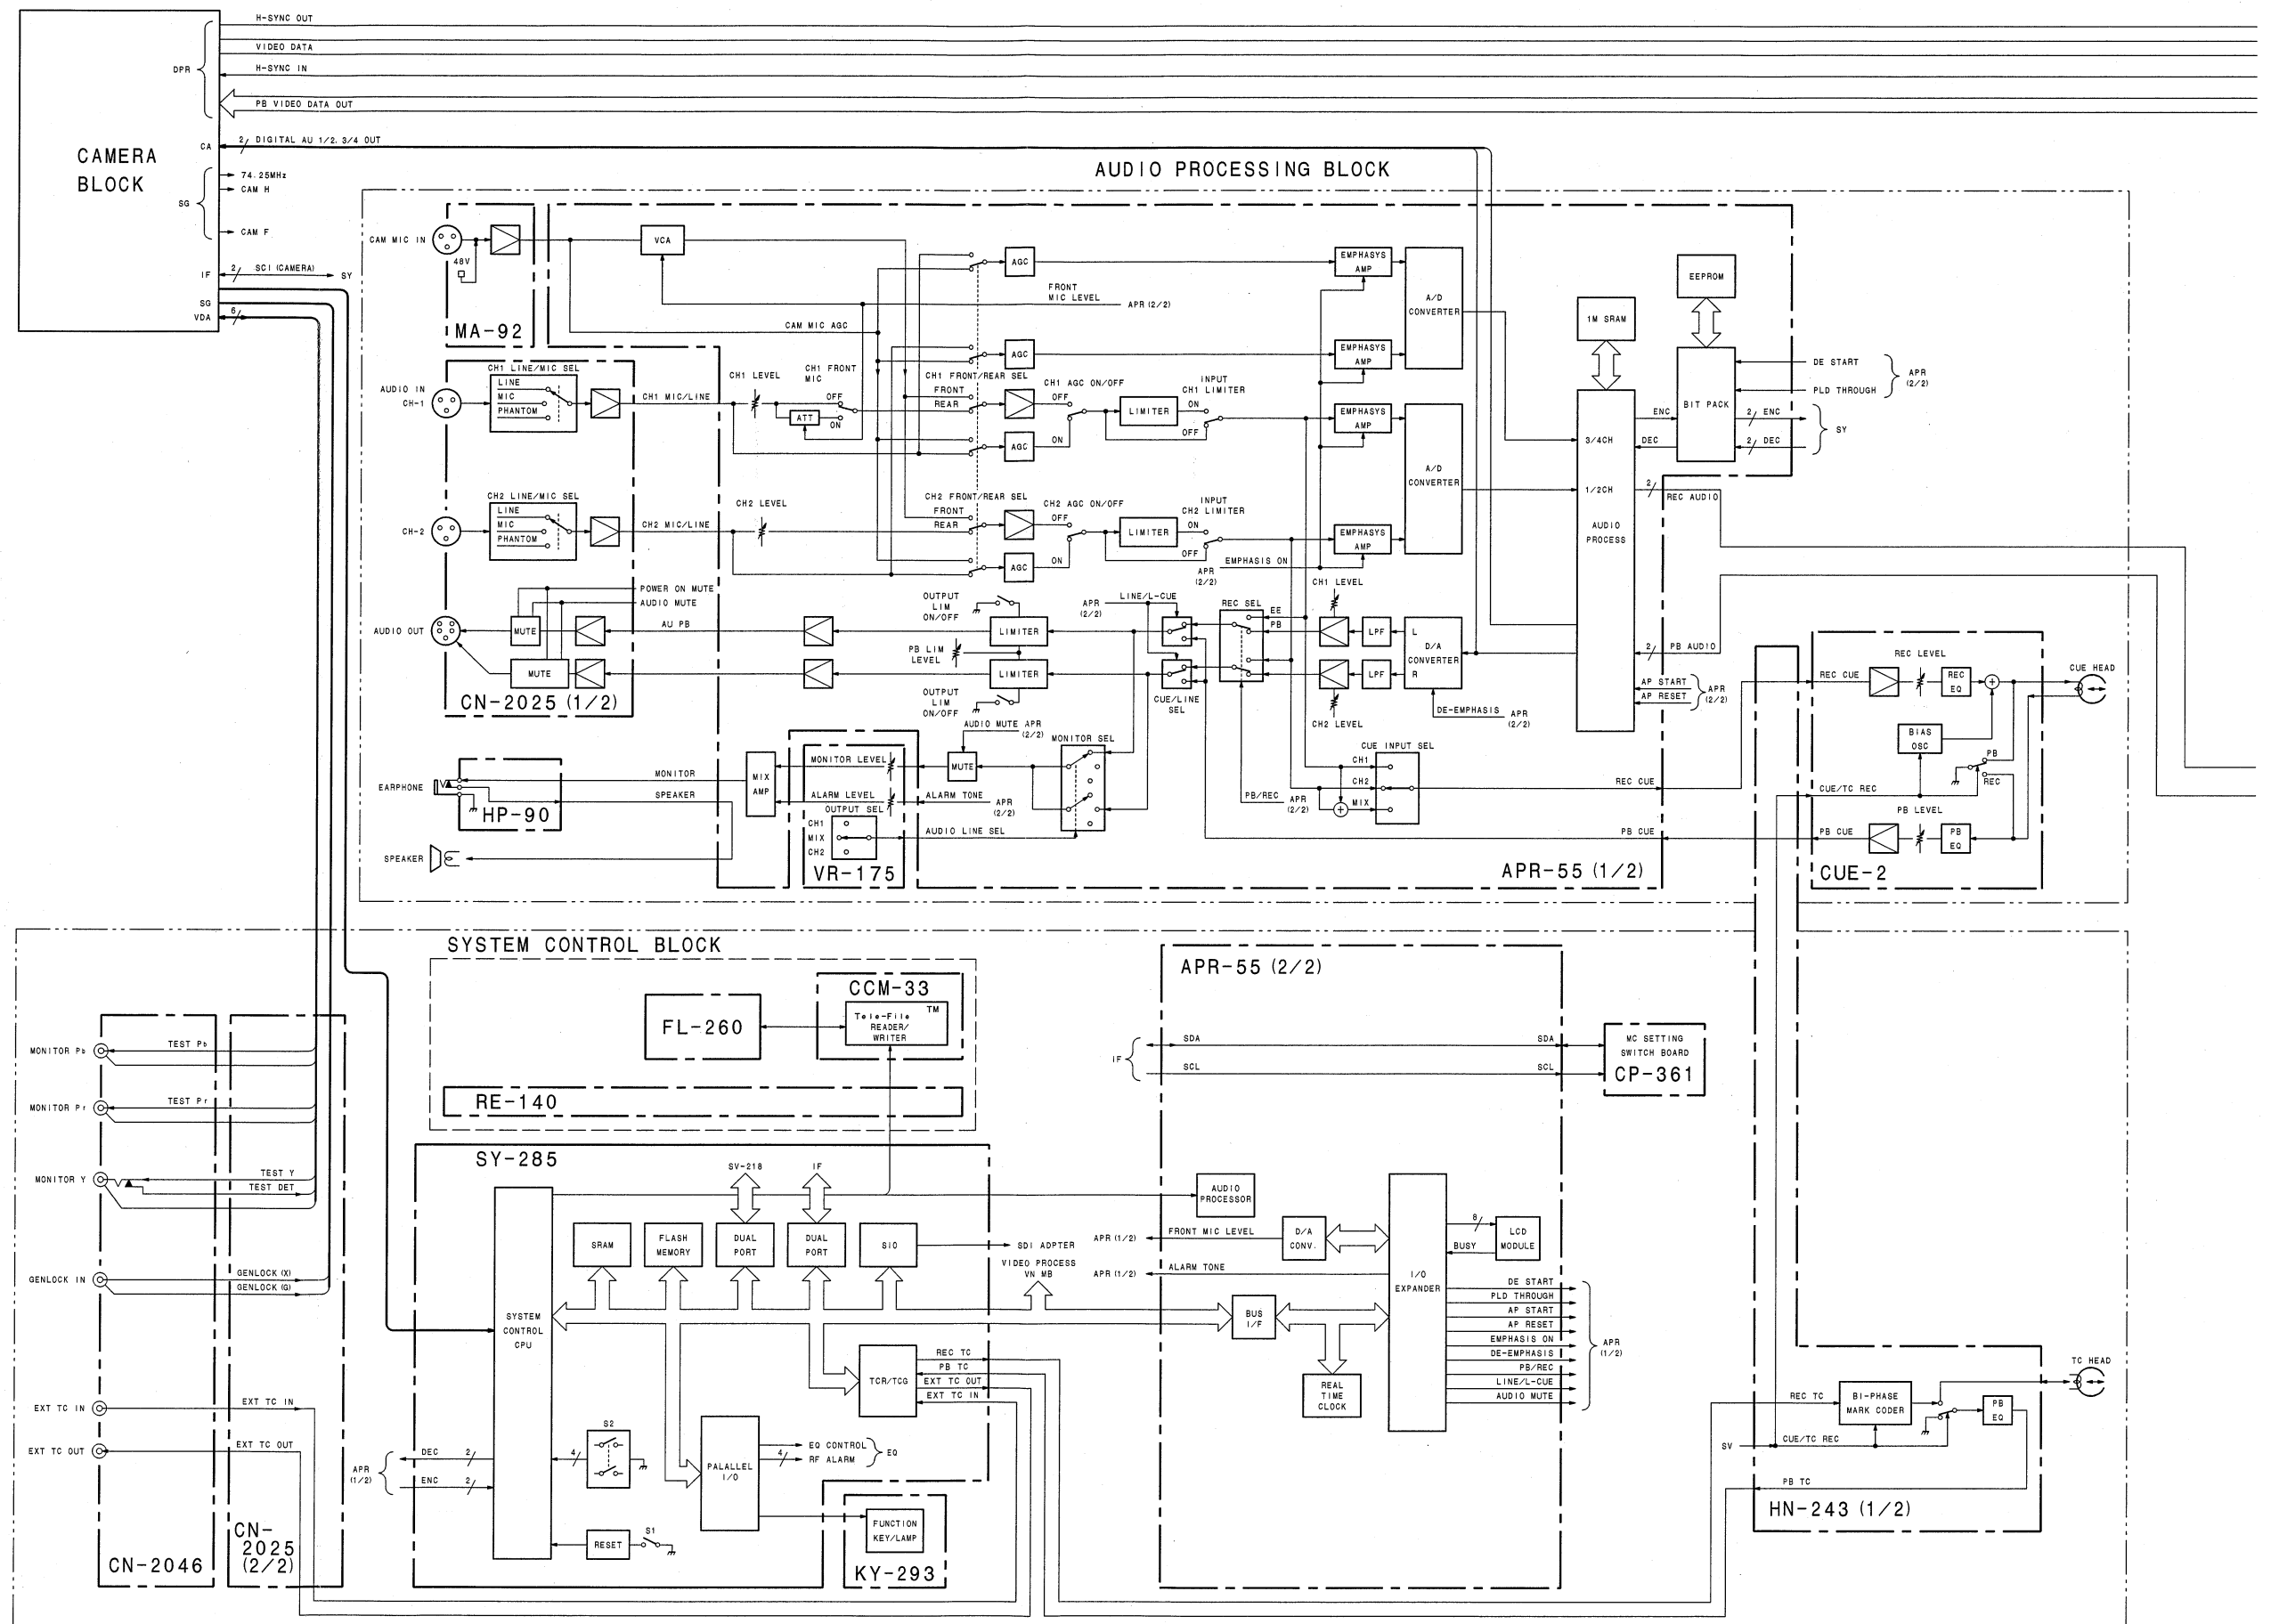


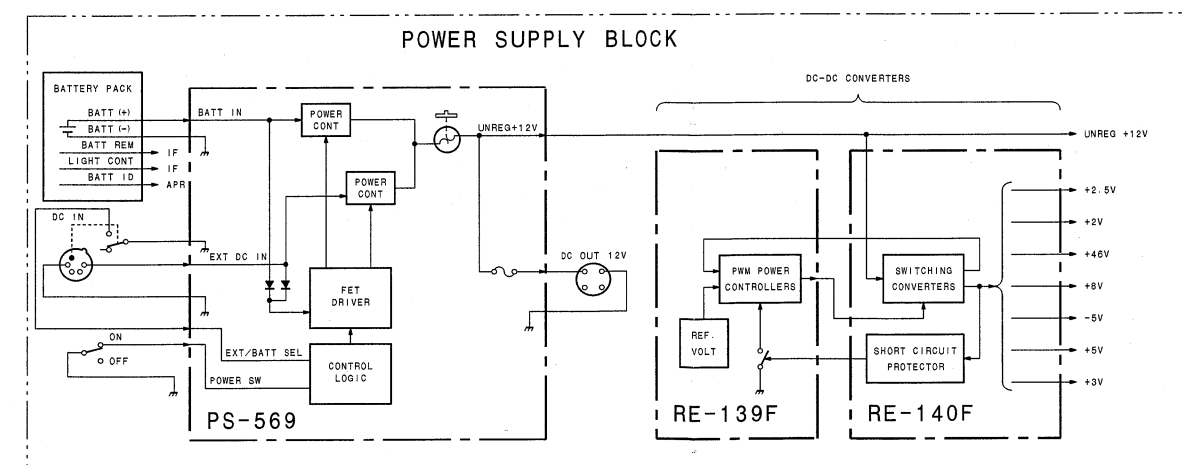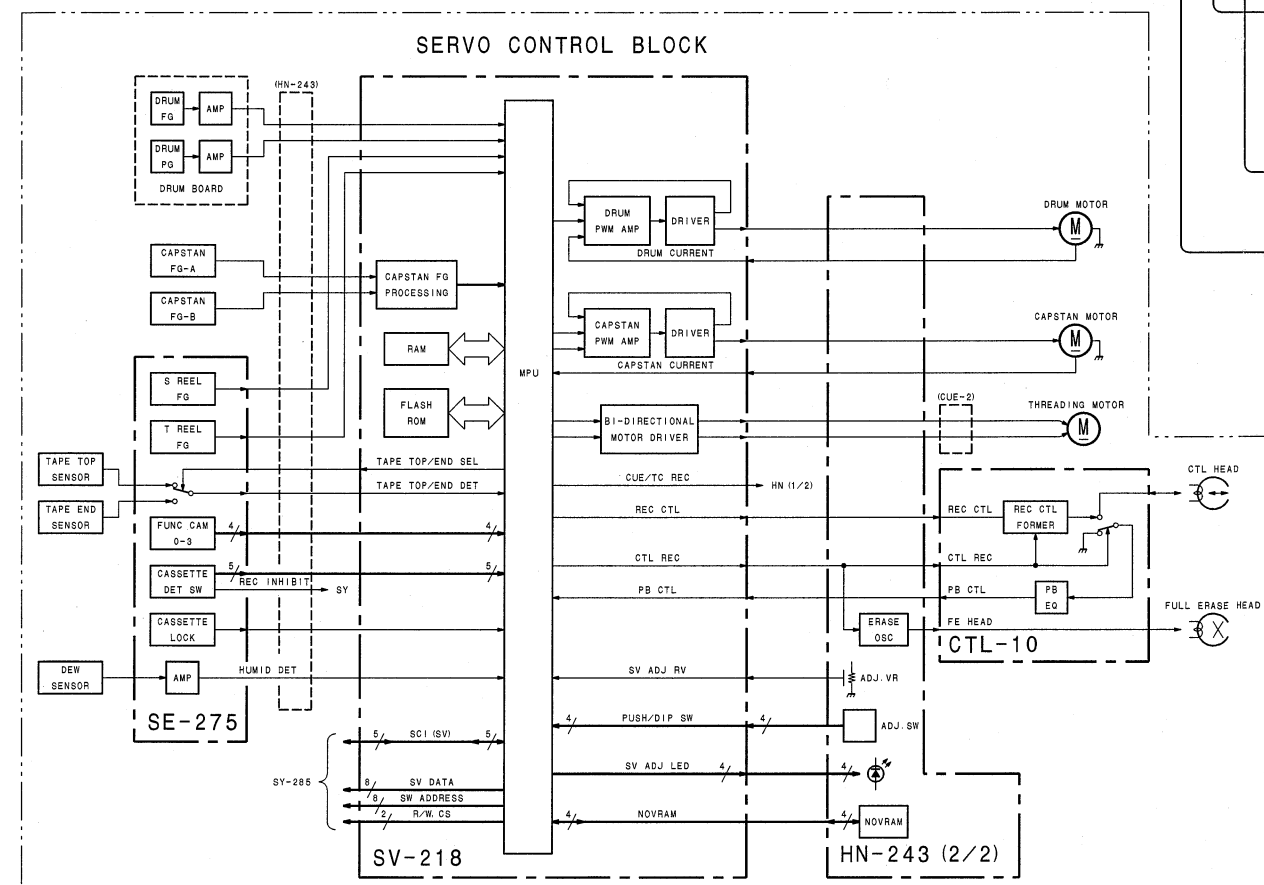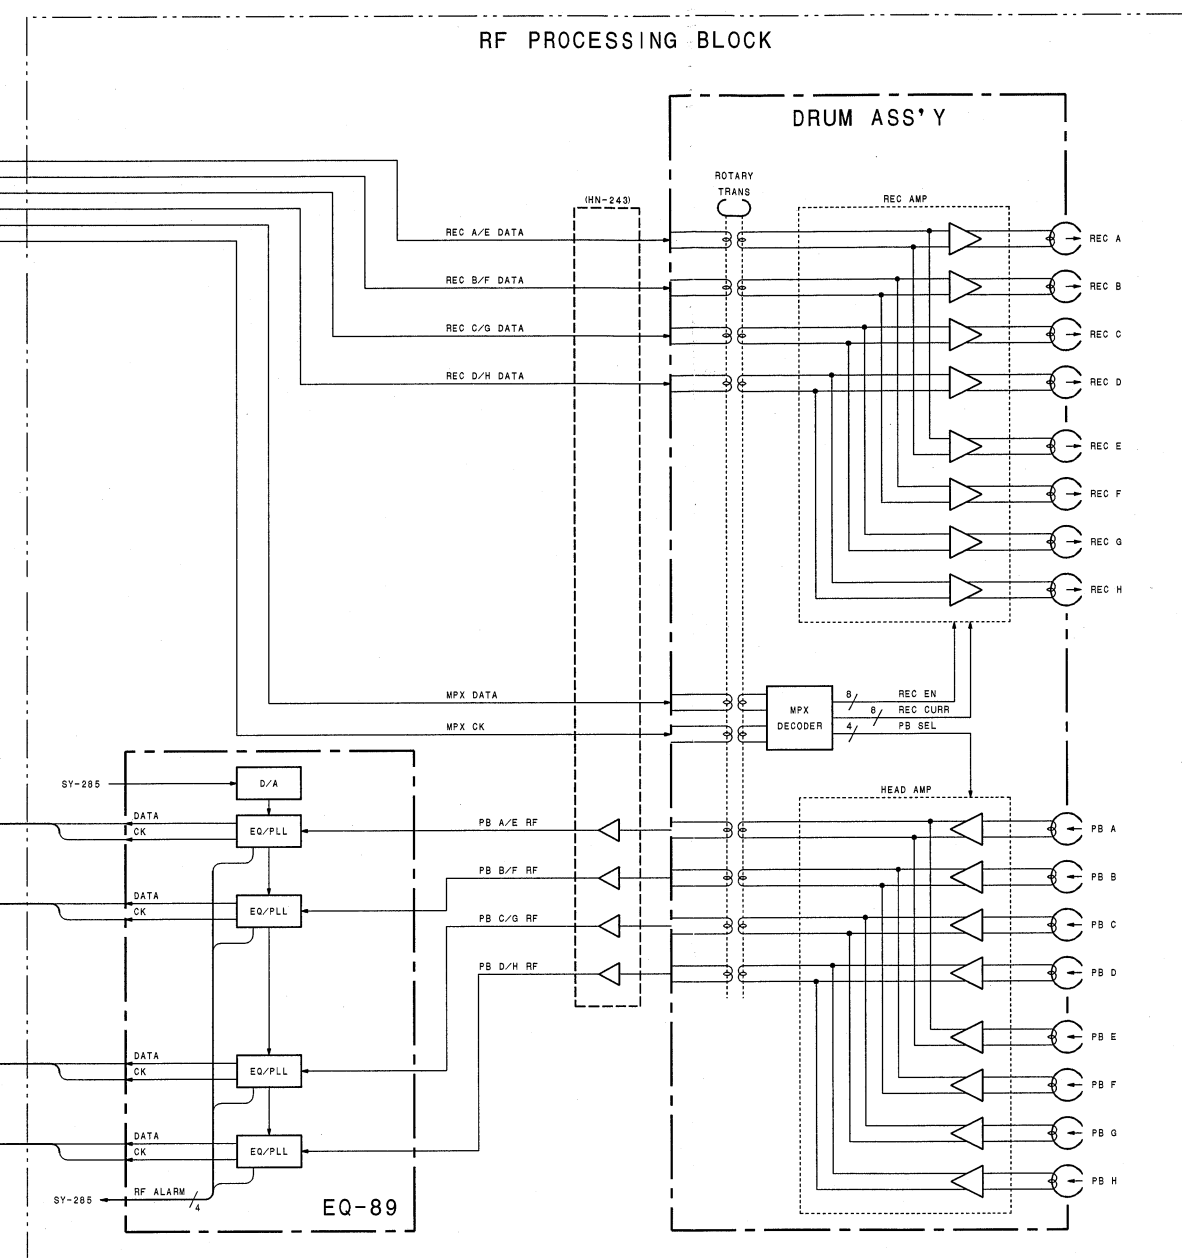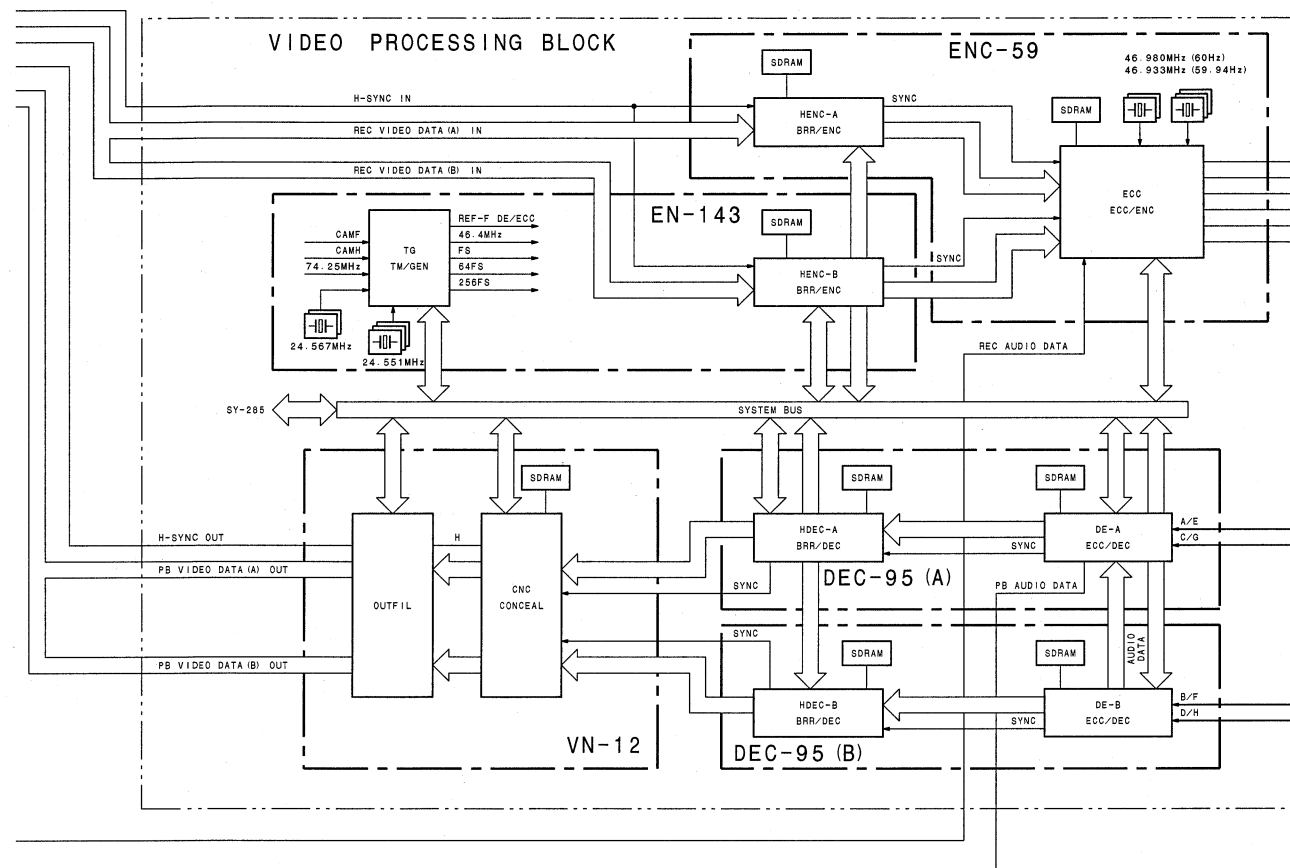


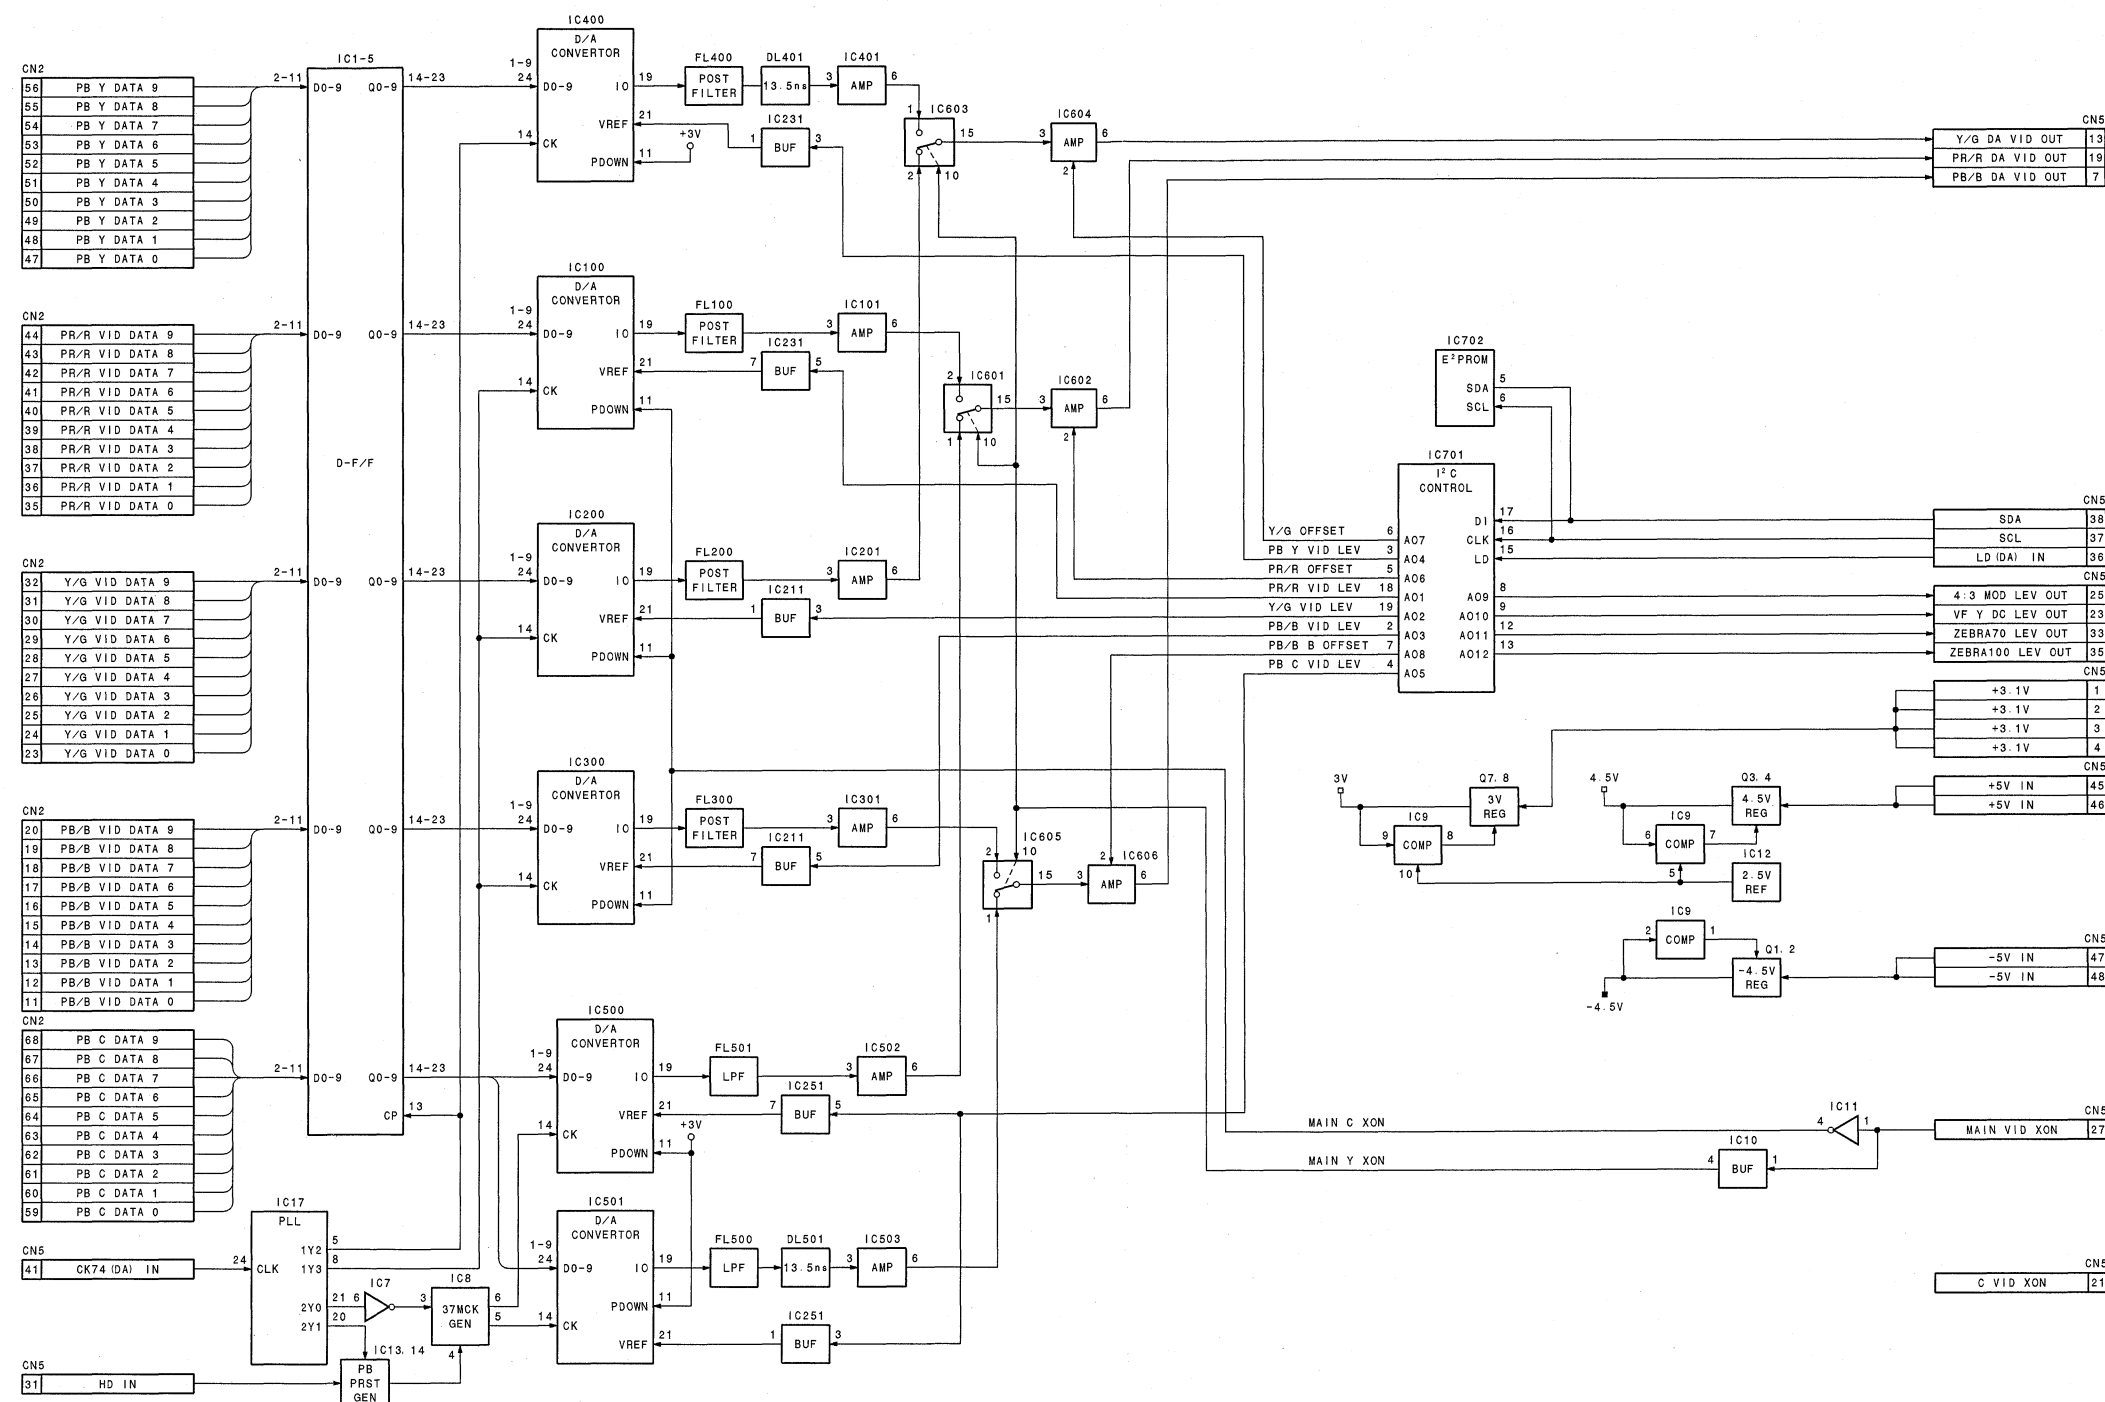


Post filter, D/A converter
DA-148
LOT NO. 911-






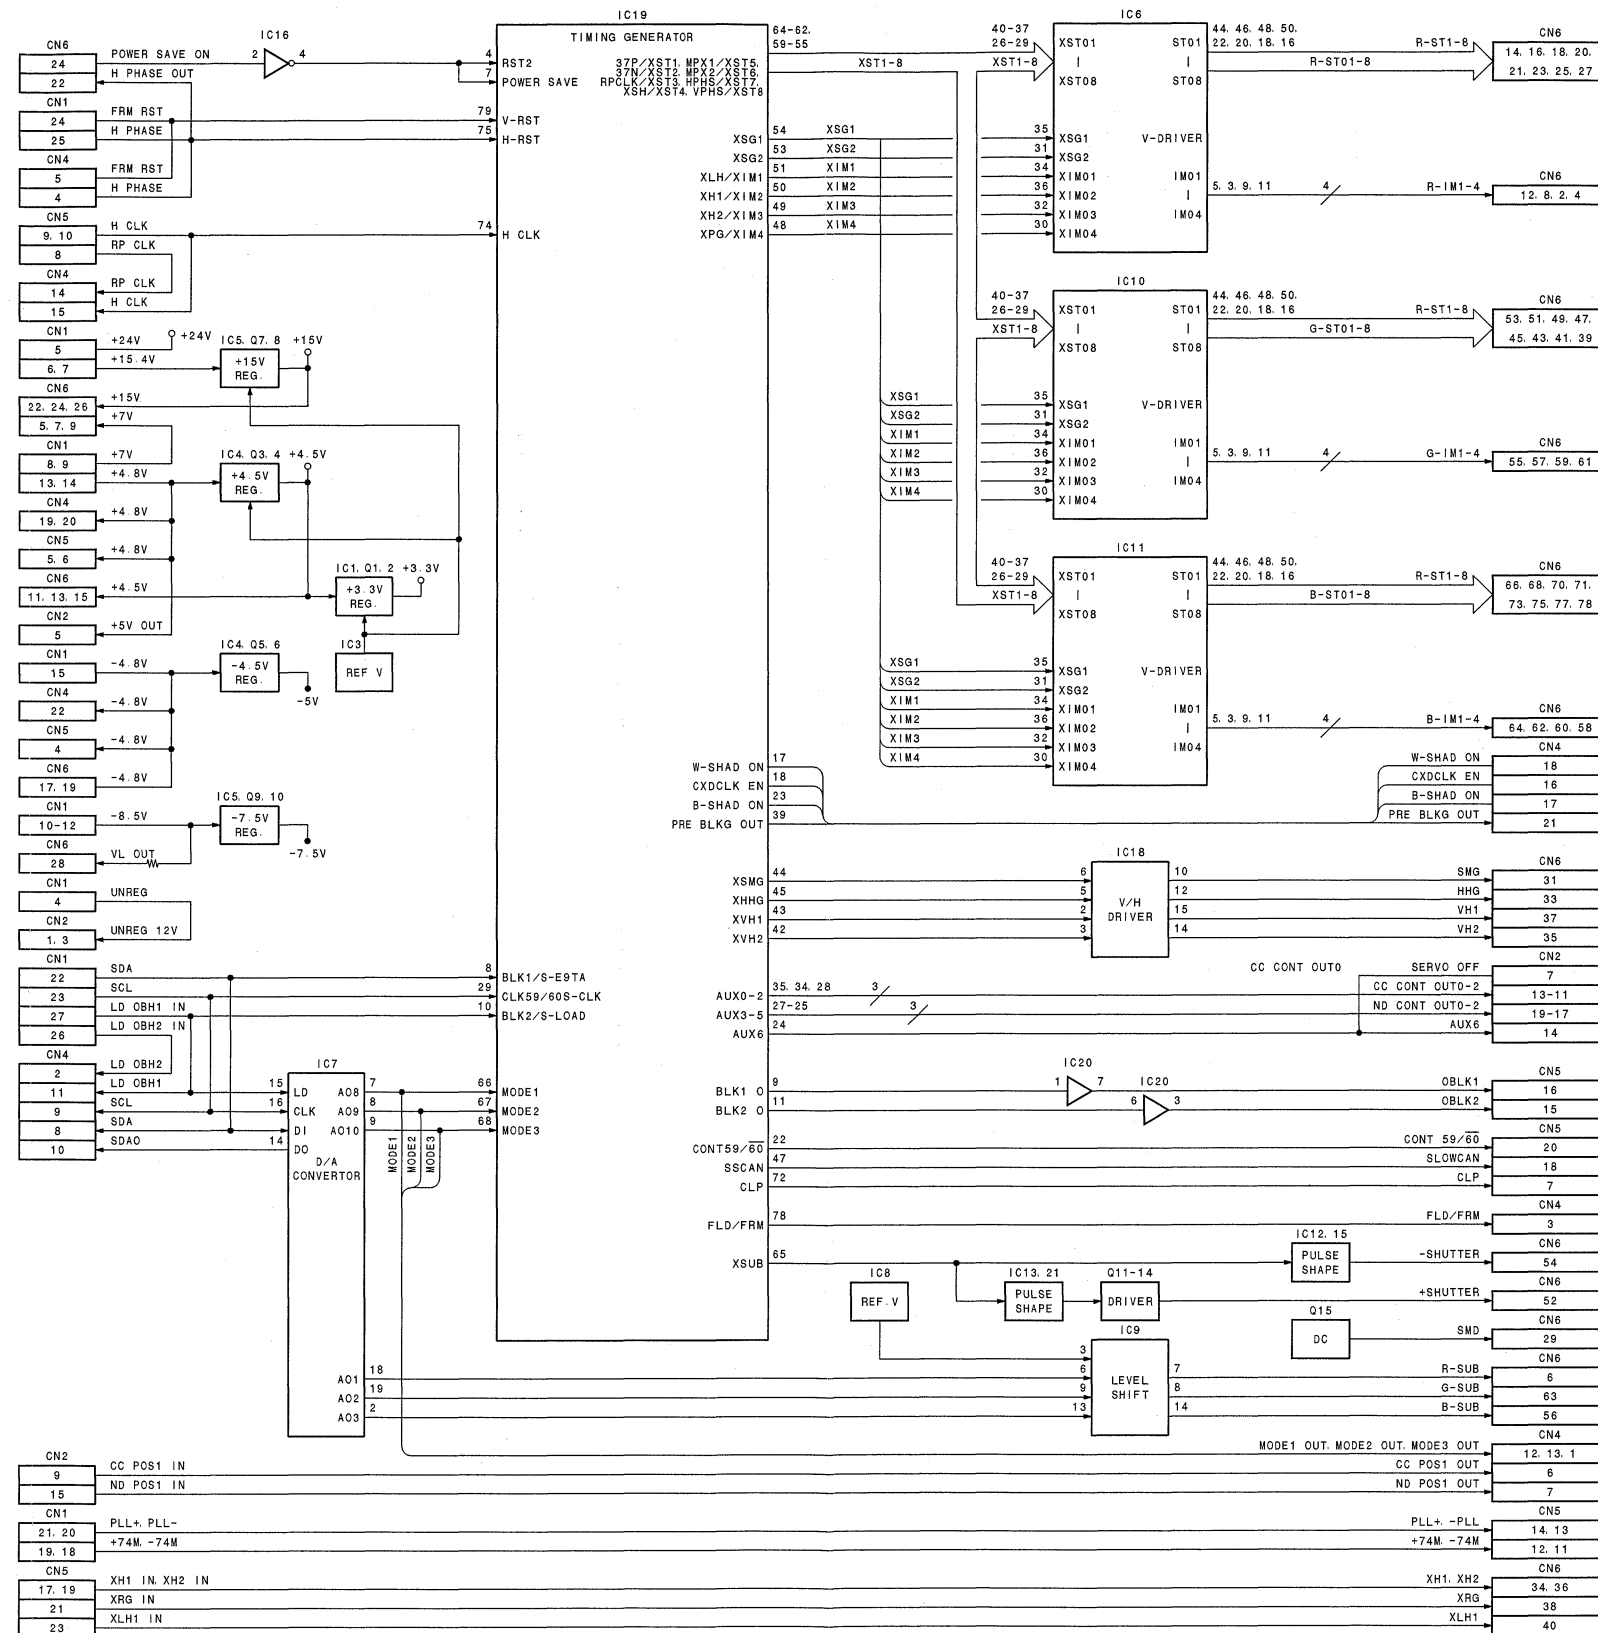


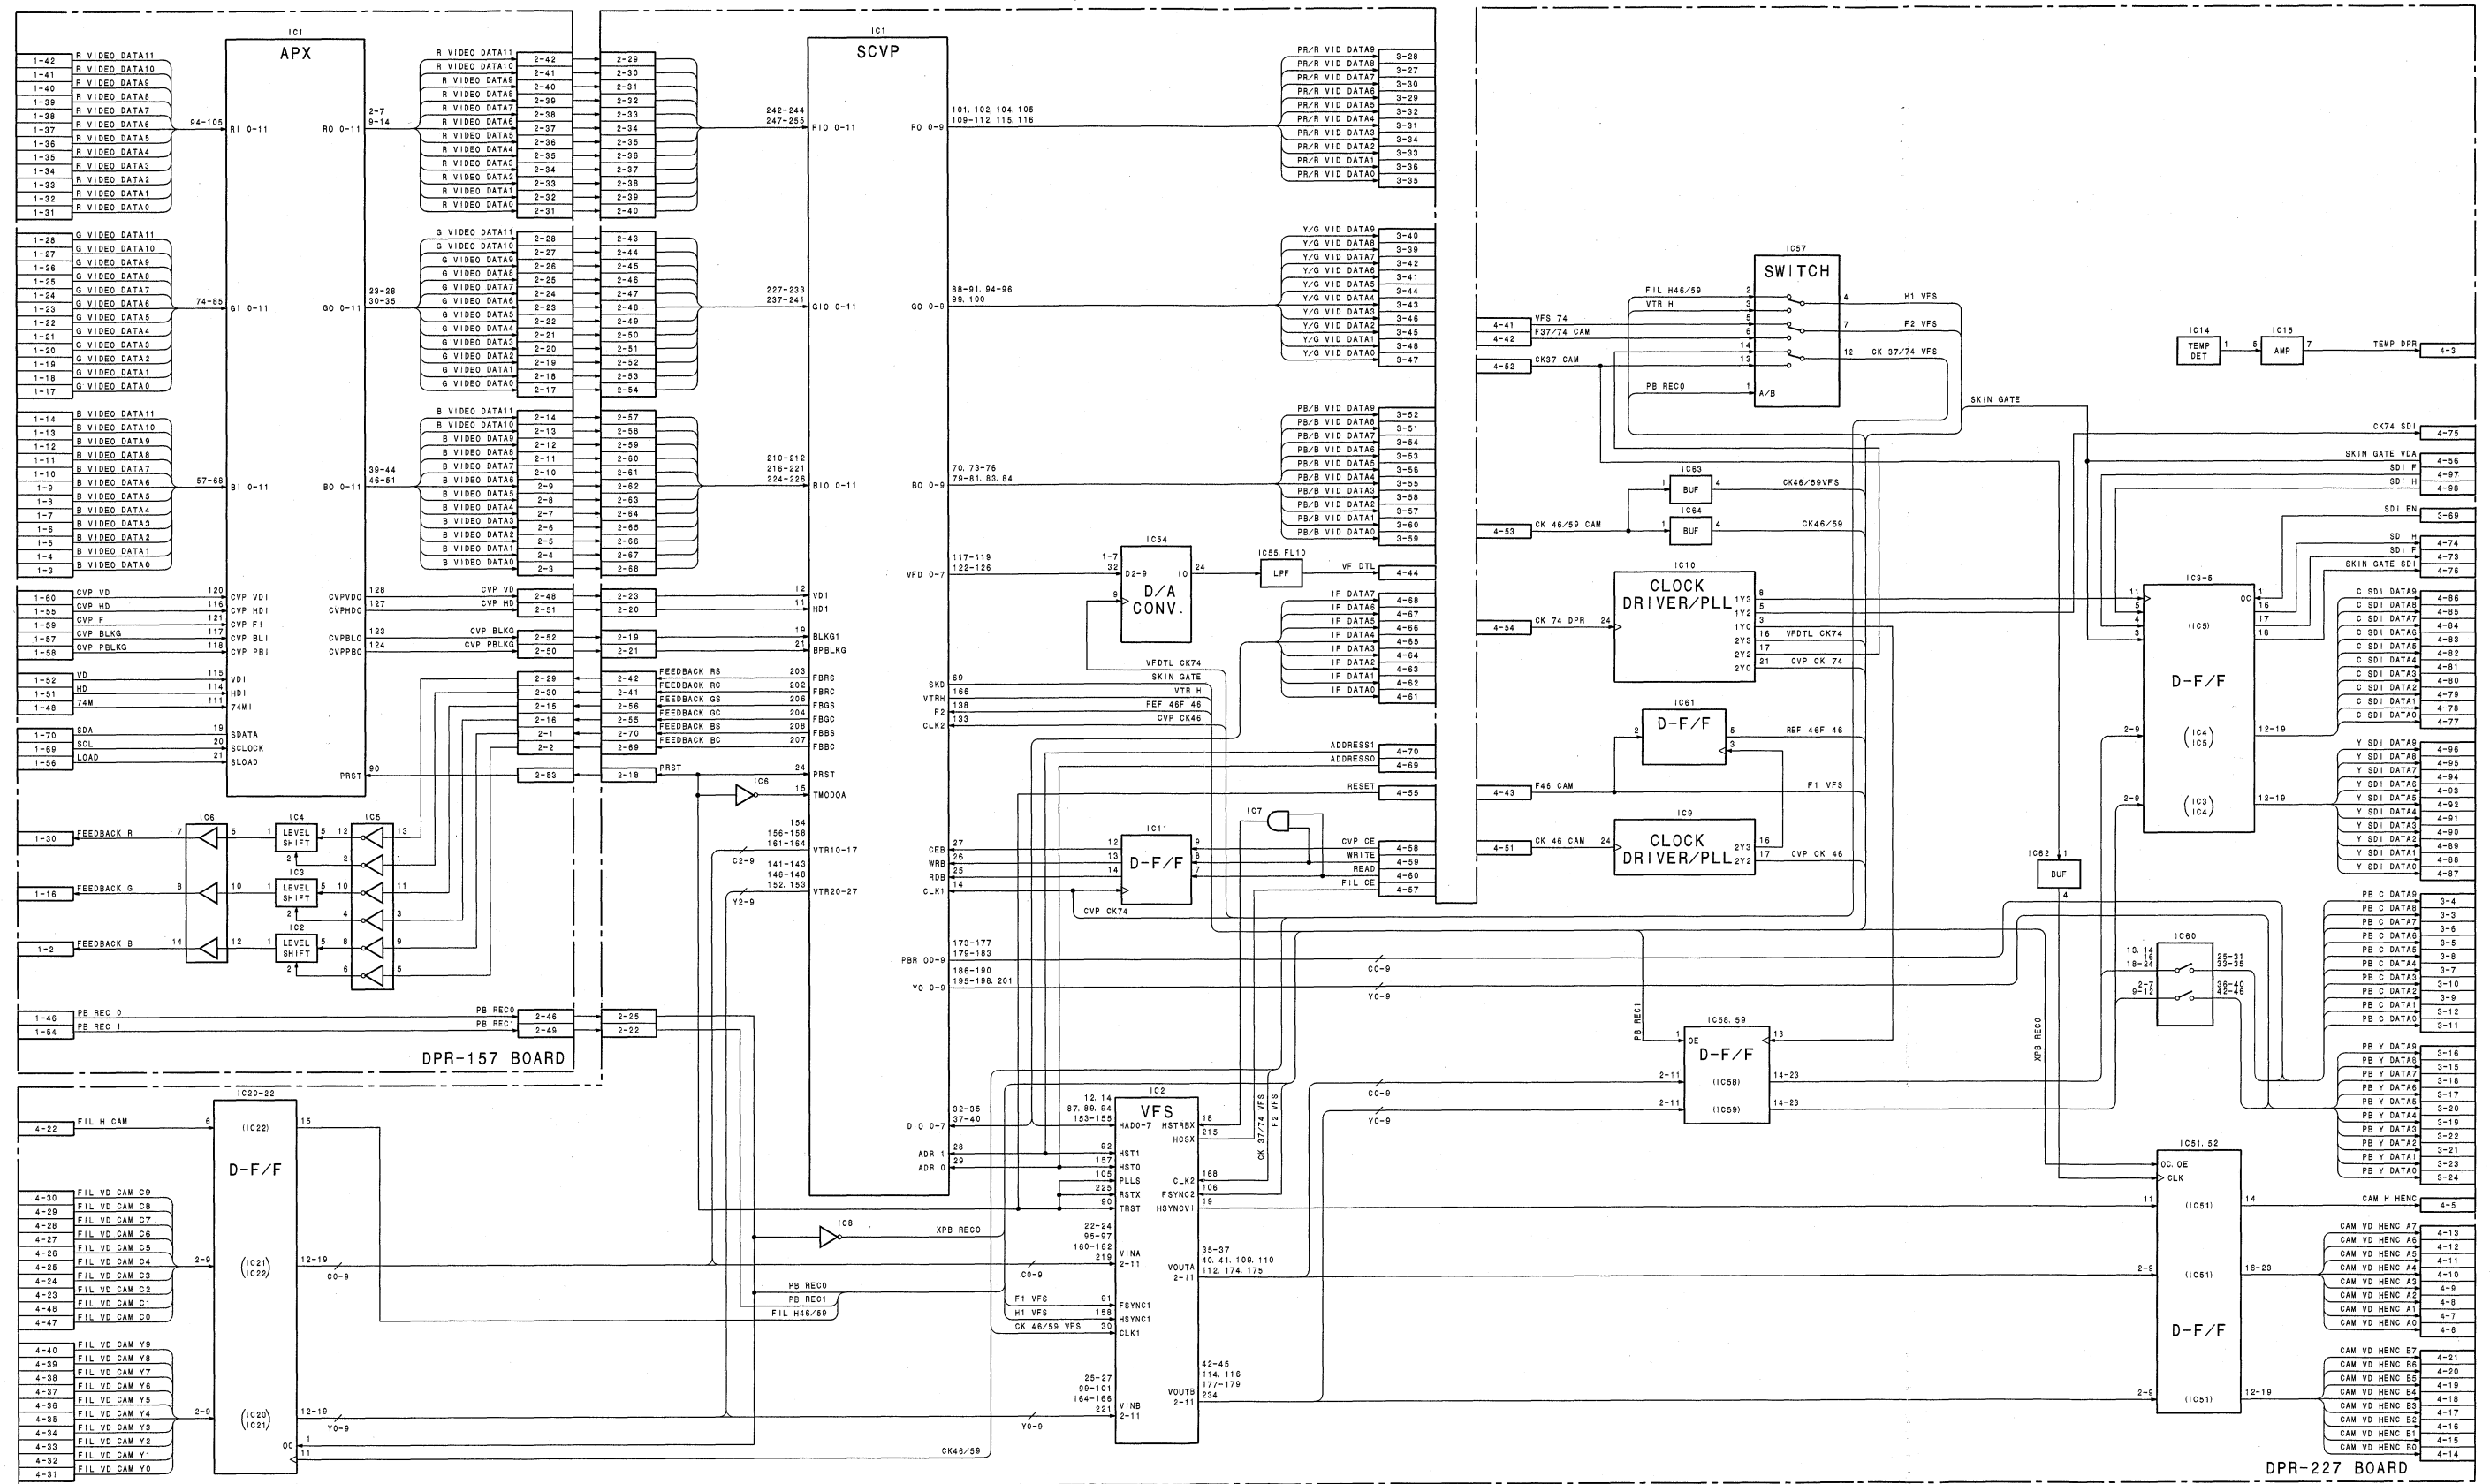


SCVP (Digital processing),
VFS (Frame rate converter) Digital processing
DPR-227 **DPR-157**
LOT NO. 2A3- LOT NO. 911-

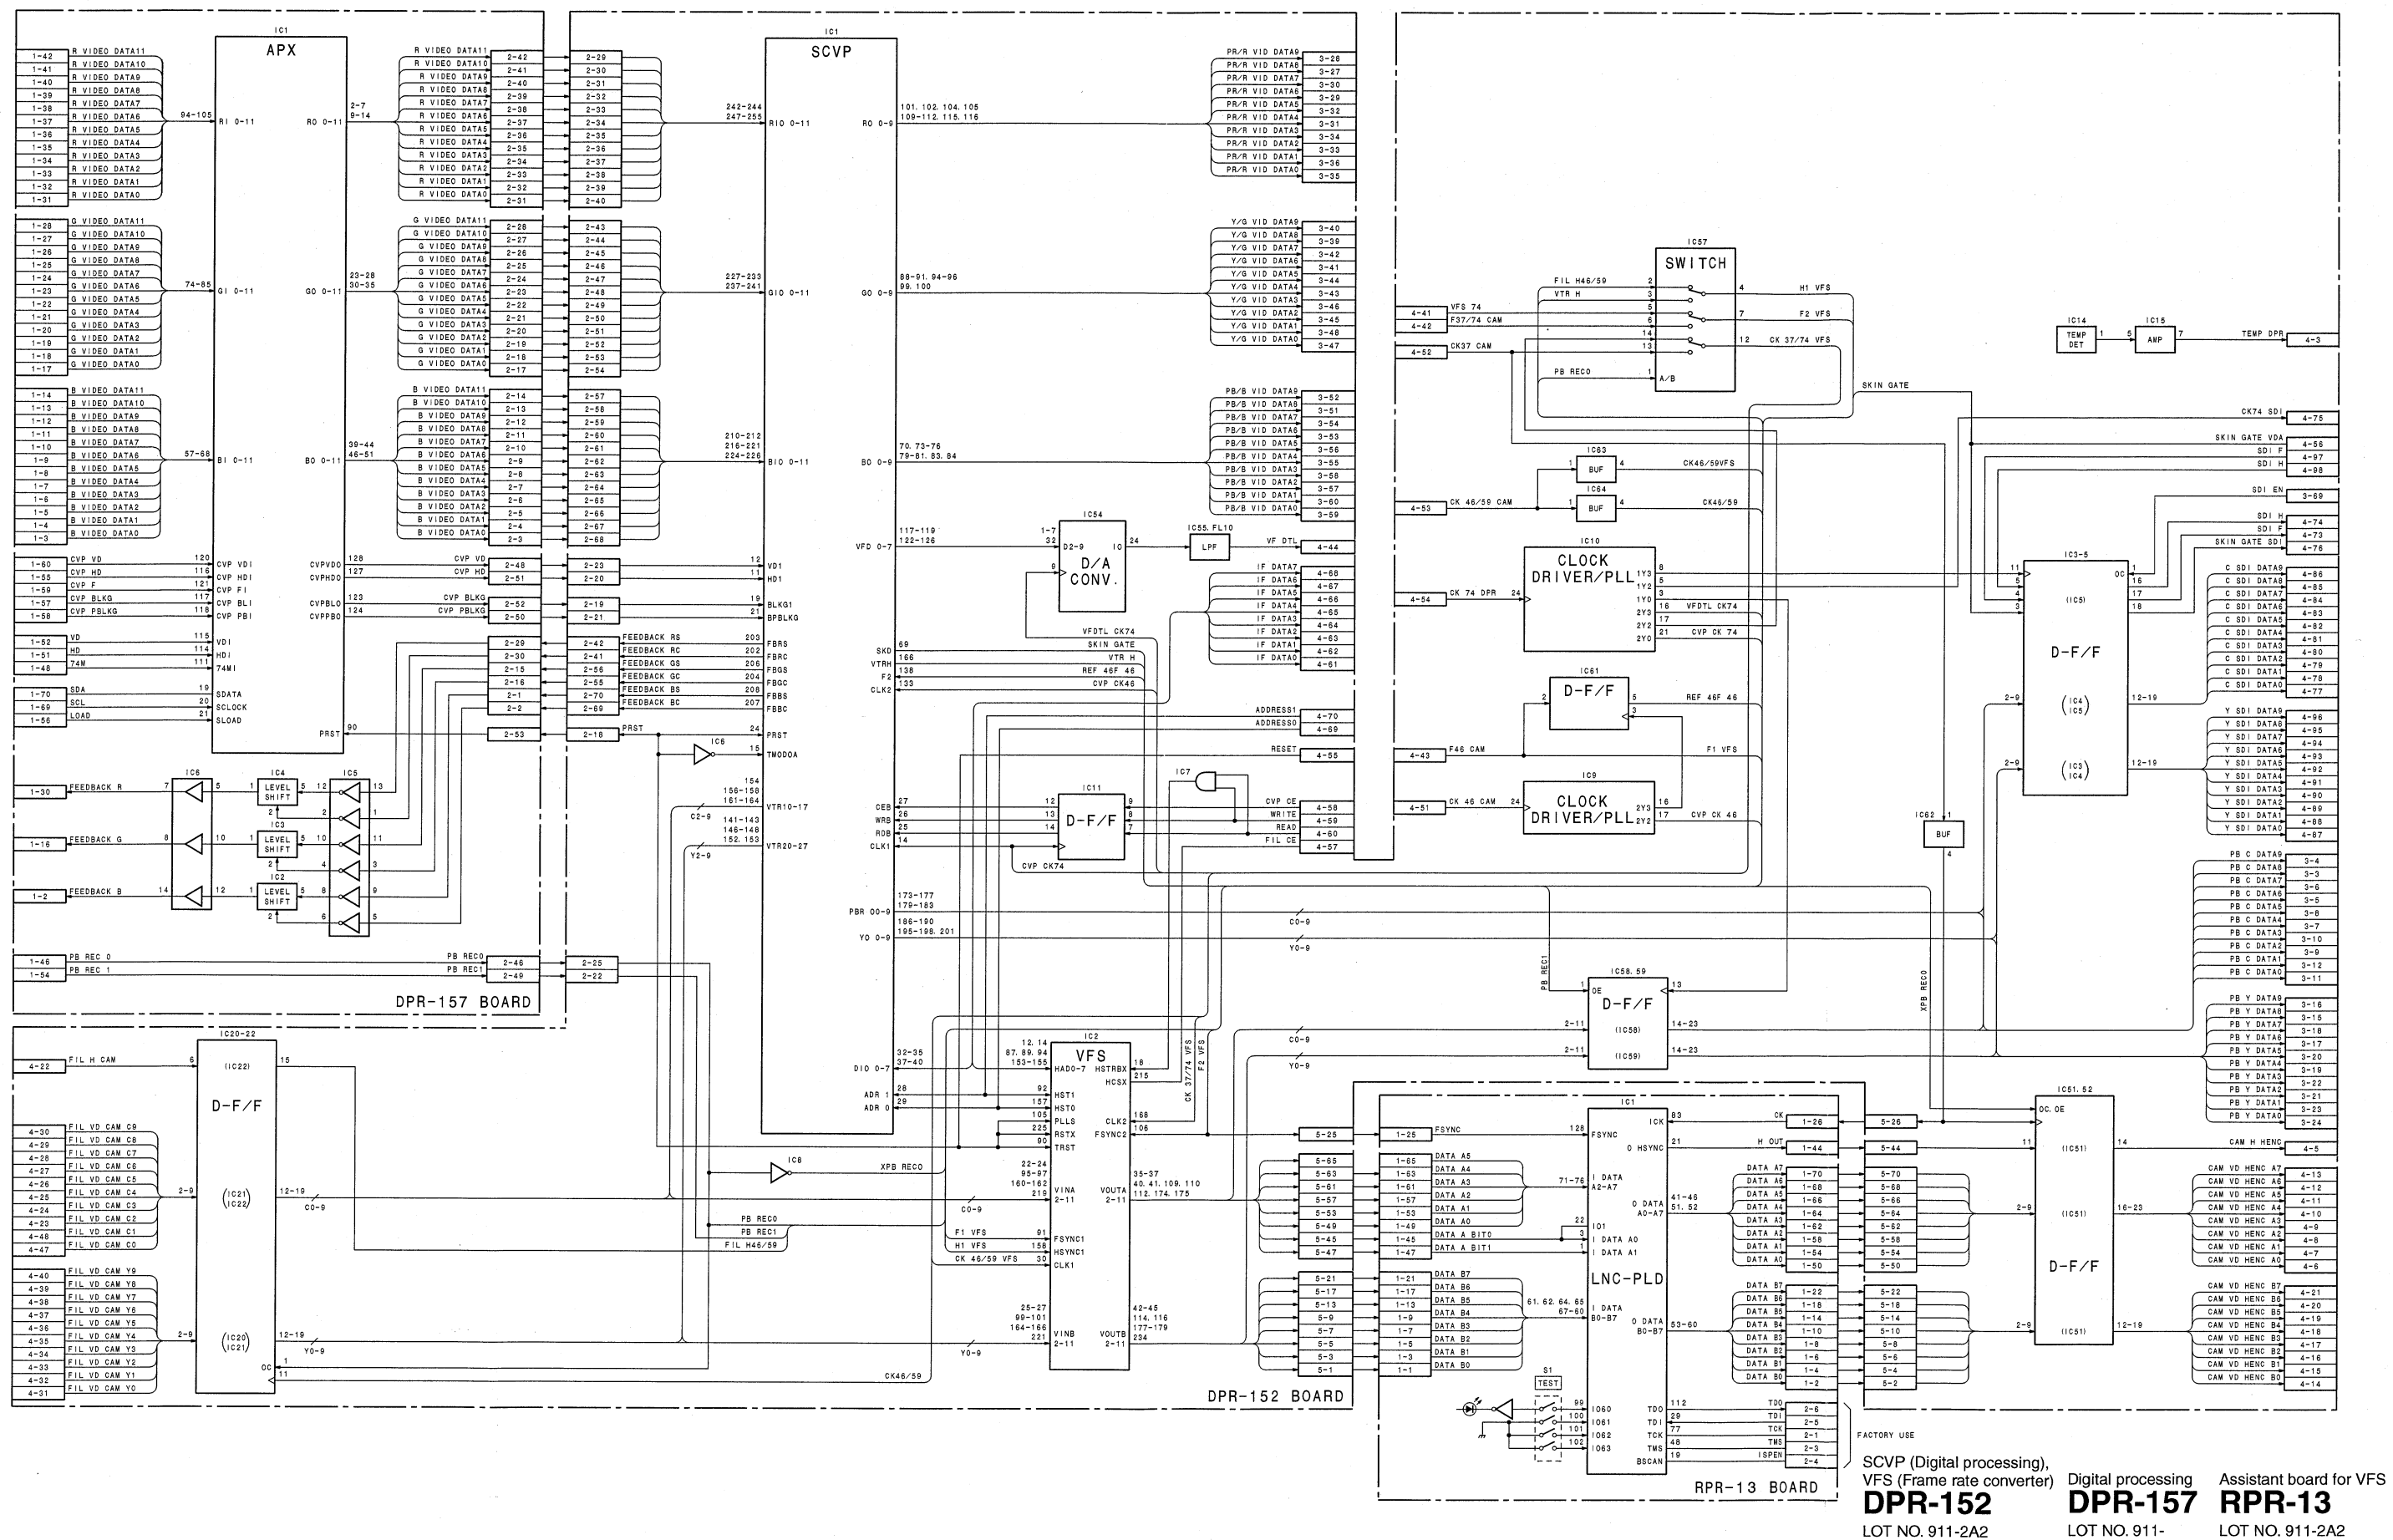

IF-819 IF-819

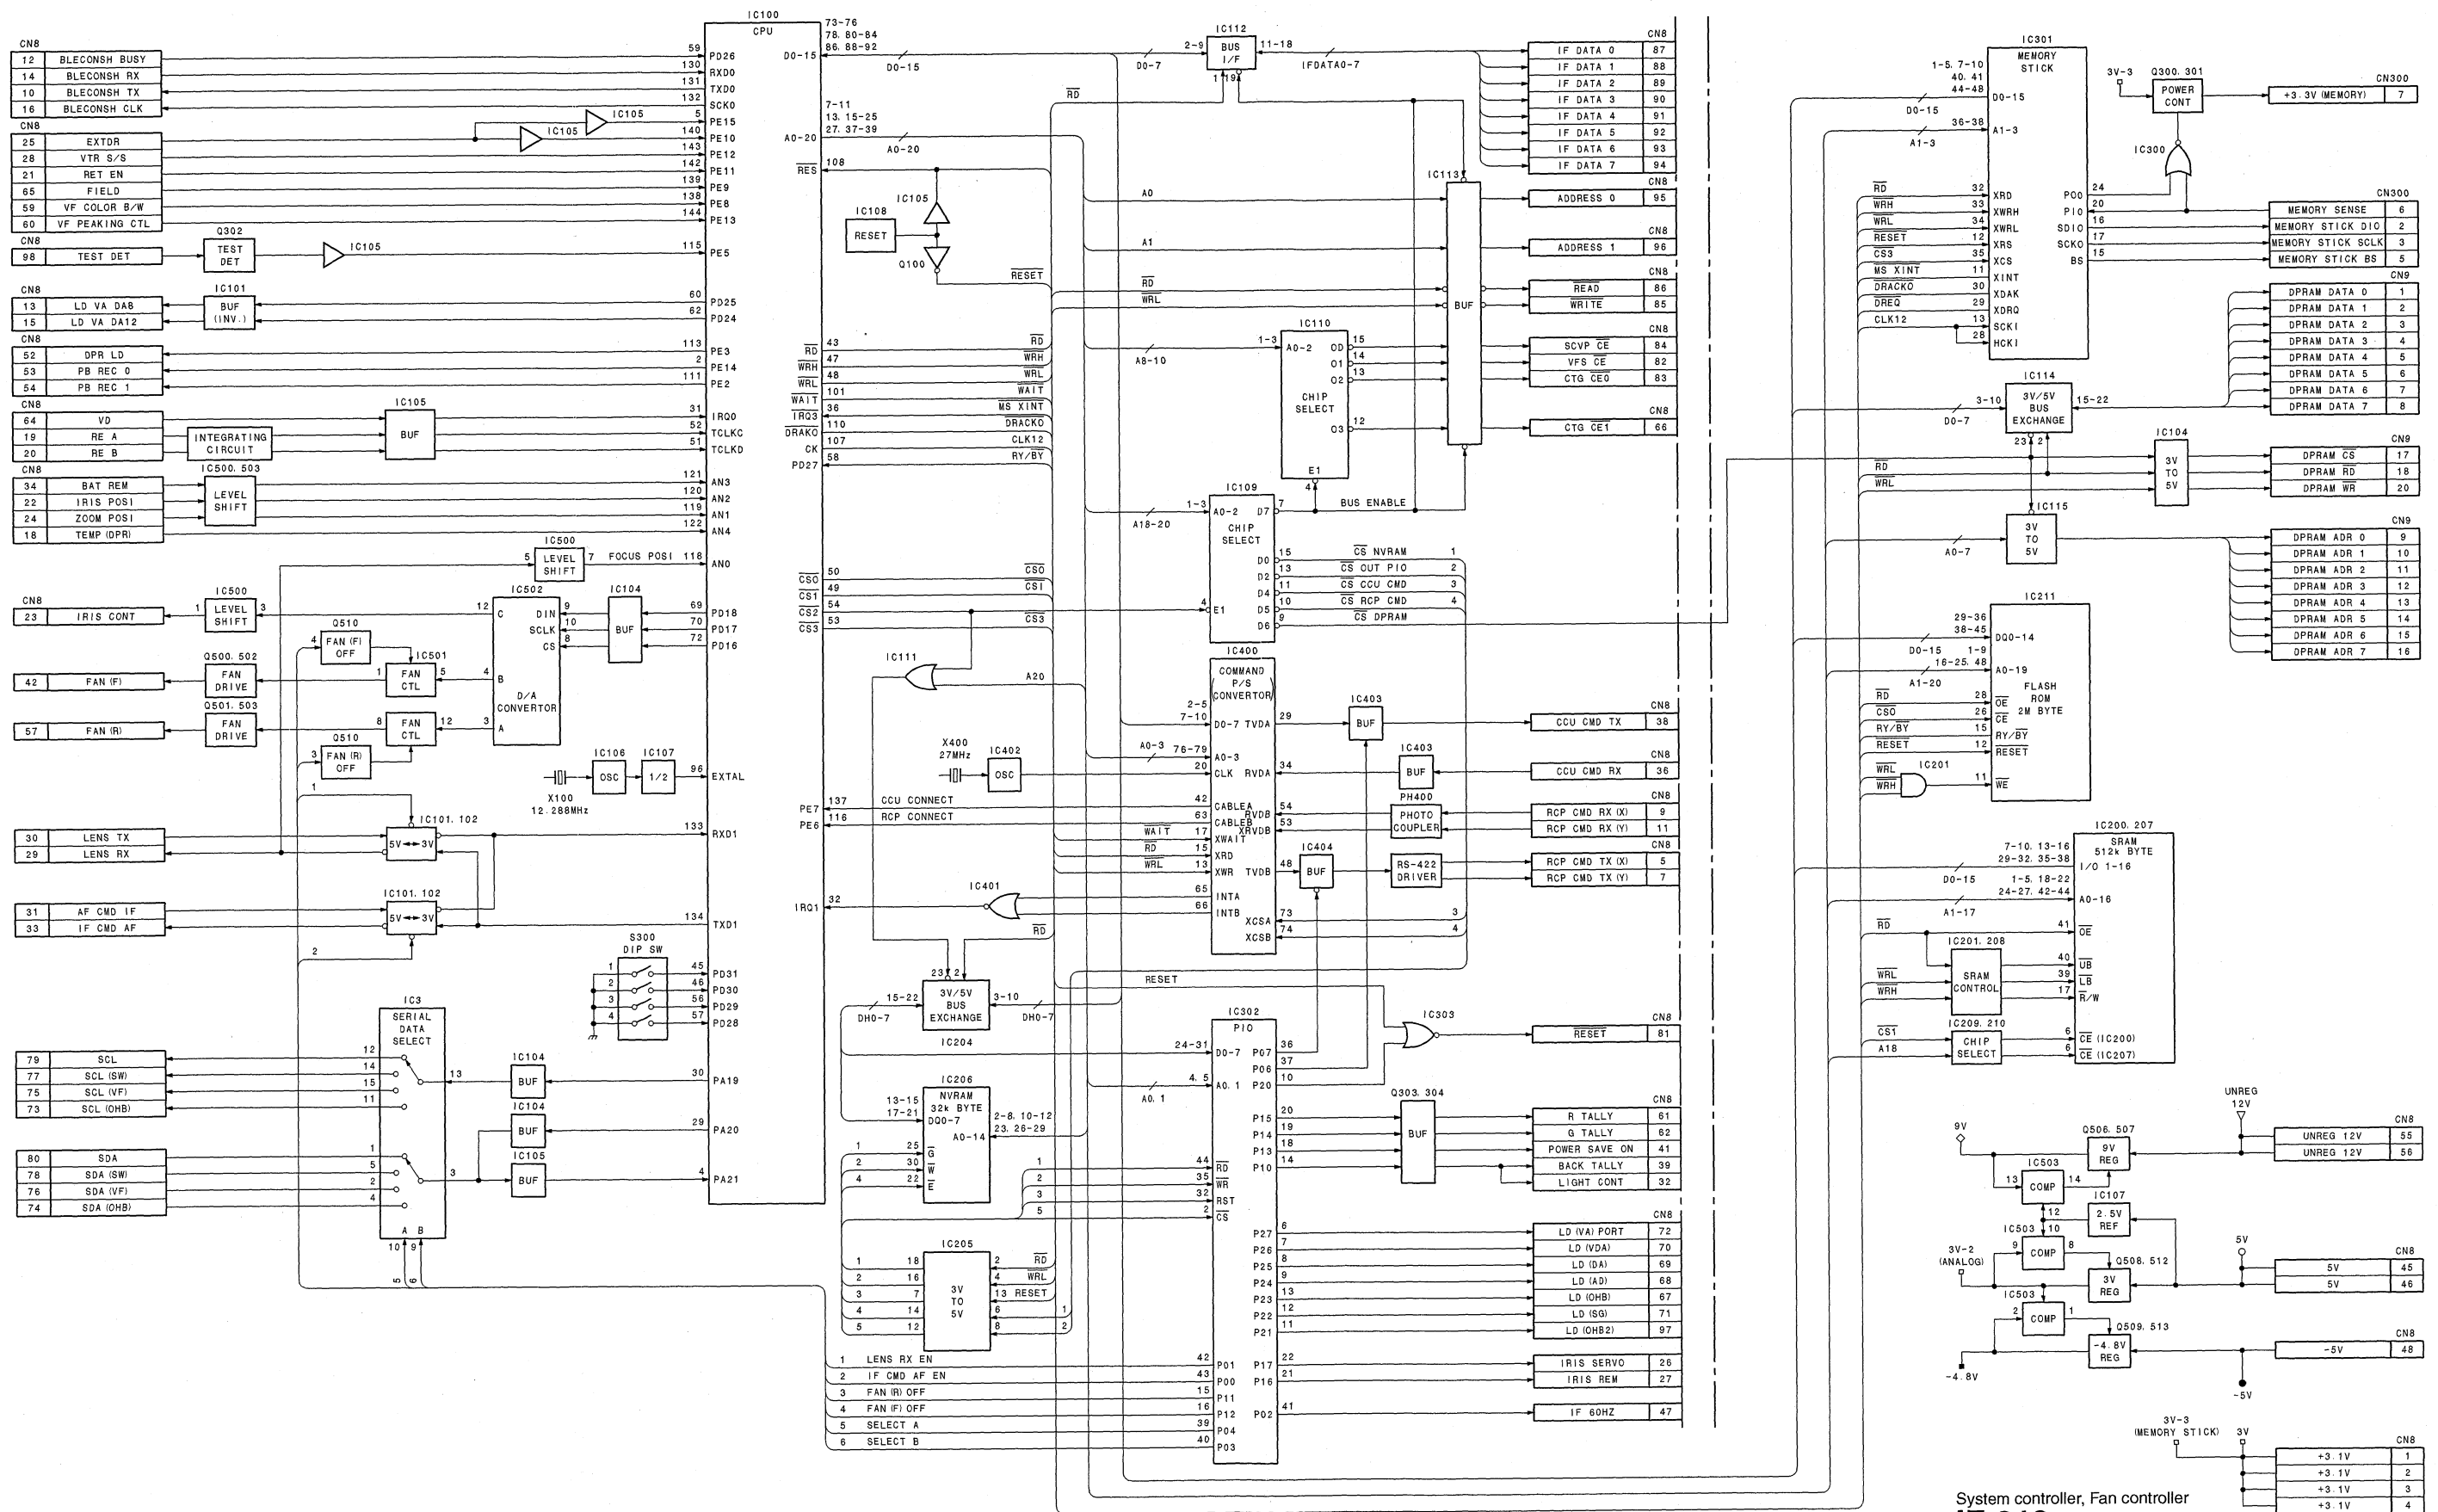



System controller, Fan controller
IF-819
LOT NO. 911-

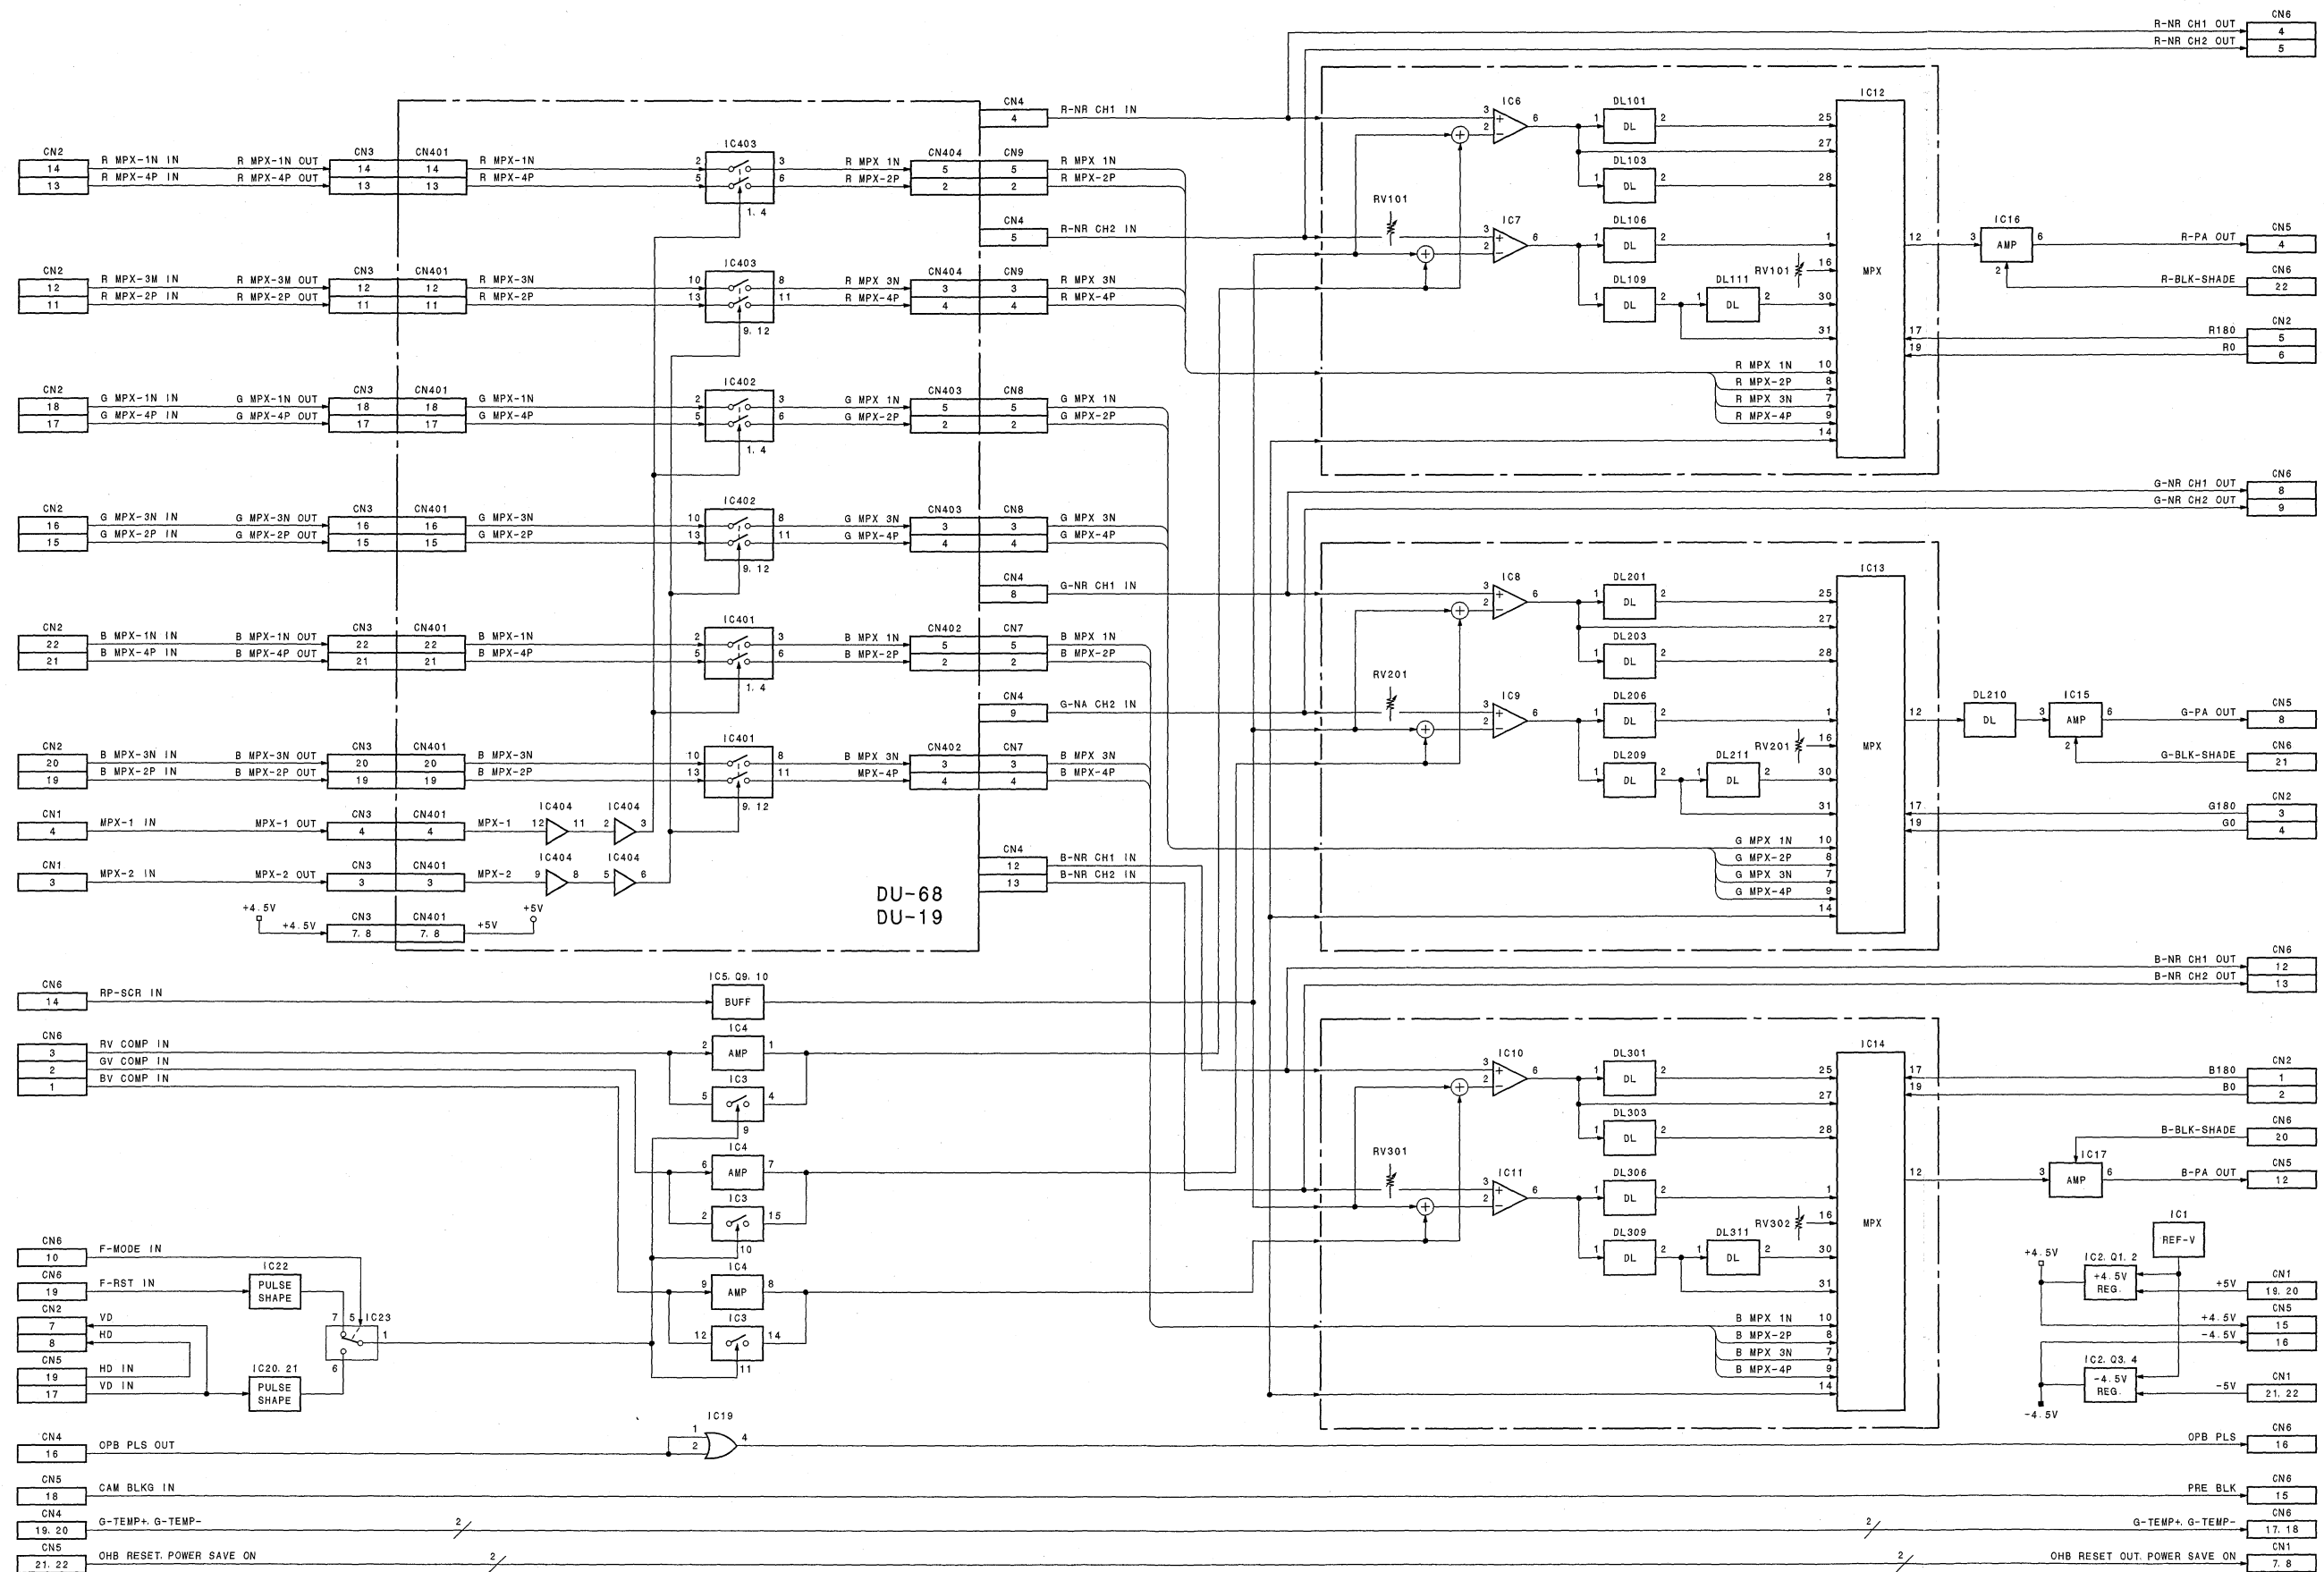


Pre-amp
PA-238
 LOT NO. 911-
 Connector Board
DU-68
 LOT NO. 073-
 Connector Board
DU-19
 LOT NO. 911-072






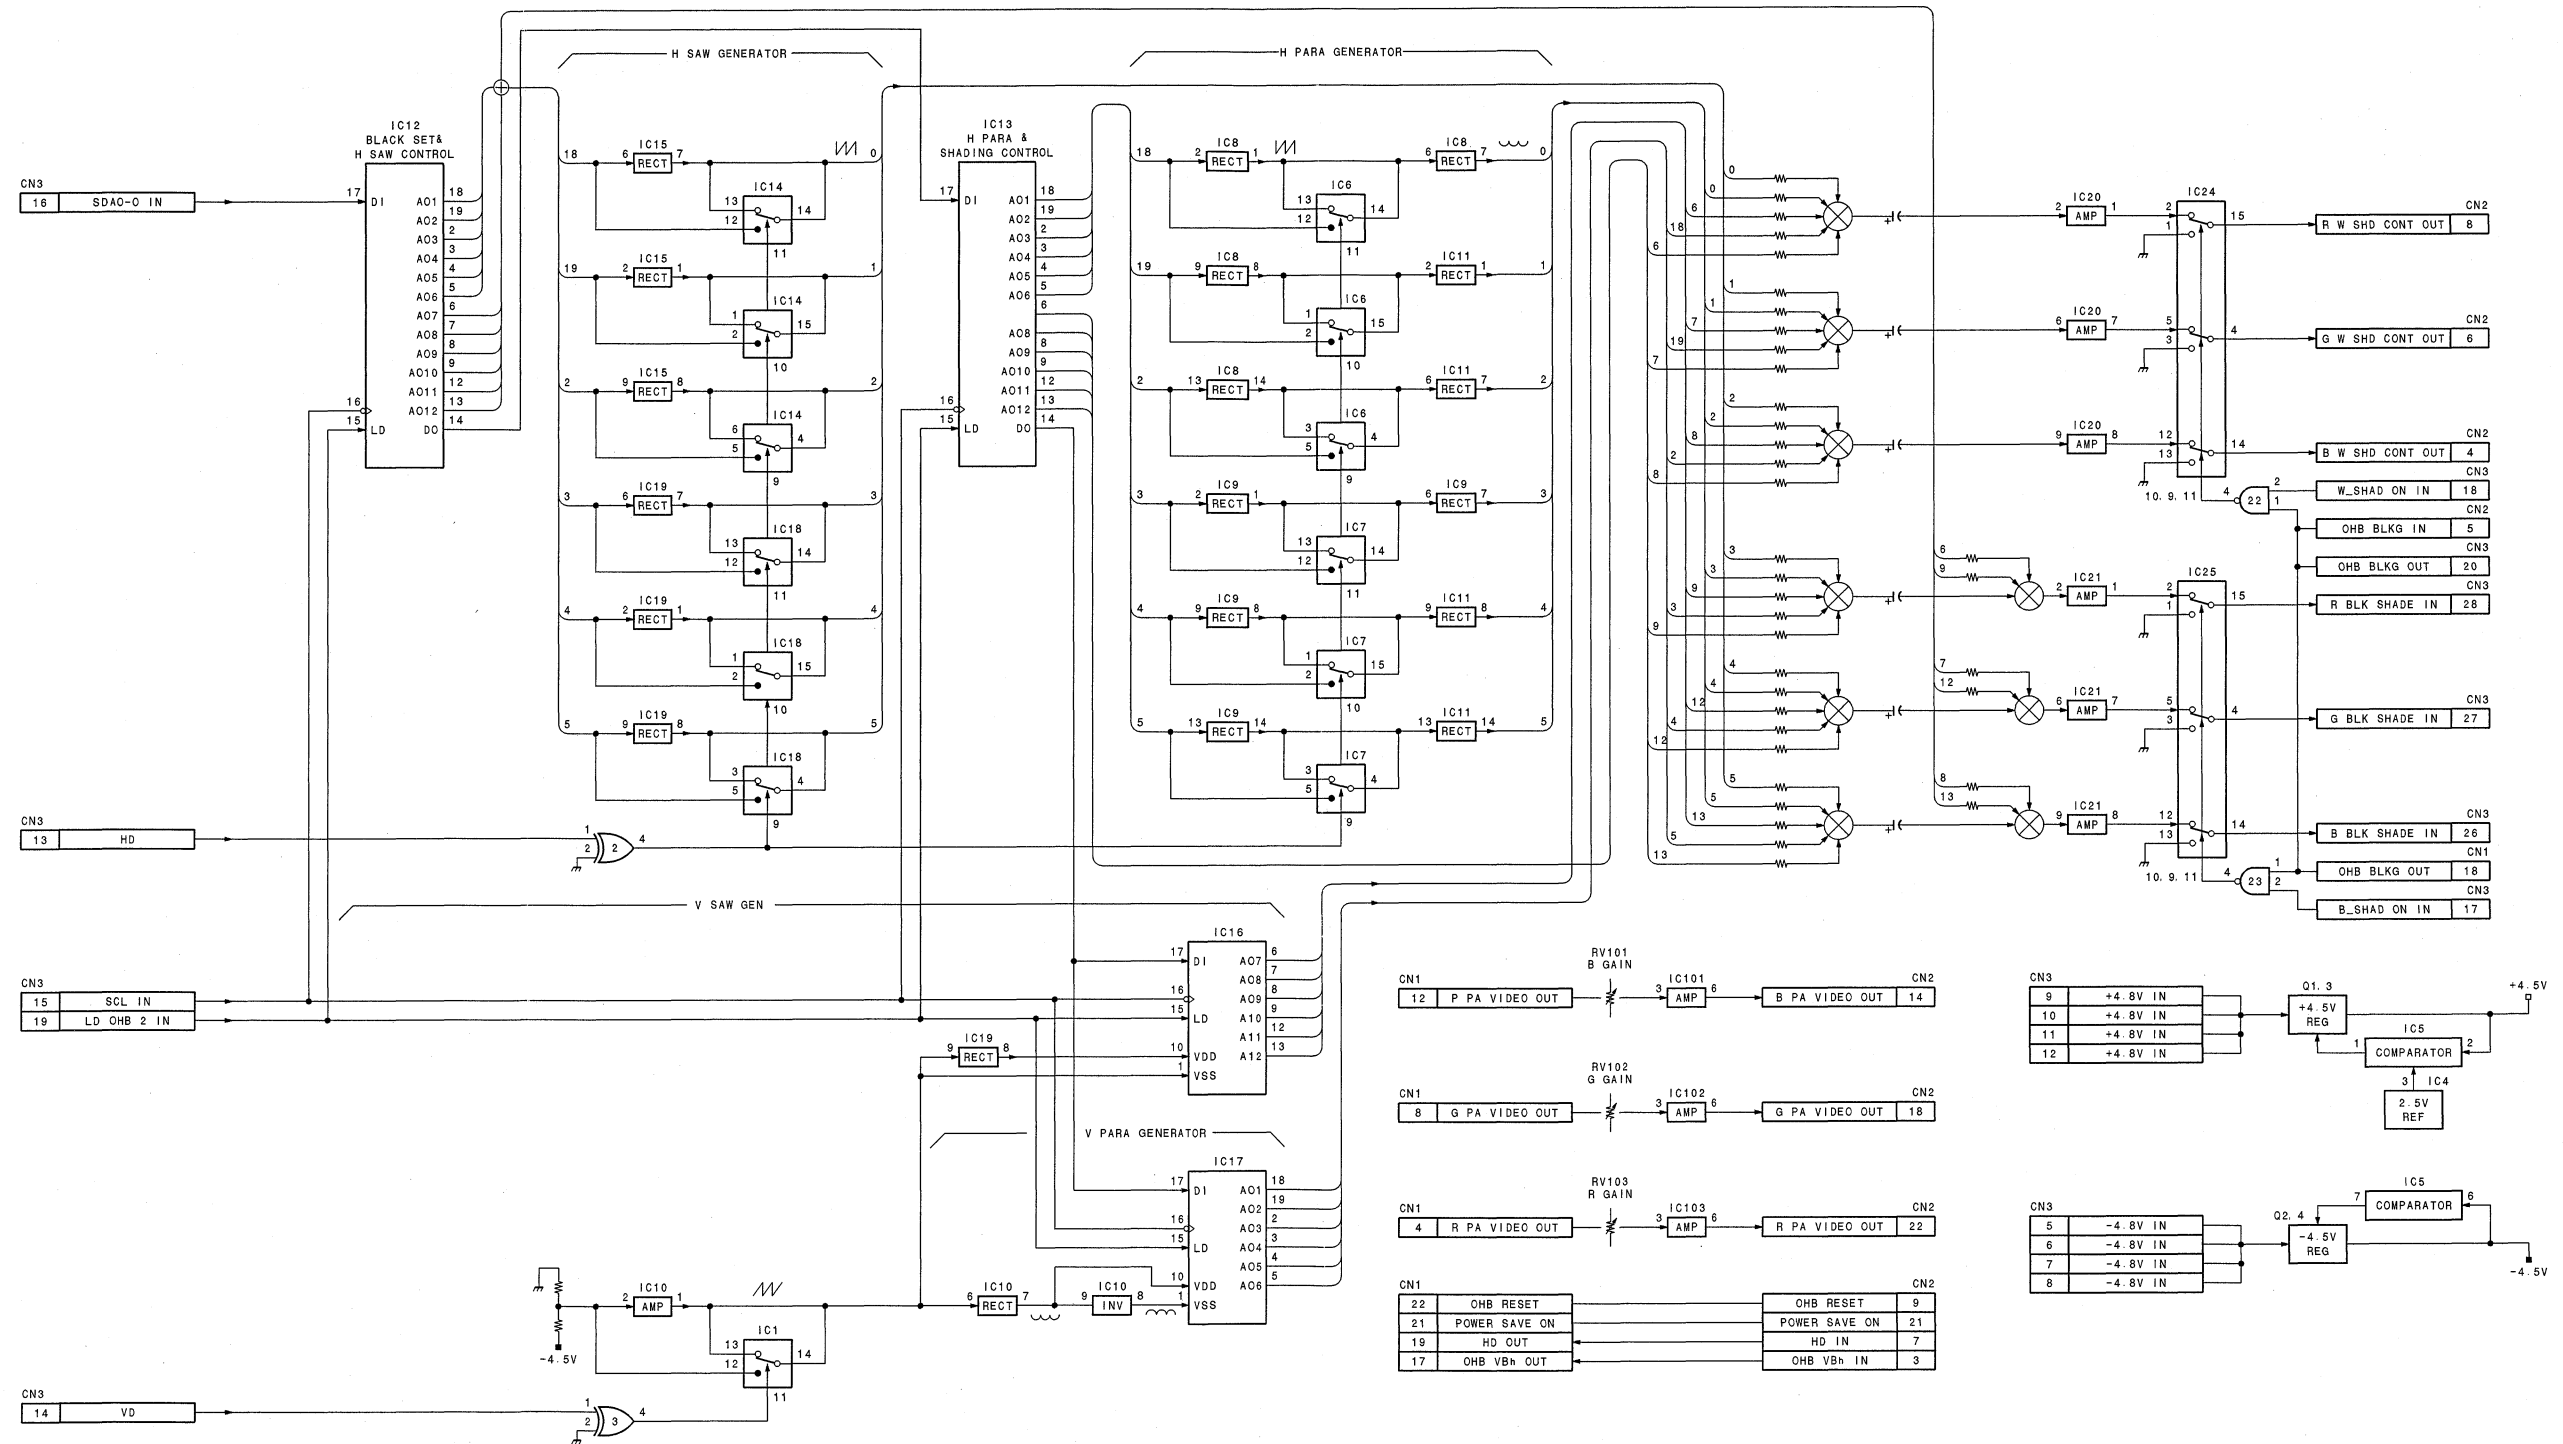


Shading correction signal generator
SH-74
LOT NO. 911-

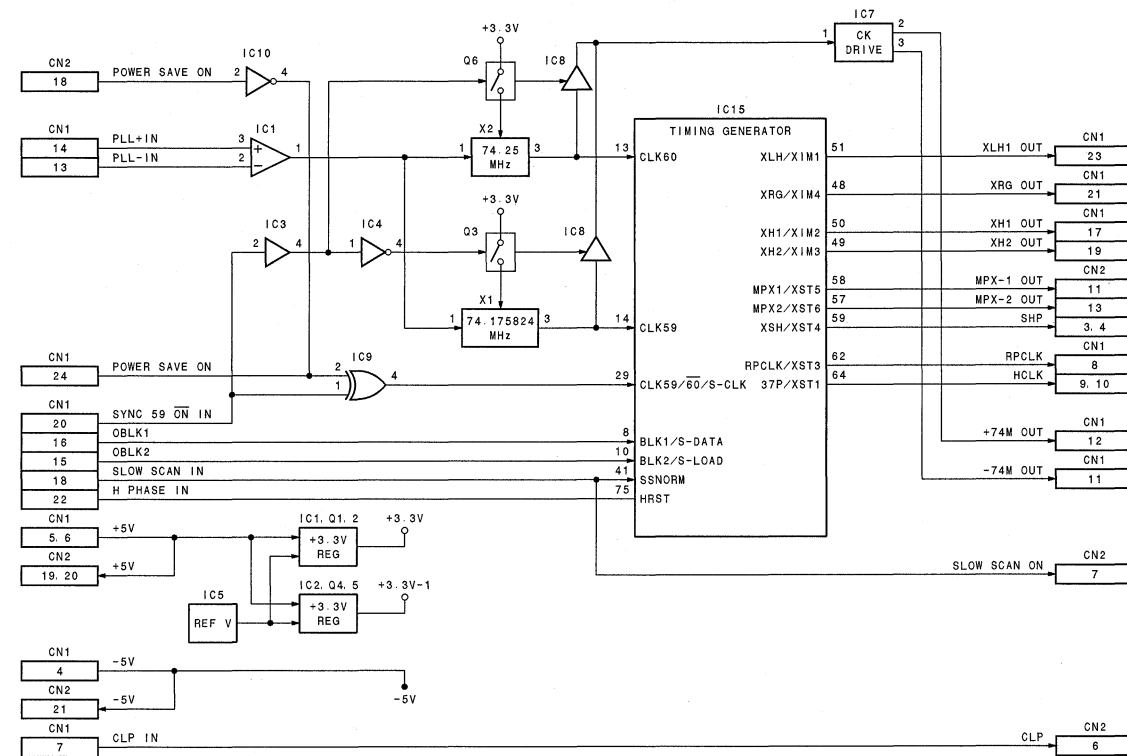


Timing generator
TG-213
LOT NO. 911-





VDA-51



Video Processing (1/2)





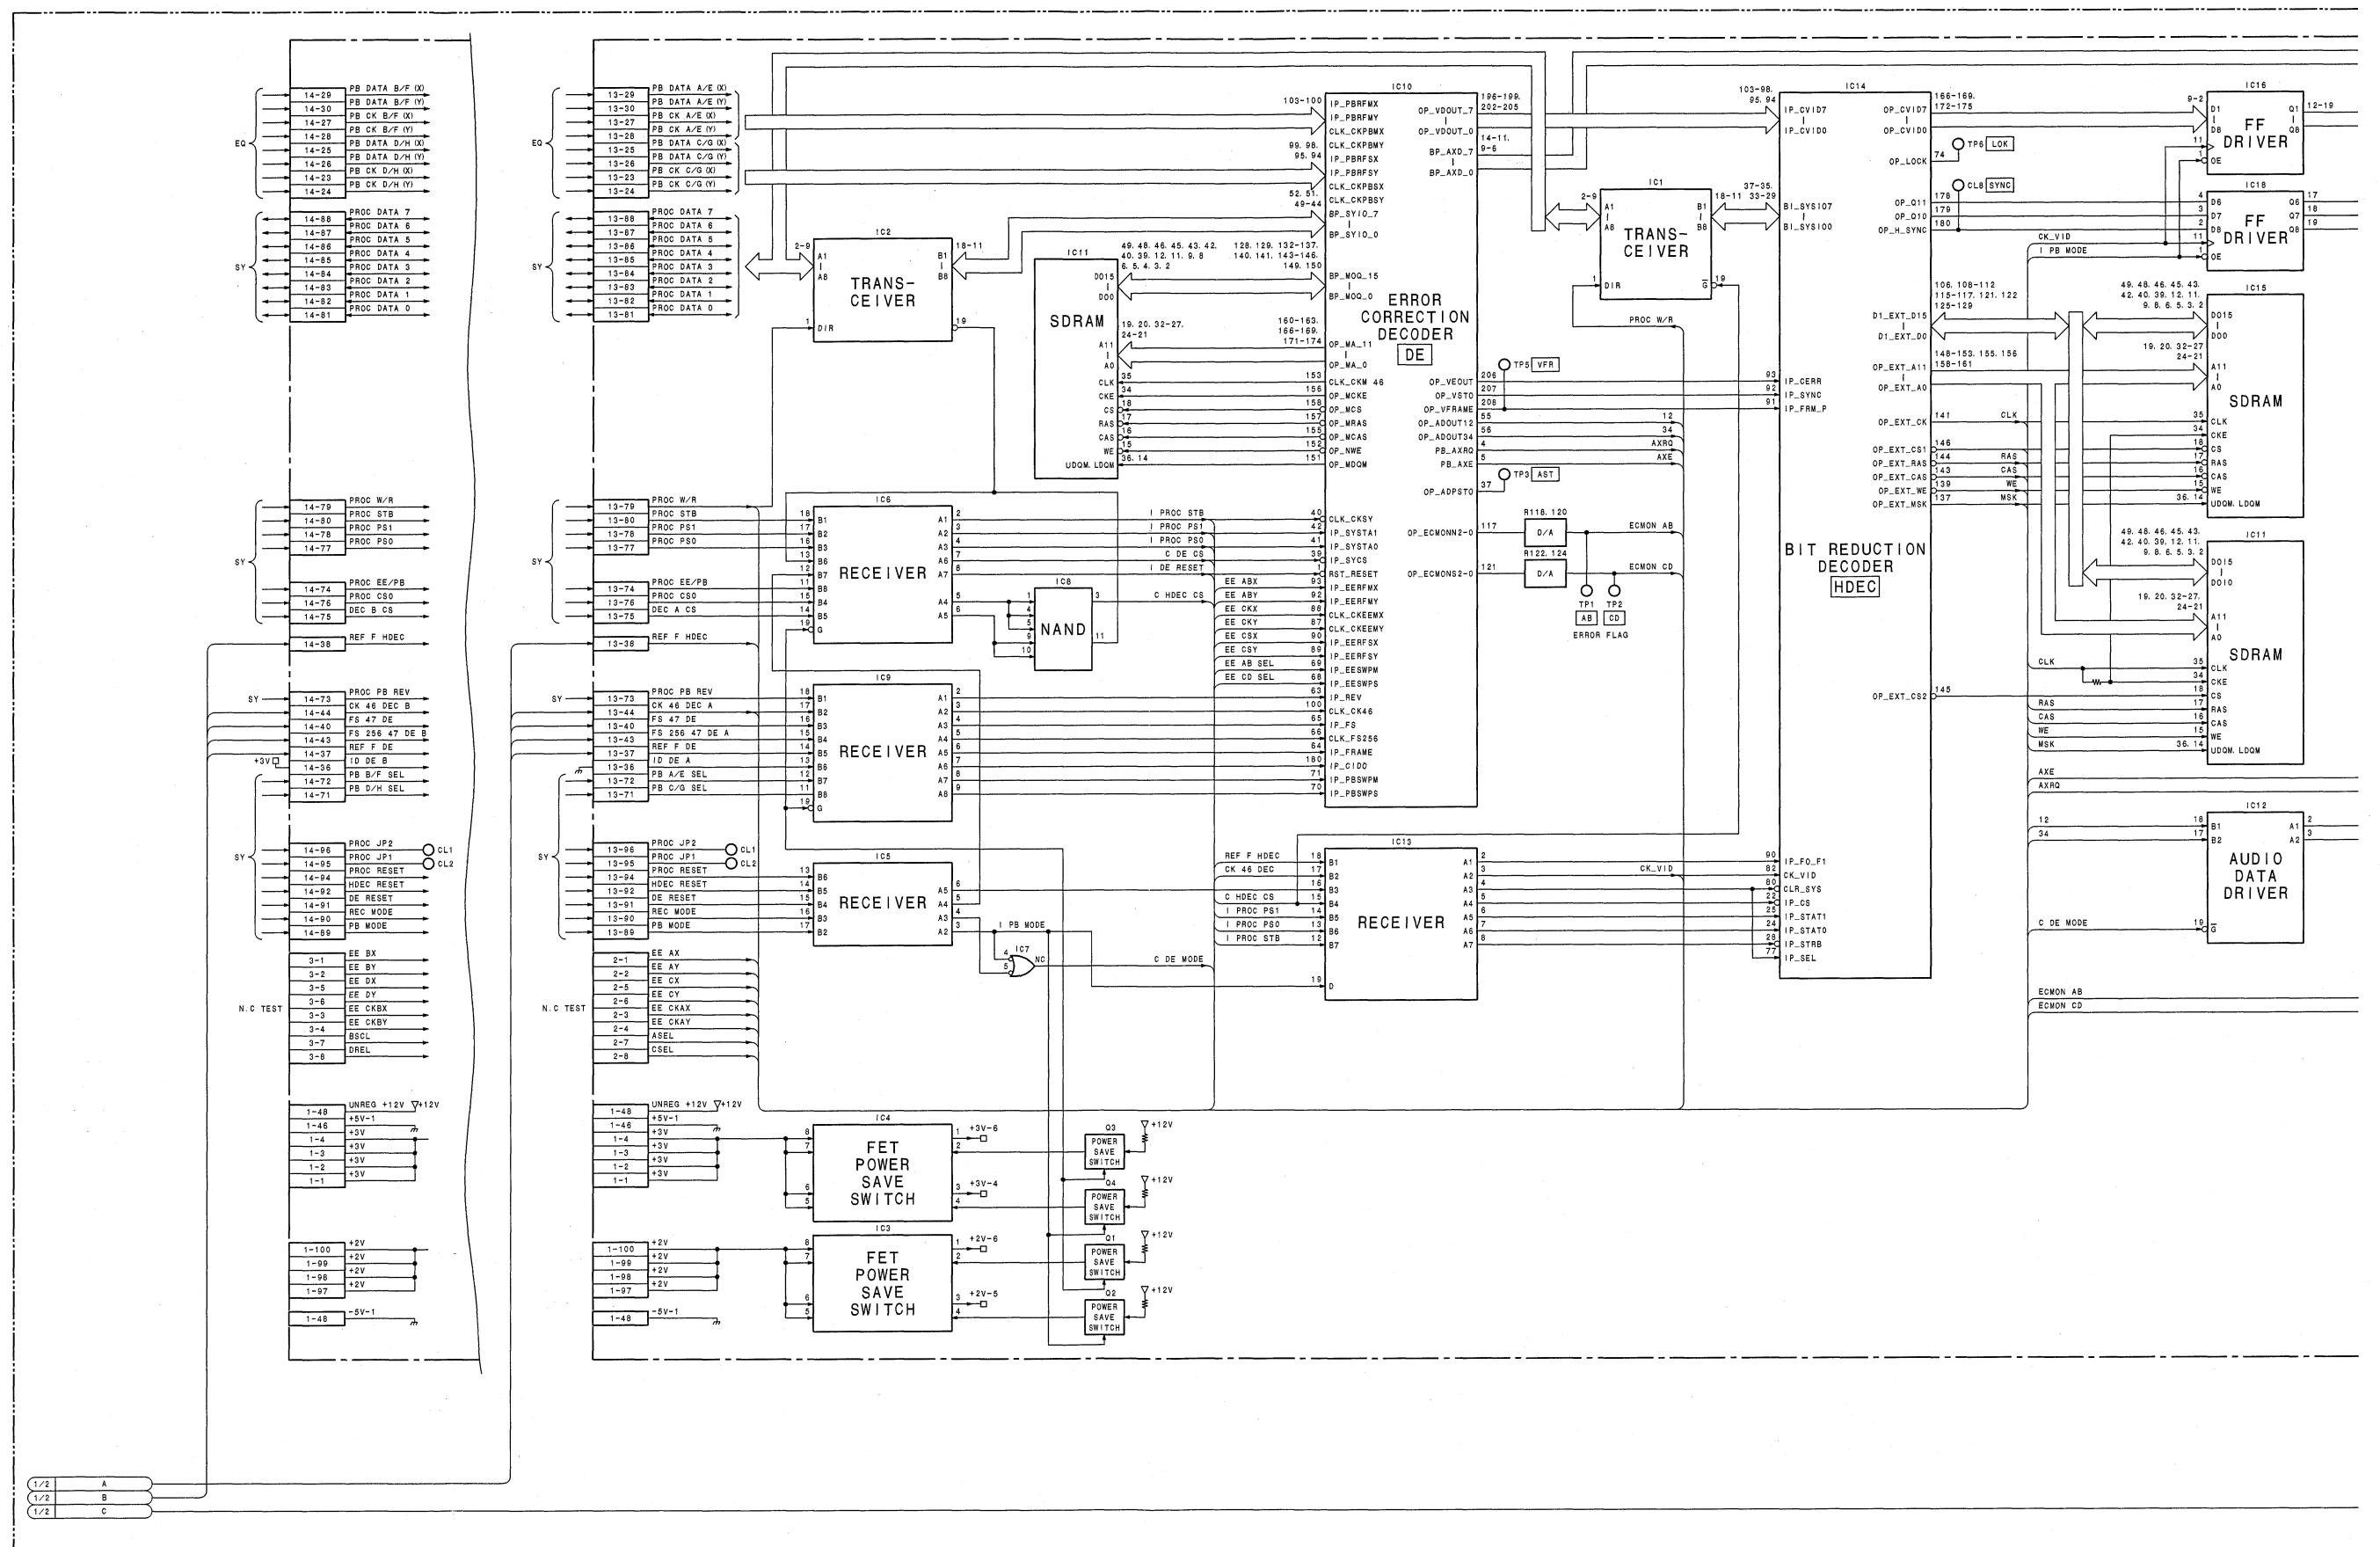





DEC-95, EN-143, ENC-59, VN-12

LOT NO. 911-


Audio Processing Audio Processing

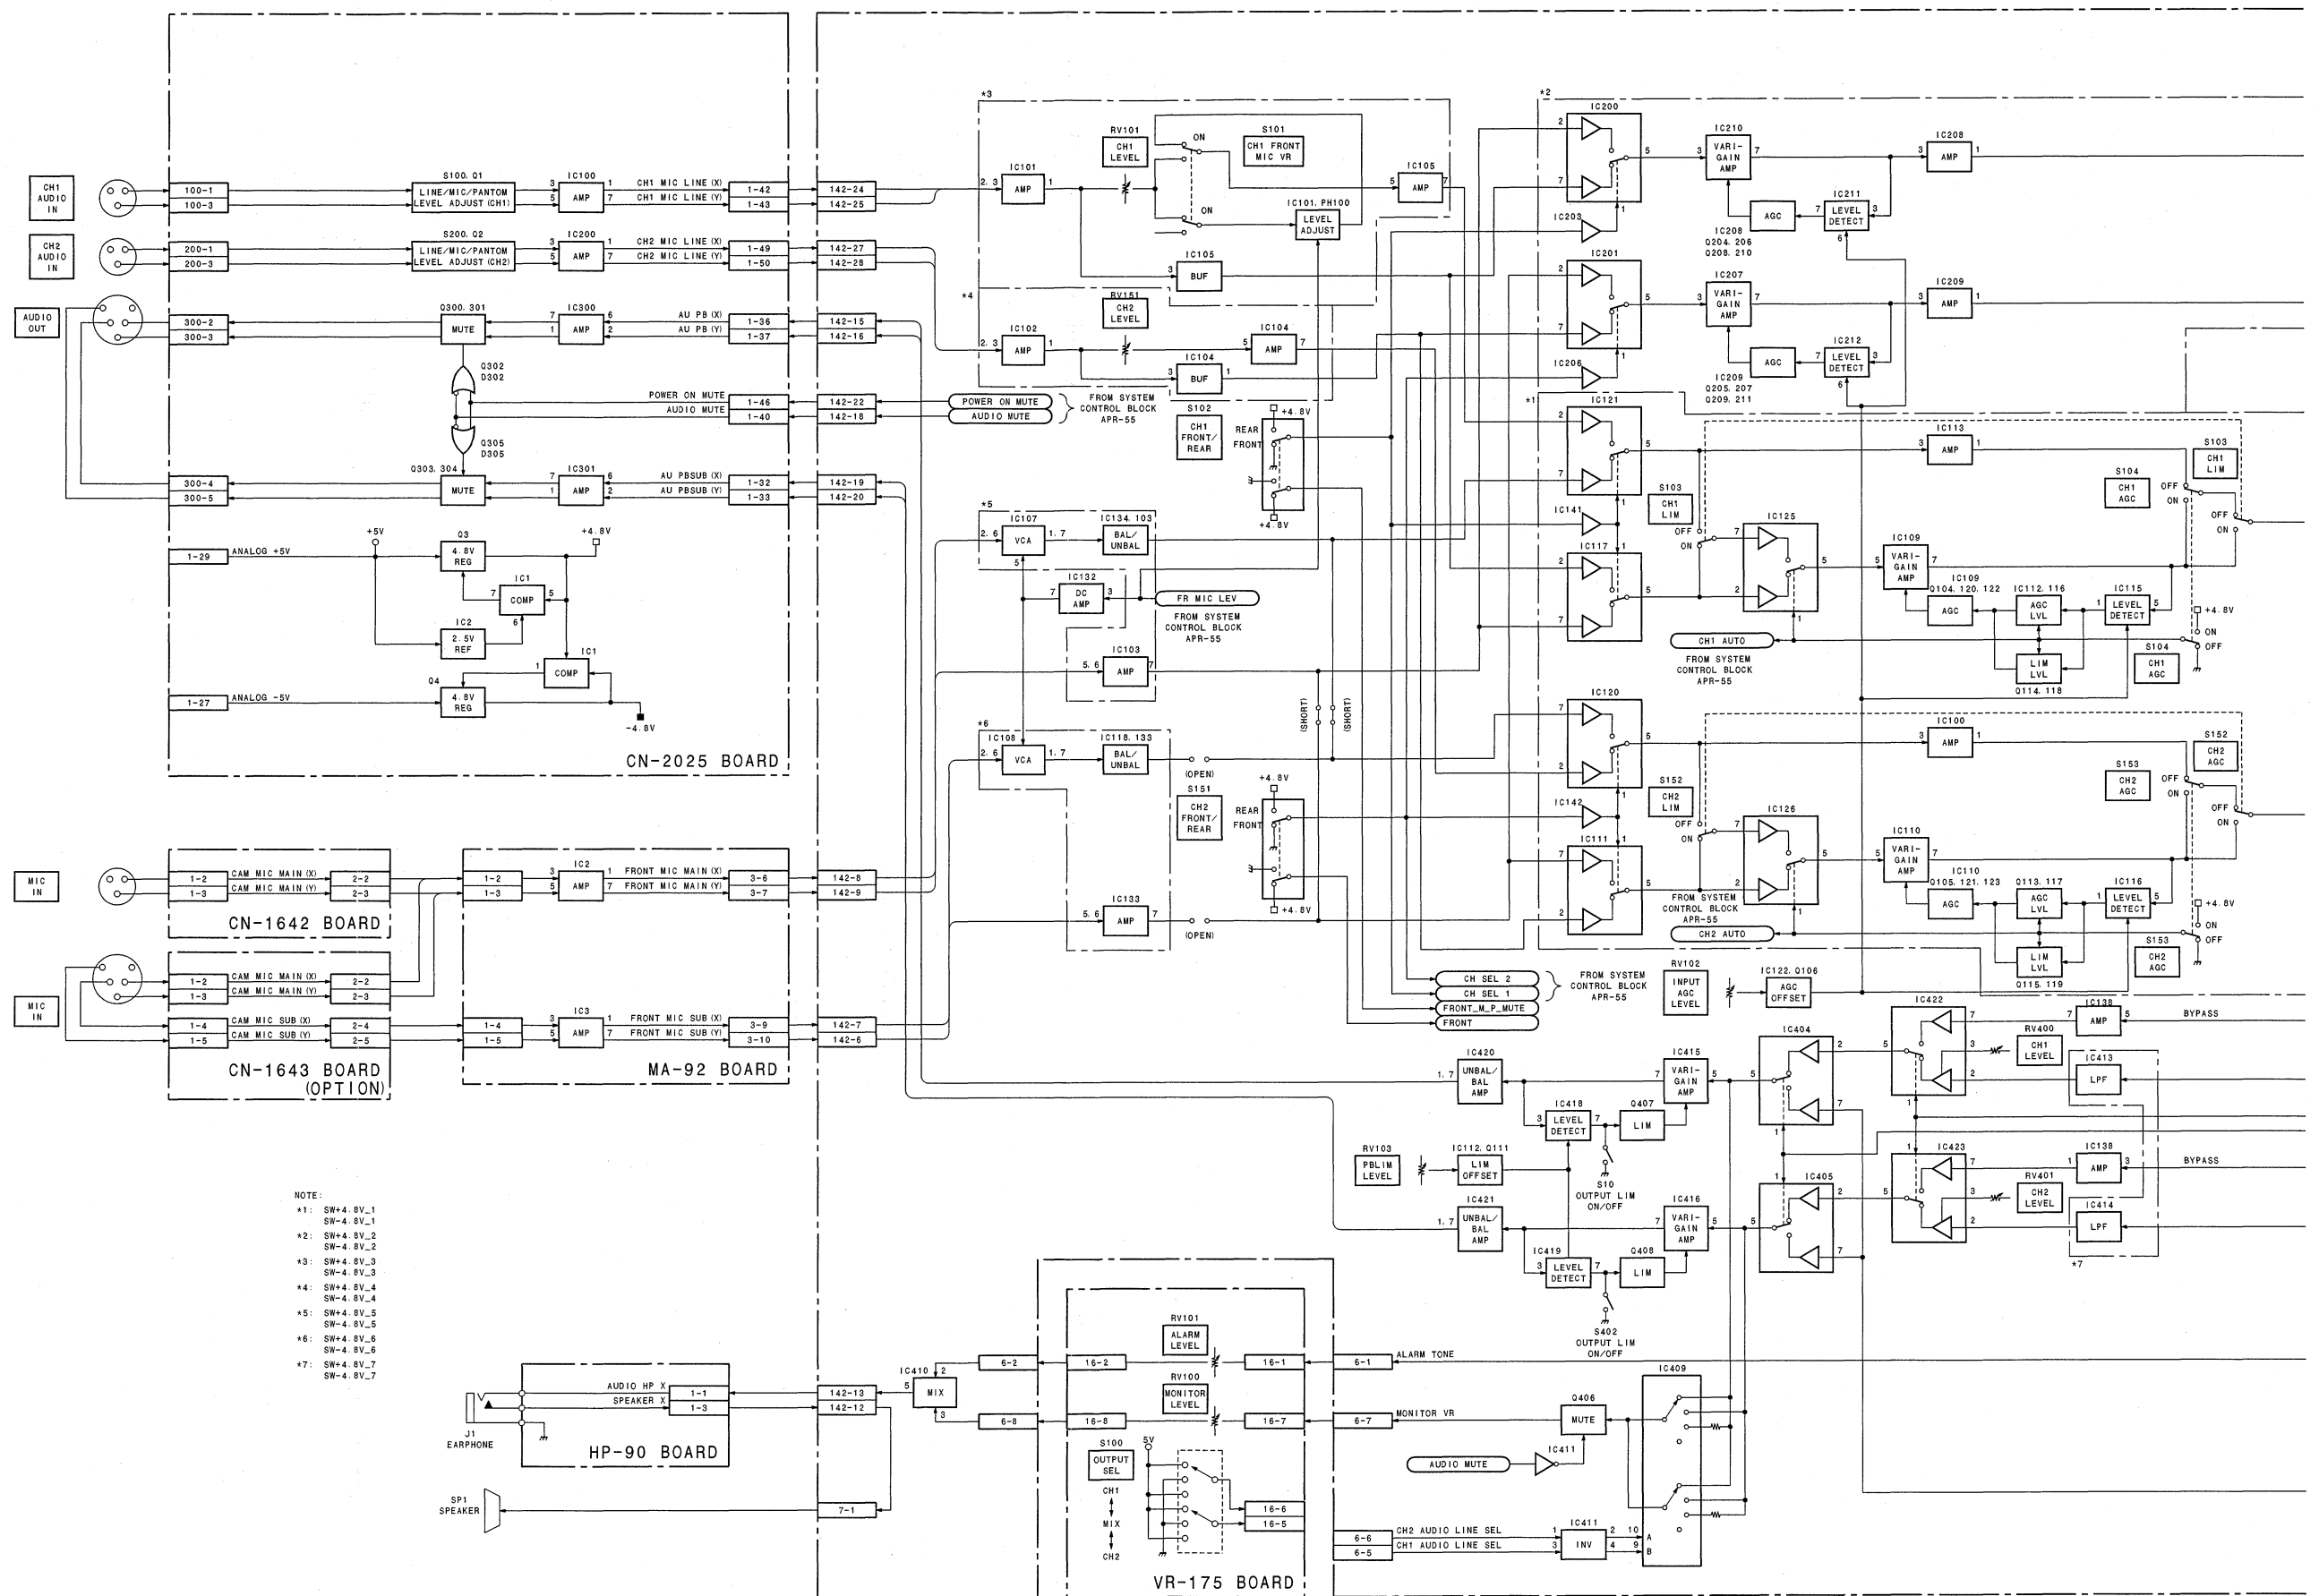


Audio Processing Audio Processing

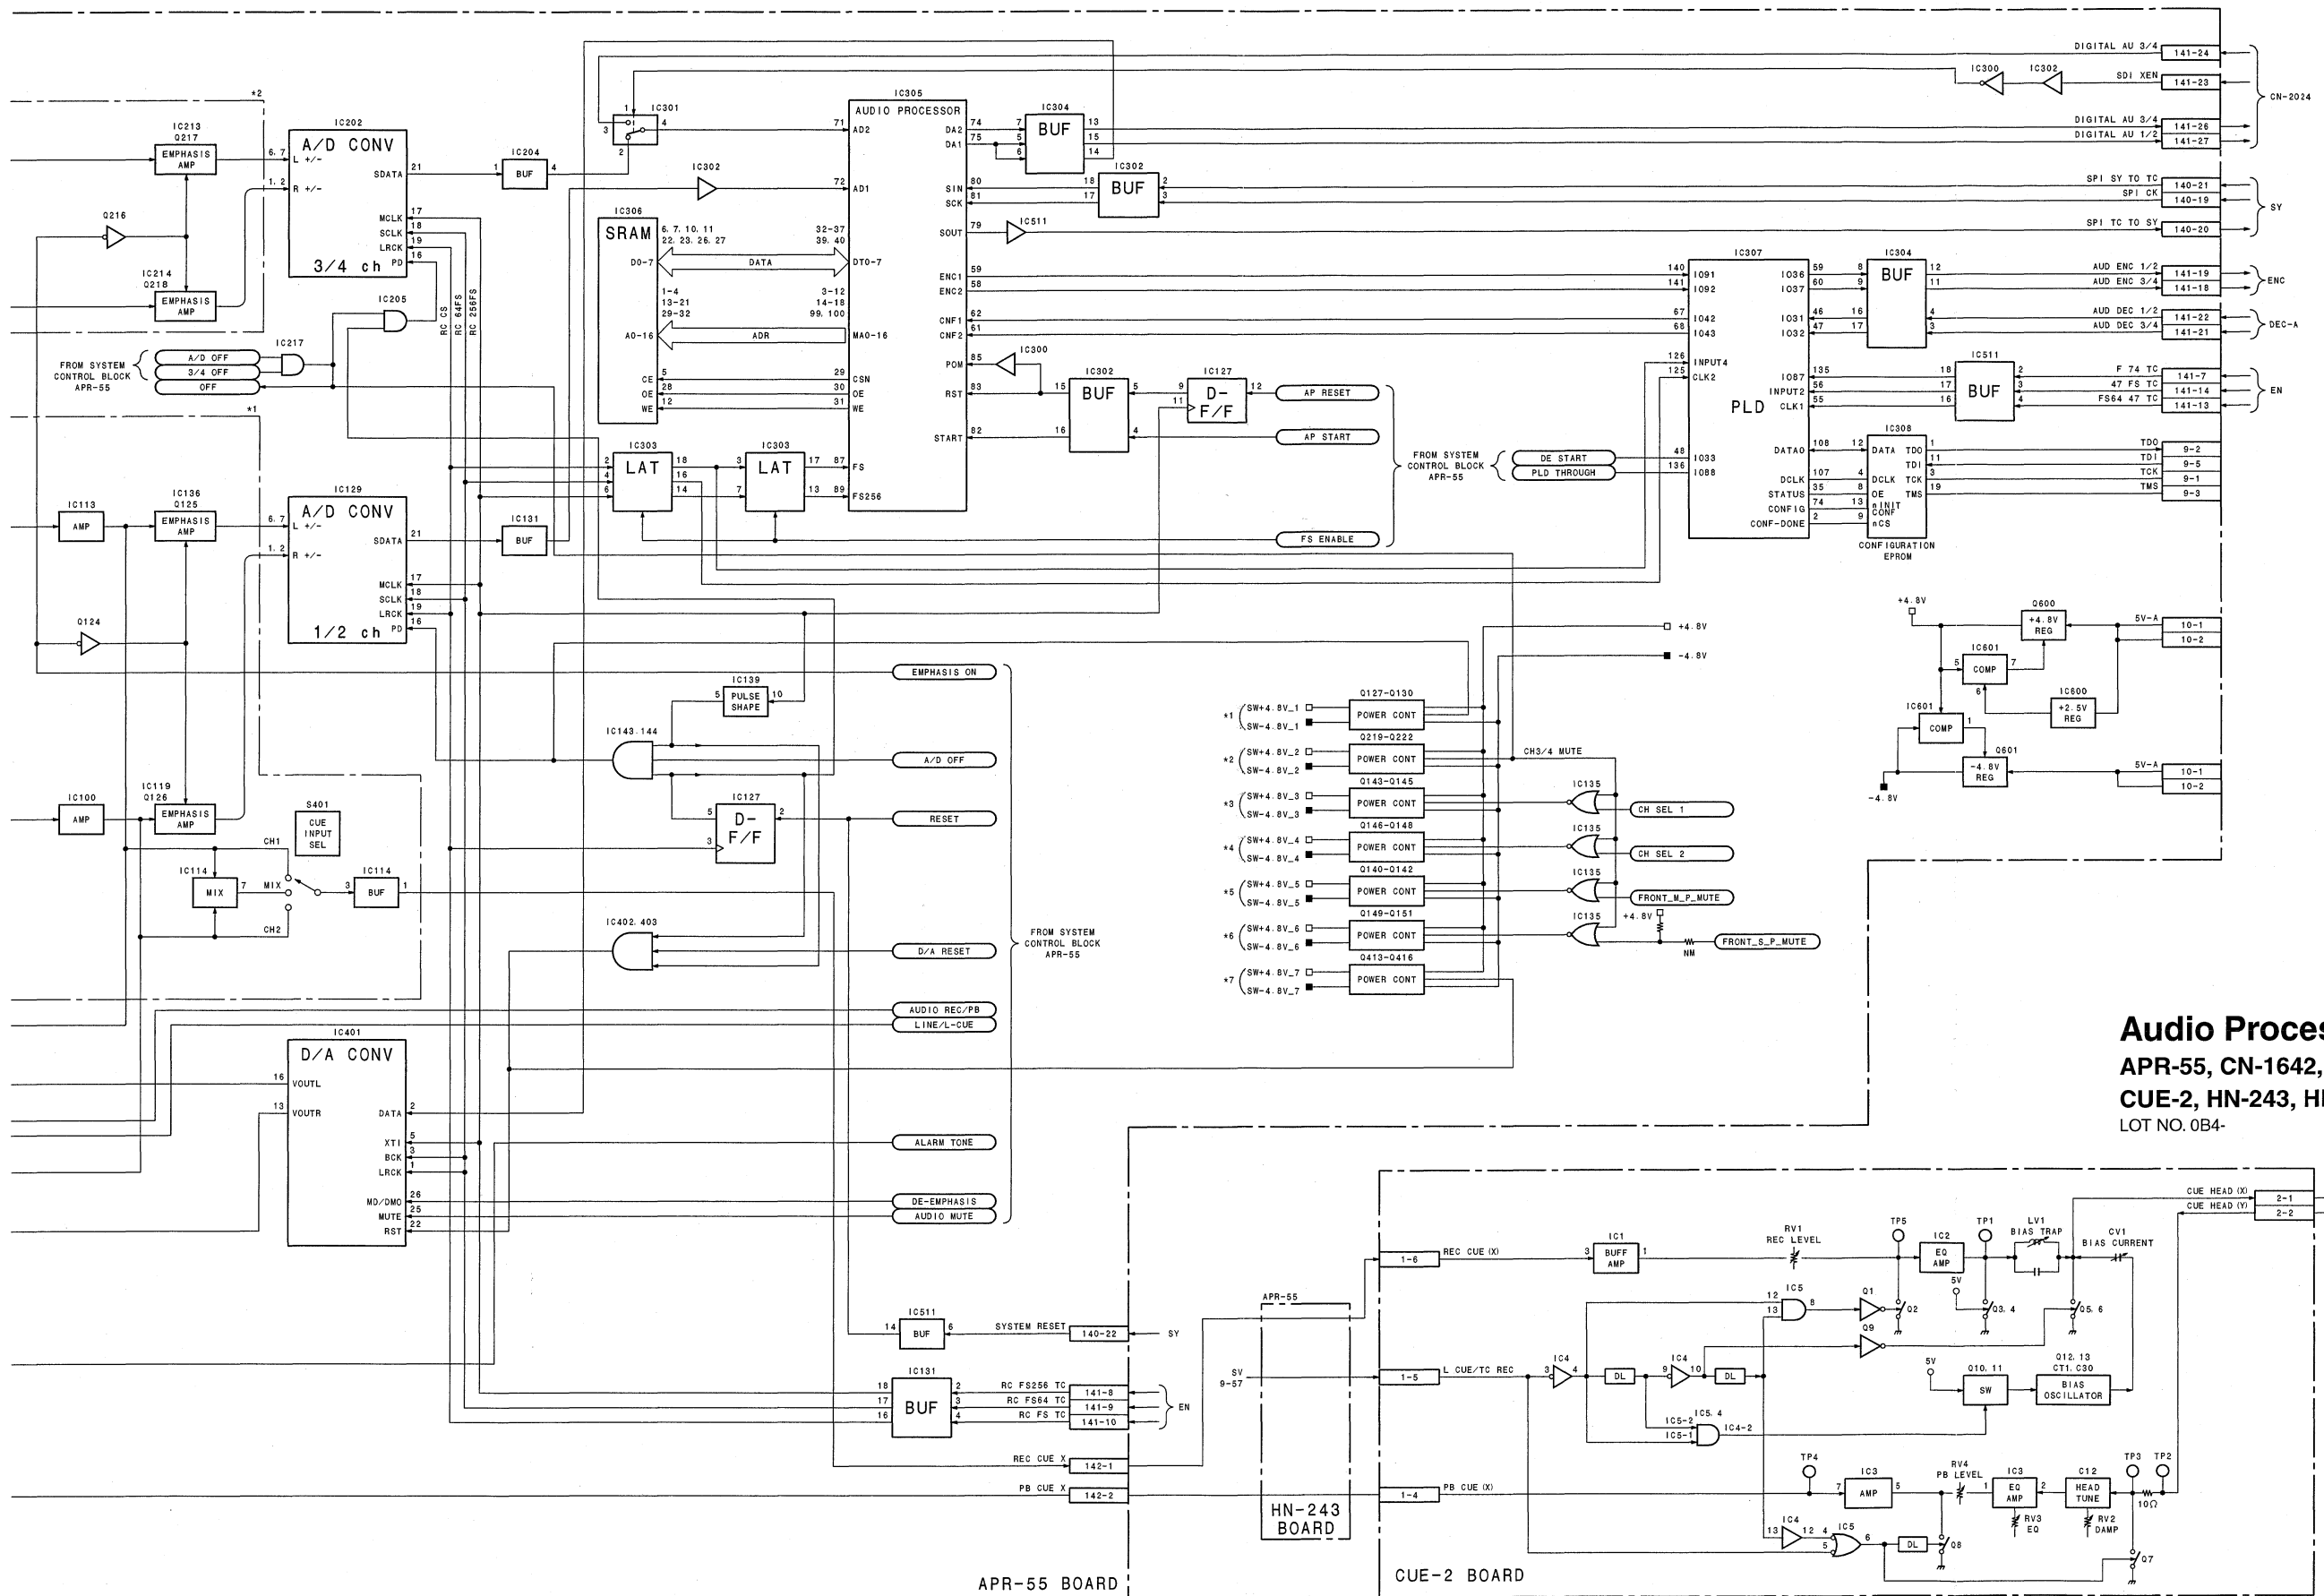

Audio Processing




Audio Processing Audio Processing

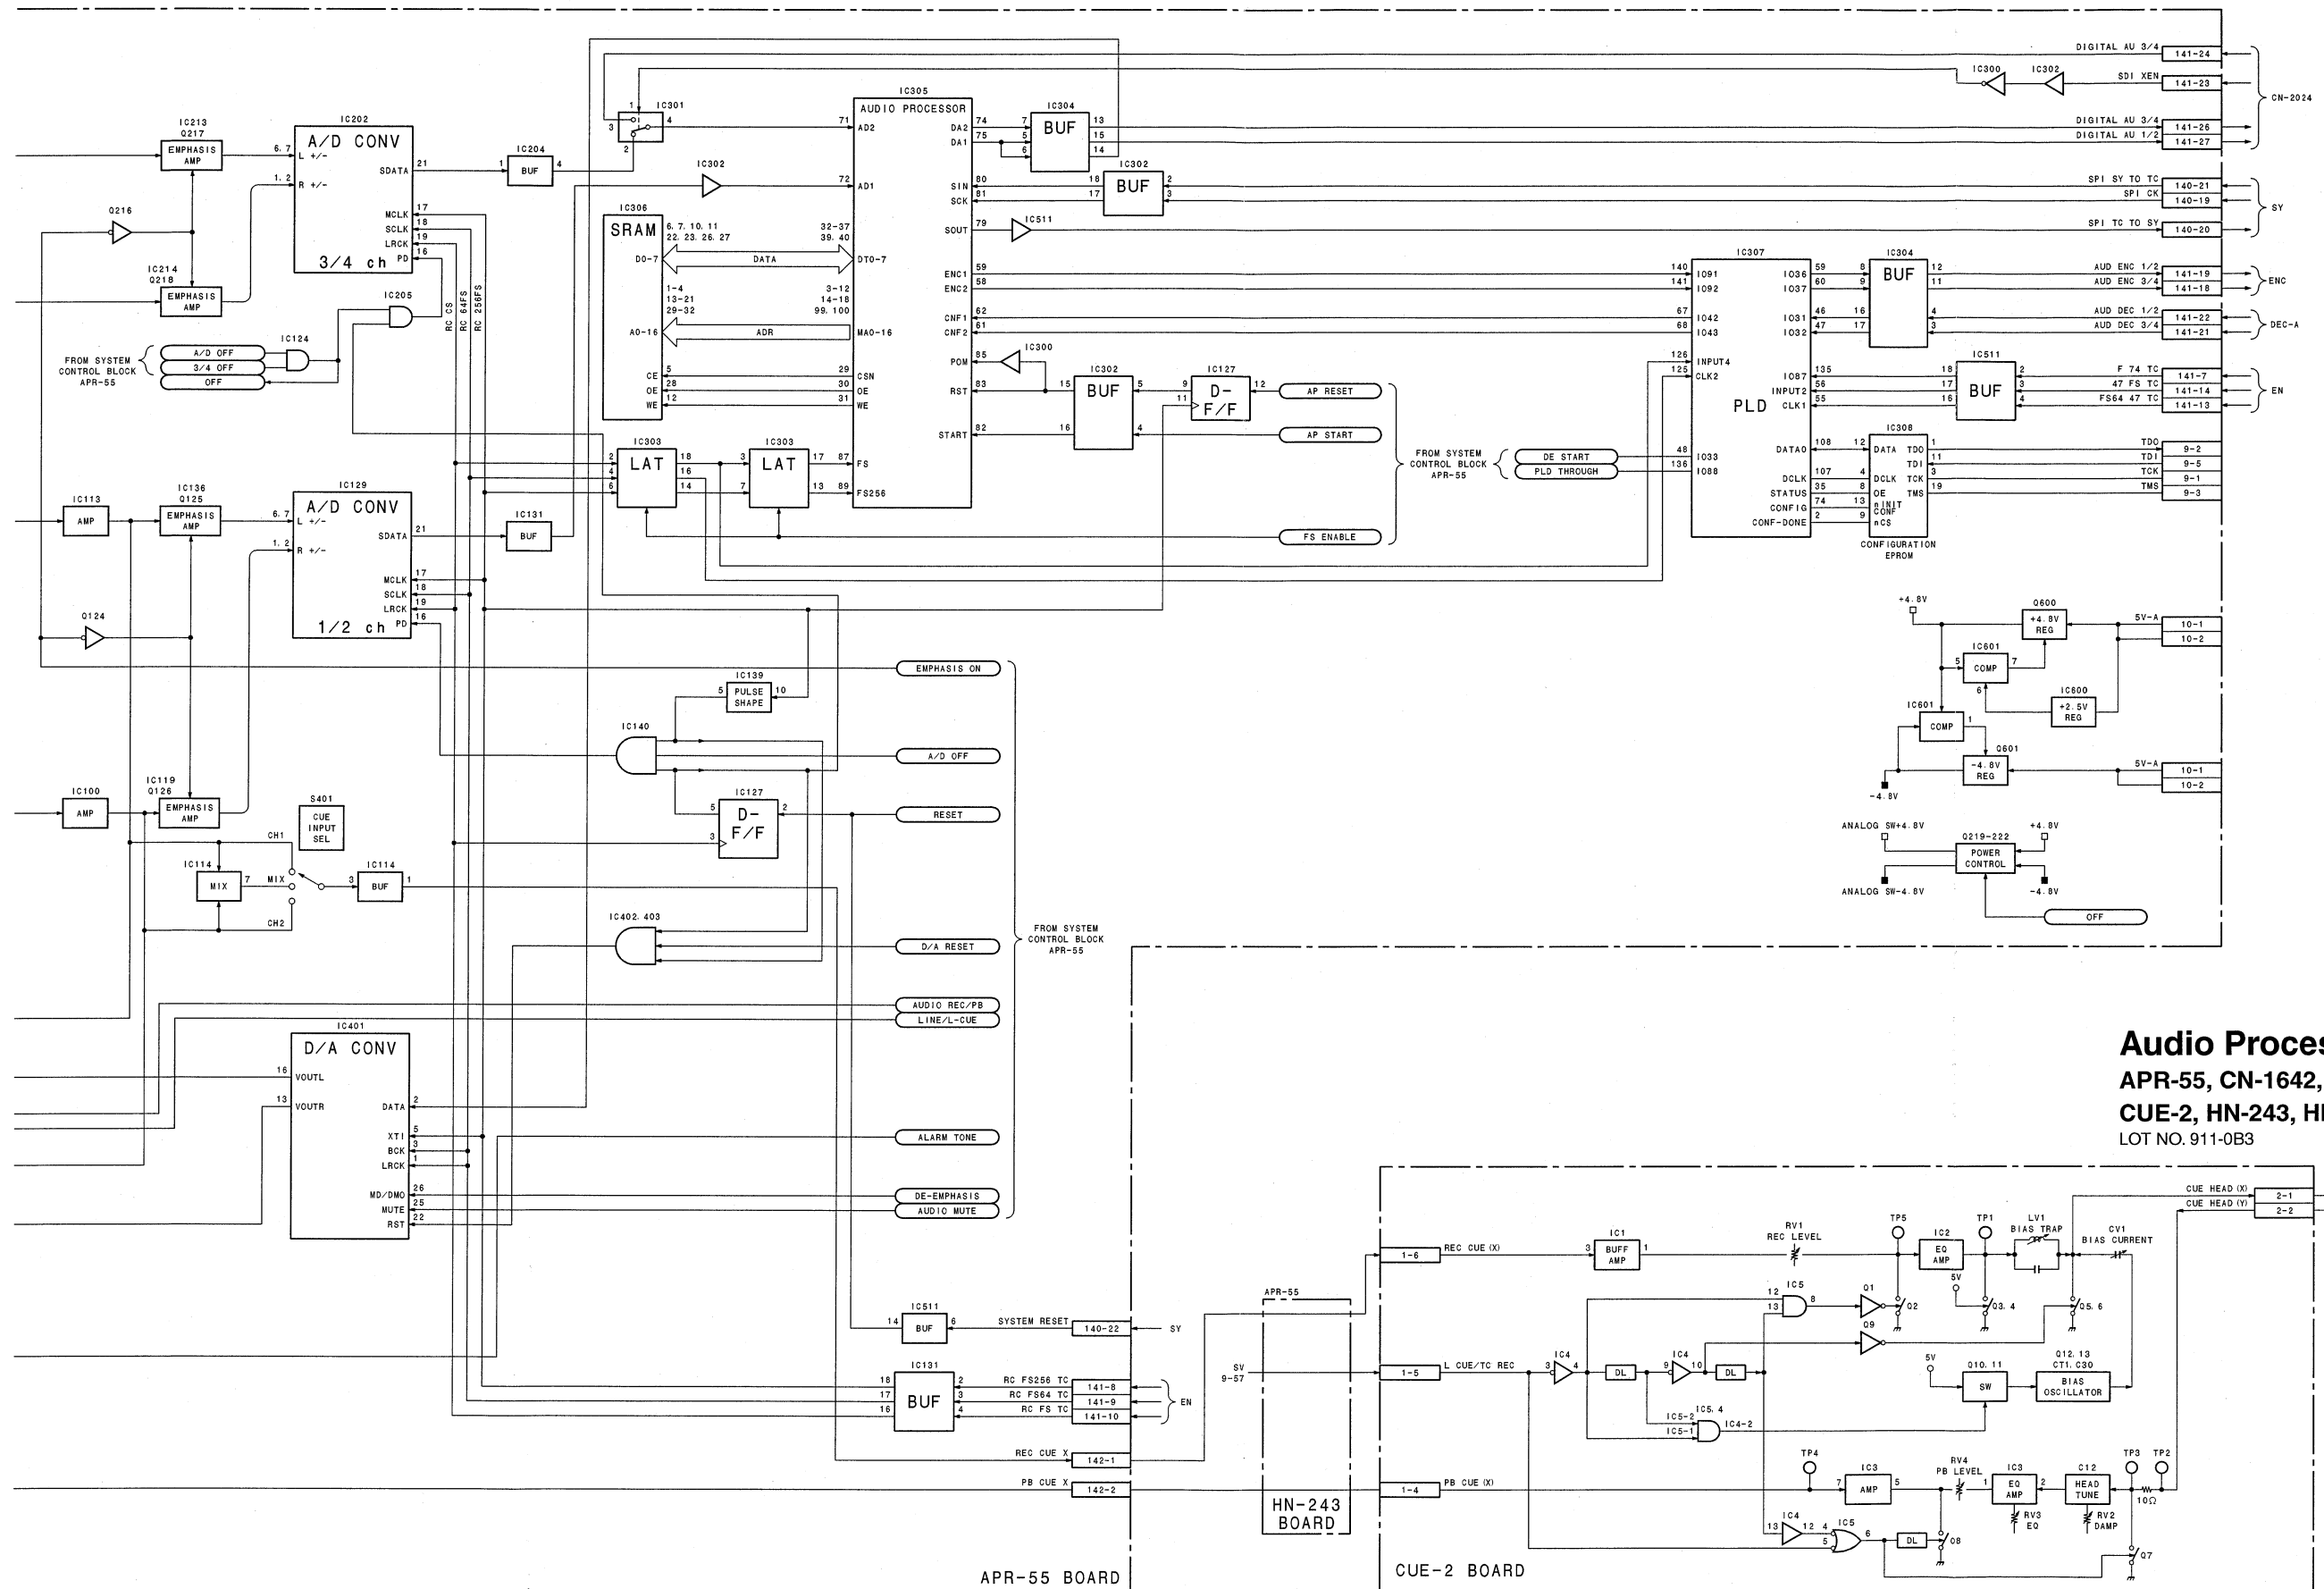



System Control




System Control




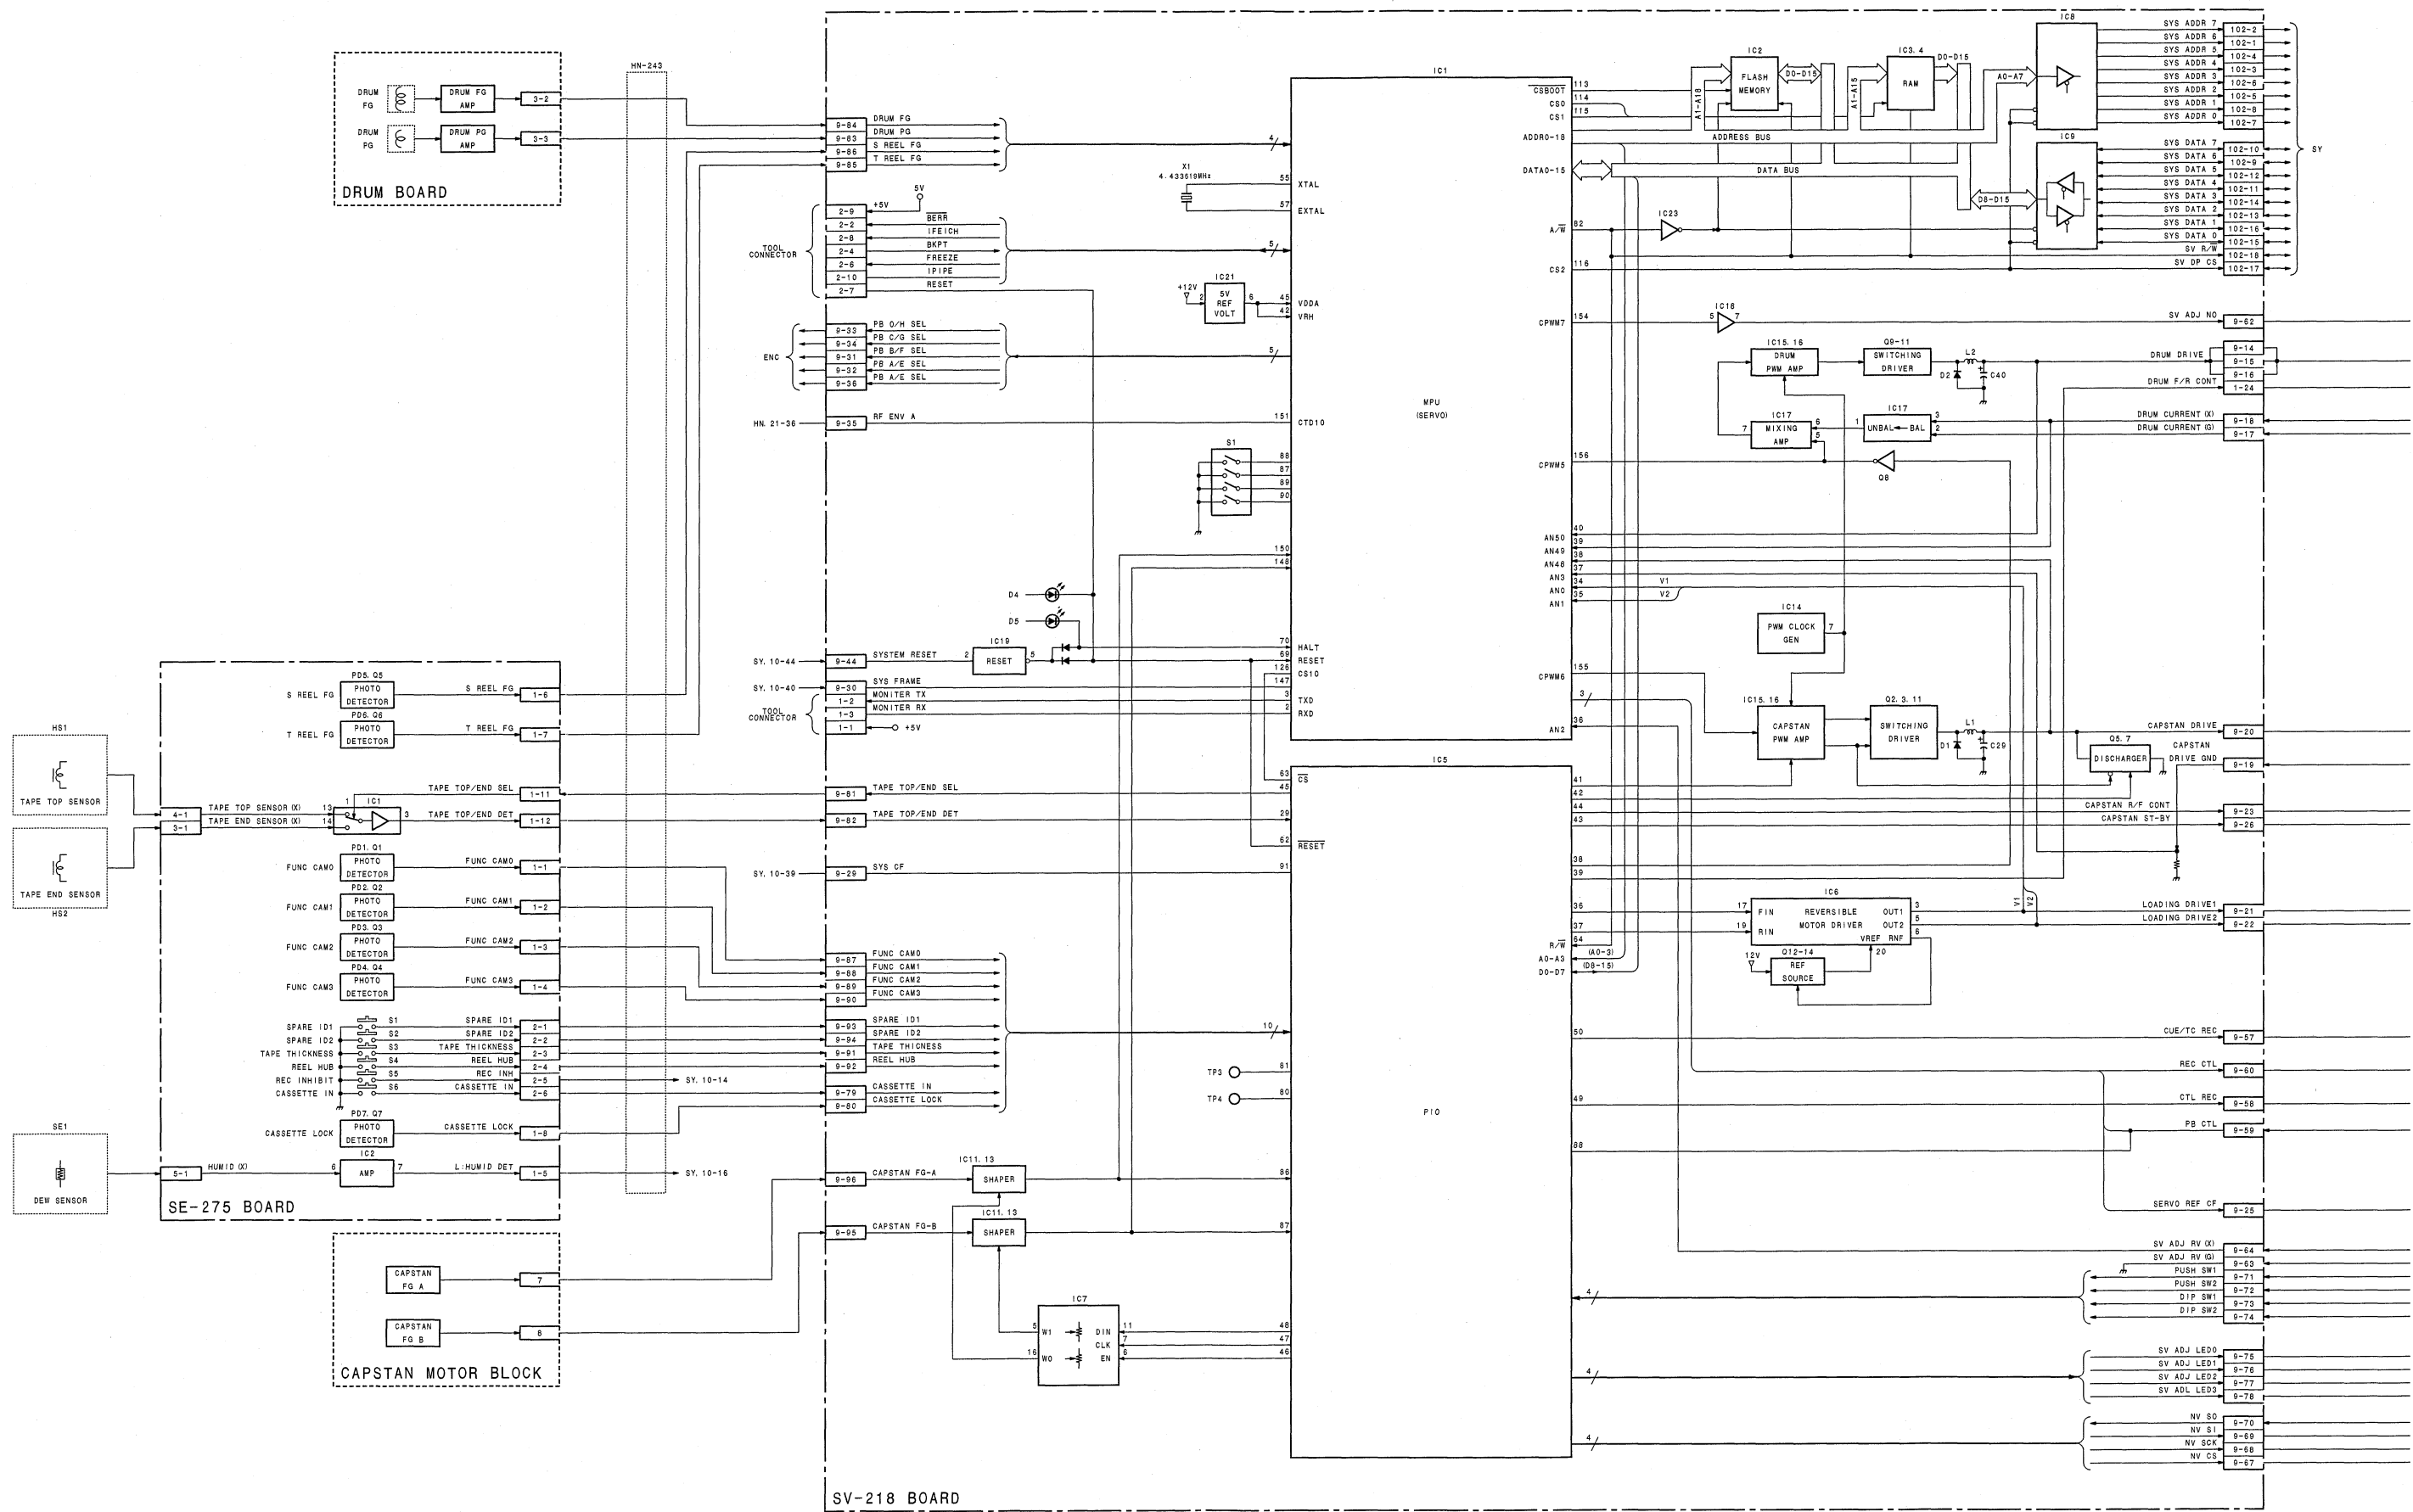

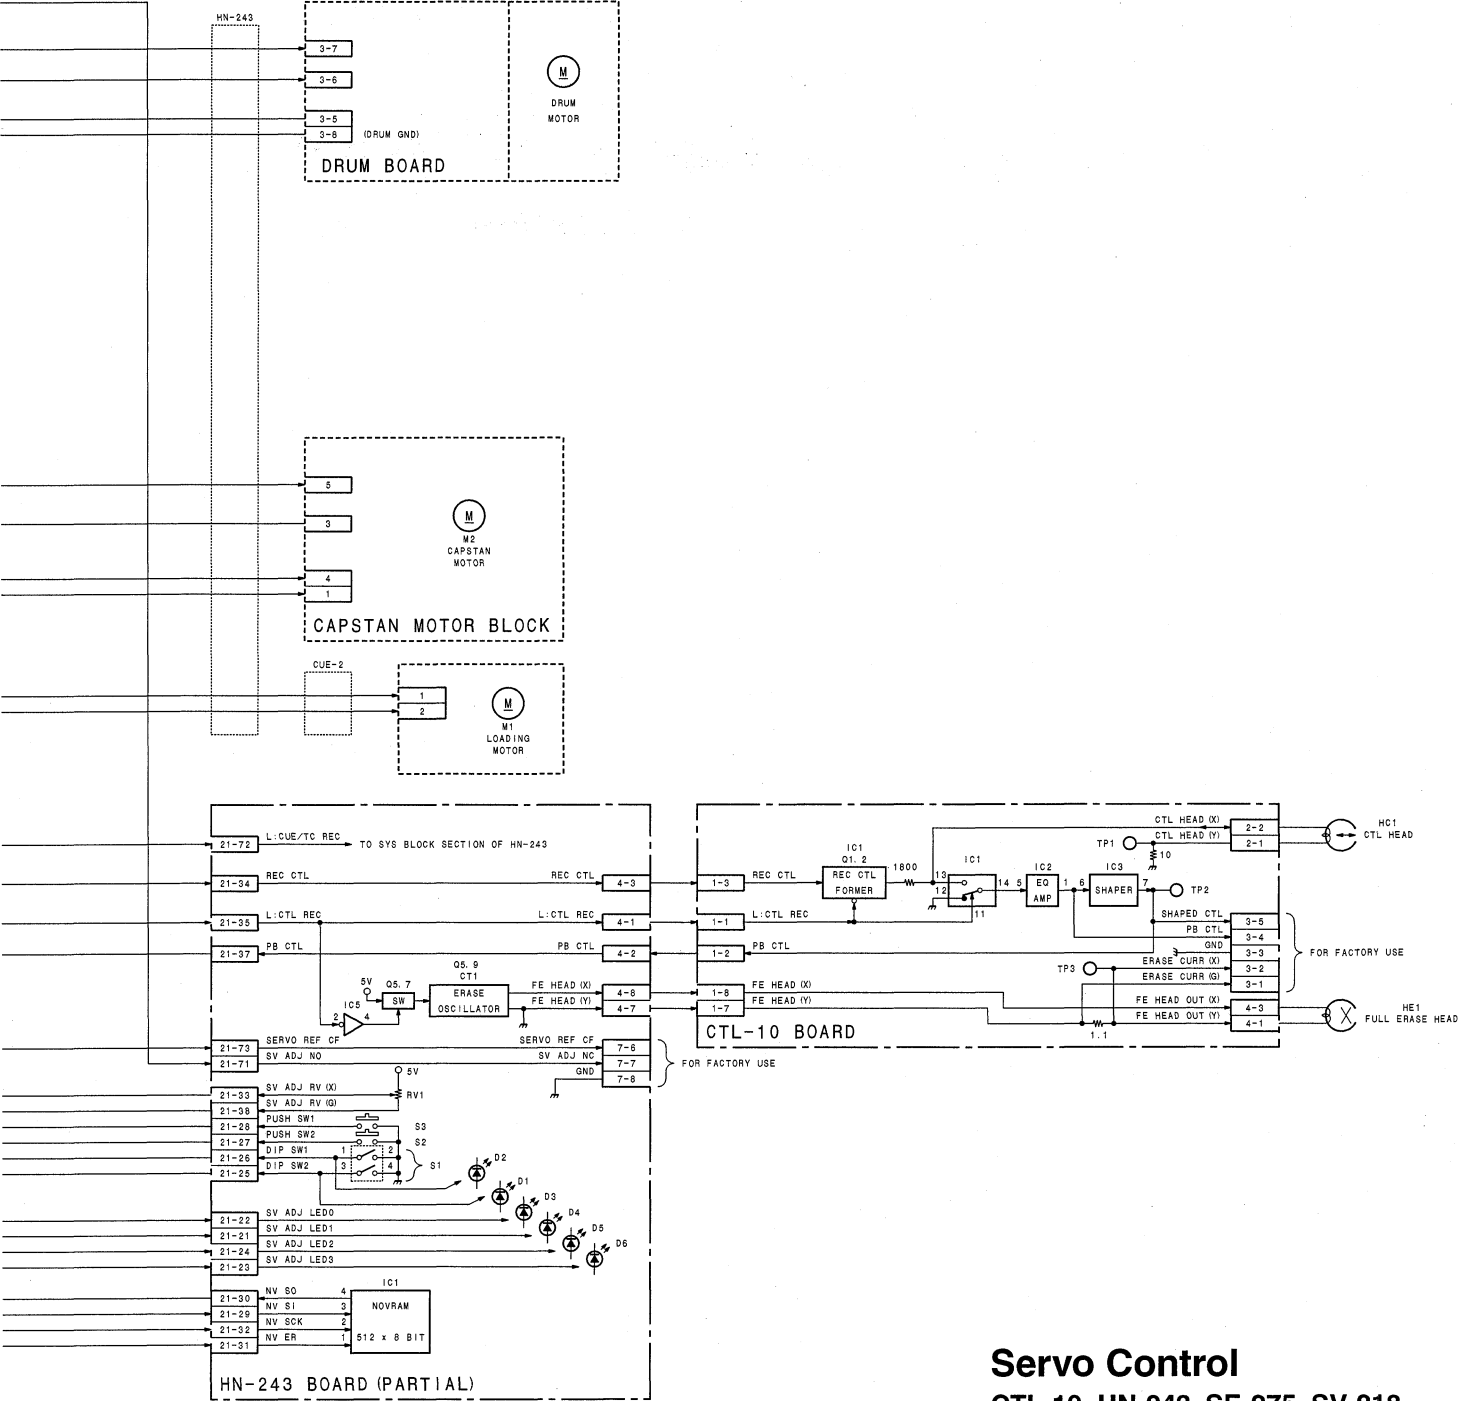

Servo Control
CTL-10, HN-243, SE-275, SV-218
LOT NO. 911-

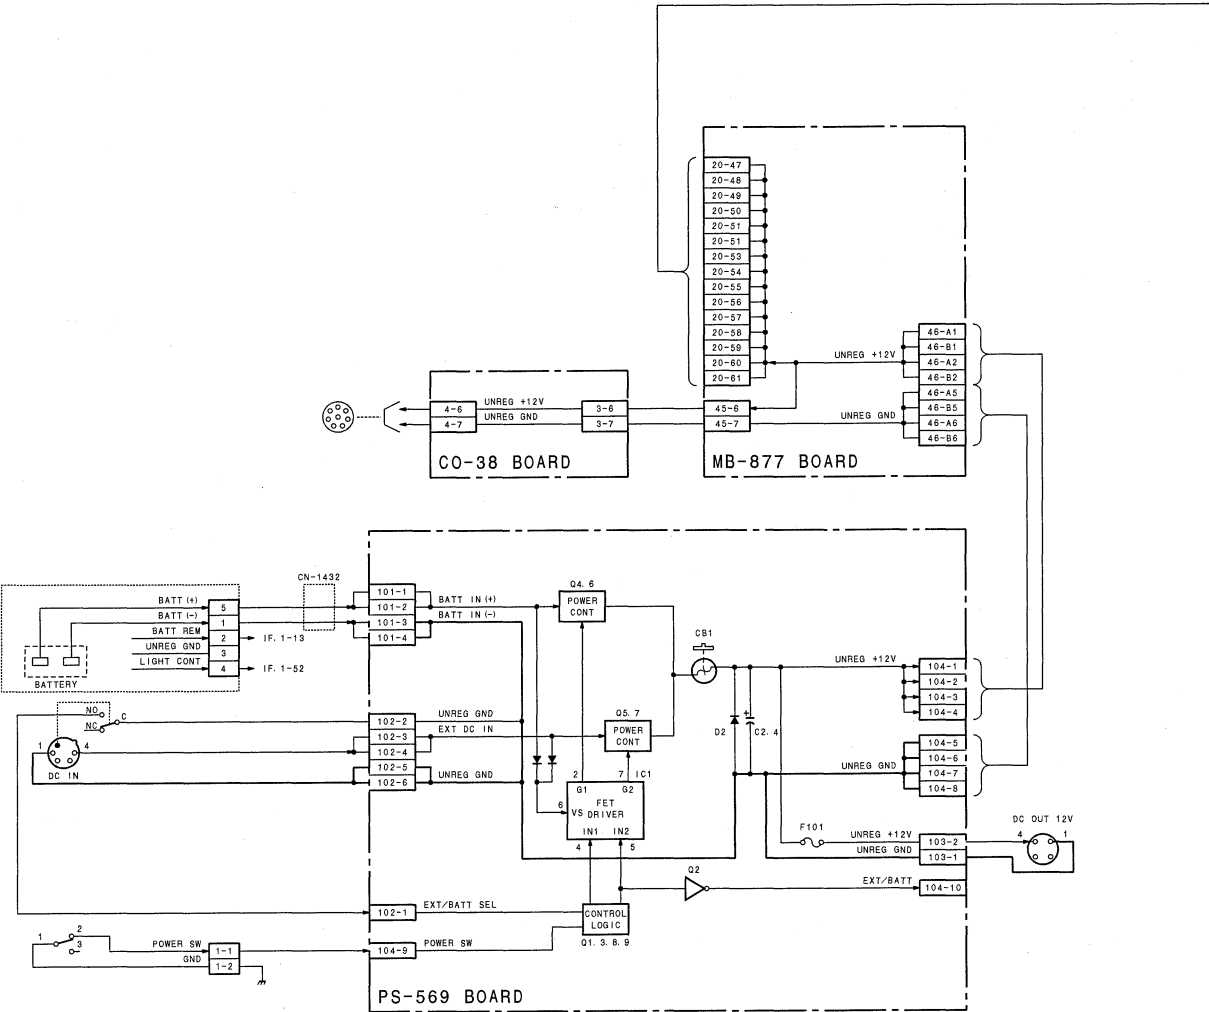

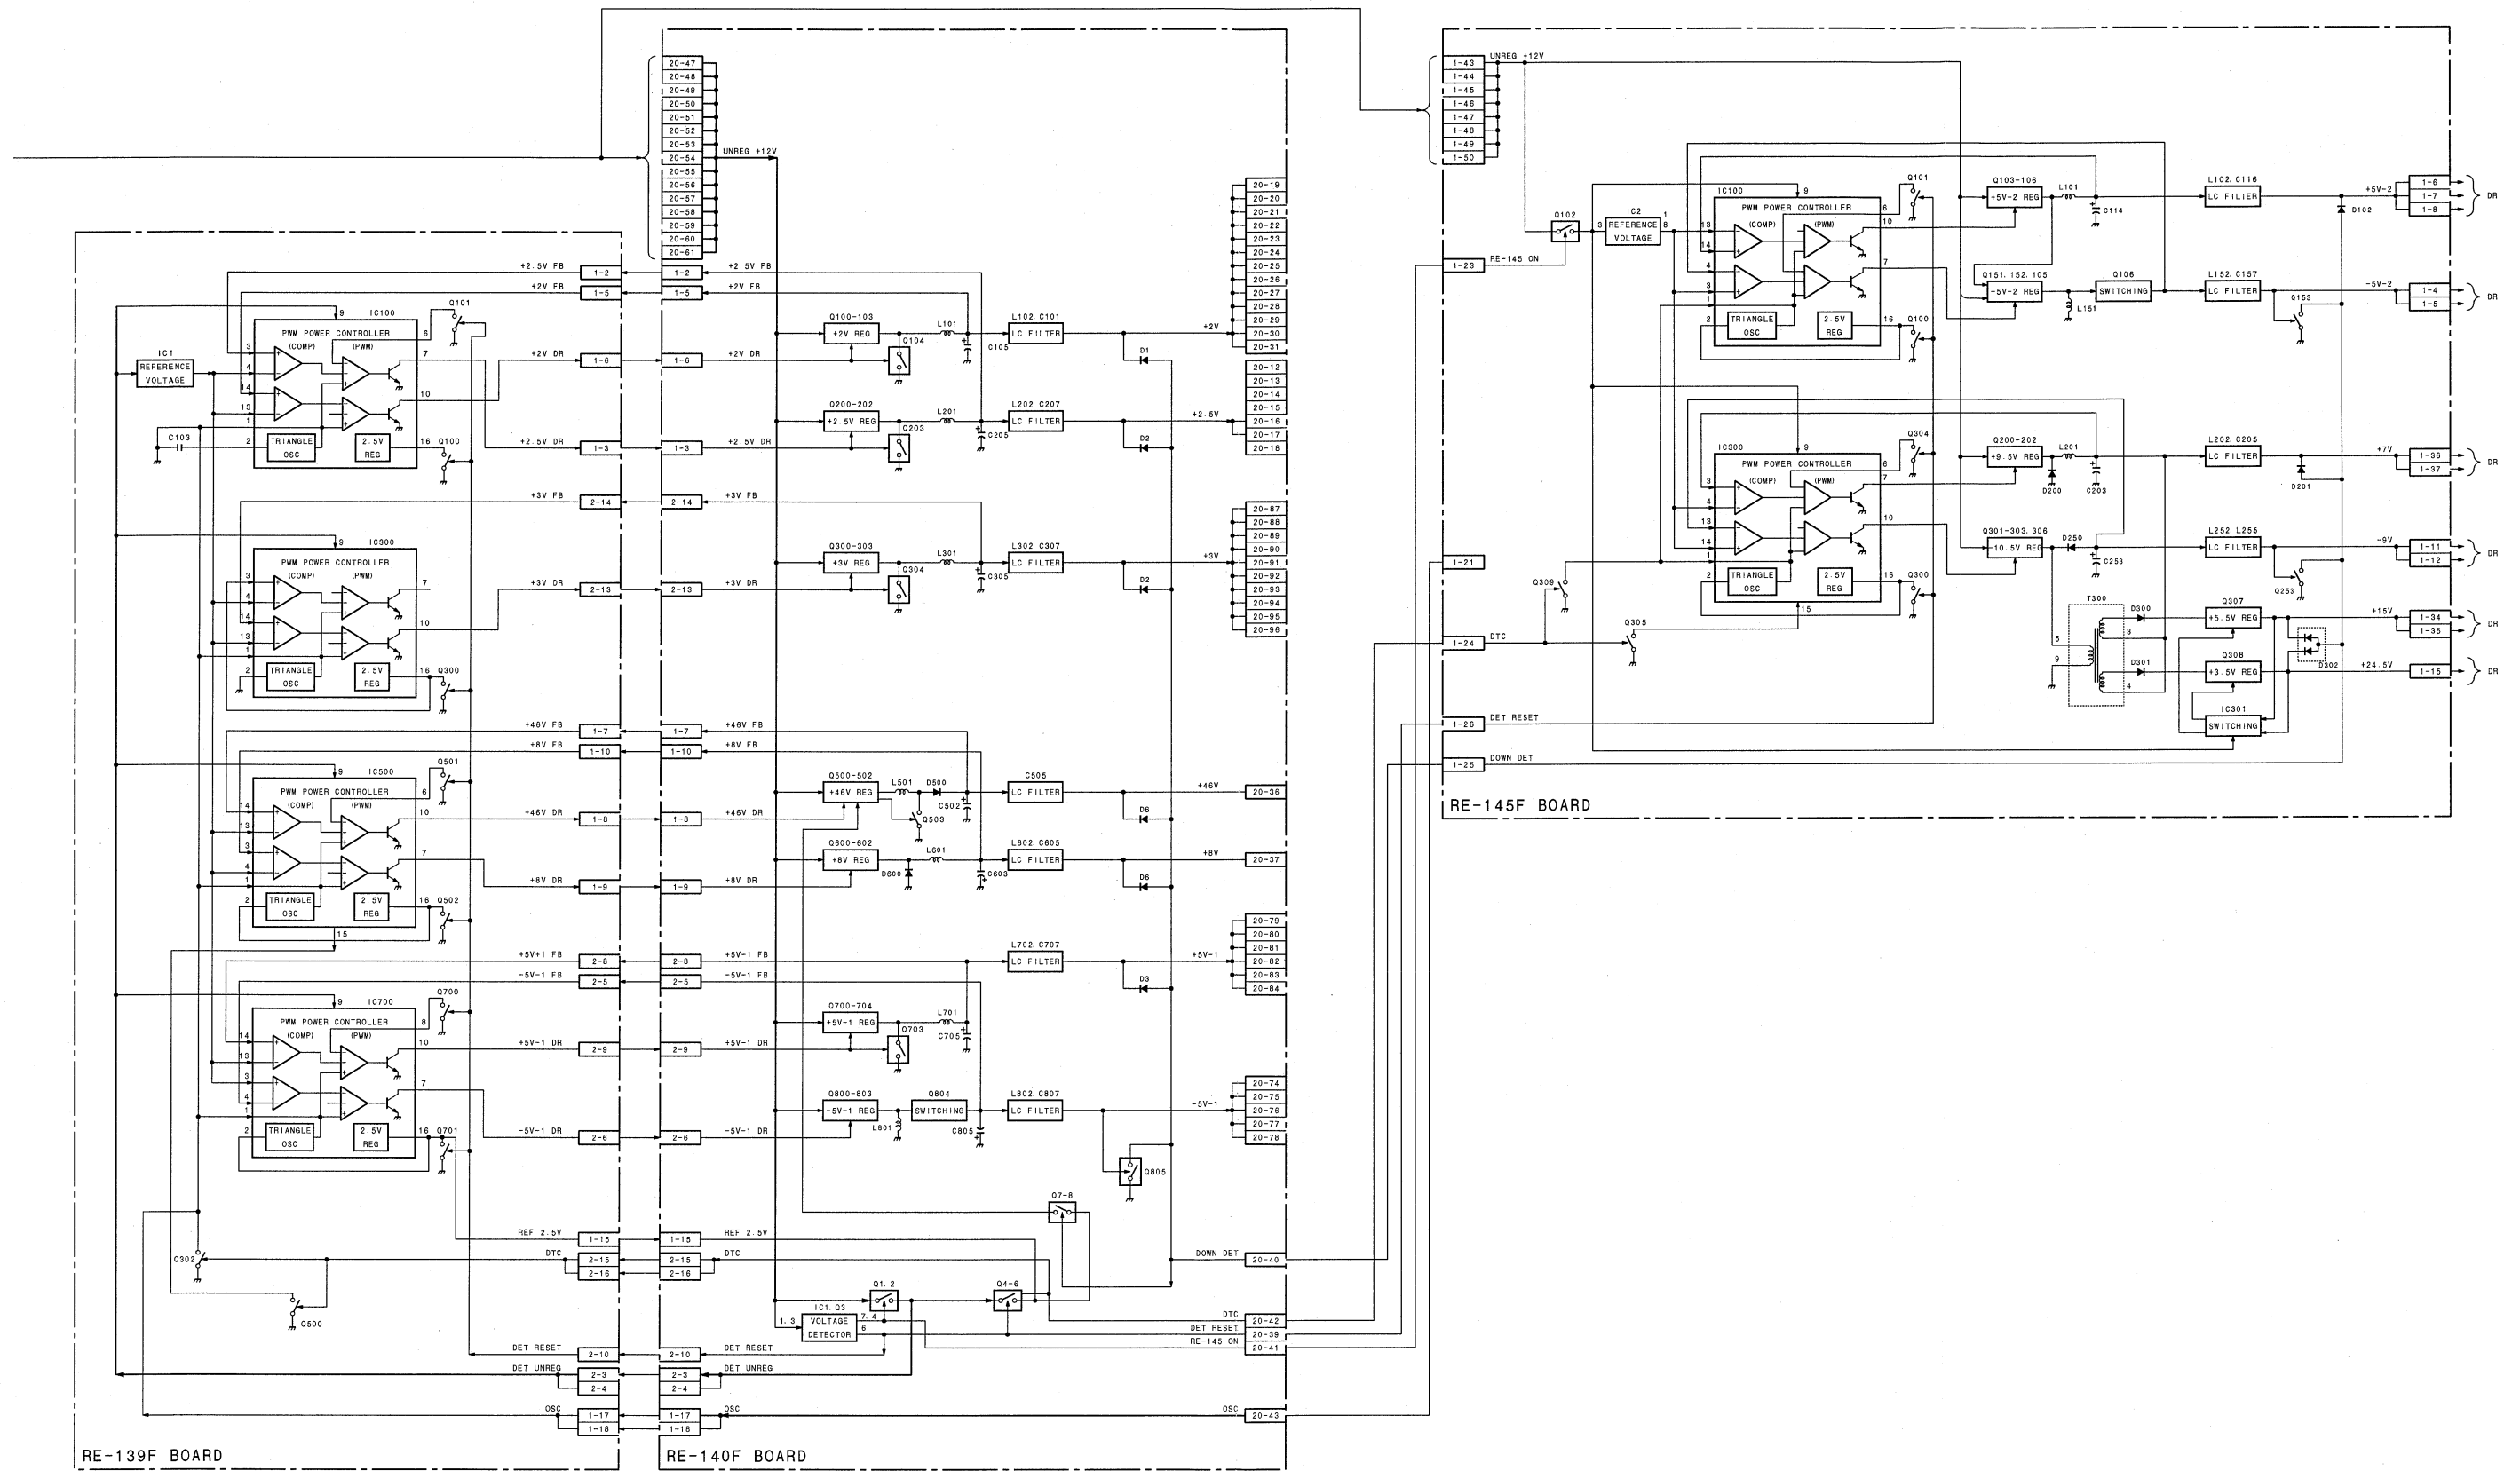


Power Supply


CO-38, PS-569, RE-139F, RE-140F, RE-145F

LOT NO. 911-

RF Processing RF Processing

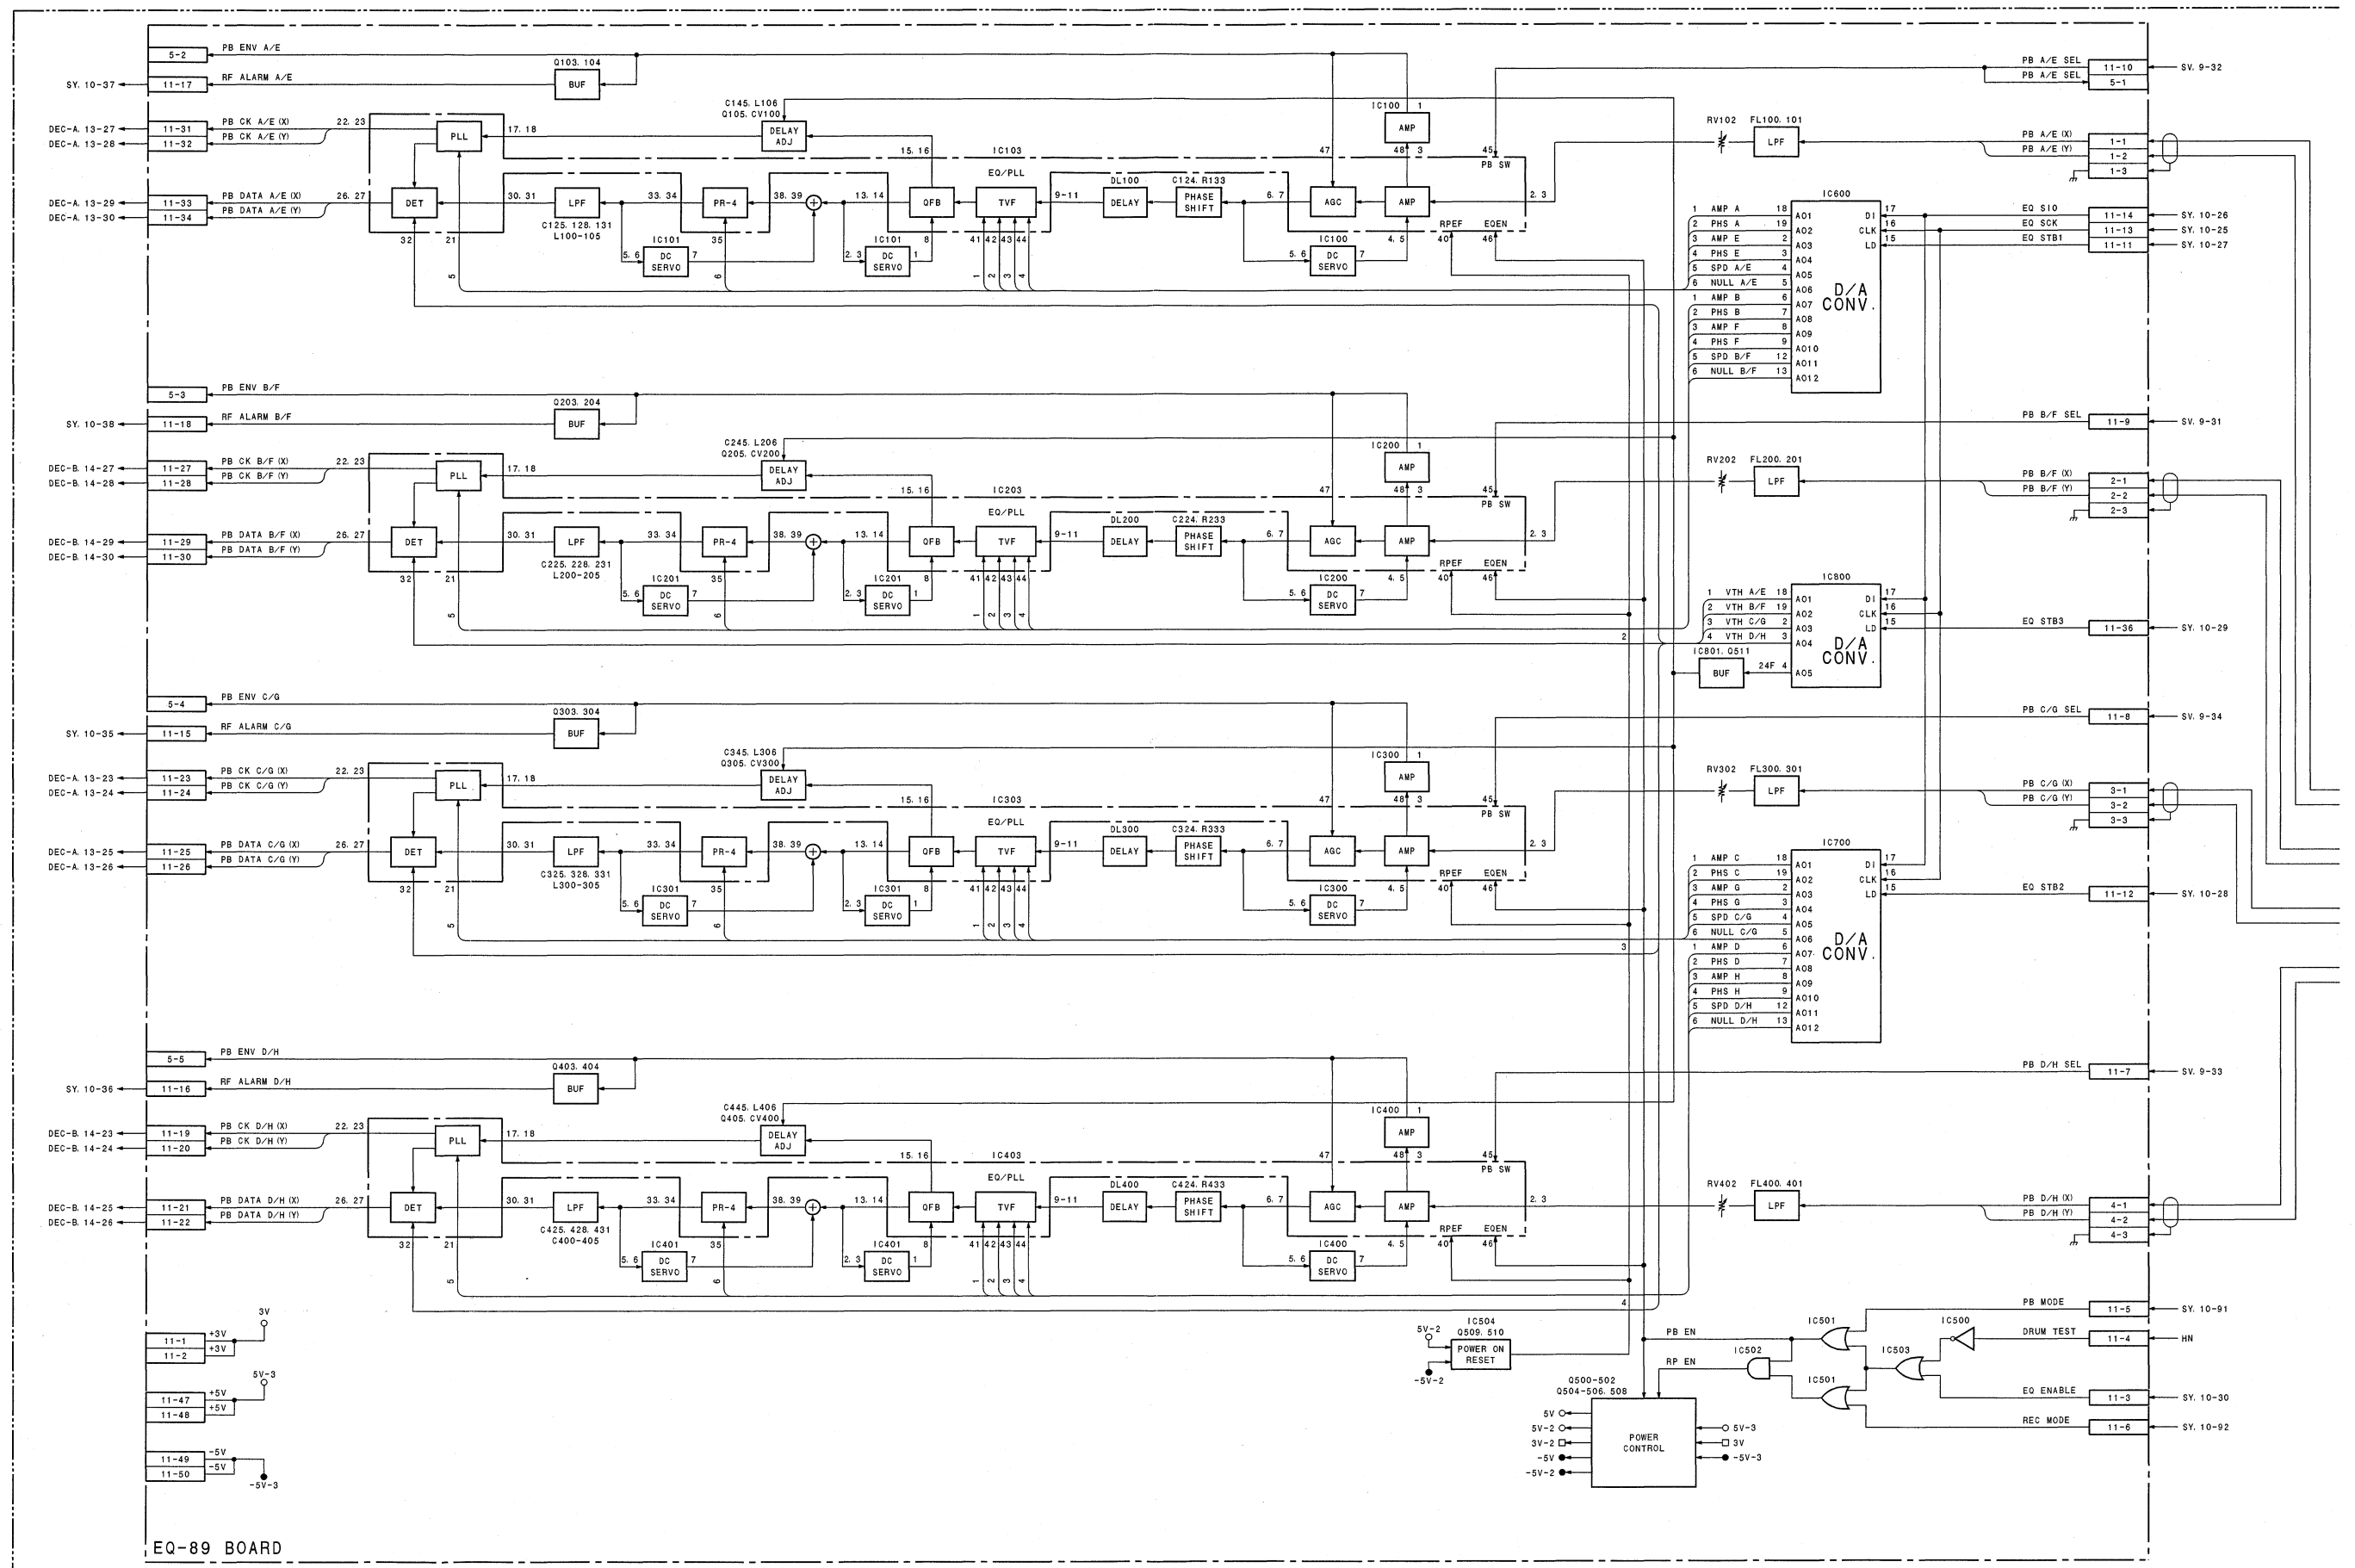

EQ-89 BOARD

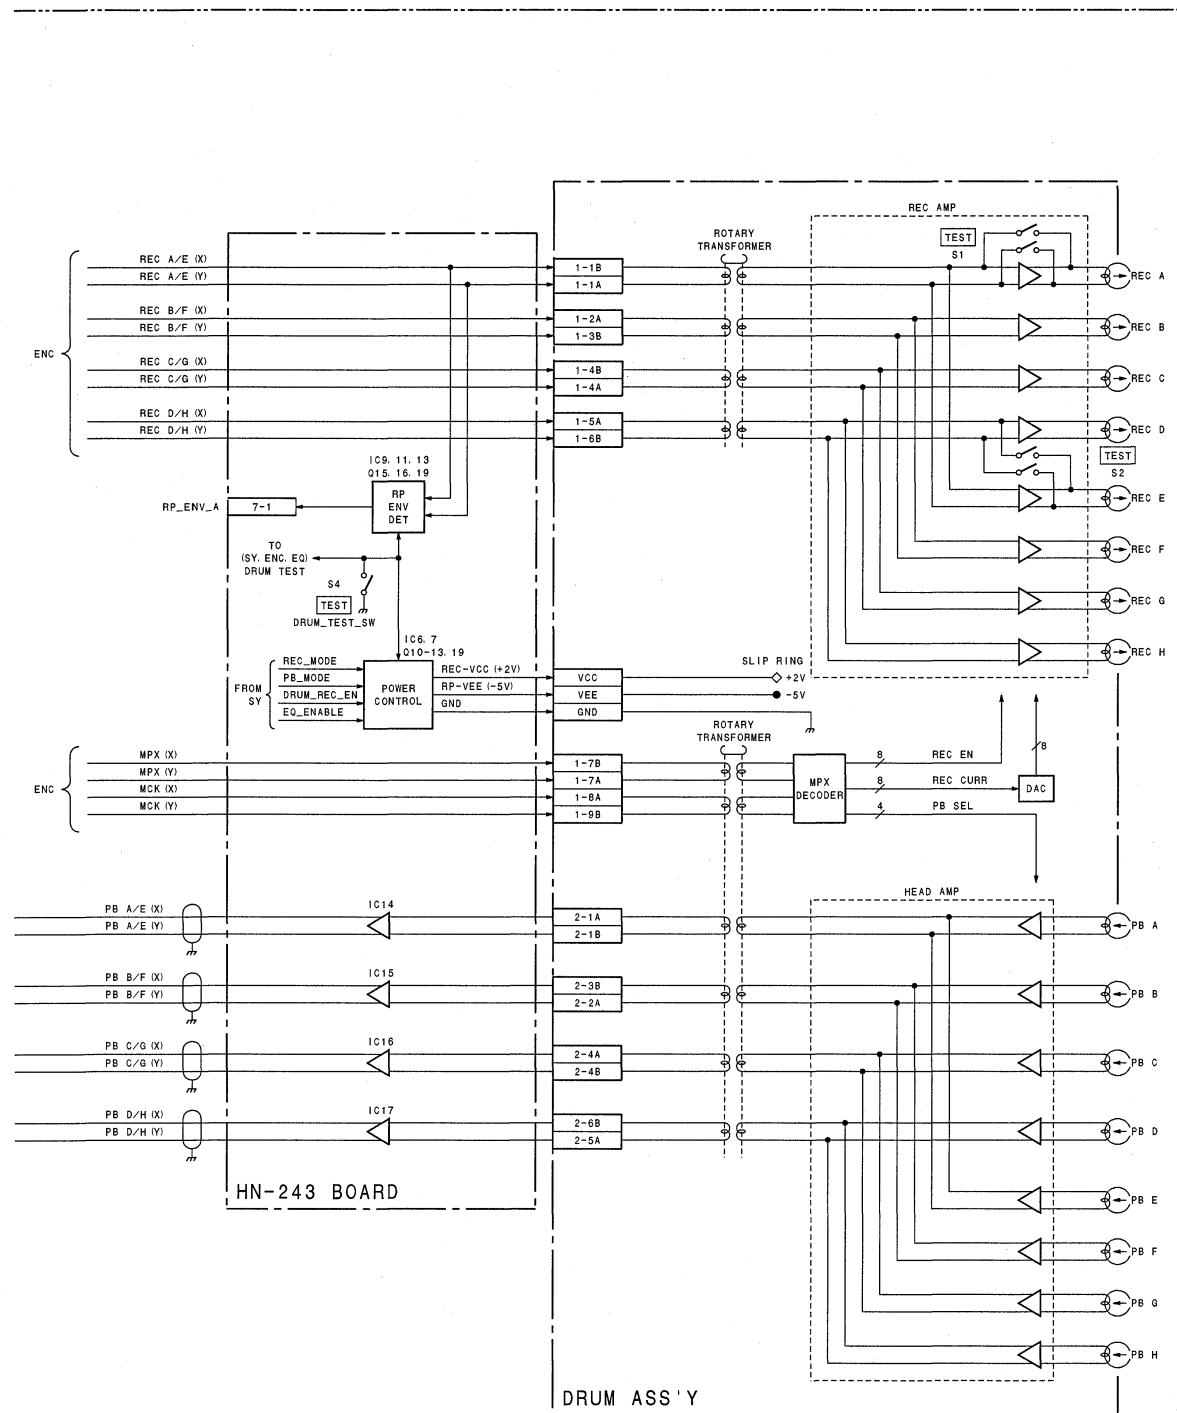

RF Processing
EQ-89, HN-243
LOT NO. 911-

RF PROCESSING BLOCK


Section 4

Schematic Diagrams

Index


No.	Board Name	Circuit Function	Page
1	AD-171/167	Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter	4-2
2	APR-55	Audio processor	4-6
3	CN-2119/1432	CCD block	4-19
4	CN-1614	Filter	4-19
5	CN-1642	Connector board for Camera mic	4-19
6	CN-1940	Relay board for AD-167 board and DPR-152 board	4-20
7	CN-1946	CCD block	4-20
8	CN-2024	Adaptor	4-21
9	CN-2025	Connector board for Audio IN/OUT & EXT DC IN/OUT	4-22
10	CN-2043	Connector board for Memory Stick	4-113
11	CN-2044	Relay board for IF-819 board and SY-285 board	4-24
12	CN-2046	Connector board for Monitor OUT, EXT TC IN/OUT	4-25
13	CN-2078	Relay board for SV-218 board and SY-285 board	4-24
14	CN-2085	Relay board for DPR-152 board and DA-148 board	4-24
15	CN-2140	Connector board	4-36
16	CO-38	Connector (Genlock IN, Remote)	4-114
17	CP-361	Control panel	4-26
18	CTL-10	CTL head amp	4-27
19	CUE-2	CUE head amp	4-28
20	DA-148	Post filter, D/A converter	4-29
21	DEC-95	ECC/BRR decoder	4-31
22	DPR-227/152	SCVP (Digital processing), VFS (Frame rate converter)	4-34
23	DPR-157	Digital processing	4-37
24	DR-411	CCD driver, Timing generator	4-40
25	DU-68/19	Connector Board	4-42
26	EN-143	BRR encoder (B), Timing generator	4-43
27	ENC-59	BRR encoder (A), ECC encoder	4-49
28	EQ-89	RF equalizer	4-54
29	HN-243	Harness, Erase head amp, TC head amp	4-60
30	HP-90	Headphone	4-113
31	IF-819	System controller, Fan controller	4-62
32	KY-293	Function key	4-112
33	MA-92	Camera mic amp	4-69
34	MB-877	Motherboard	4-70
35	PA-238	Pre-amp	4-80
36	PS-569	Power supply, Circuit breaker	4-81
37	RE-139F	Power supply, Regulator (VTR)	4-83
38	RE-140F	Power supply, Regulator (VTR)	4-84
39	RE-145F	Power supply, Regulator (CCD block)	4-86
40	RPR-13	Assistant board for VFS	4-88






No.	Board Name	Circuit Function	Page
41	SE-275	Tape sensor, DEW sensor	4-89
42	SG-267	GEN lock, Timing pulse generator (CTG), Character generator	4-90
43	SH-74	Shading correction signal generator	4-92
44	SV-218	Servo controller	4-95
45	SW-911	VTR S/S switch, Shutter switch, ABB/AWB switch	4-112
46	SW-912	Rotary encoder switch	4-112
47	SW-1032	Back tally, Back tally switch	4-113
48	SY-285	System controller for VTR block, Timecode controller	4-98
49	TG-213	Timing generator	4-101
50	VA-195	Video amp, White gain, White shading compensator	4-102
51	VDA-51	Monitor out, VF out, Character mix, Marker mix, Zebra mix, Skin marker mix	4-104
52	VN-12	Concealment, FIL (Rate convert)	4-107
53	VR-175	Memory card, Audio select switch, Alarm level, Monitor level	4-112
54	Frame Wiring	–	4-110

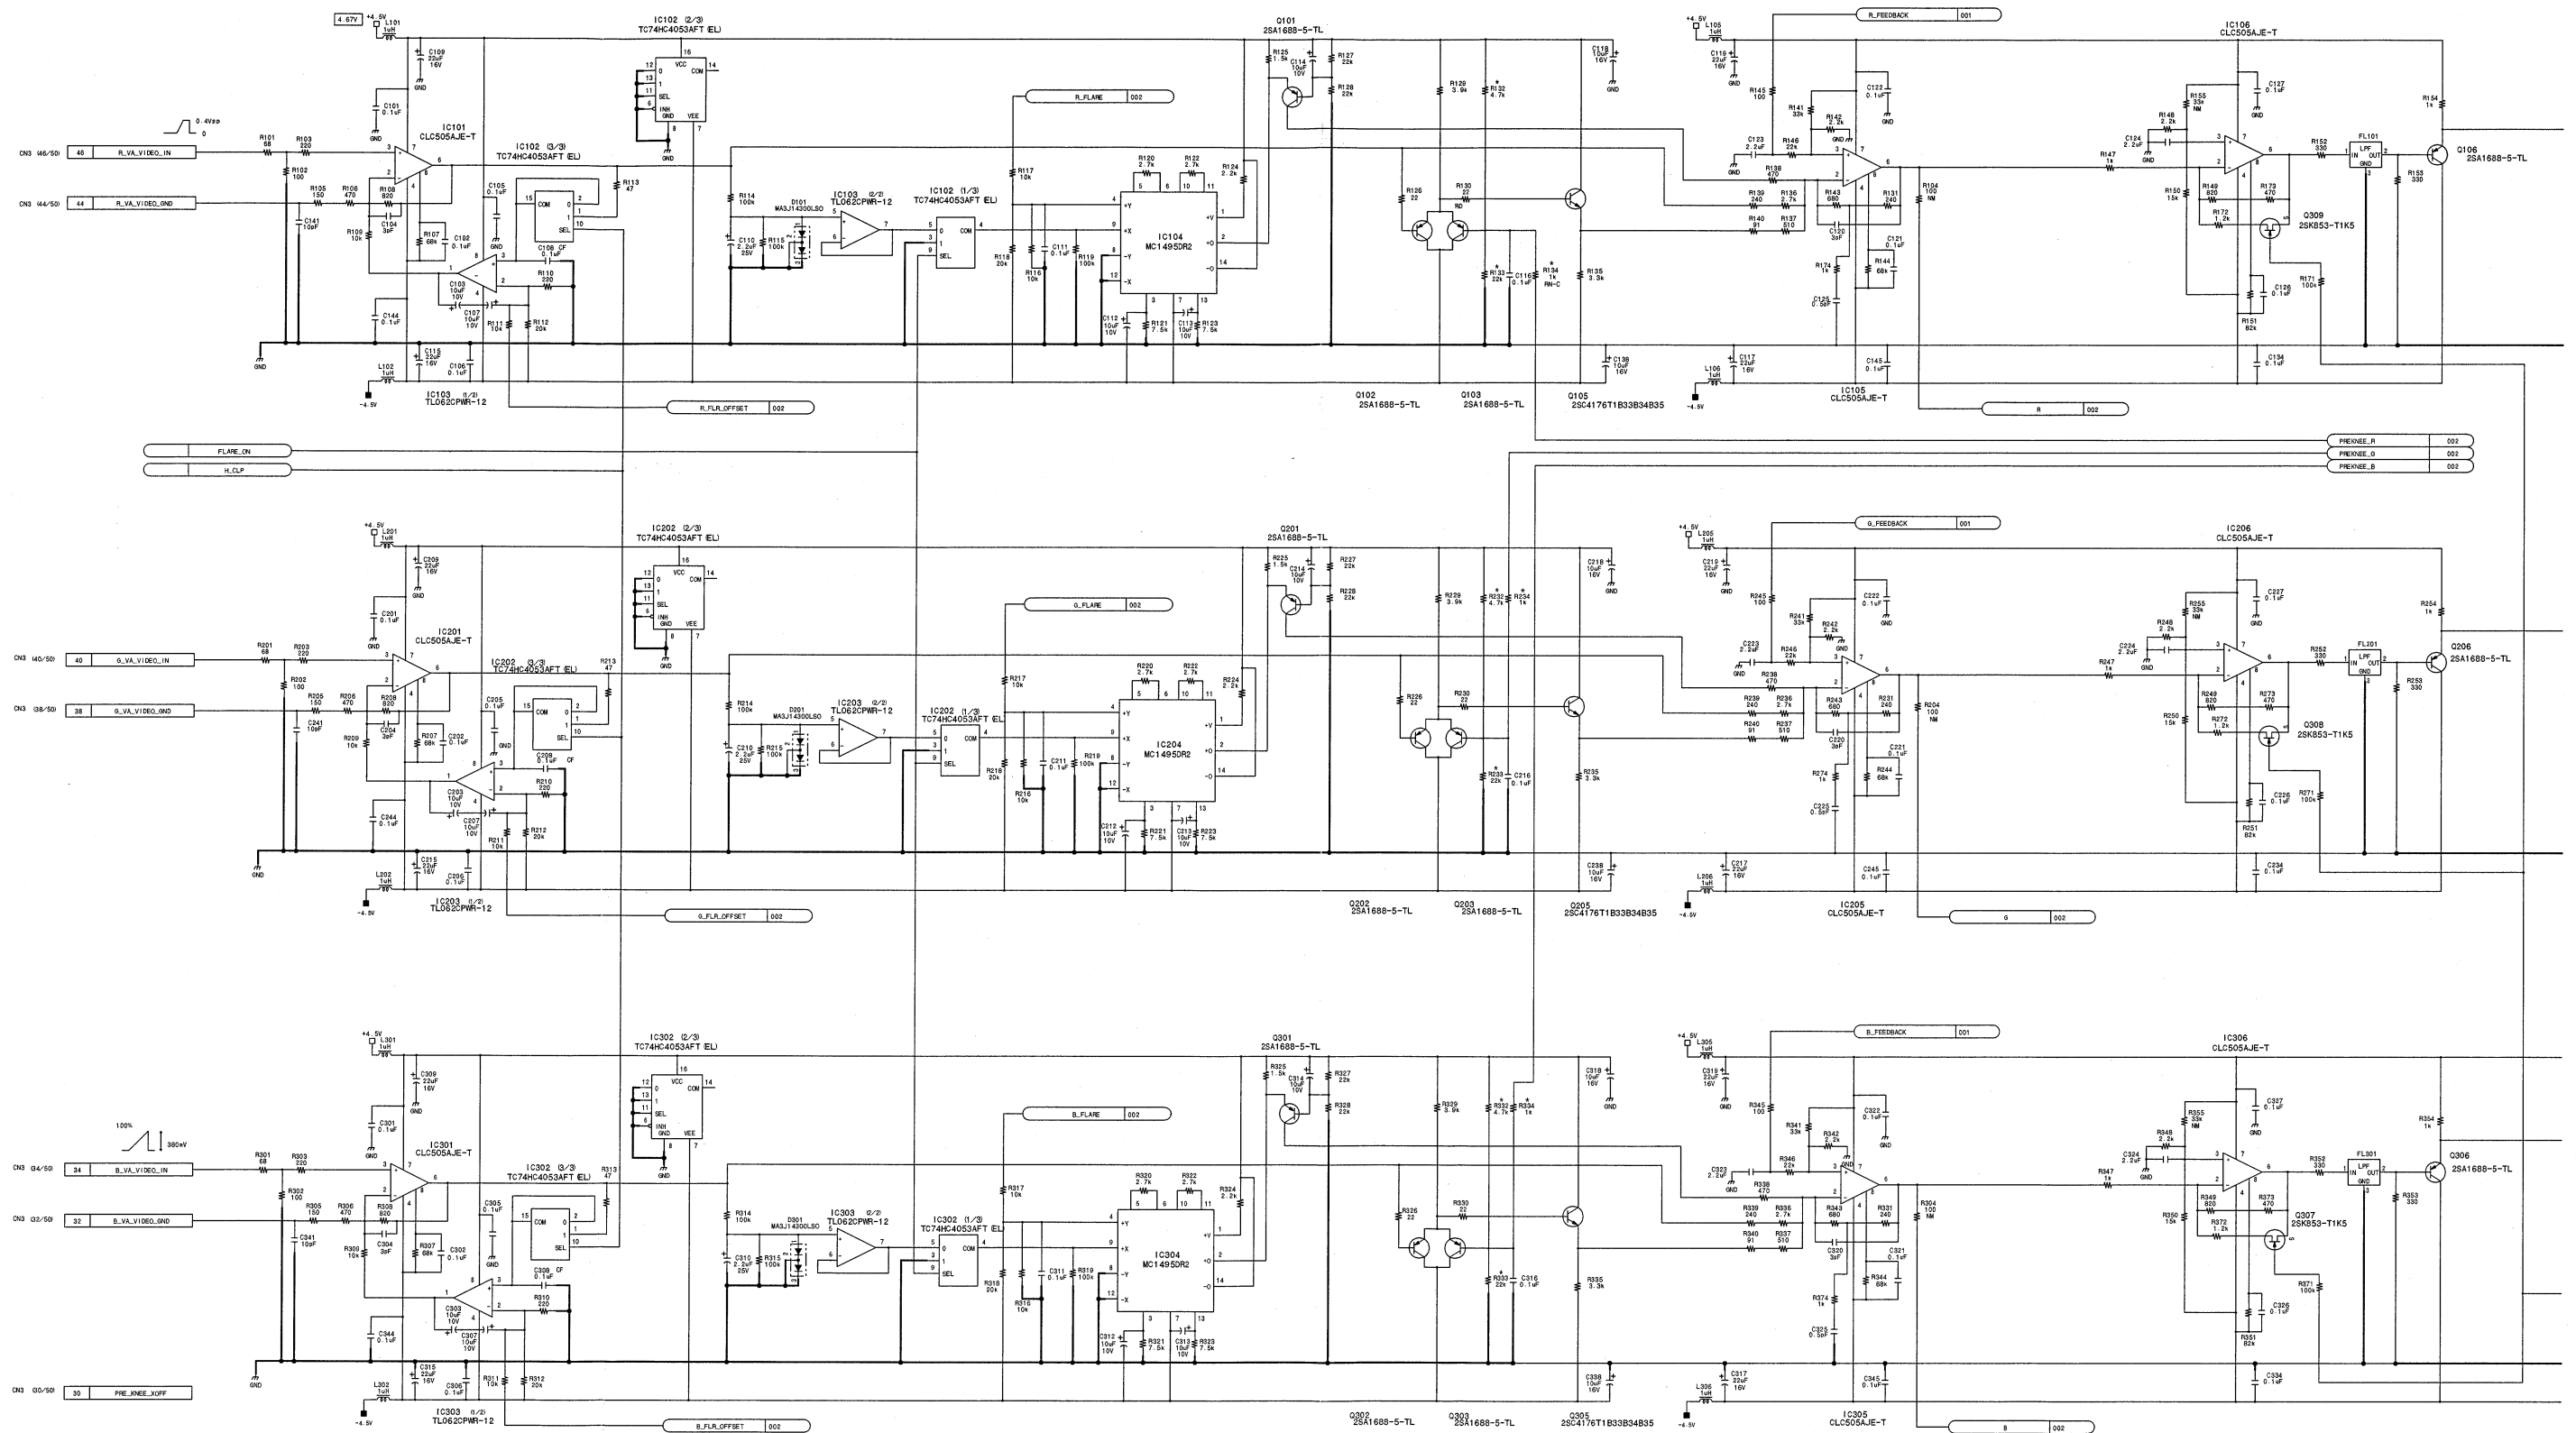


4-2 (b)

4-2 (b)

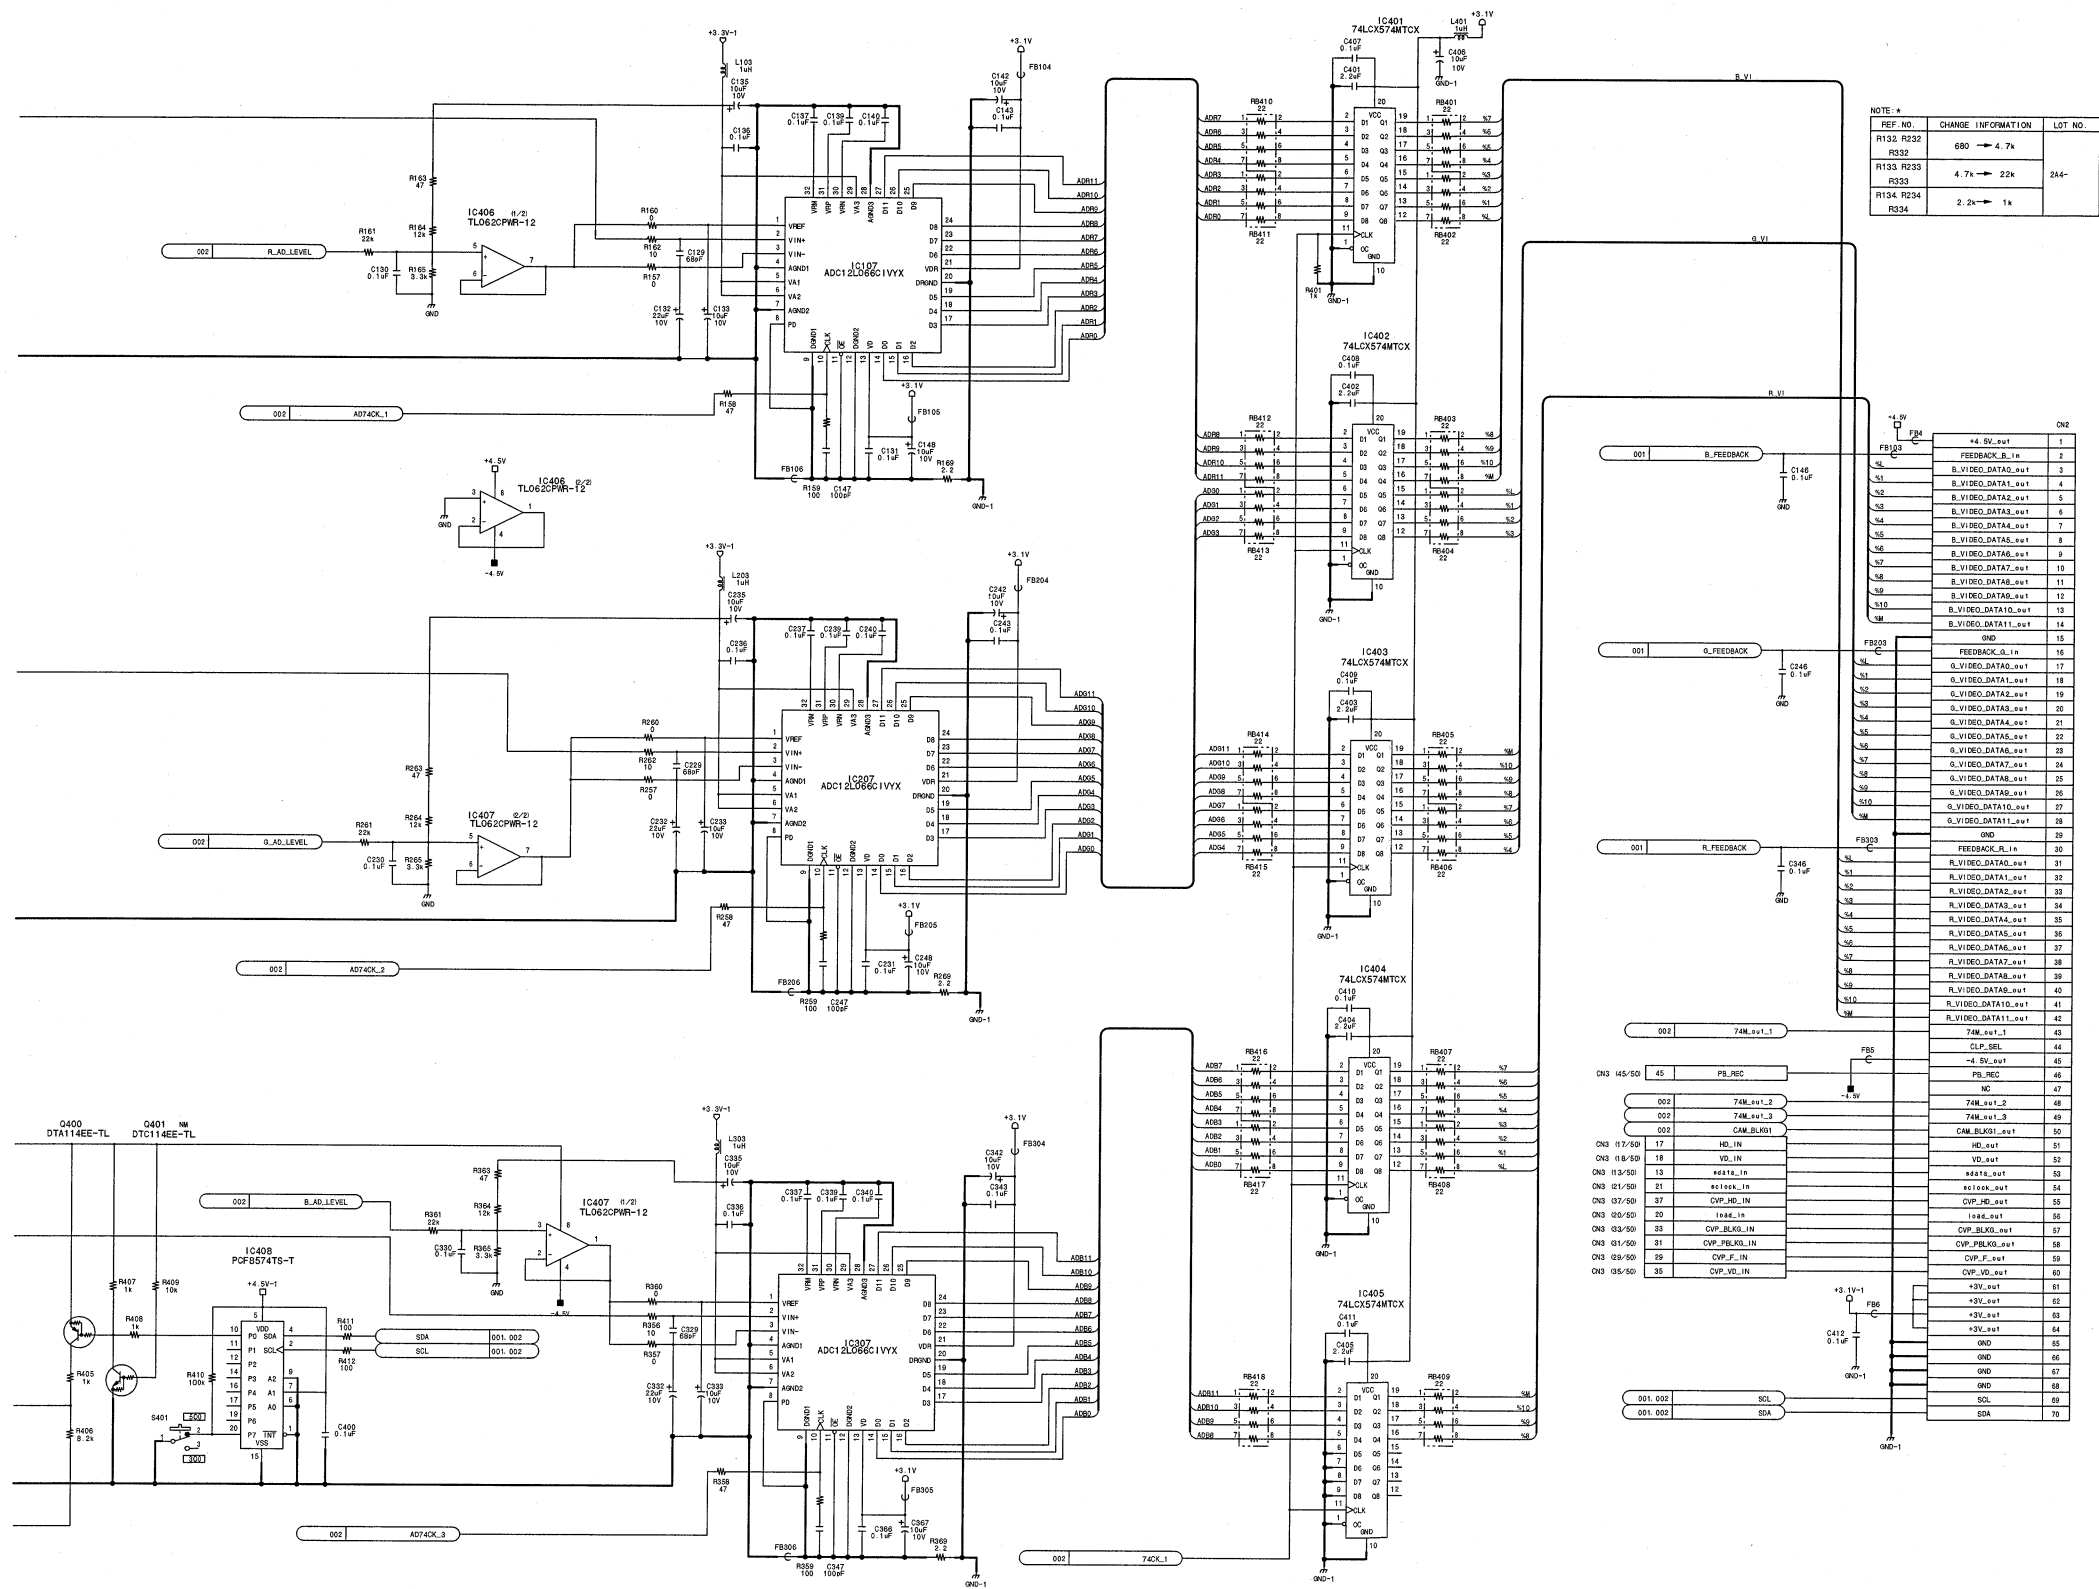

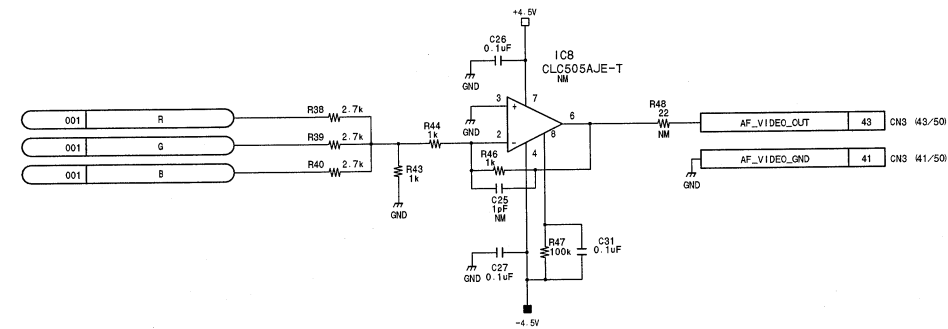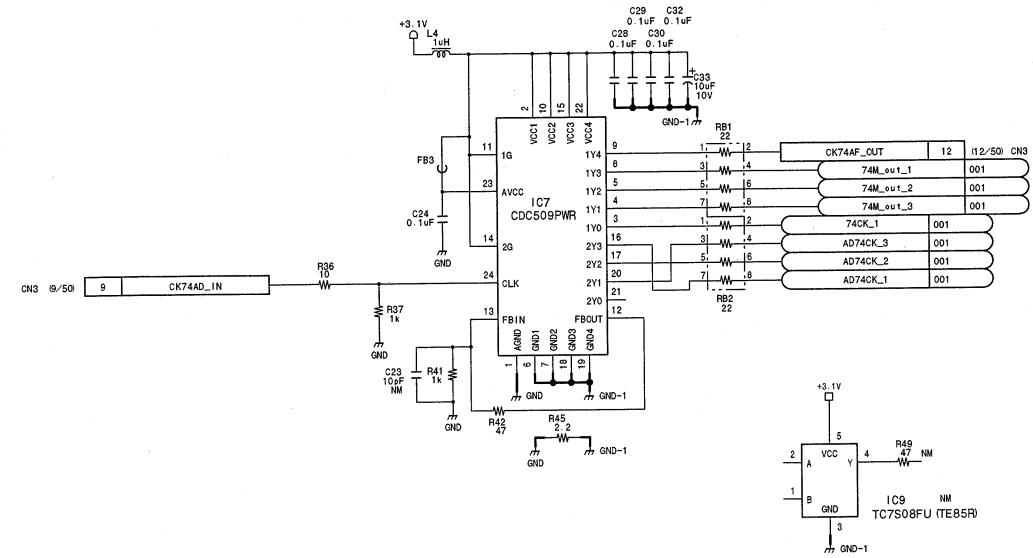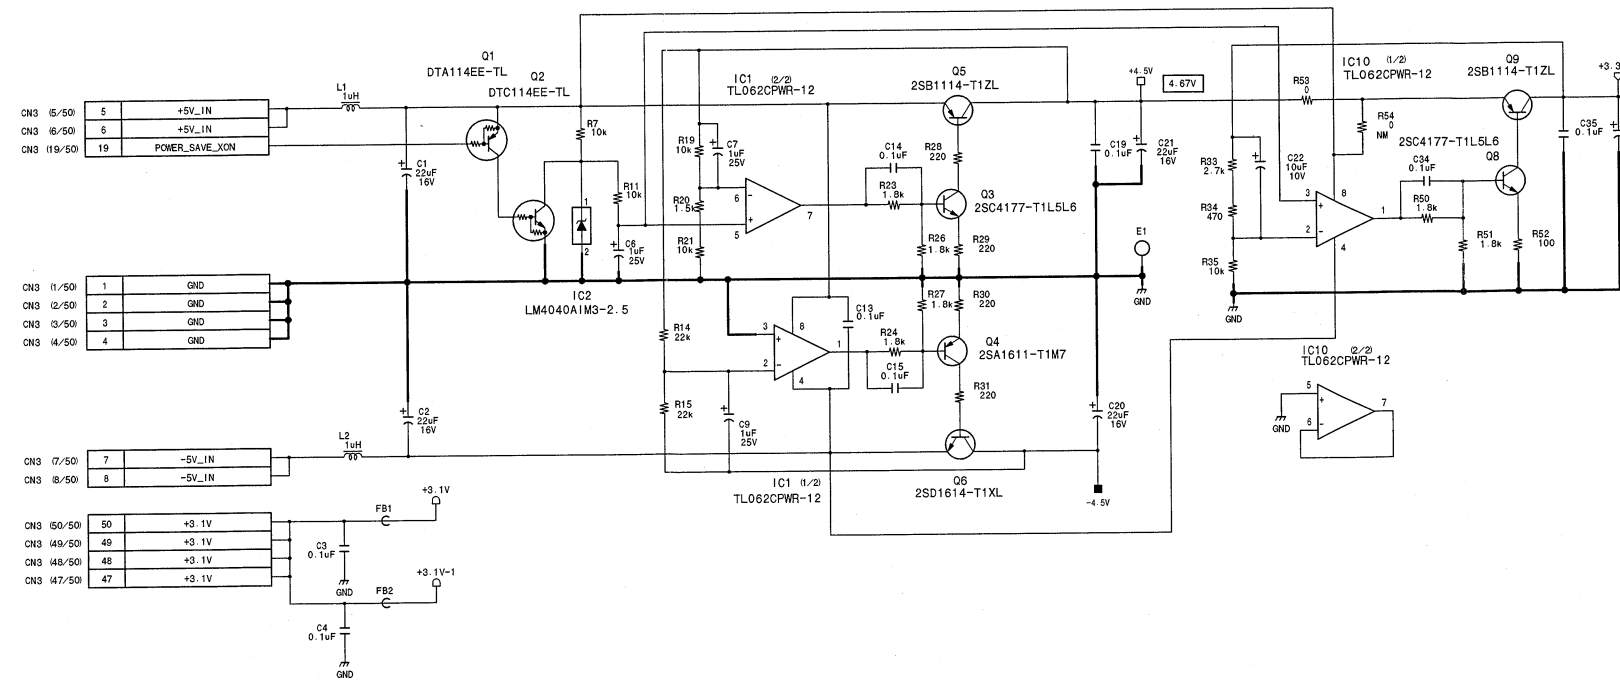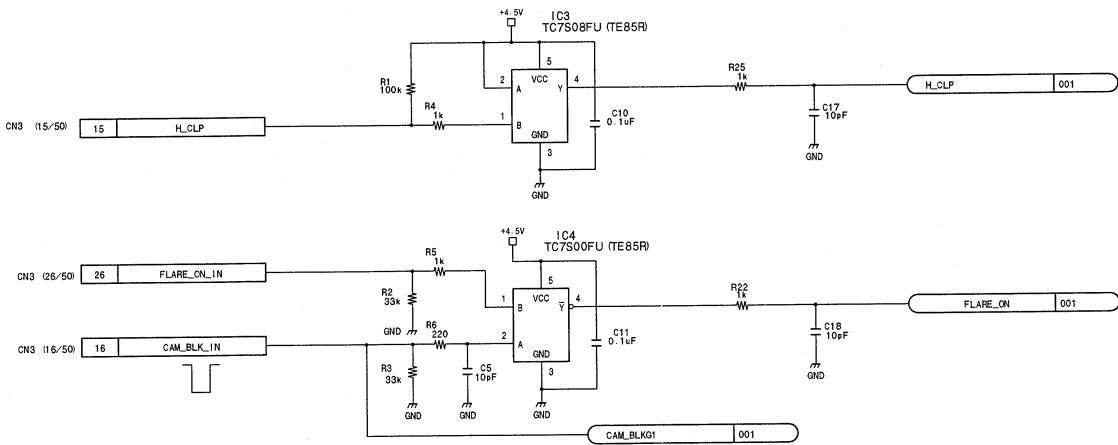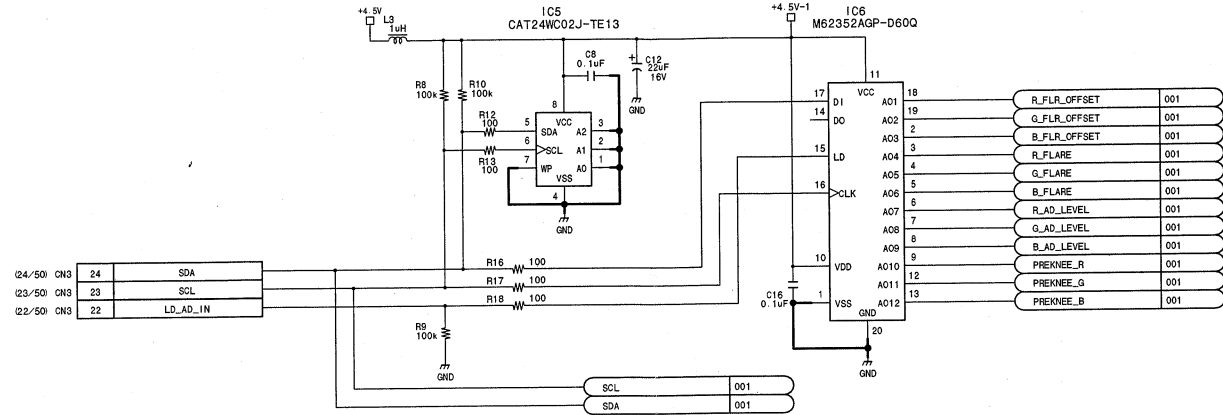


Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter
AD-171 (2/2)
BOARD NO. 1-685-659-12
LOT NO. 2A3-
HDW-F900_AD-171_120_2

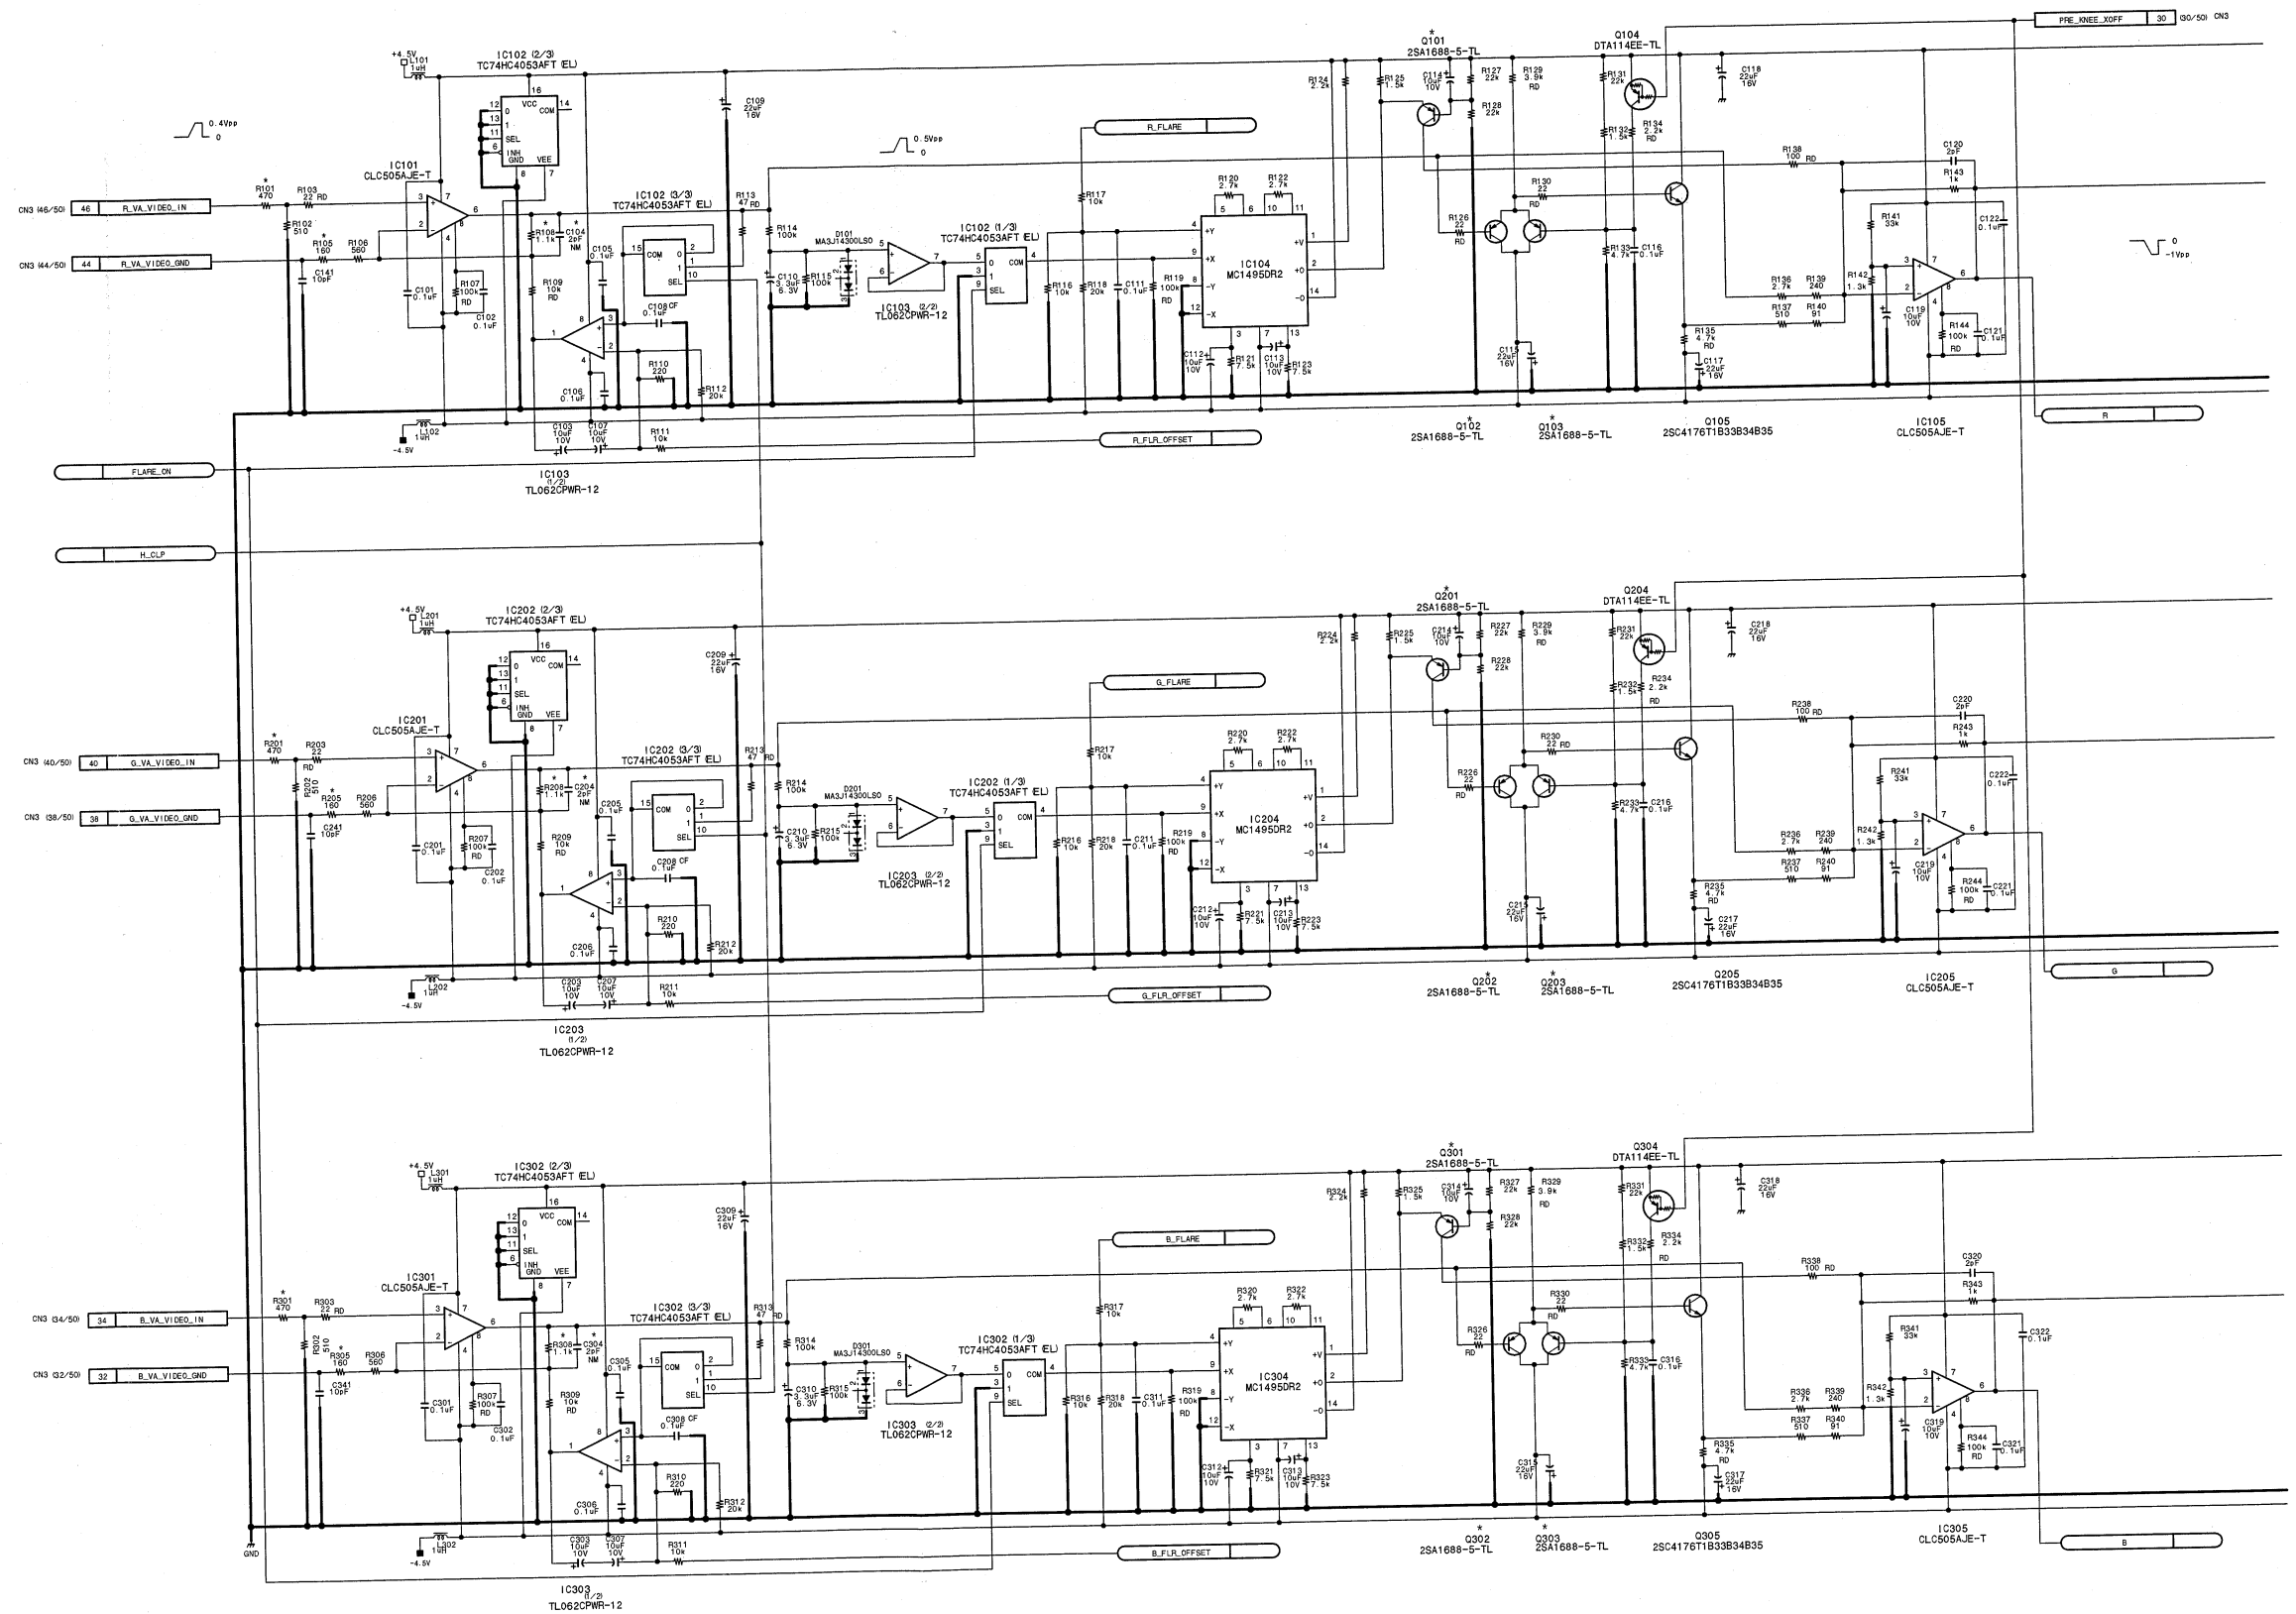

4-2 (a)

4-2 (a)

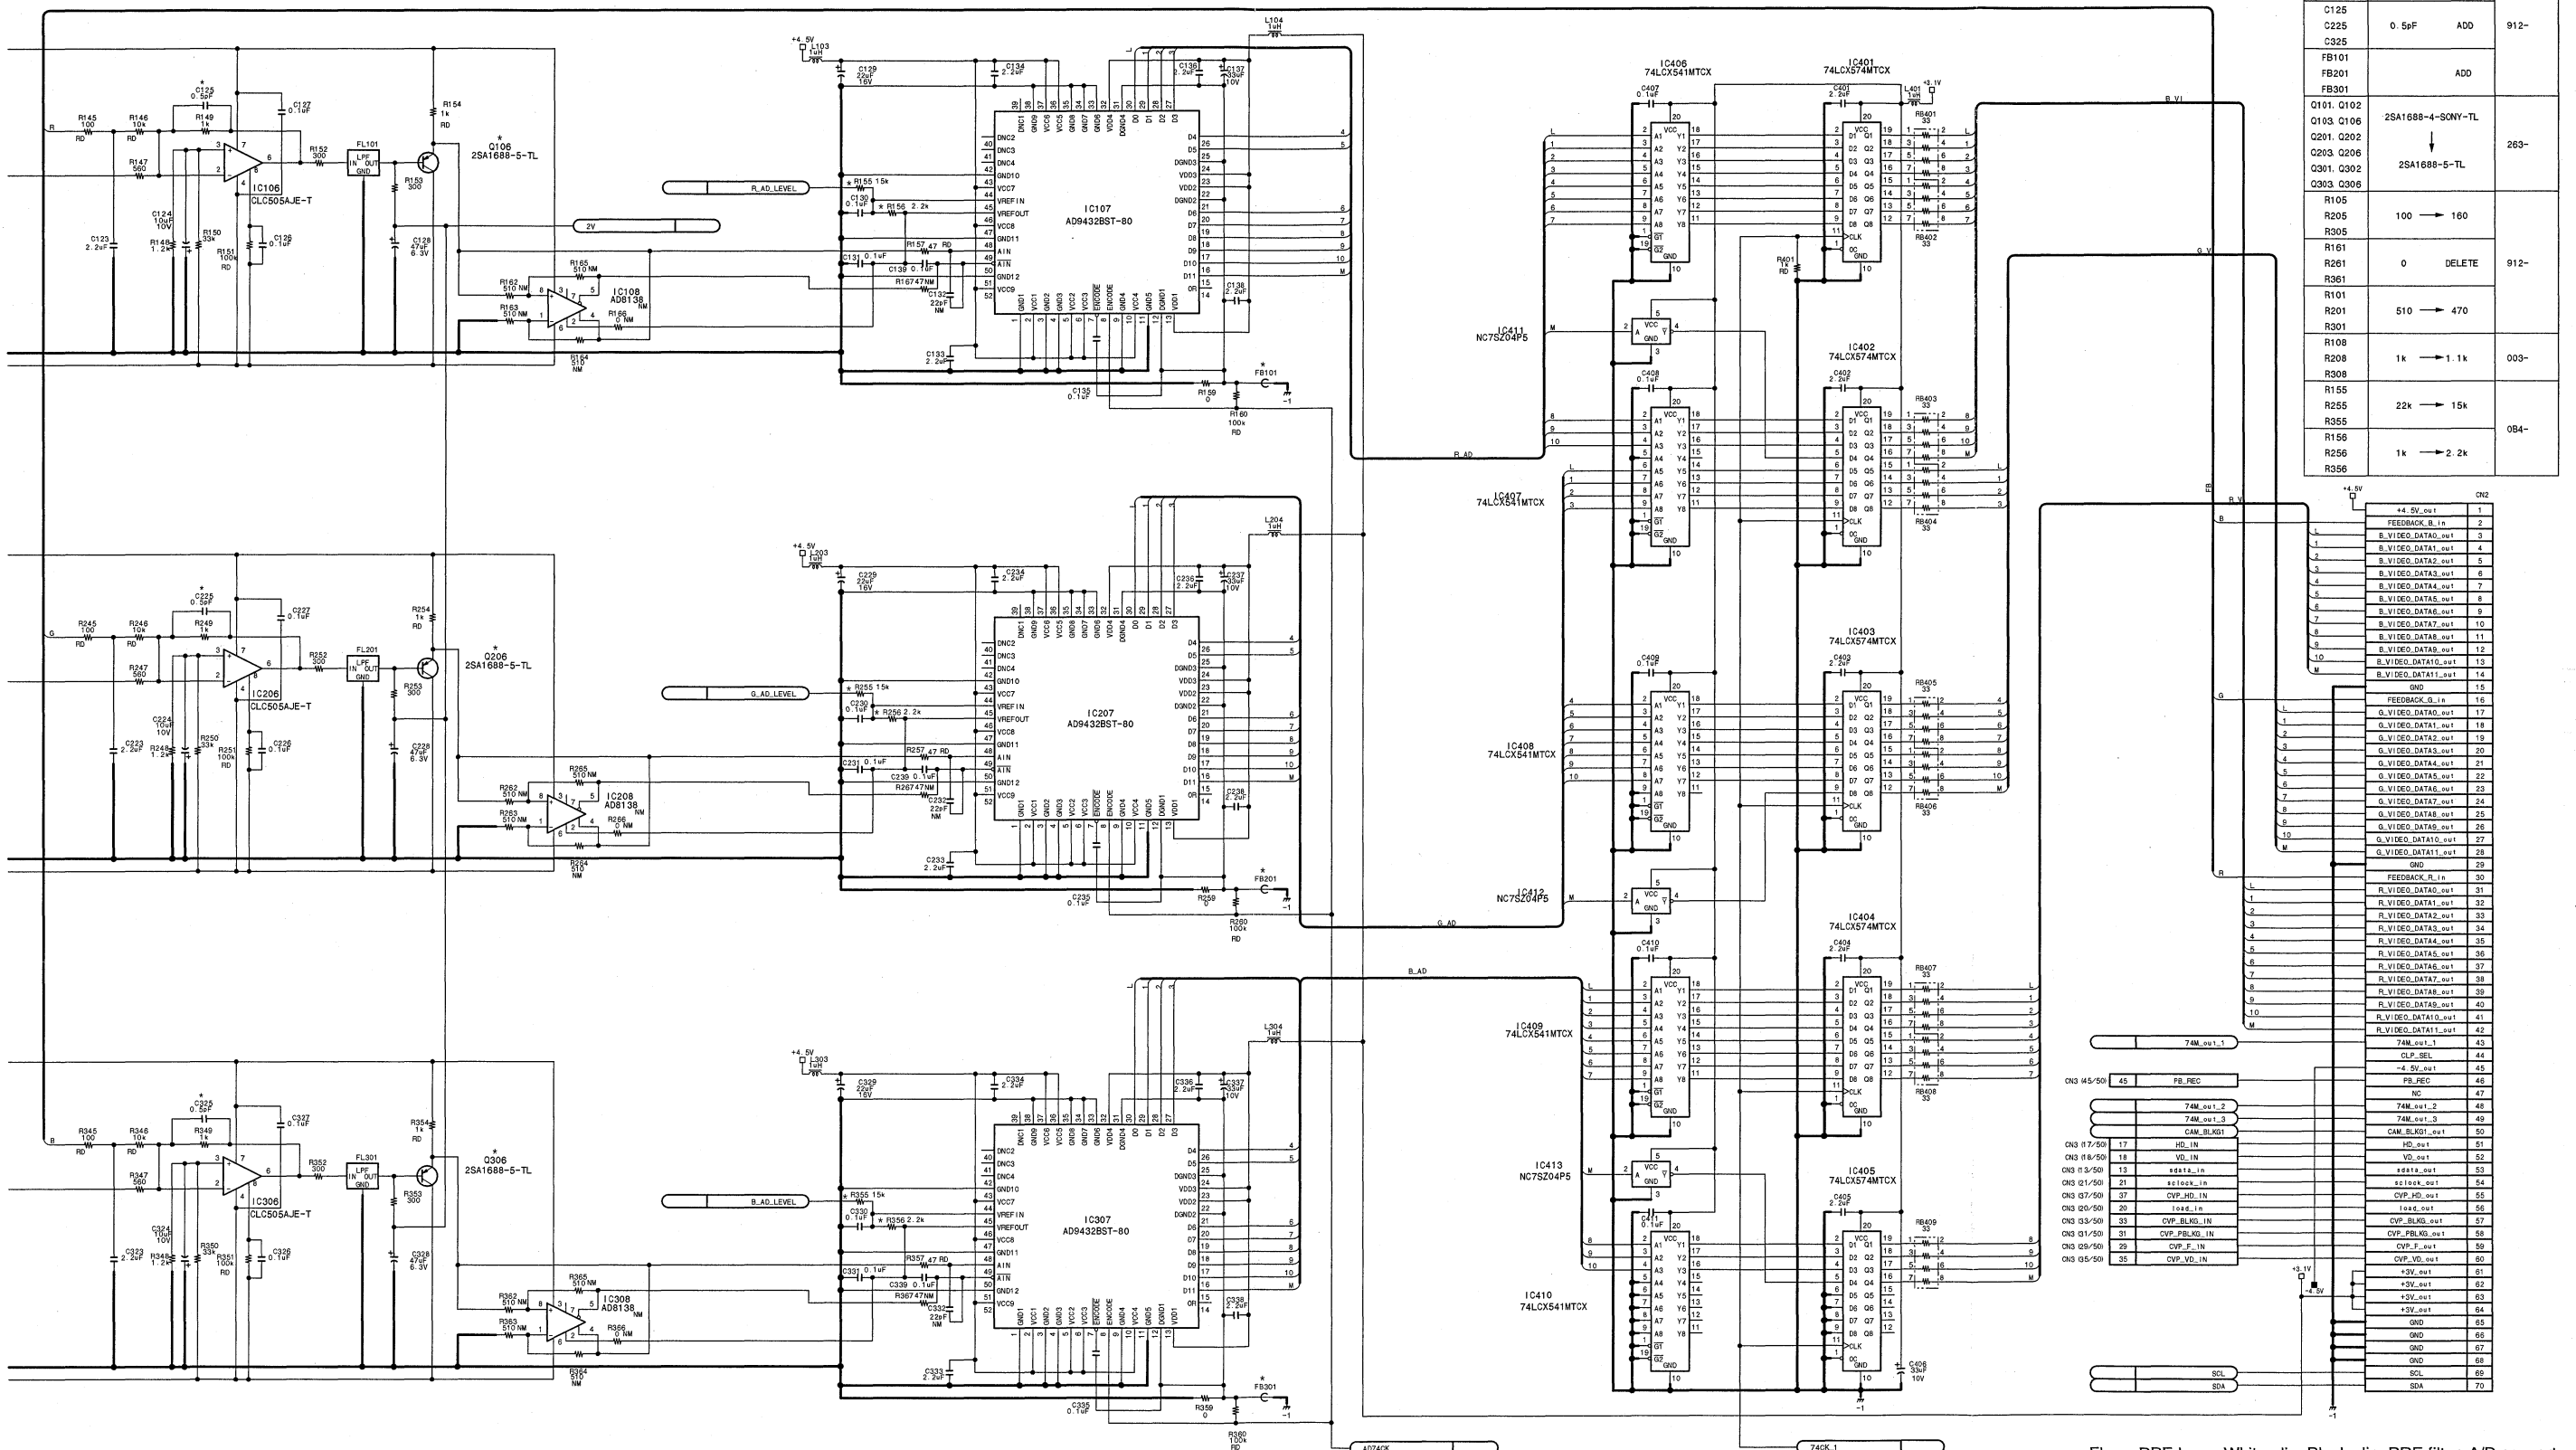


NOTE: *

REF. NO.	CHANGE INFORMATION	LOT NO.
C104	2.0uF → 0.5uF	912-
C204		
C304		
C125	0.5uF ADD	
C225		263-
C325		
FB101	ADD	
FB301		
O101, O102	25A1688-4-SONY-TL	912-
O103, O106		
O203, O206	25A1688-5-TL	
O301, O302		
O303, O306		003-
R105	100 → 160	
R205		
R305		
R161	0 DELETE	084-
R261		
R361		
R101	510 → 470	
R201		
R301		
R108	1k → 1.1k	
R208		
R308		
R155	22k → 15k	
R255		
R355		
R156	1k → 2.2k	
R256		
R356		

REF. NO.	CHANGE INFORMATION	LOT NO.
C104	2.0uF → 0.5uF	912-
C204		
C304		
C125	0.5uF ADD	
C225		263-
C325		
FB101	ADD	
FB301		
O101, O102	25A1688-4-SONY-TL	912-
O103, O106		
O203, O206	25A1688-5-TL	
O301, O302		
O303, O306		003-
R105	100 → 160	
R205		
R305		
R161	0 DELETE	084-
R261		
R361		
R101	510 → 470	
R201		
R301		
R108	1k → 1.1k	
R208		
R308		
R155	22k → 15k	
R255		
R355		
R156	1k → 2.2k	
R256		
R356		

Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter
AD-167 (1/2)
 BOARD NO. 1-677-599-11, 12
 LOT NO. 911-2A2
 HDW-F900C-AD-167_211_1

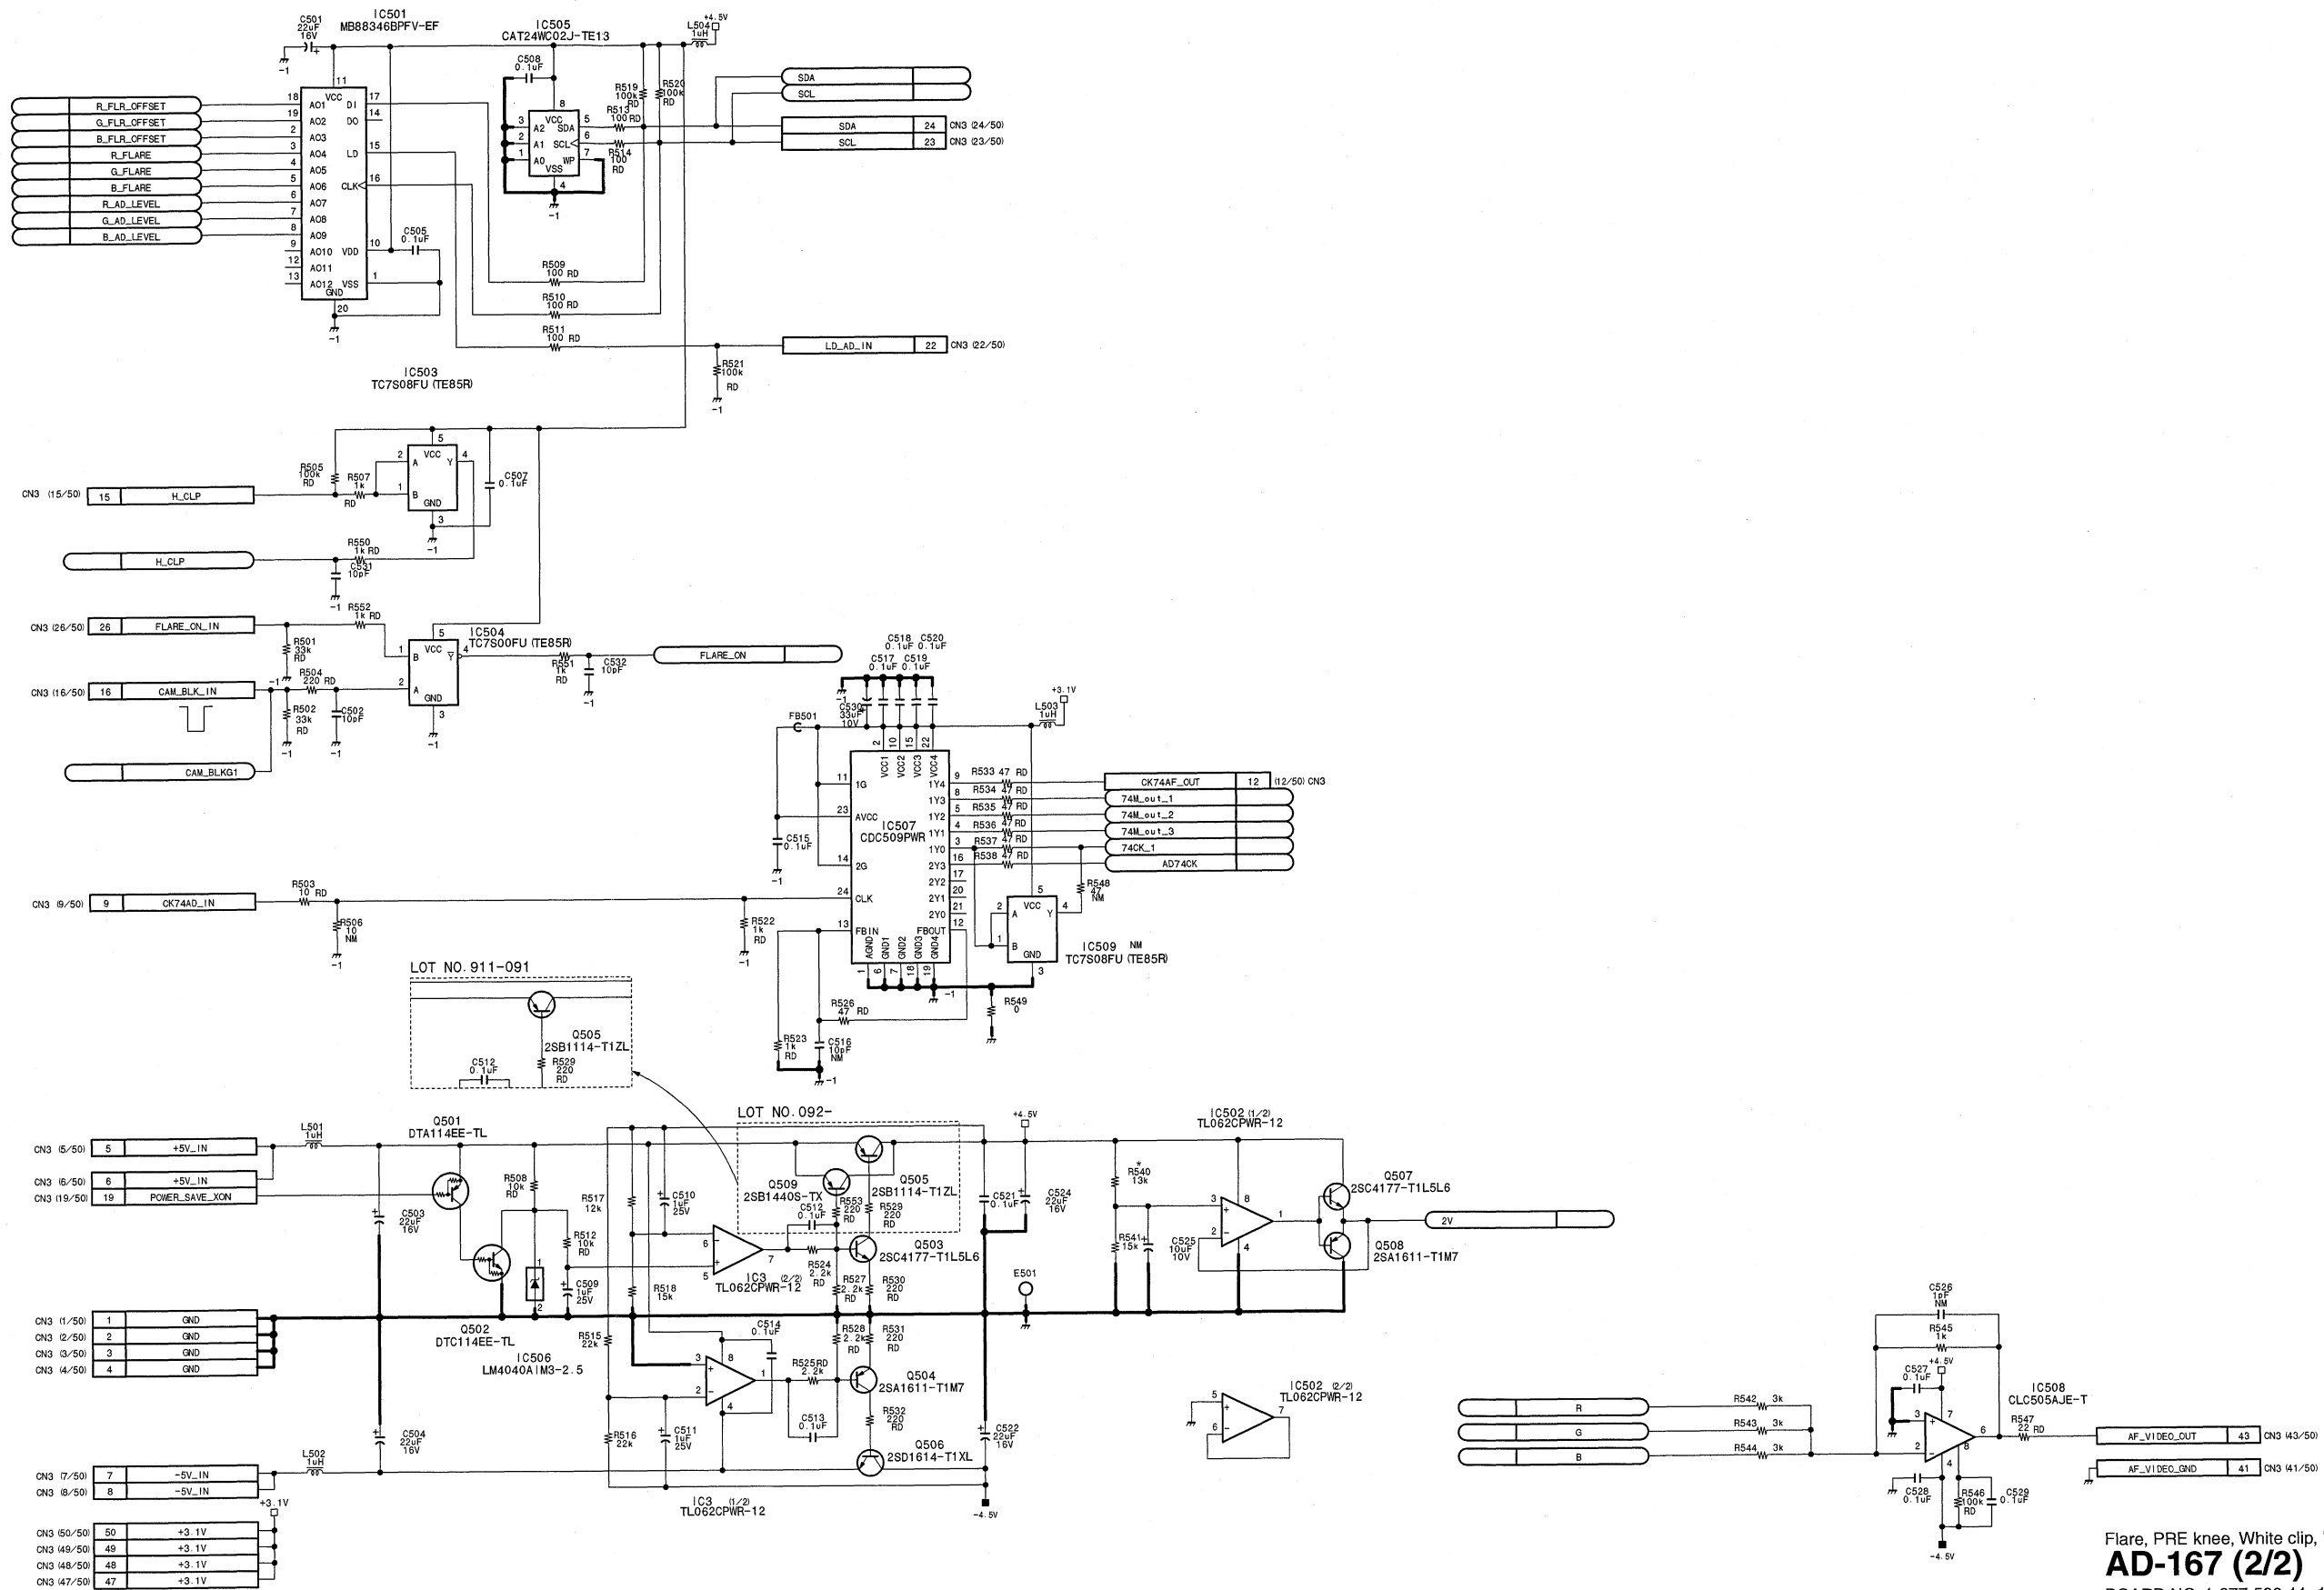

Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter
AD-167 (2/2)
 BOARD NO. 1-677-599-11, 12
 LOT NO. 911-2A2
 HDW-F900C_AD-167_211_2


REF. NO.	CHANGE INFORMATION	LOT NO.
R540	15k → 13k	912-

4-4 (a)

4-4 (a)

HDW-F900 P2V2


APR-55 (1/7)

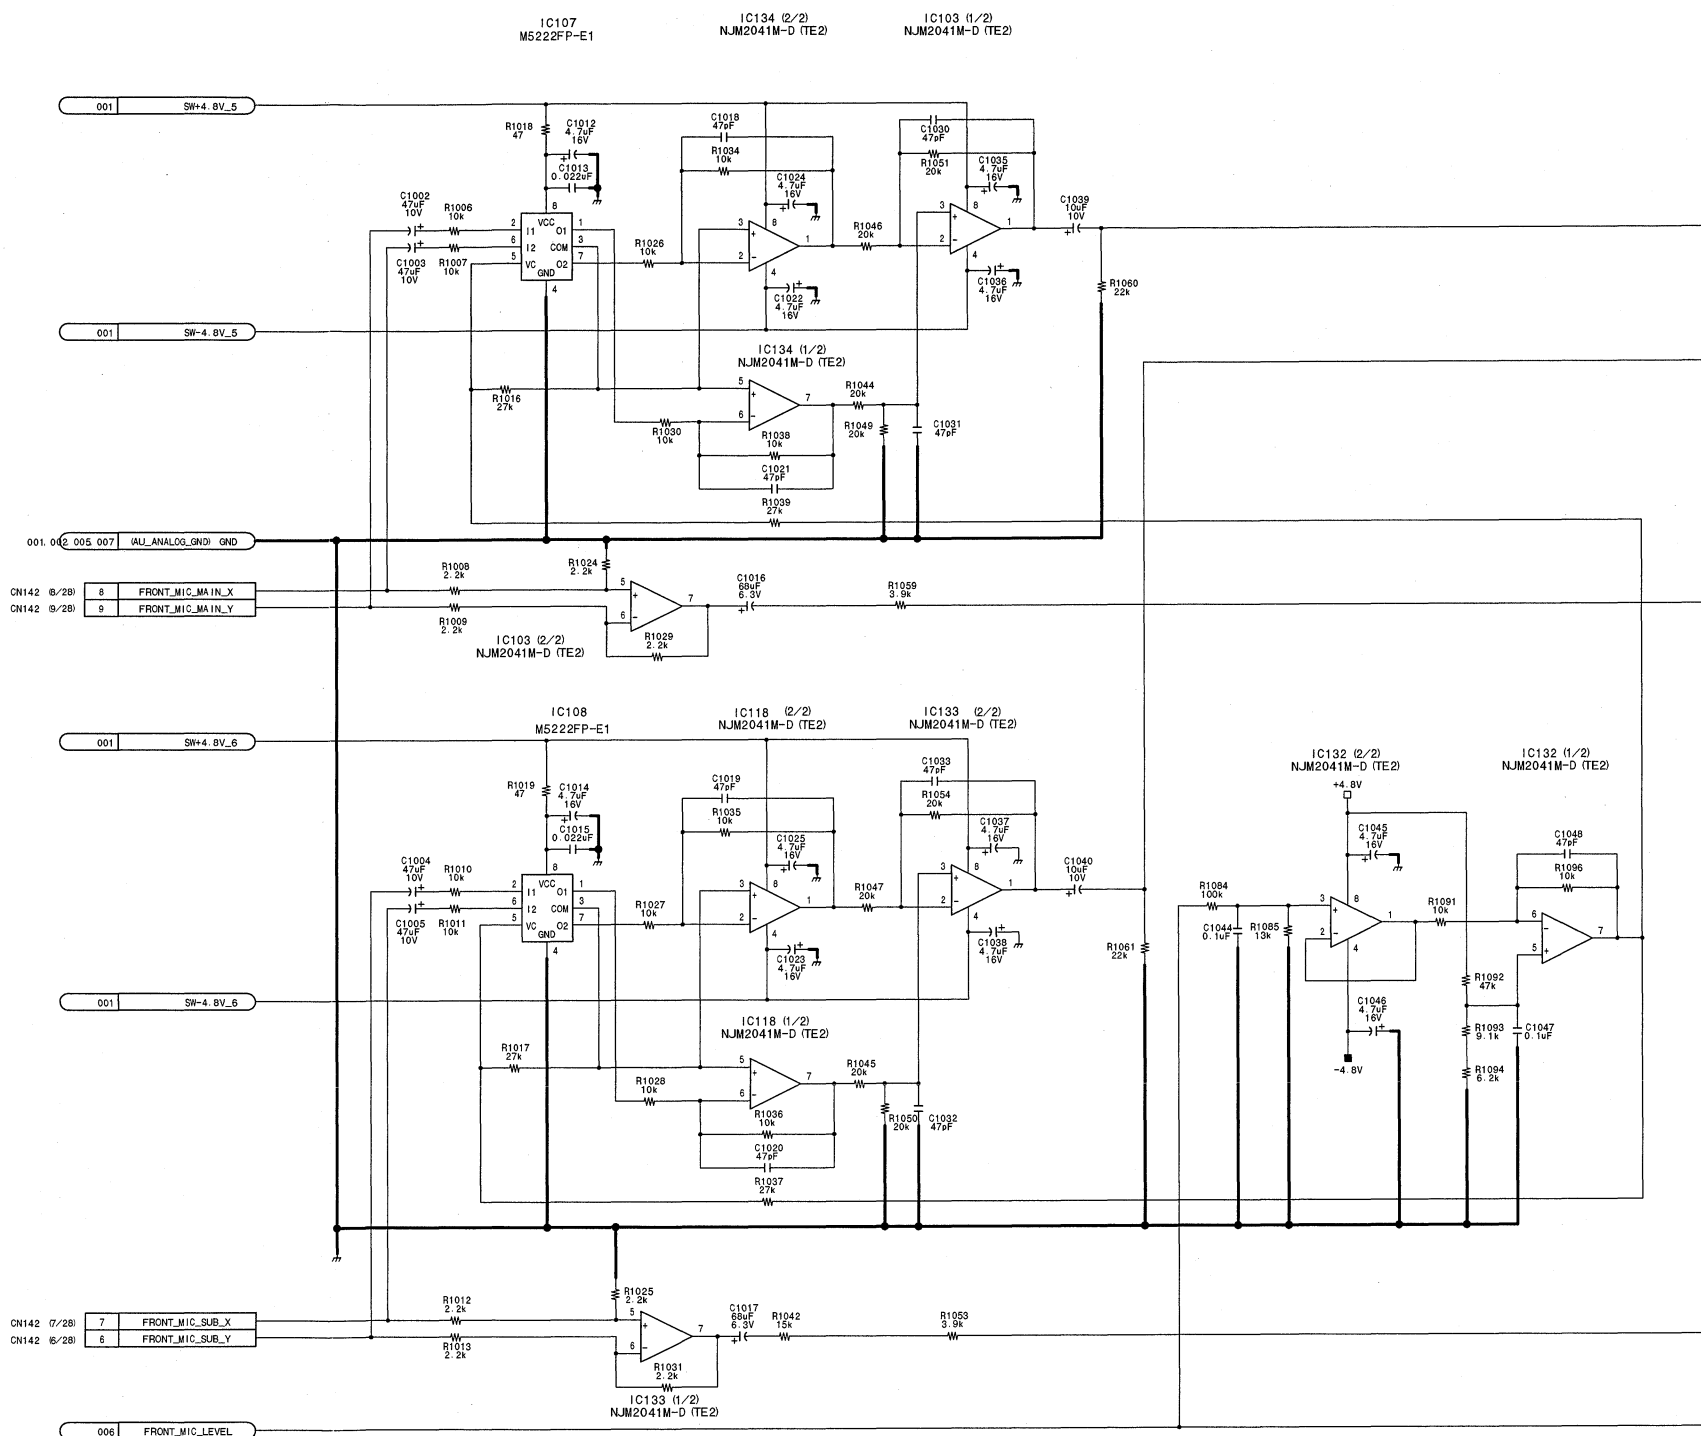


4-6 (b)

HDW-F900 P2V2


H

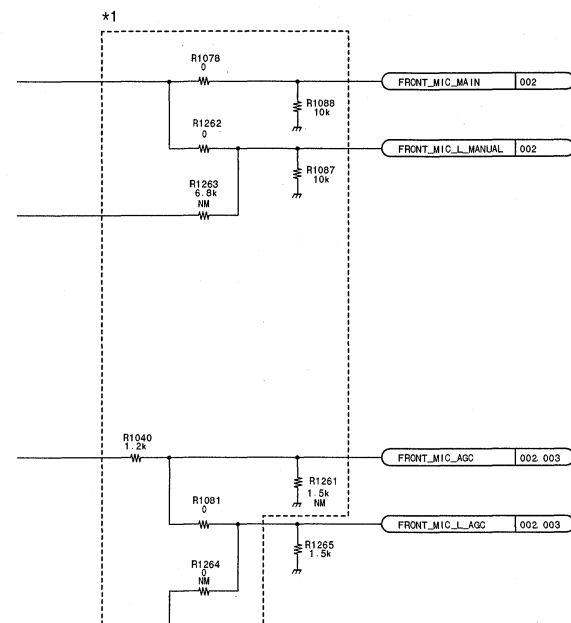

	MONO	STEREO
R1040	1. 2k	15k
R1078	0	6. 8k
R1262	0	N. M
R1081	0	N. M
R1263	N. M	6. 8k
R1264	N. M	0
R1261	N. M	1. 5k
R1088	10k	3. 3k
R1087	10k	3. 3k
R1274	47k	N. M
R1275	N. M	0

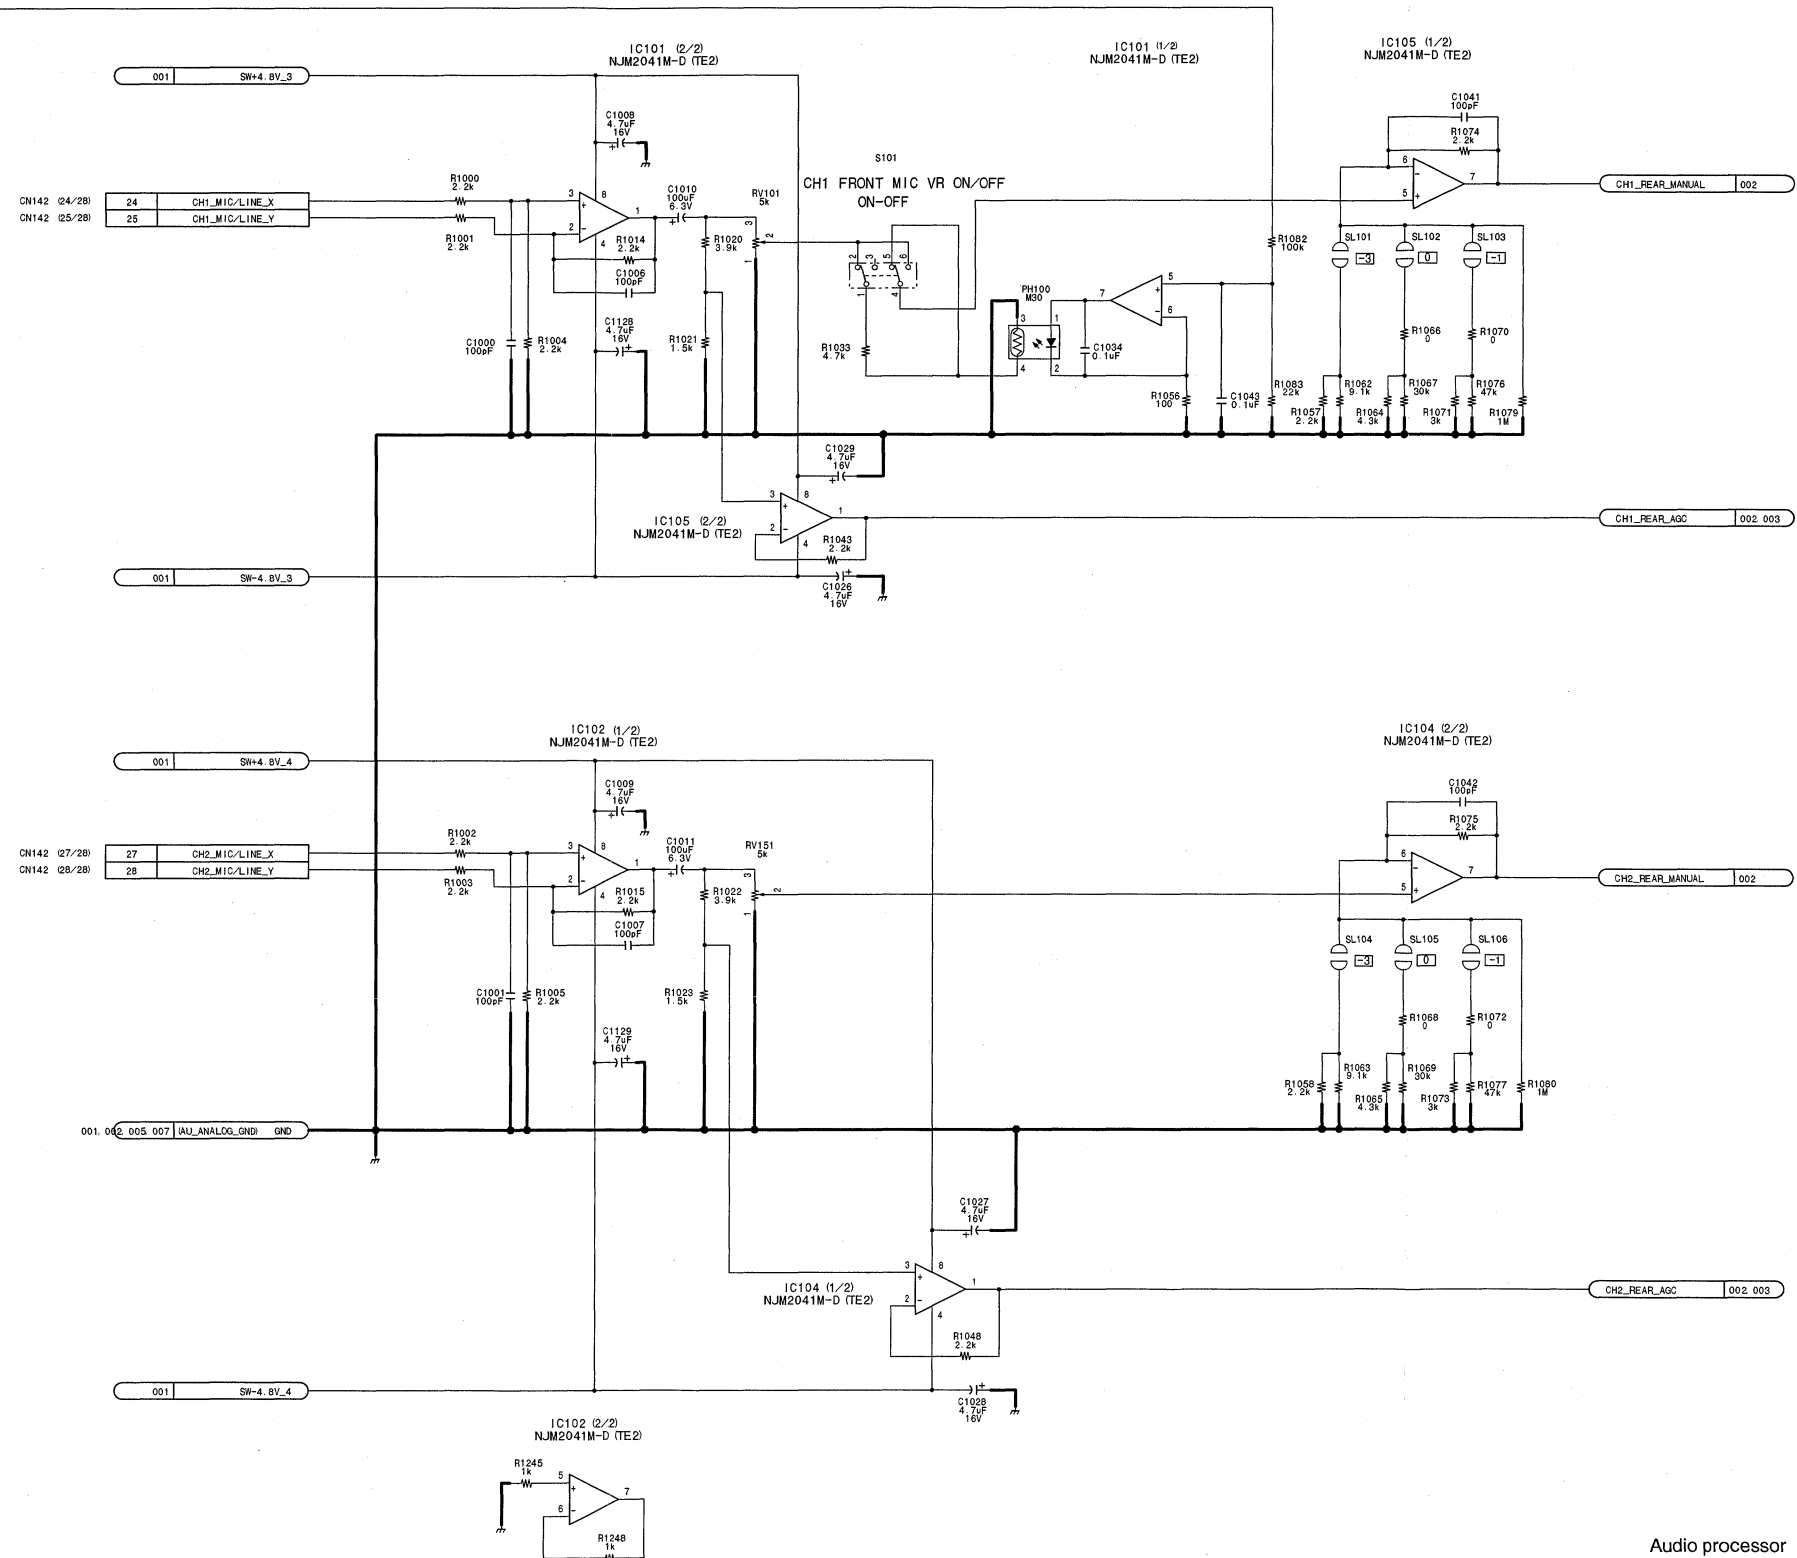



Audio processor
APR-55 (1/7)
BOARD NO. 1-677-540-12
LOT NO. 0B4-
HDW-F900_APR-55_005_1

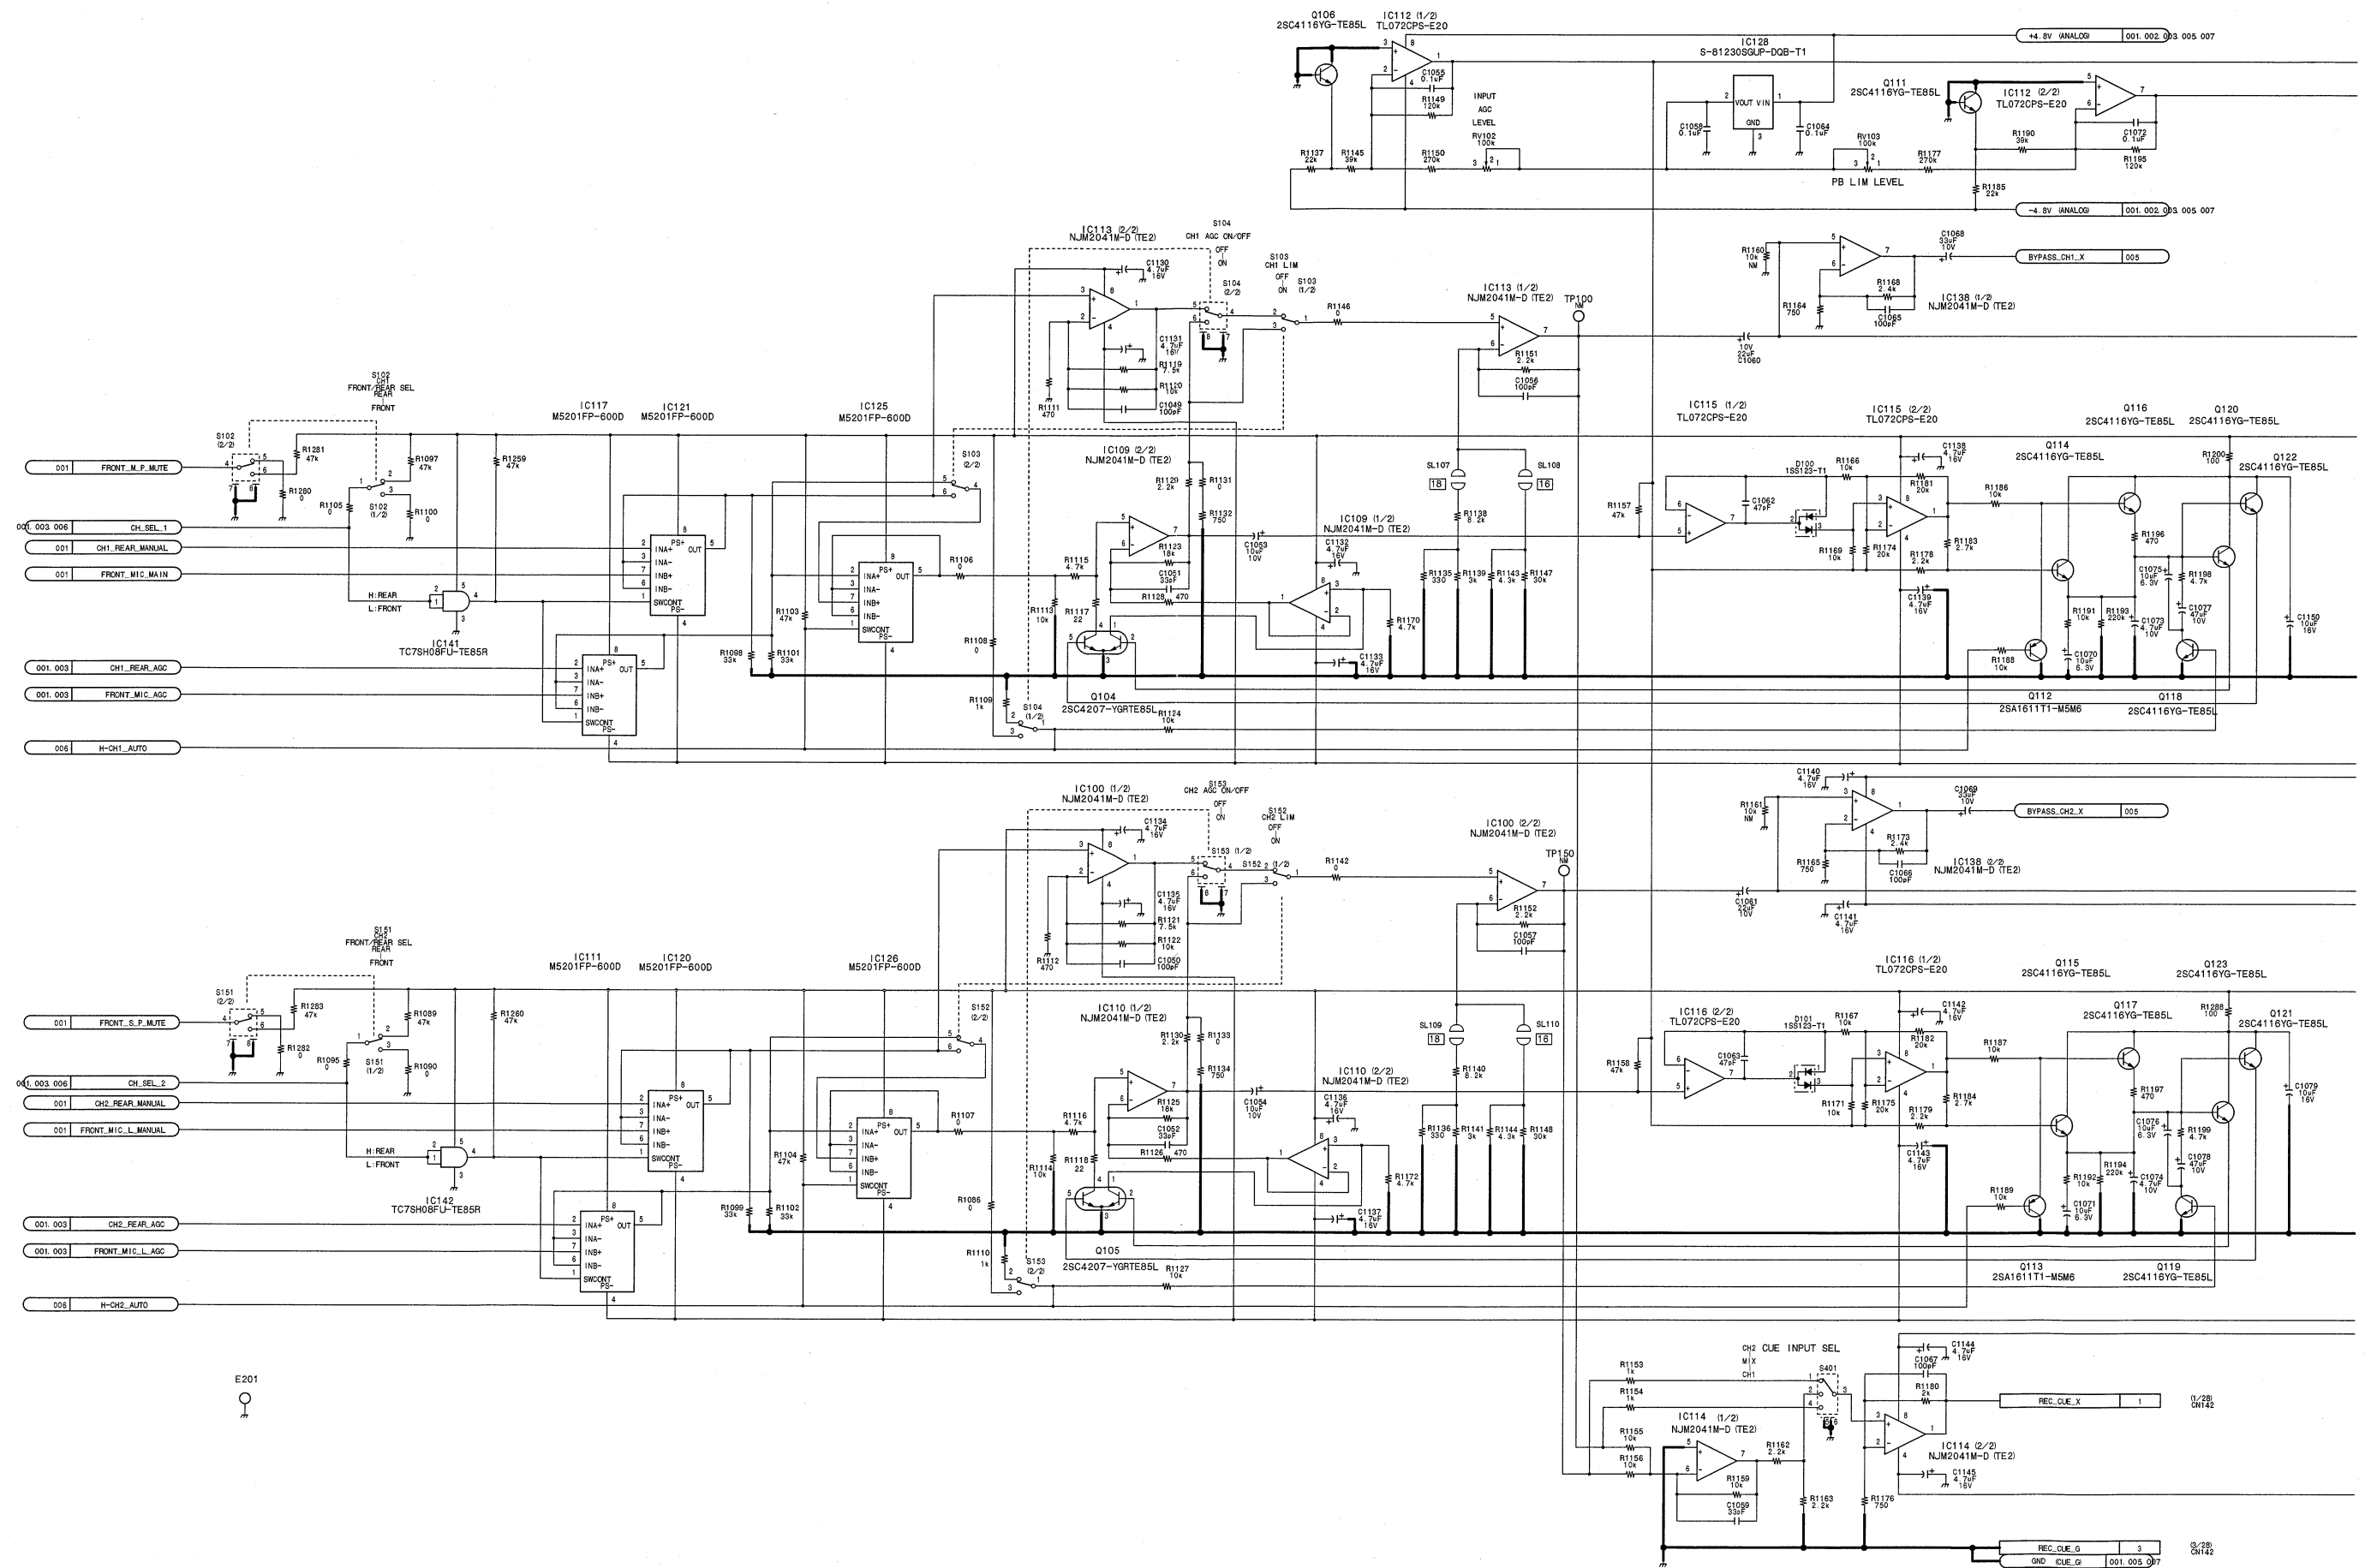

4-8 (b)


4-8 (b)



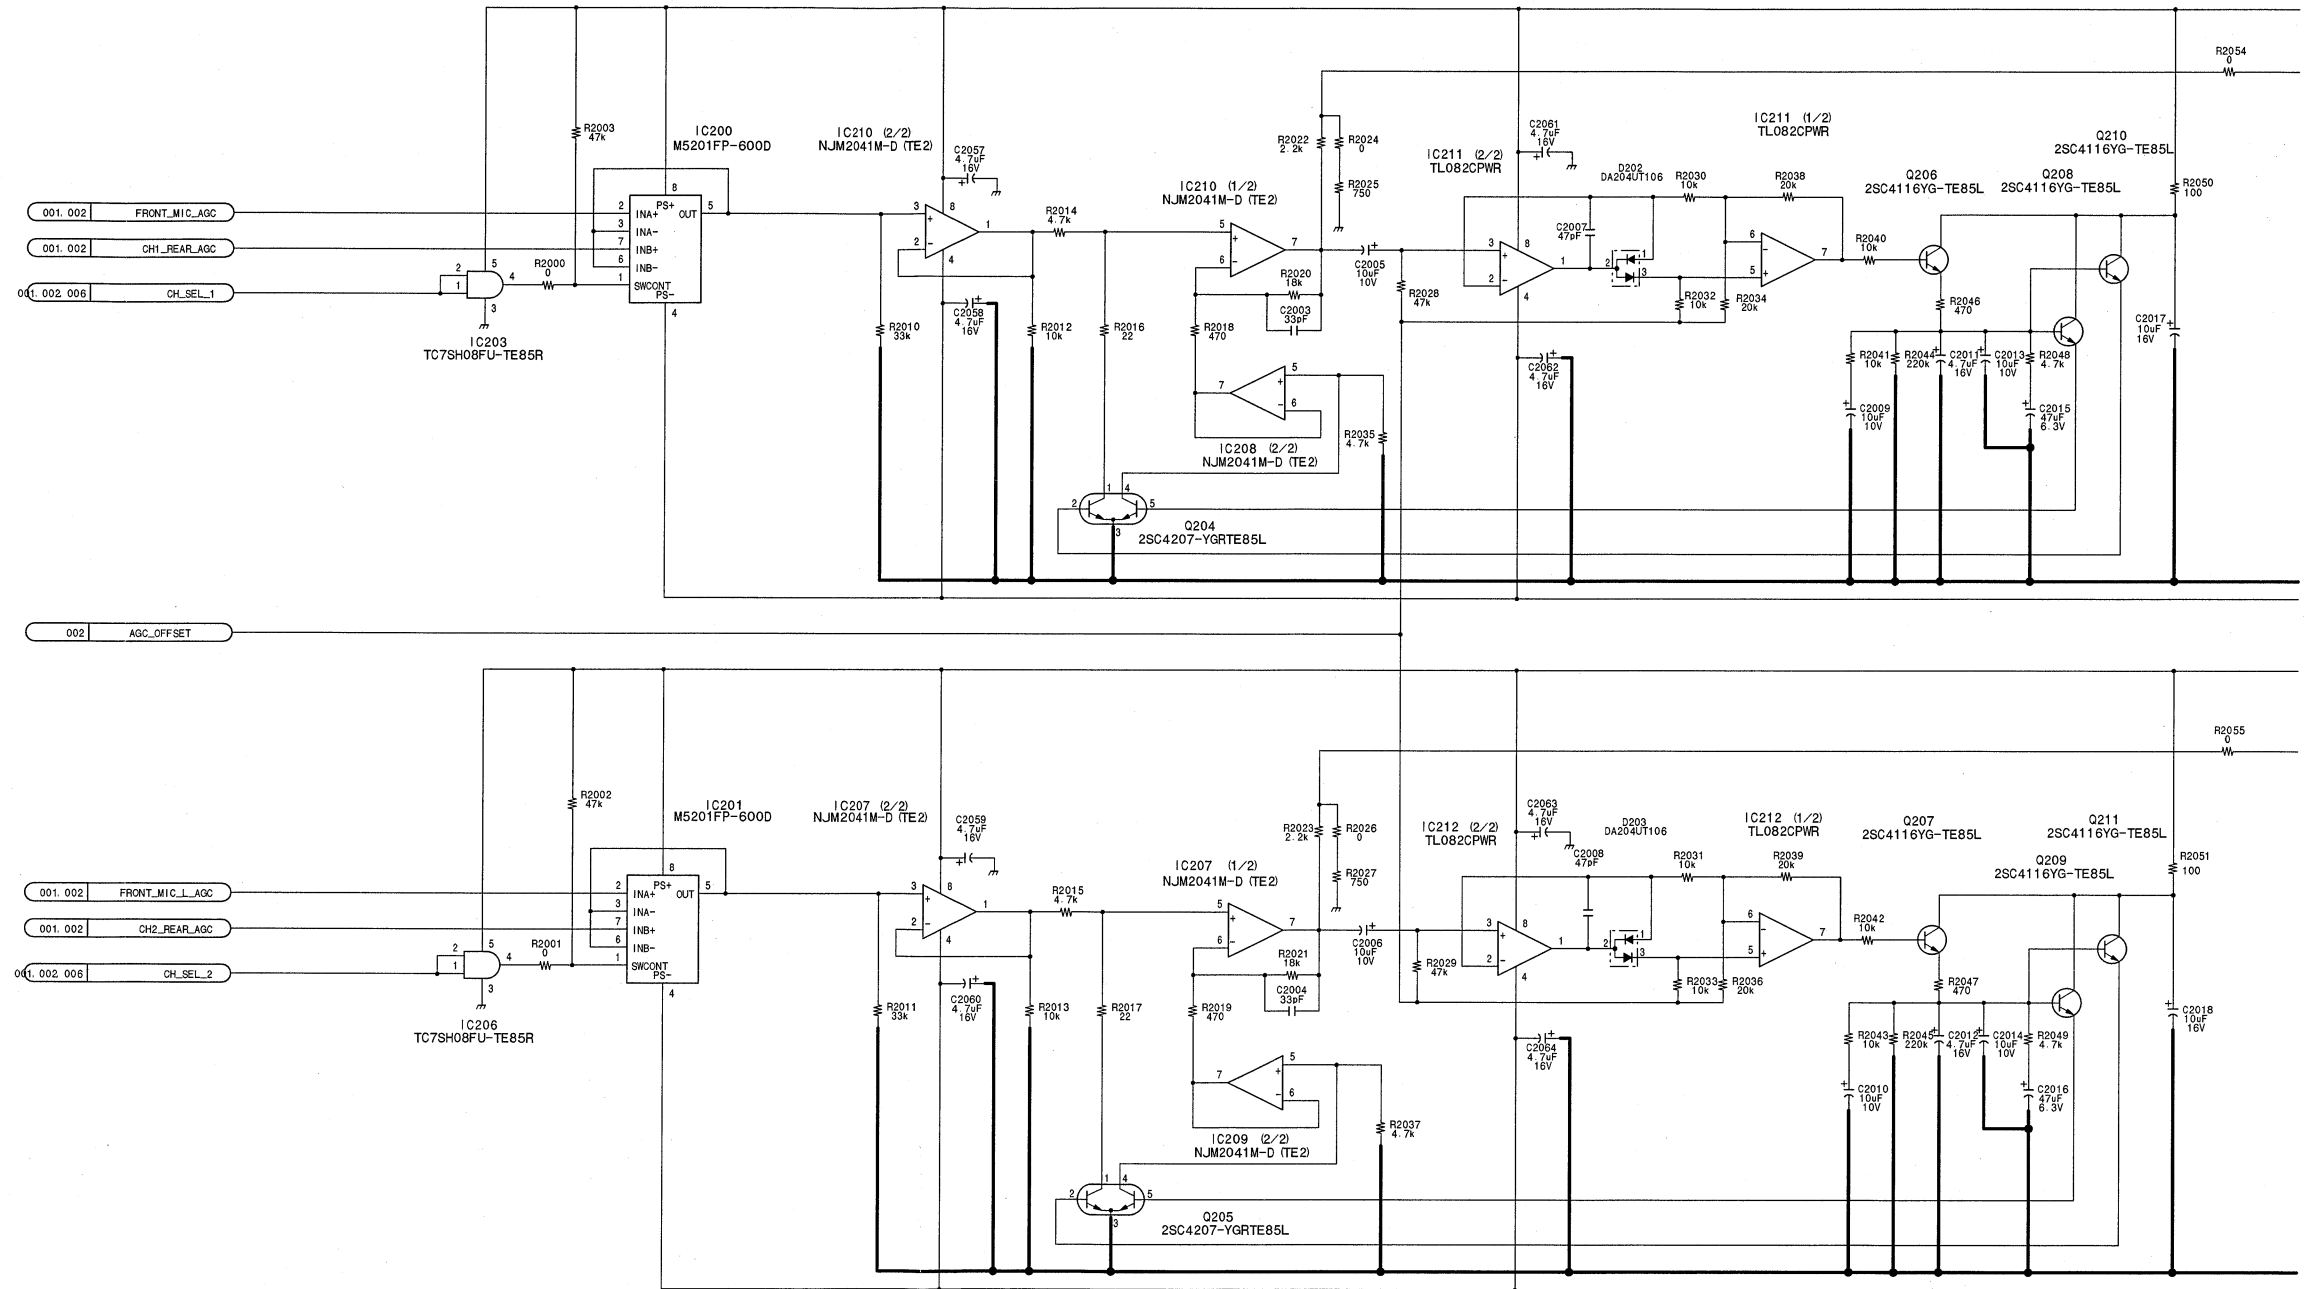



4-10 (b)


4-10 (b)

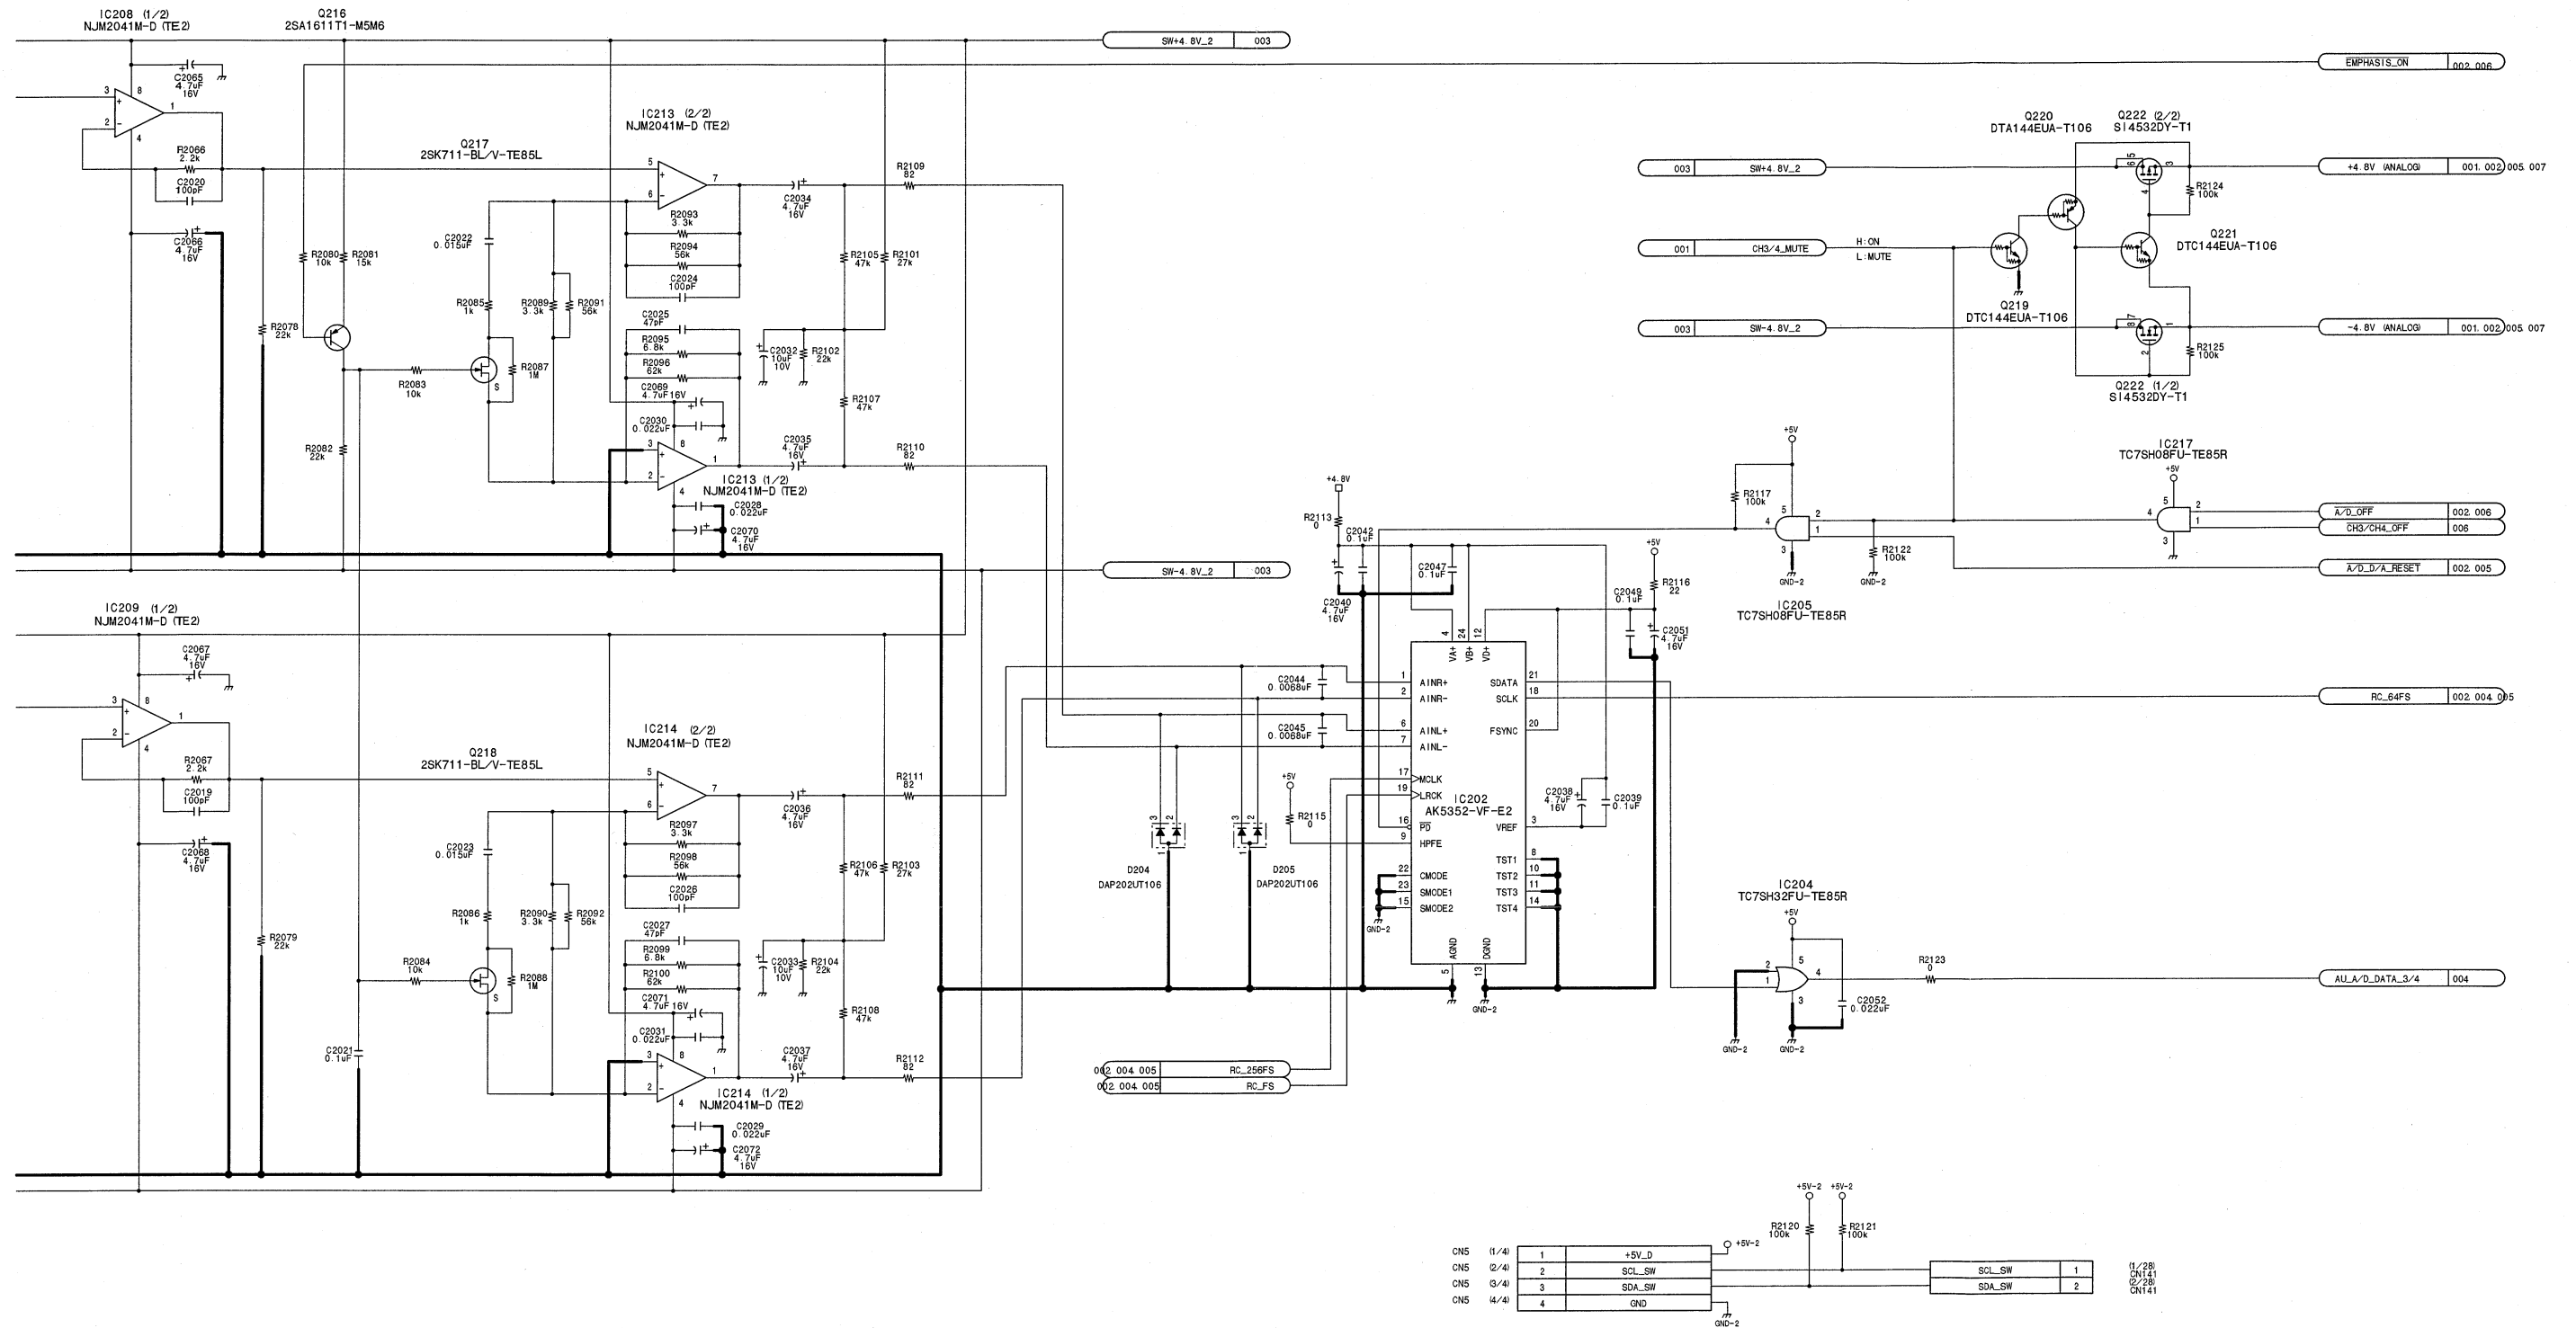

Audio processor
APR-55 (3/7)
 BOARD NO. 1-677-540-12
 LOT NO. 0B4-
 HDW-F900_APR-55_005_3

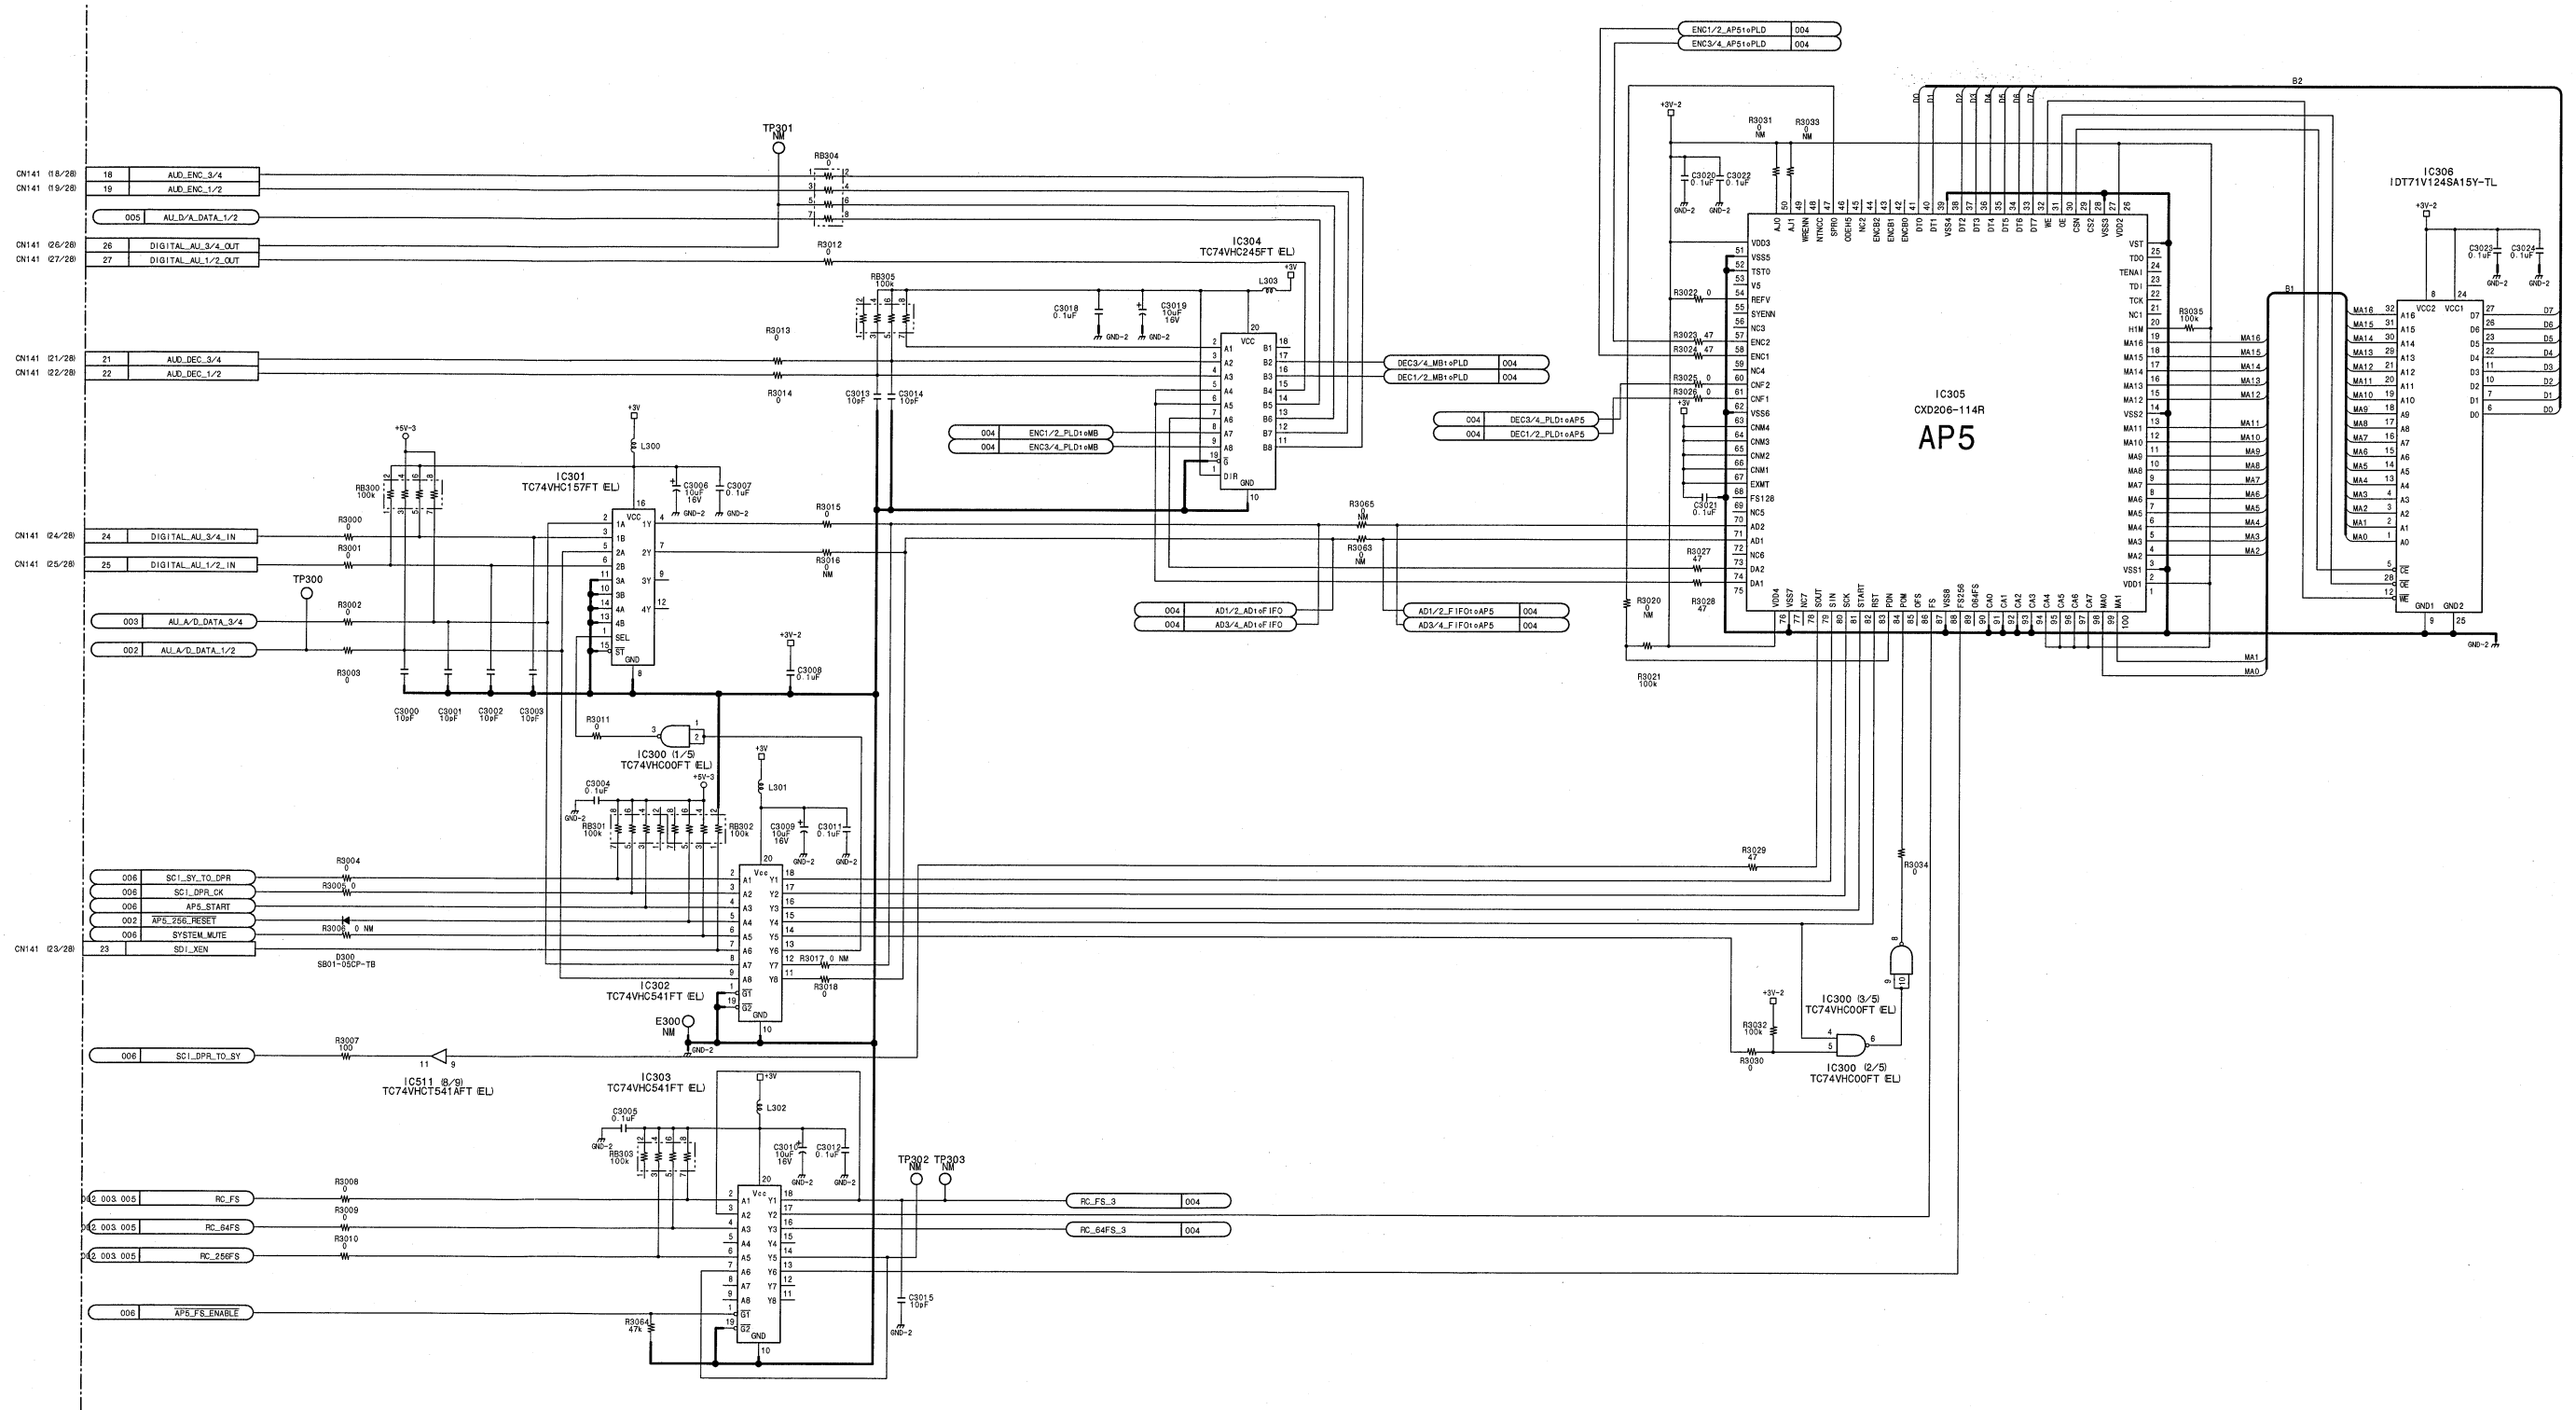




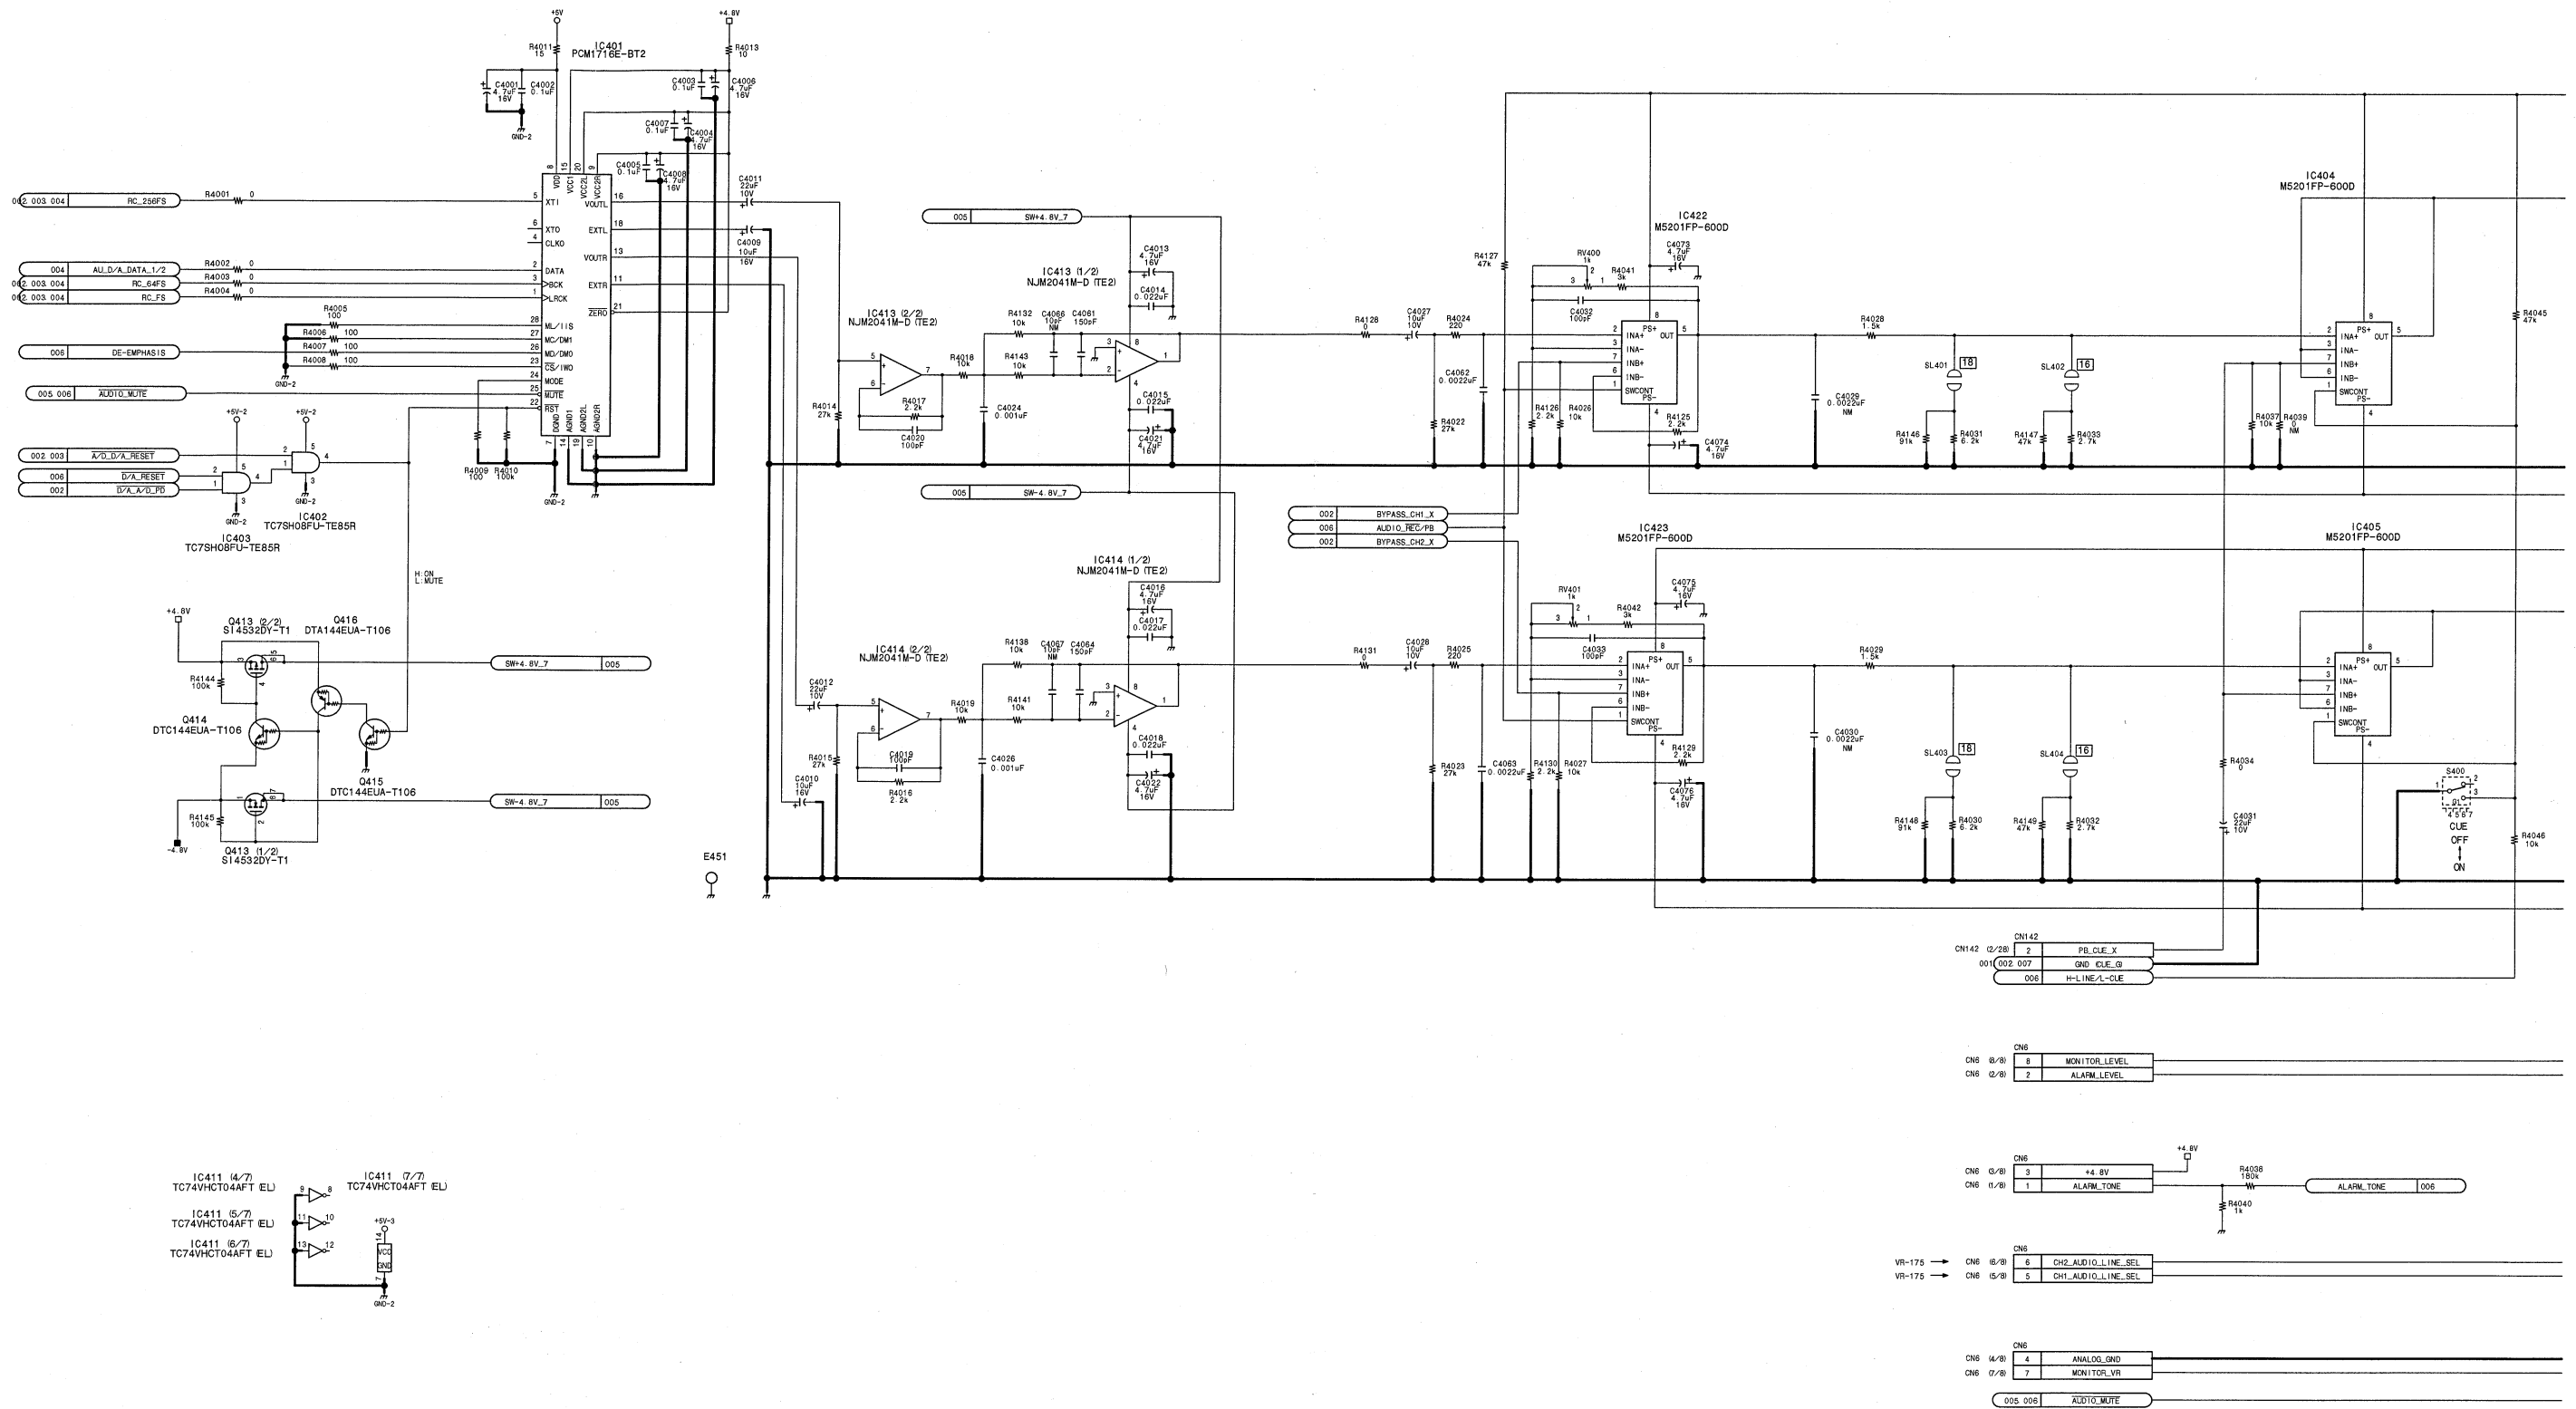



4-14 (b)

4-14 (b)


HDW-F900 P2V2

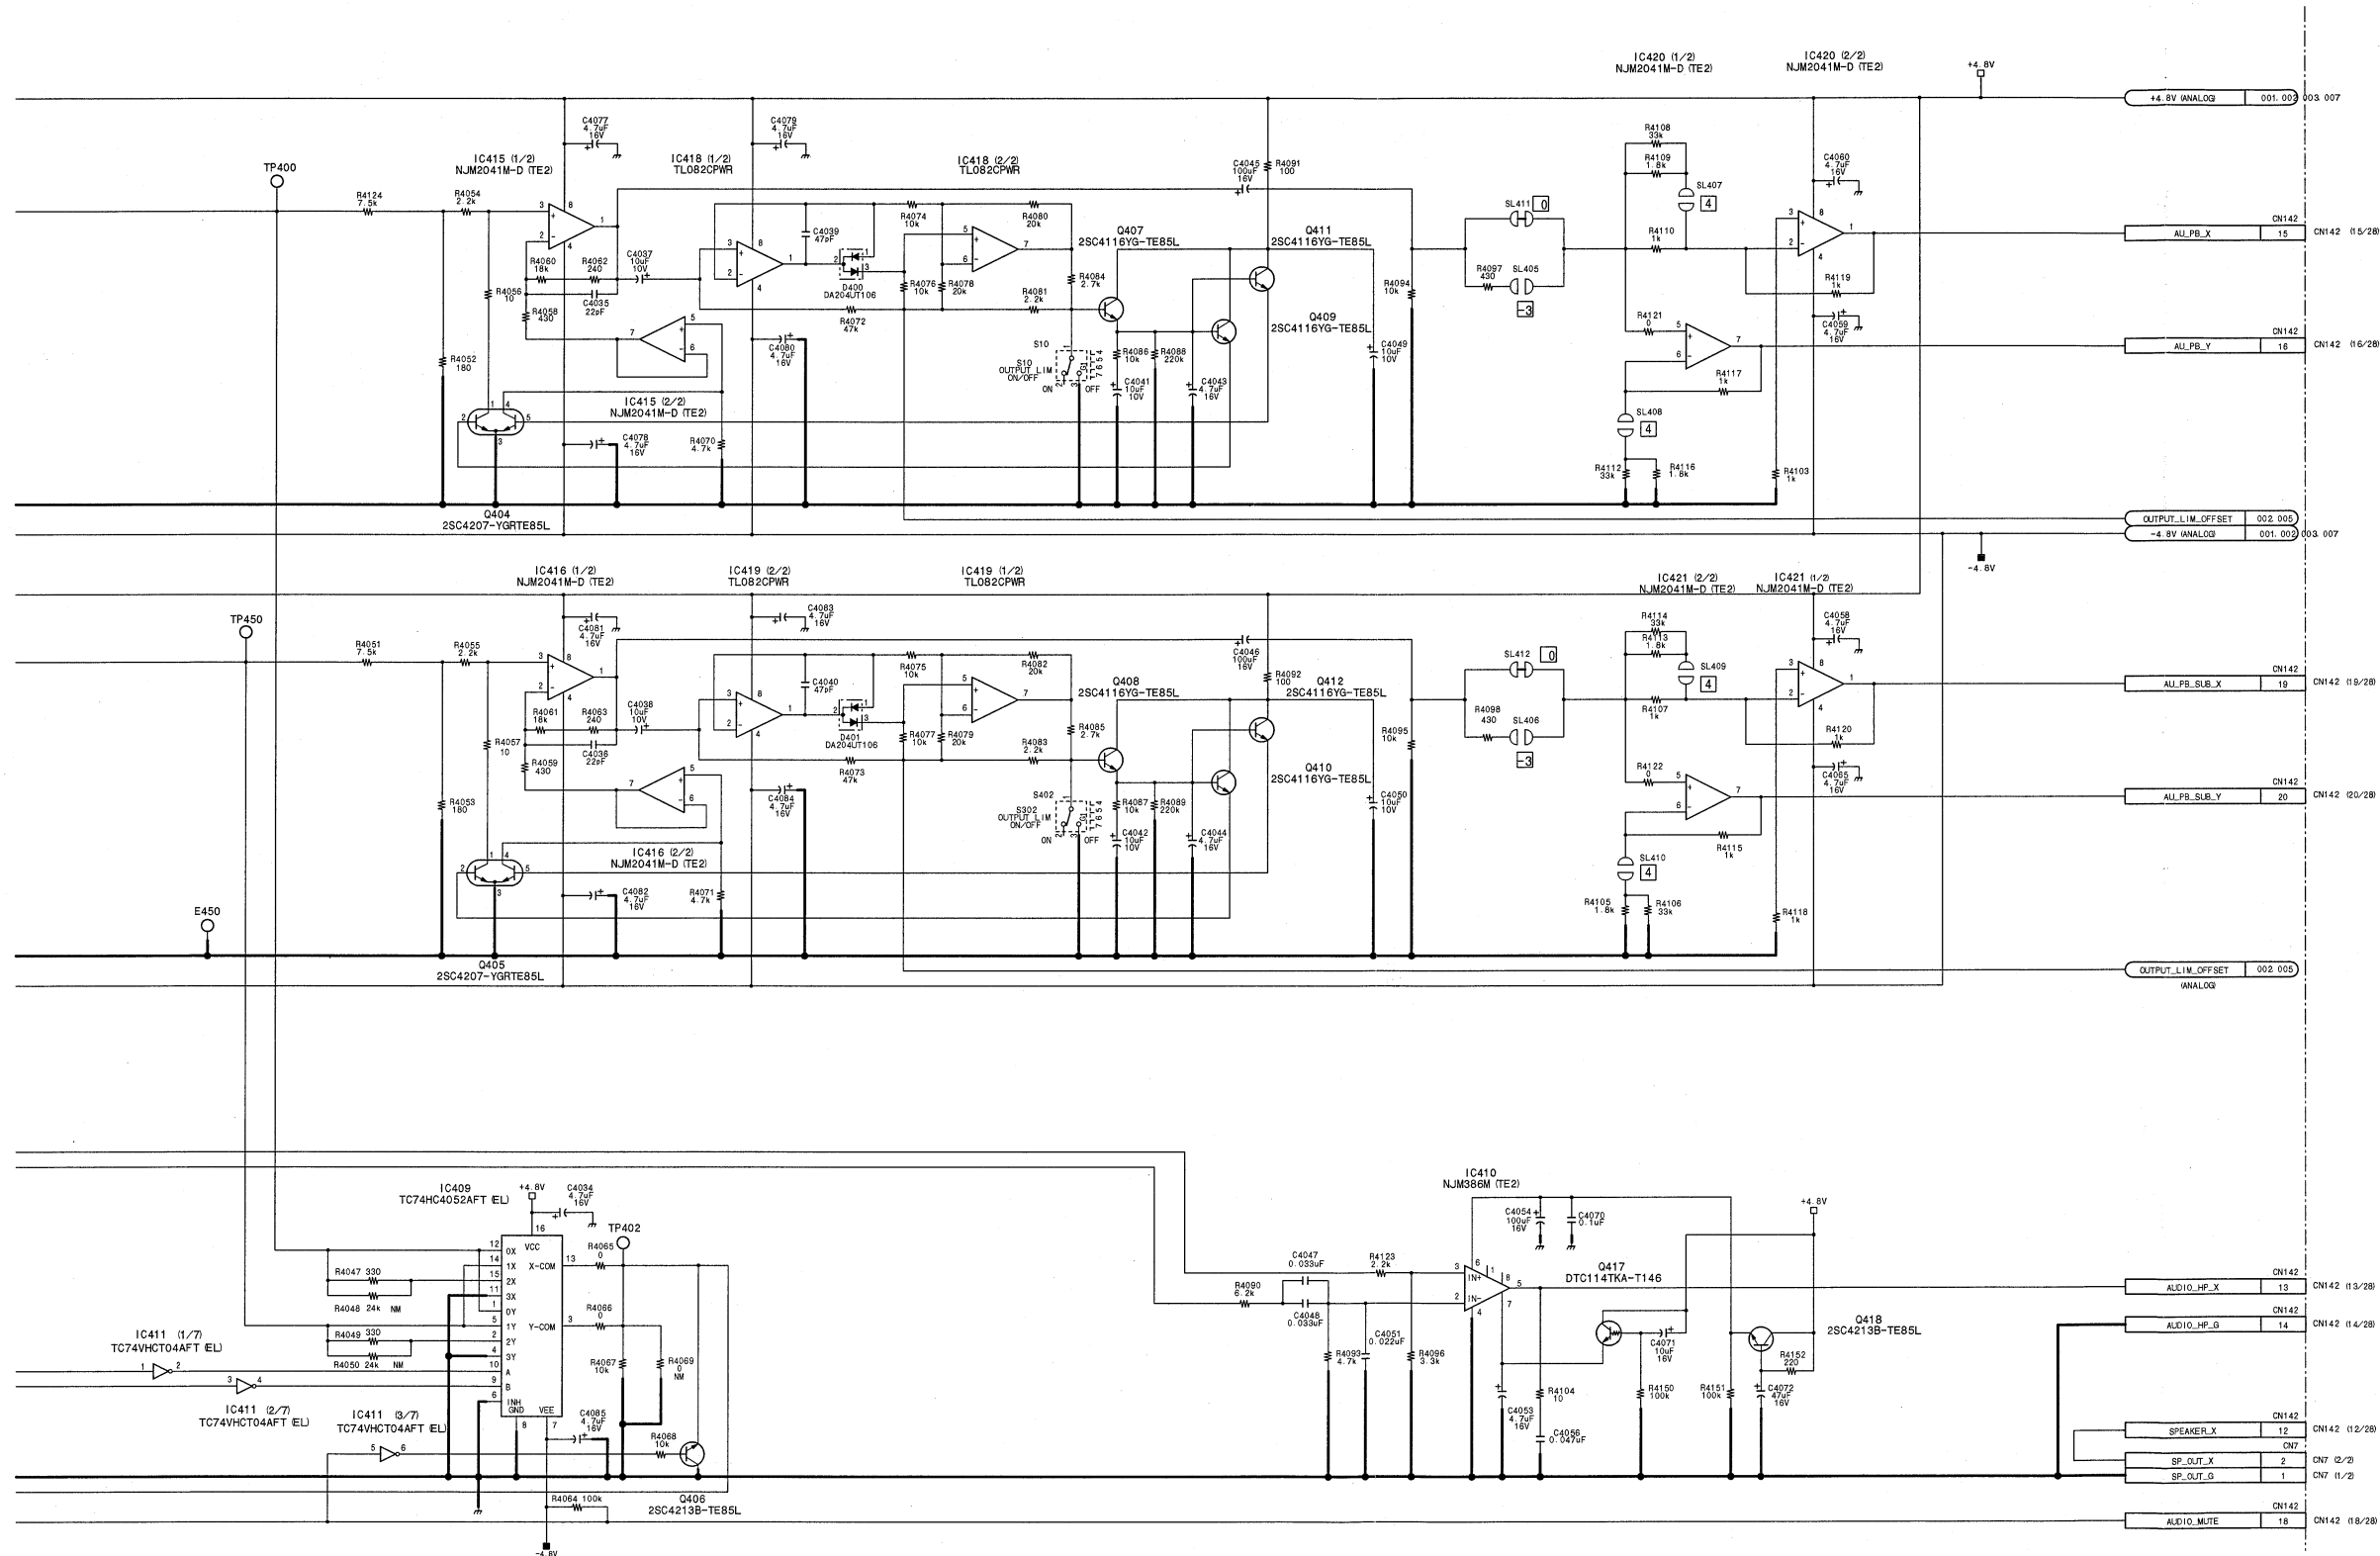


Audio processor
APR-55 (5/7)
 BOARD NO. 1-677-540-12
 LOT NO. 0B4-
 HDW-F900_APR-55_005_5

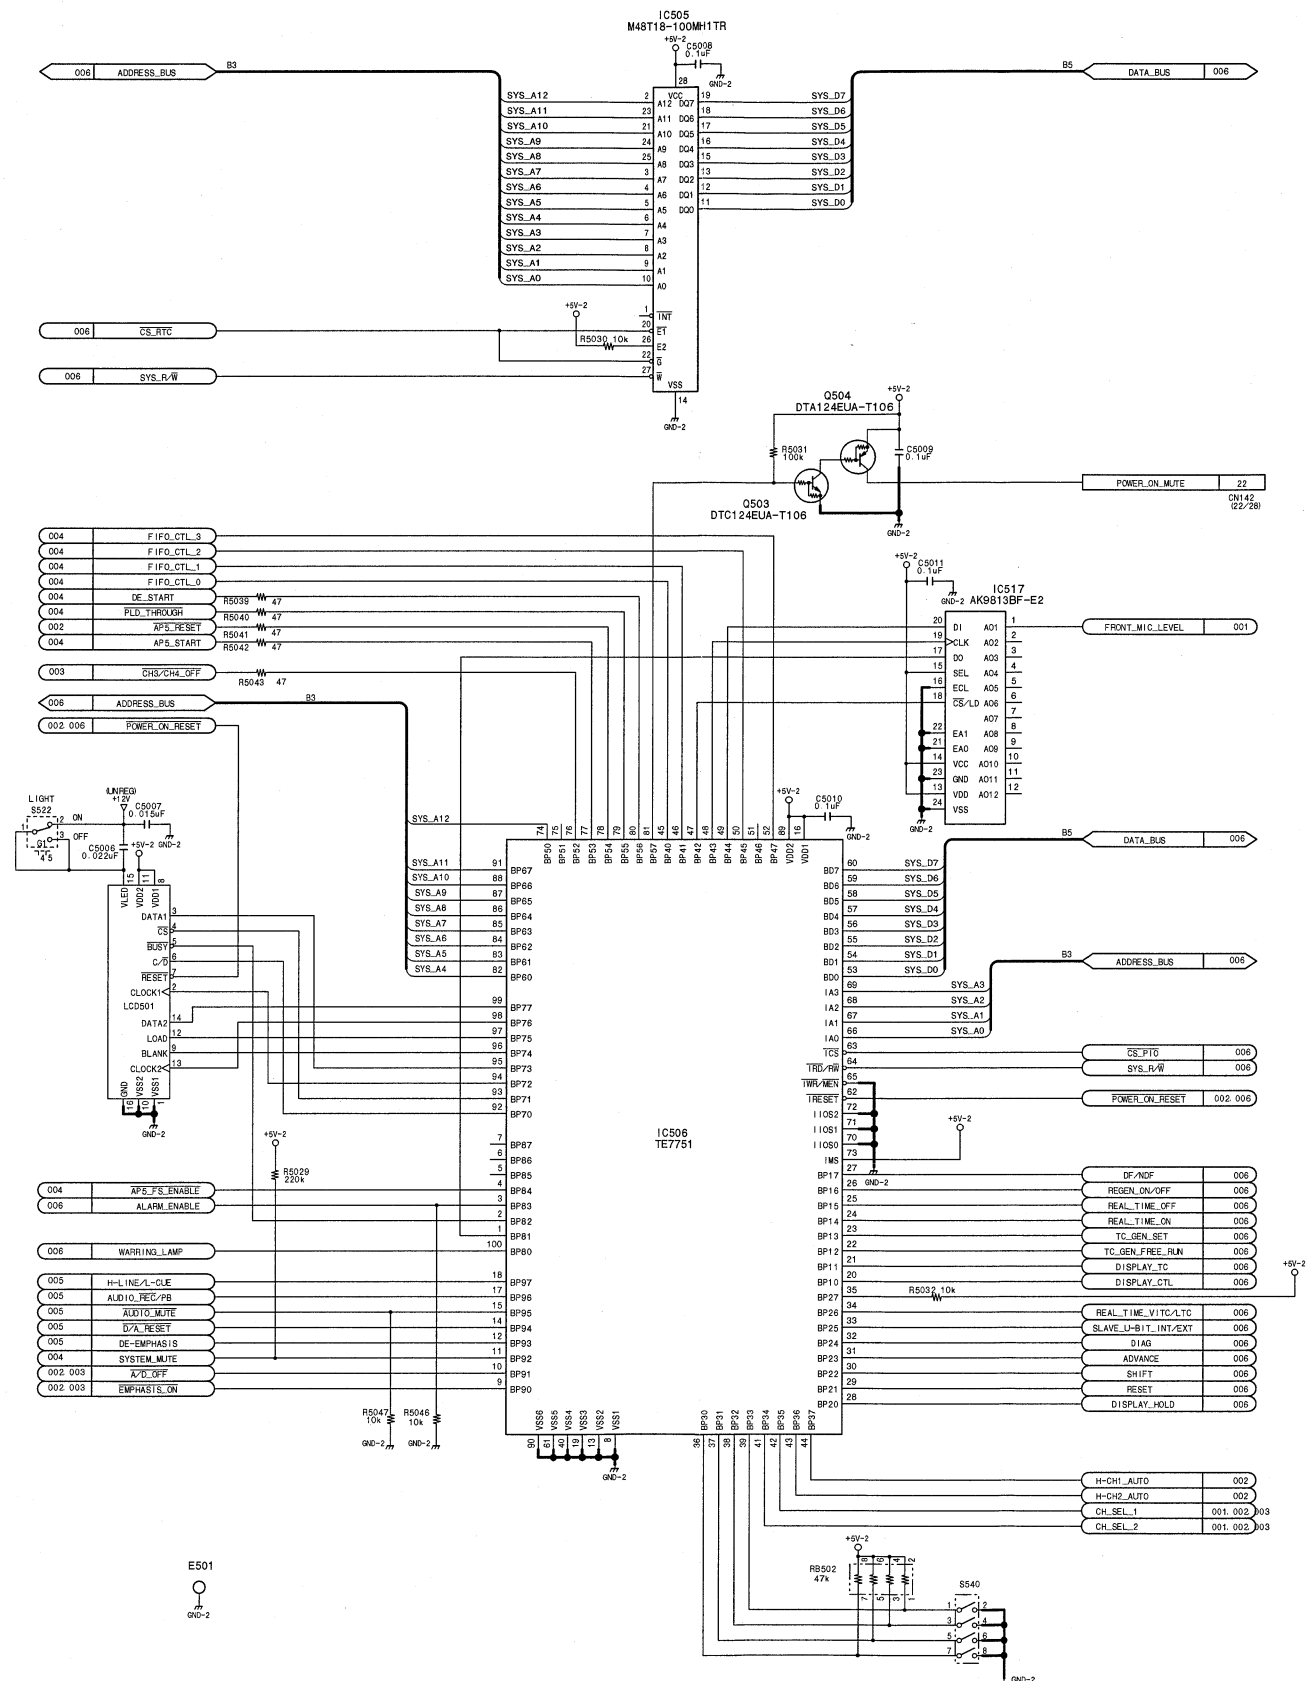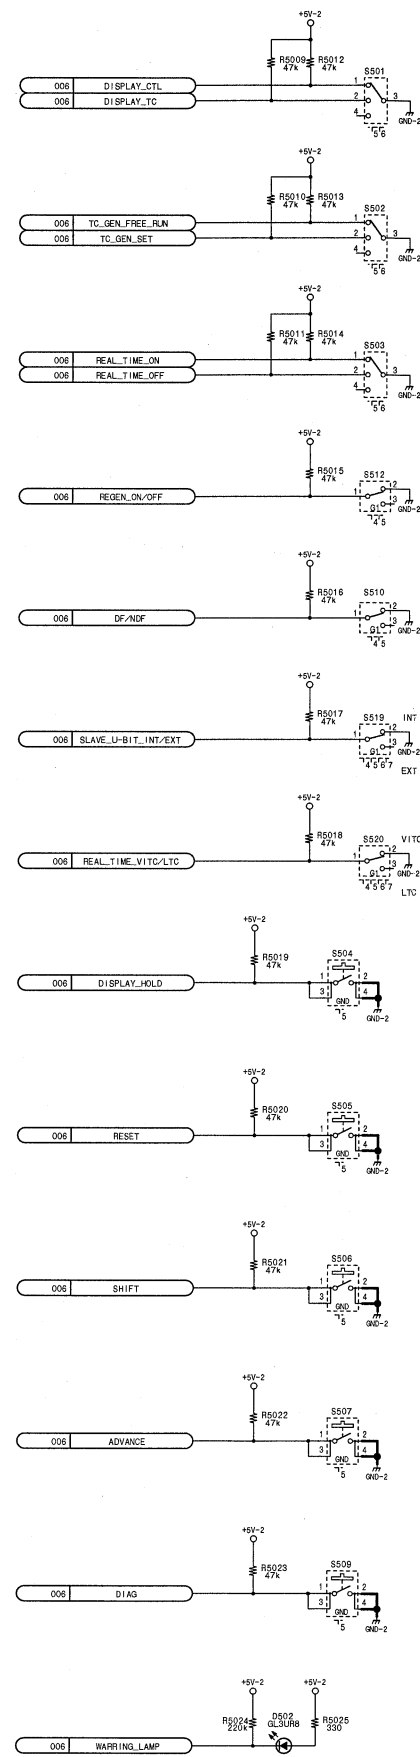


H

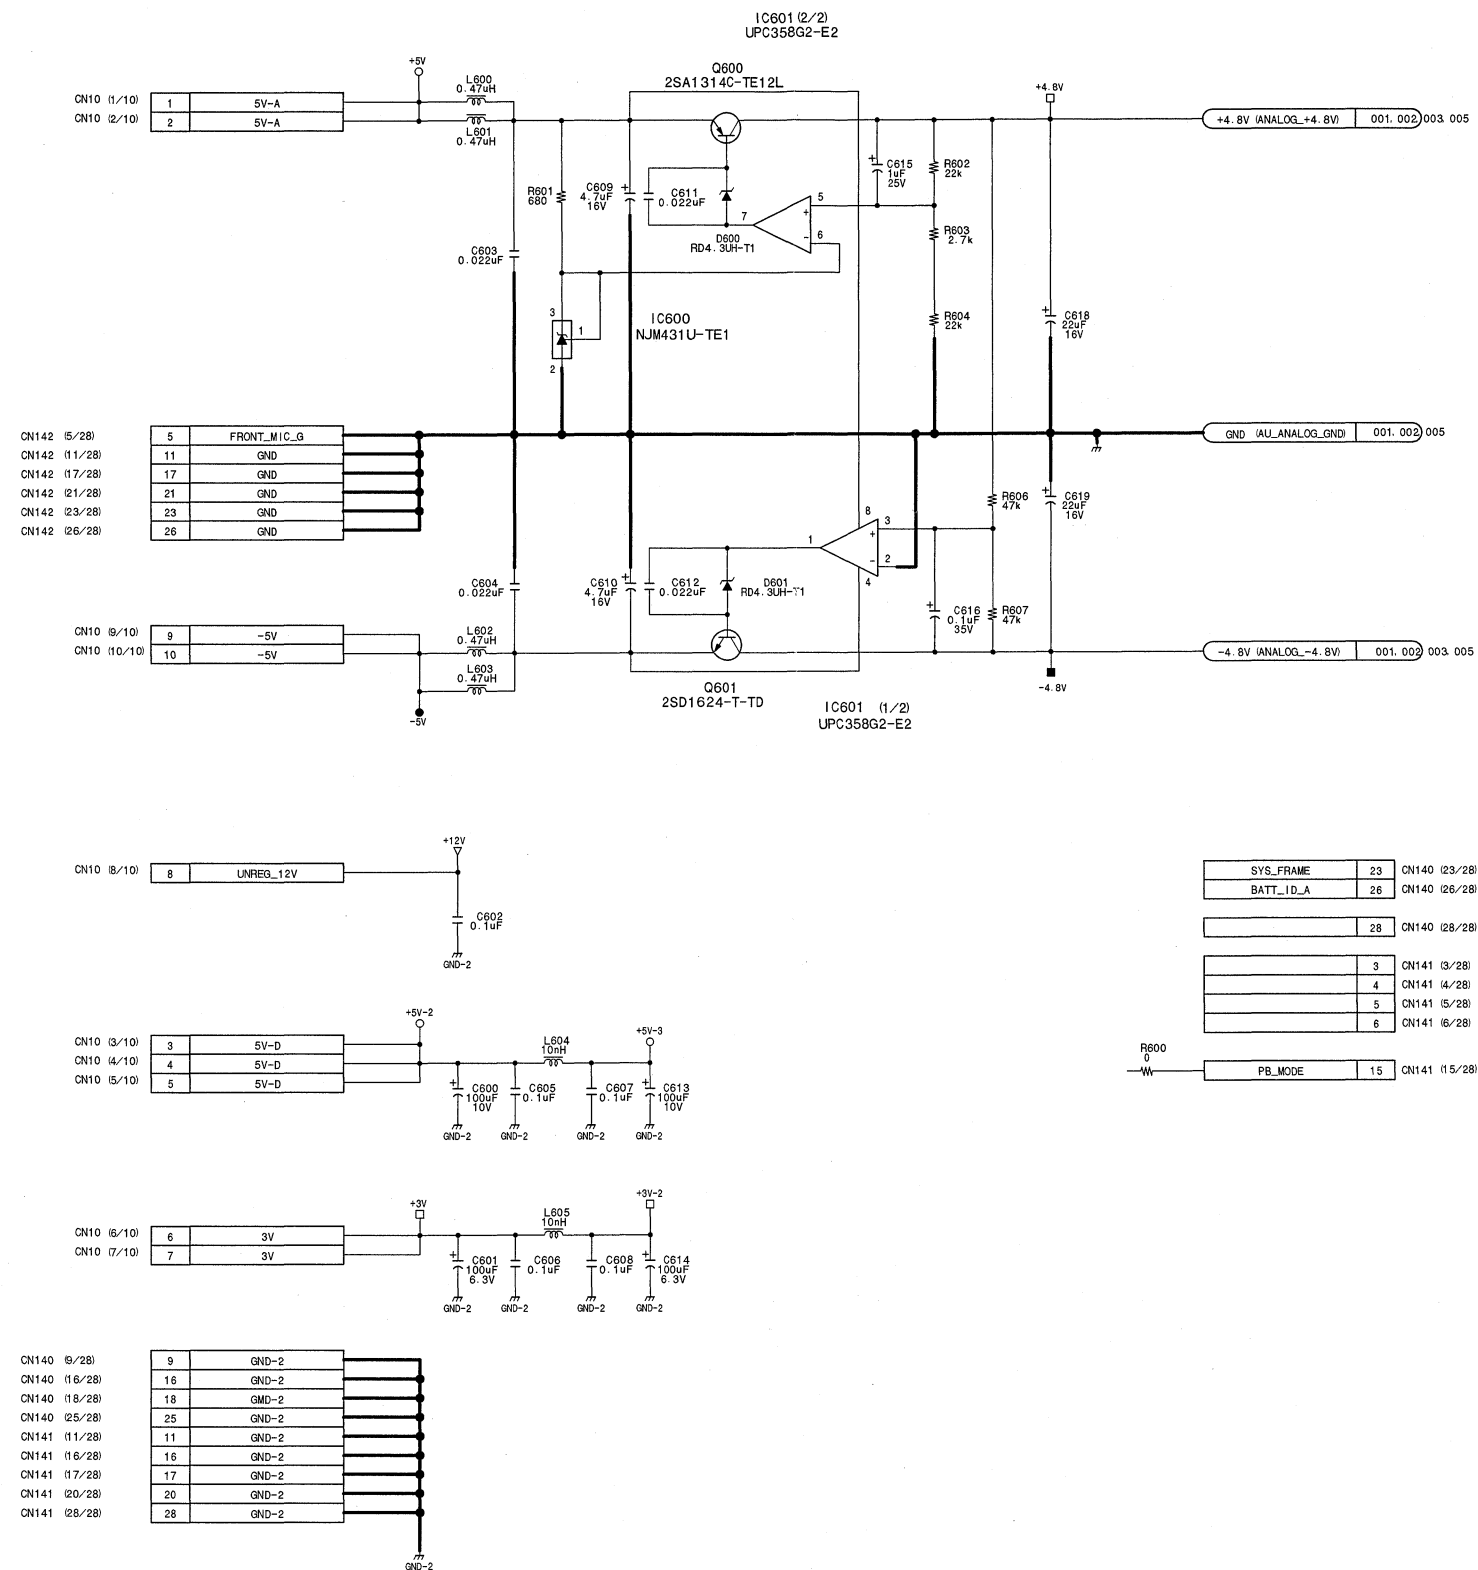


Audio processor
APR-55 (7/7)
 BOARD NO. 1-677-540-12
 LOT NO. 0B4-
 HDW-F900_APR-55_005_7

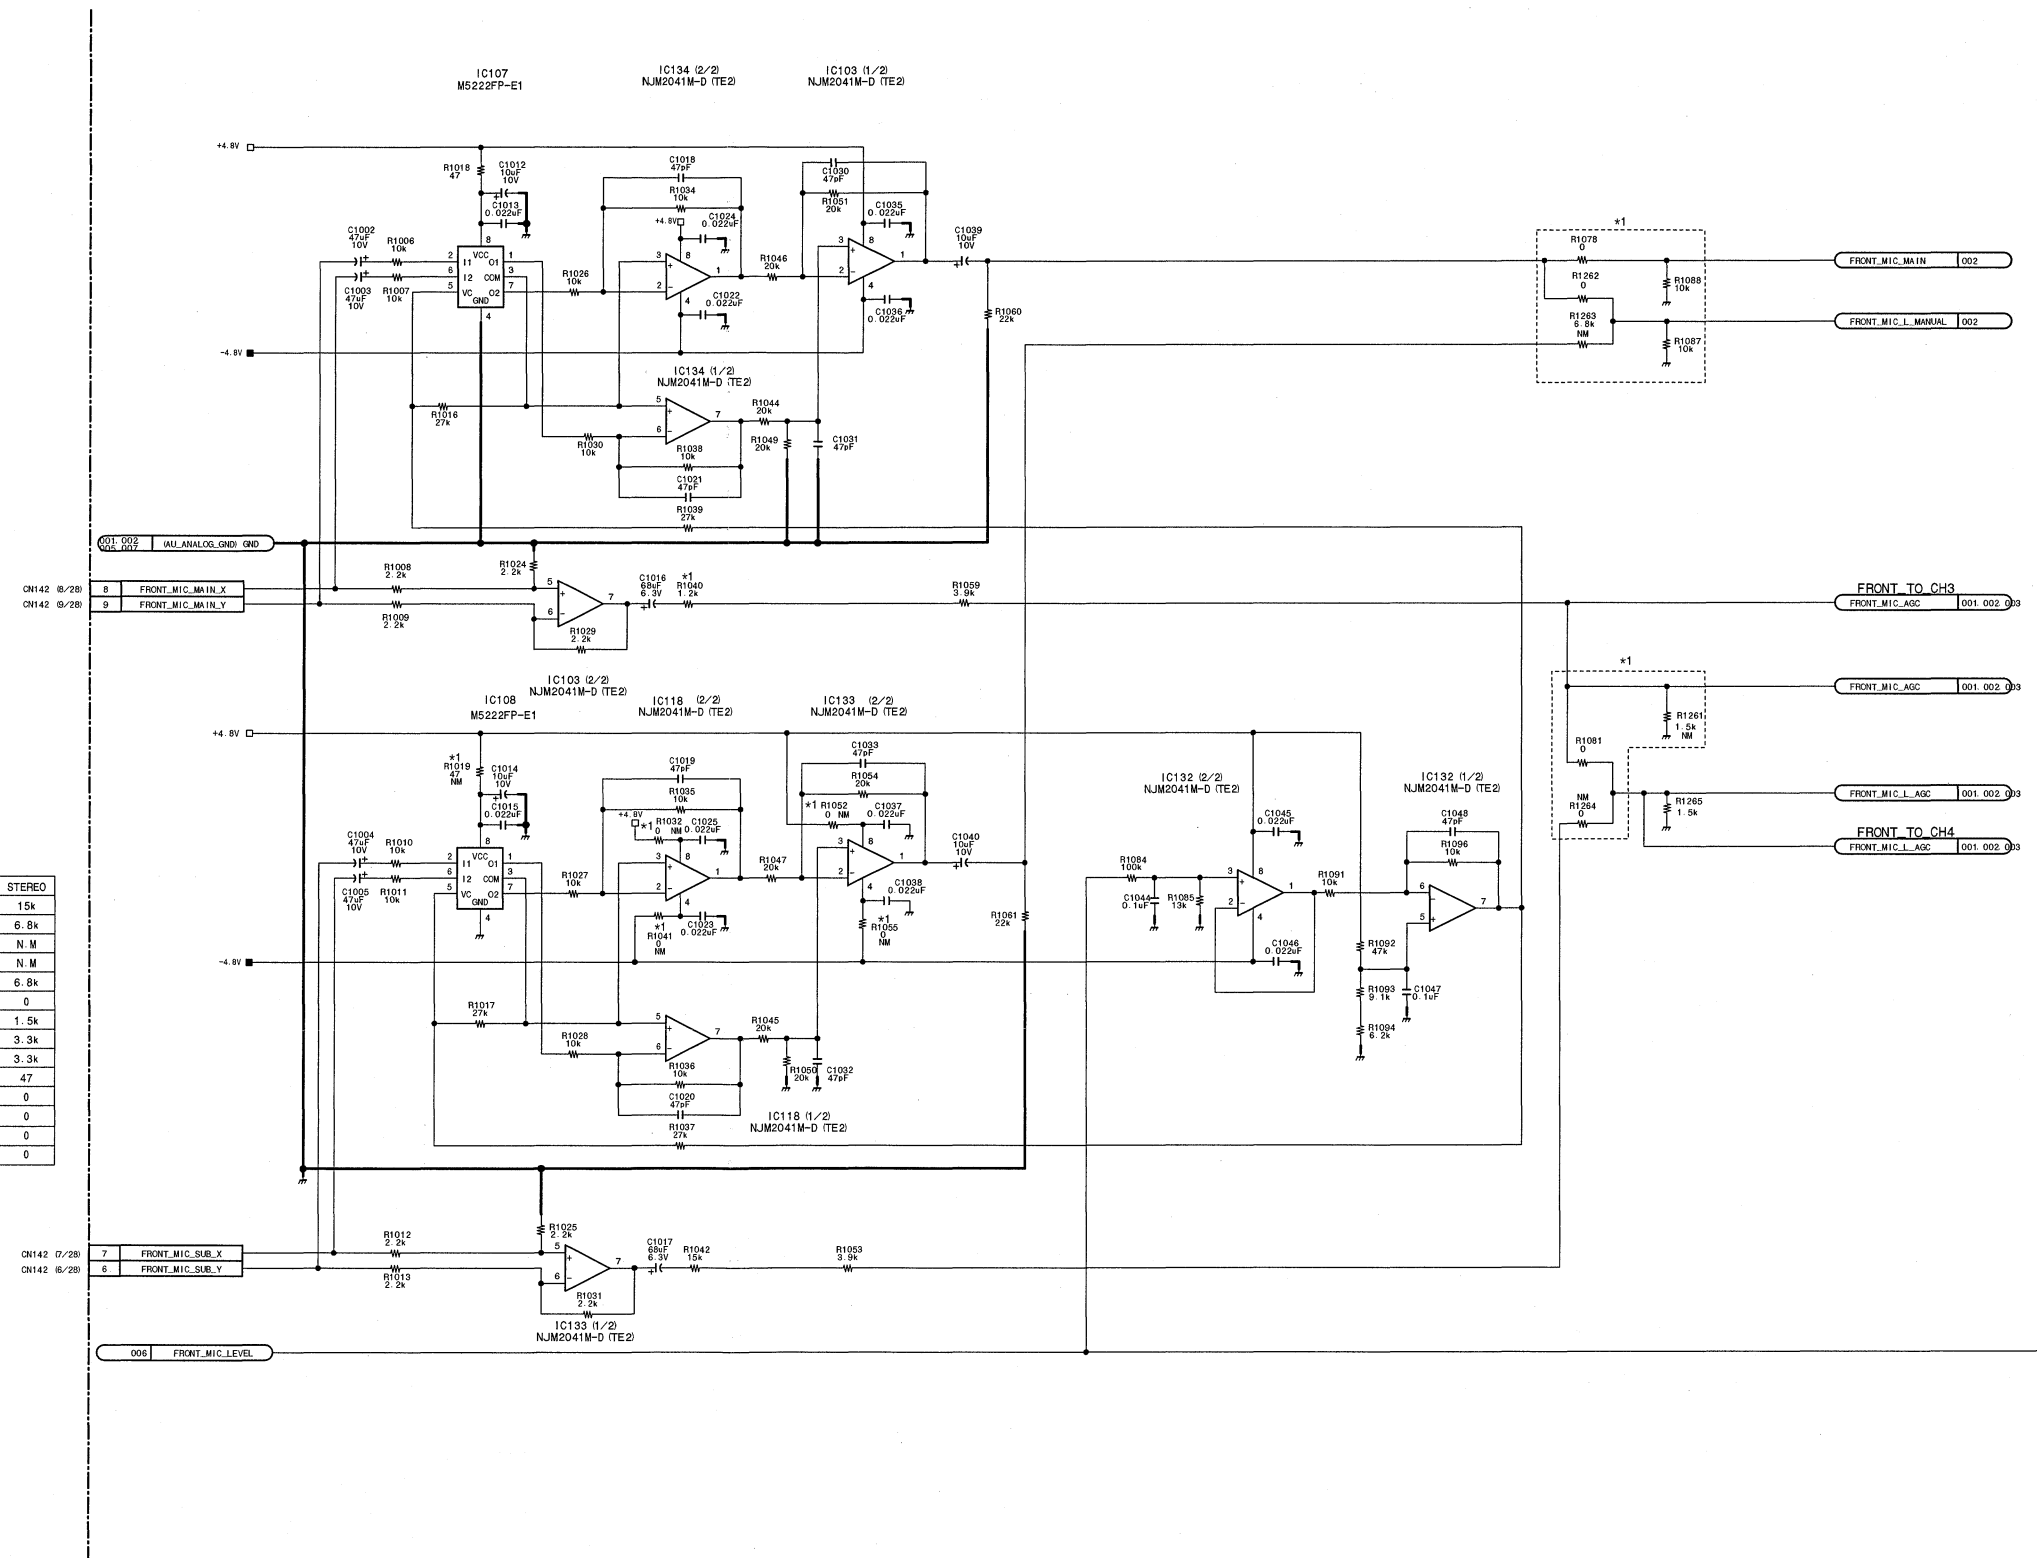


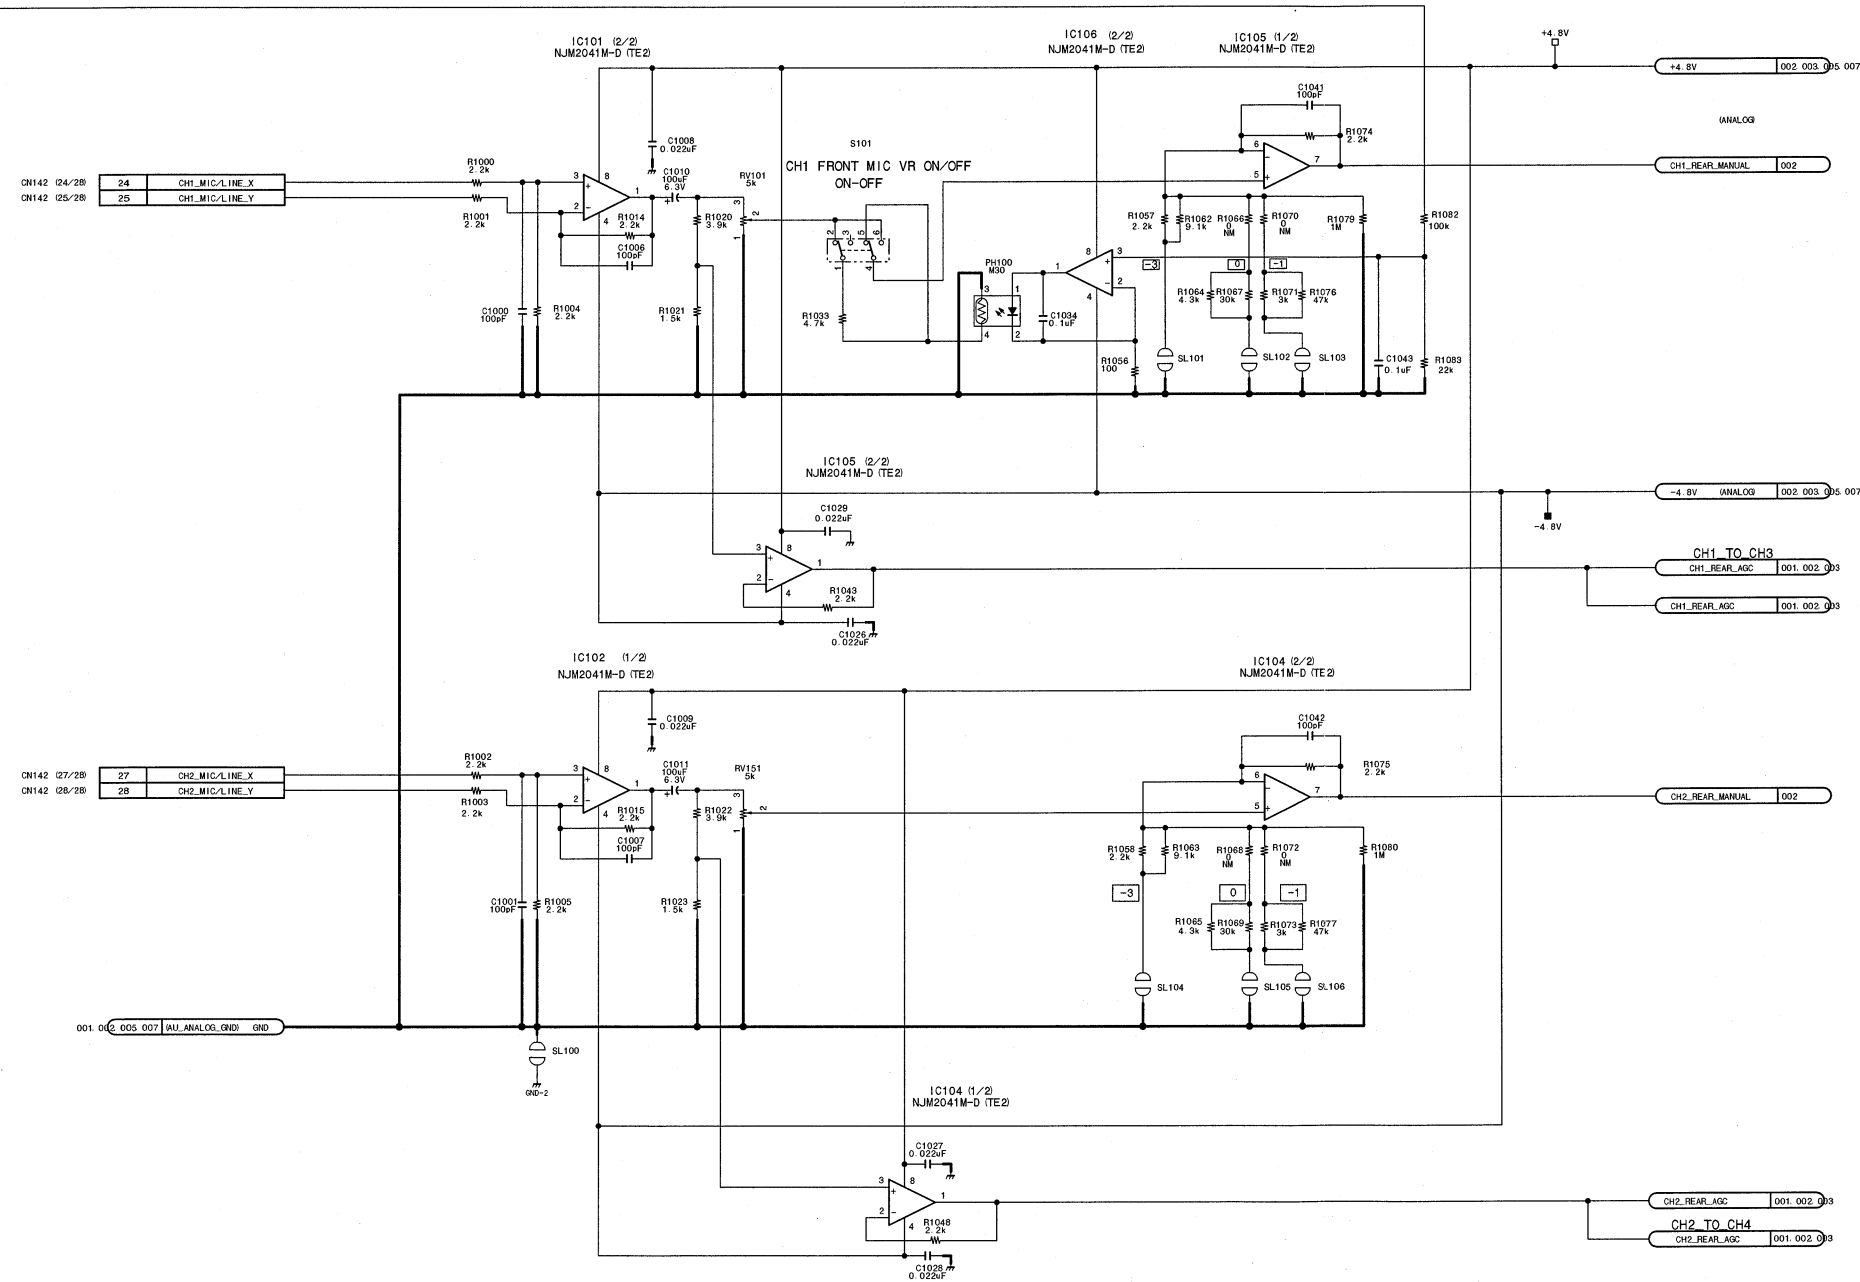


Audio processor
APR-55 (1/7)
 BOARD NO. 1-677-540-11
 LOT NO. 911-0B3
 HDW-F900V-APR-55_002_1

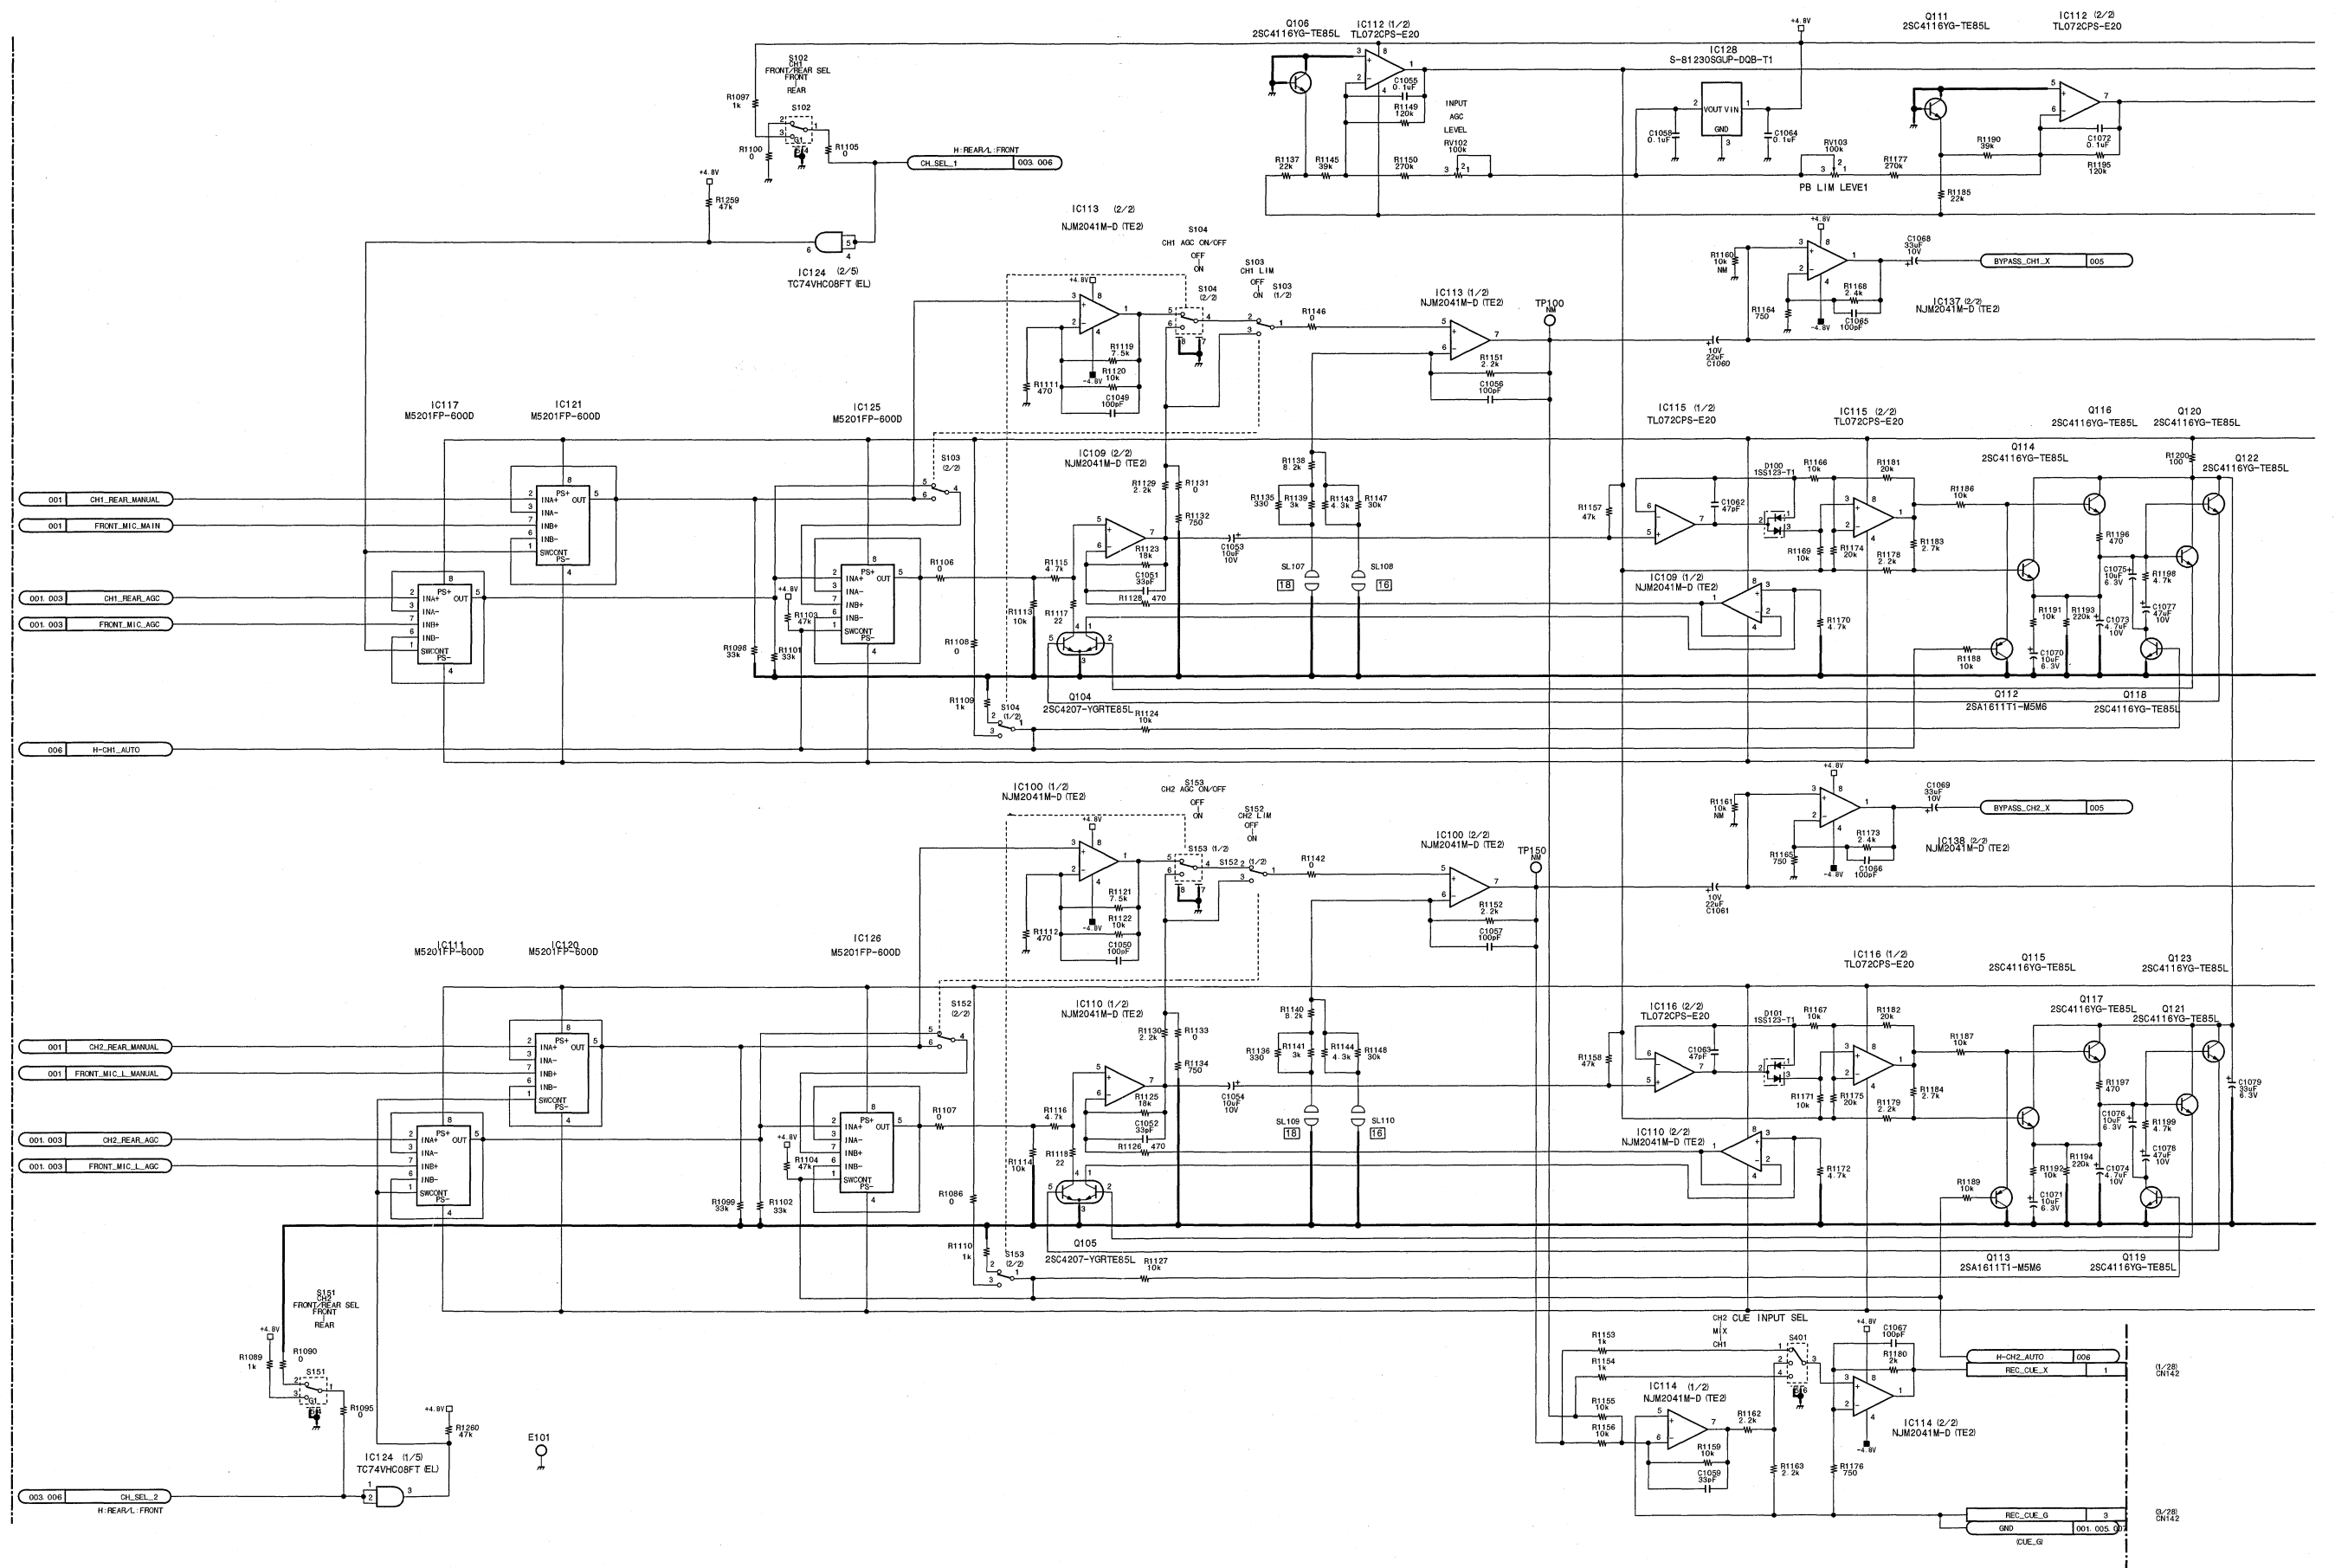



4-8 (a)

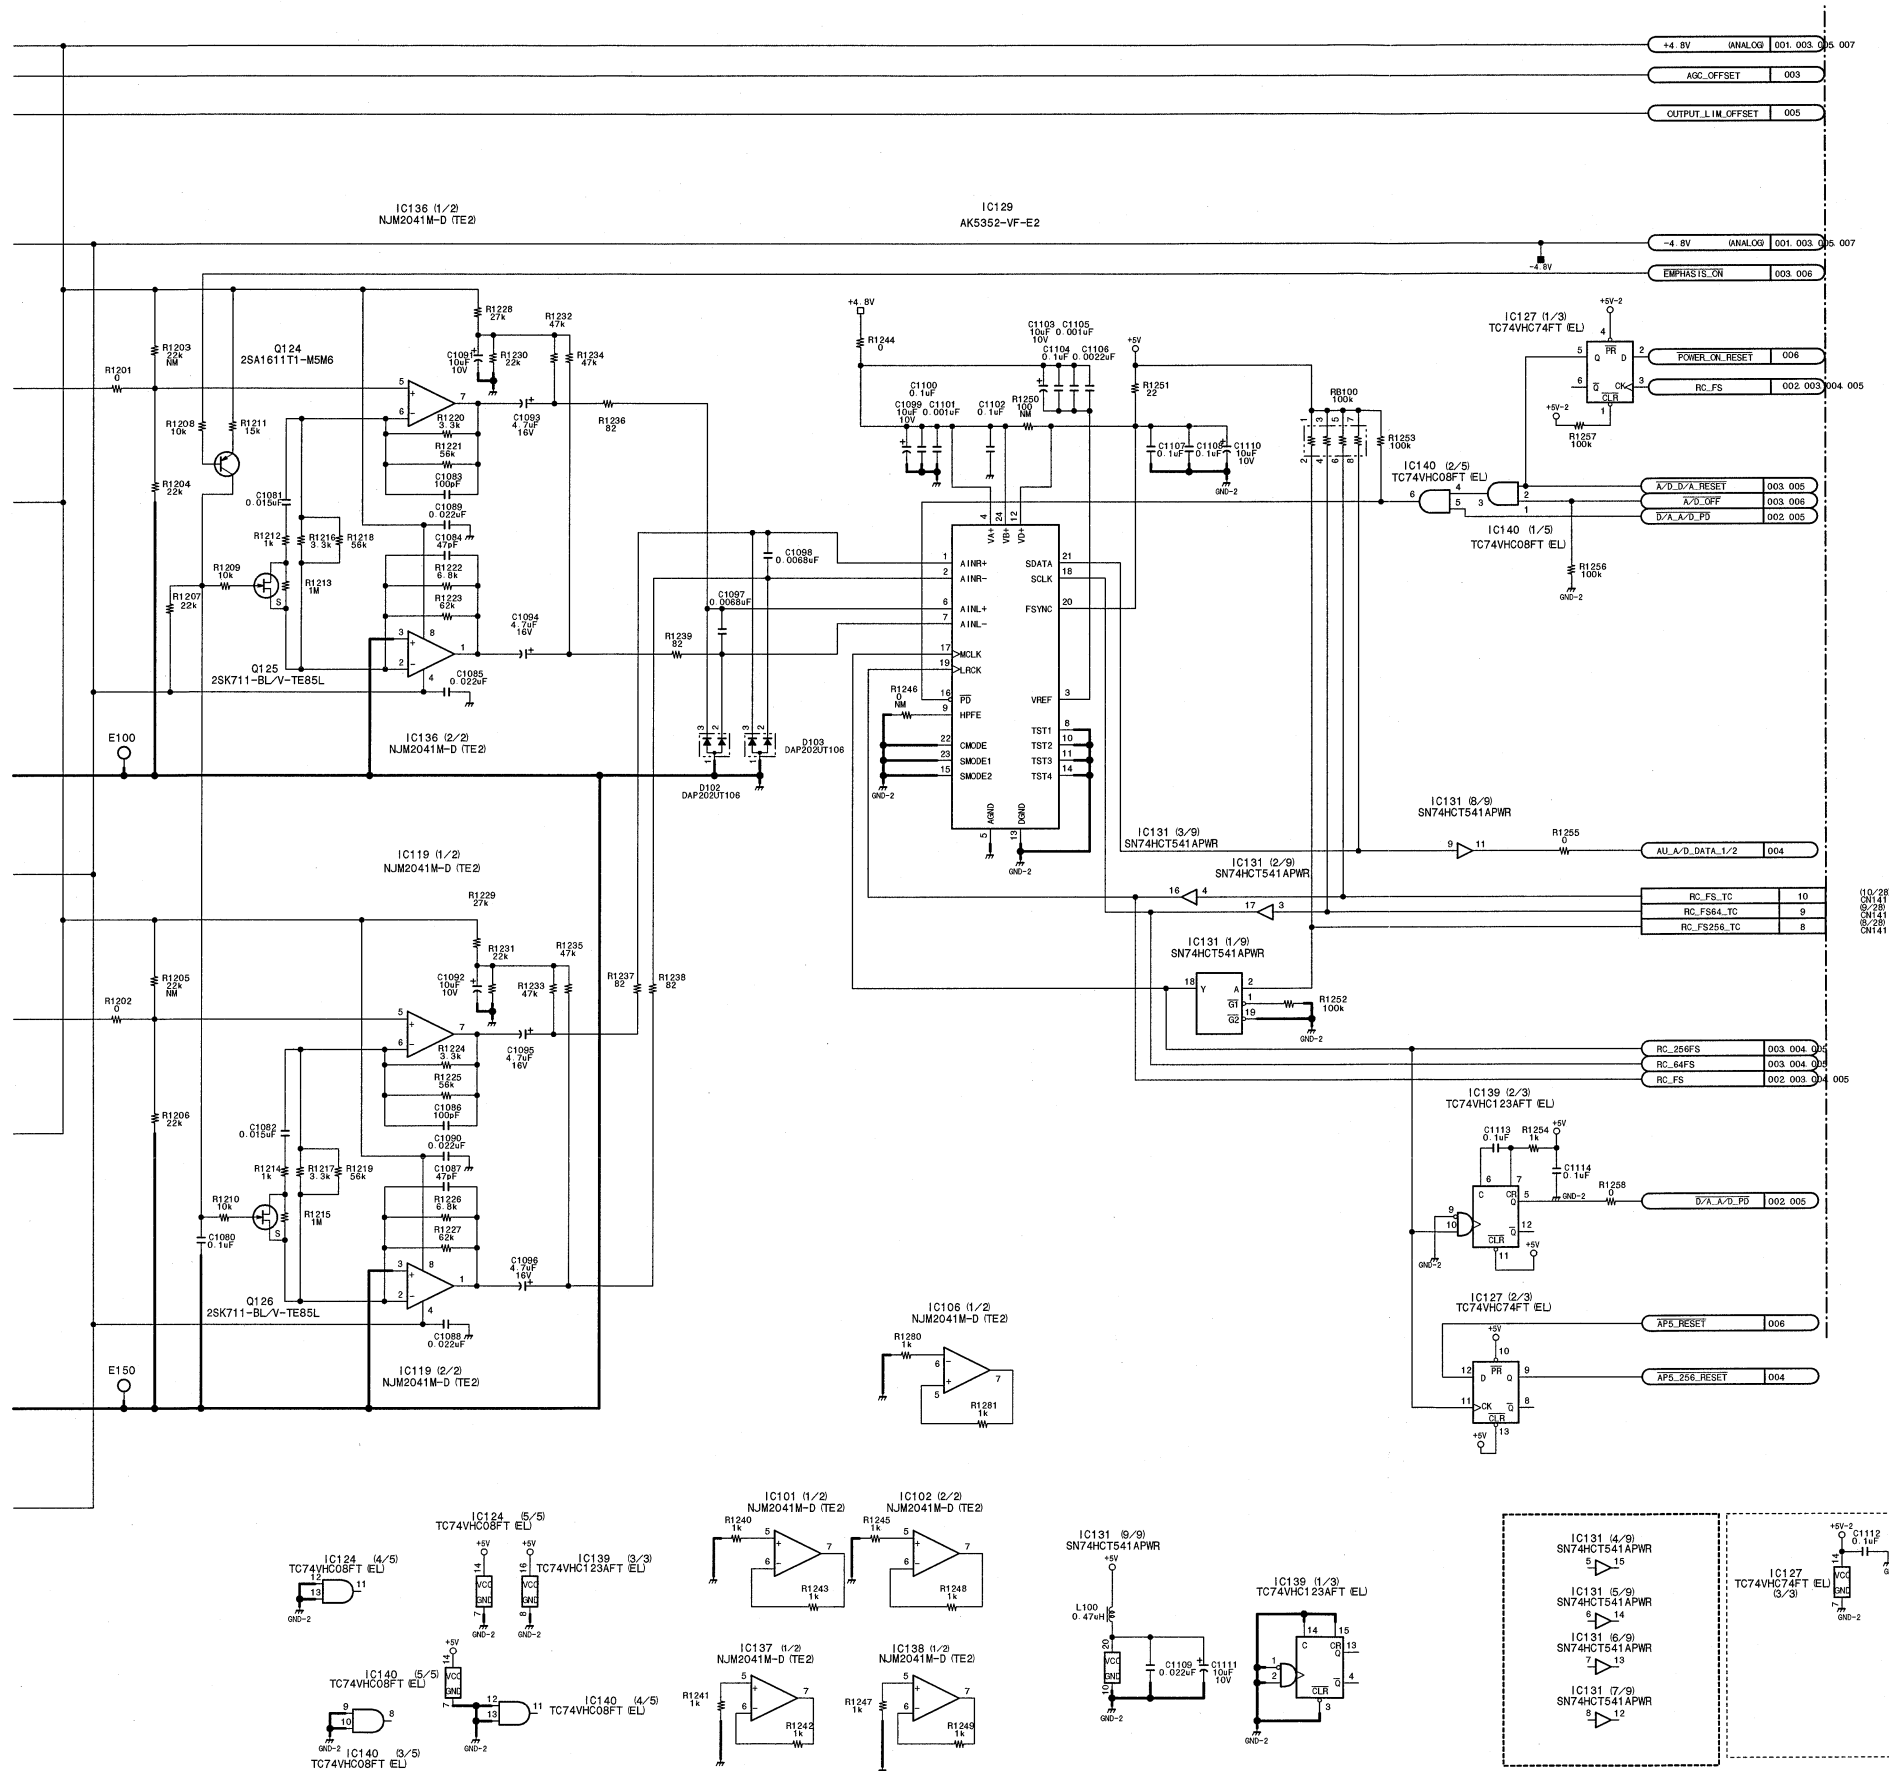

Audio processor
APR-55 (2/7)
 BOARD NO. 1-677-540-11
 LOT NO. 911-0B3
 HDW-F900V_APR-55_002-2

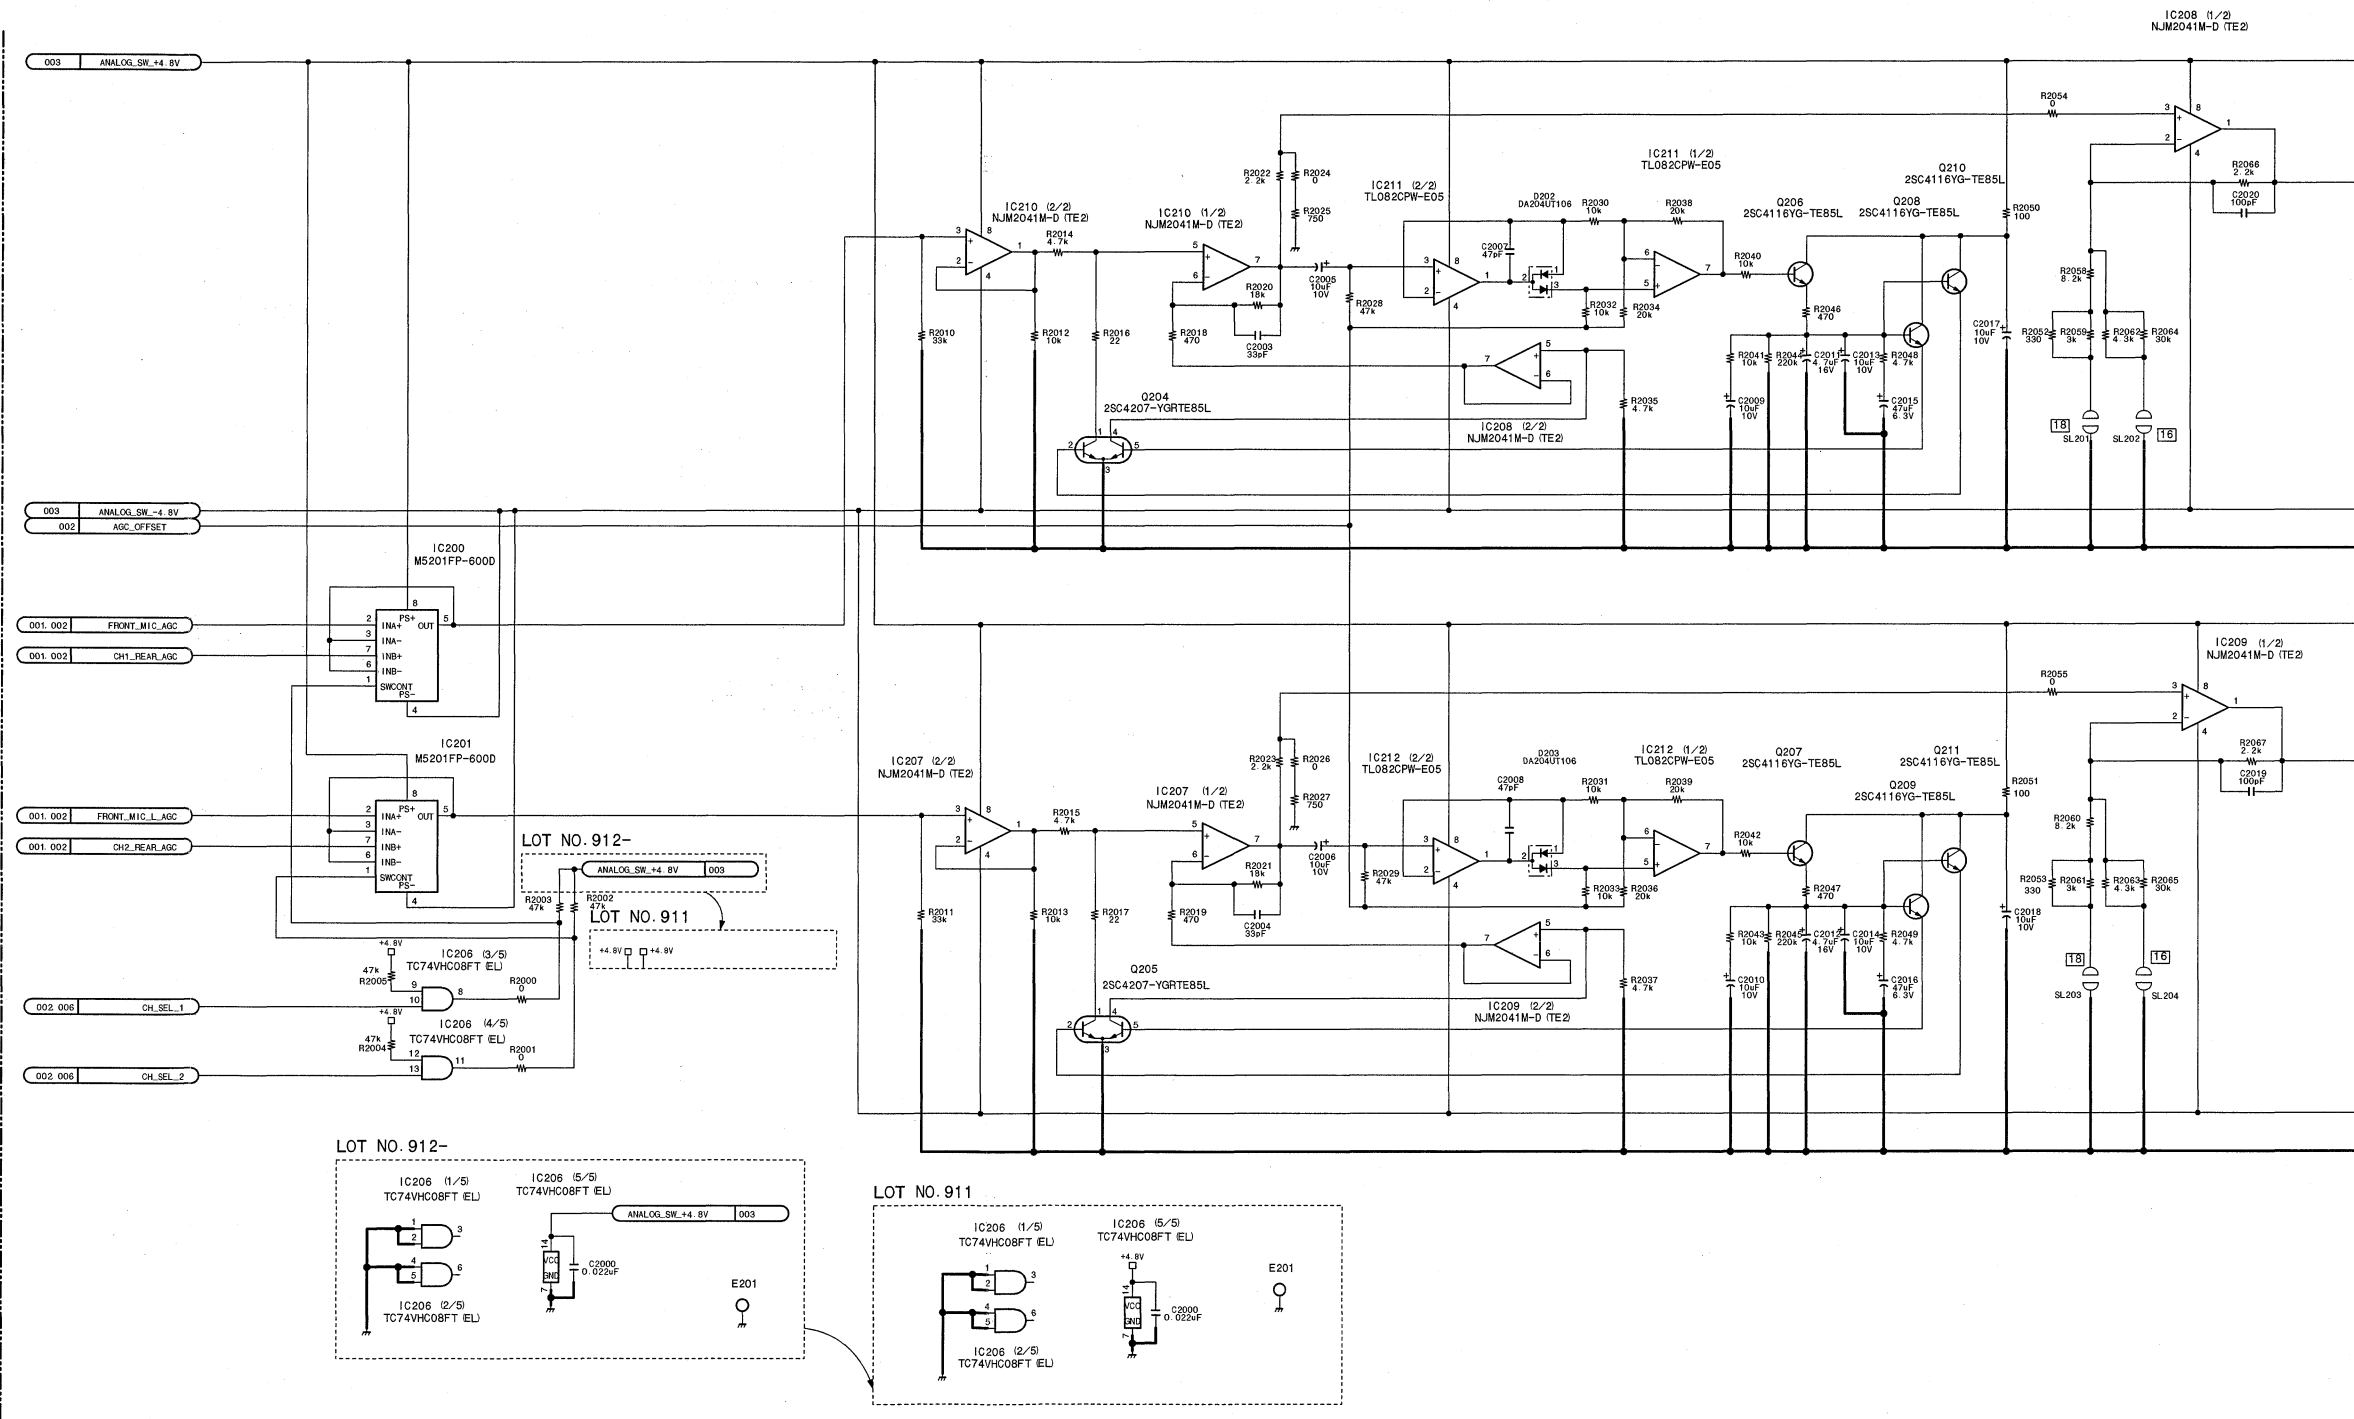


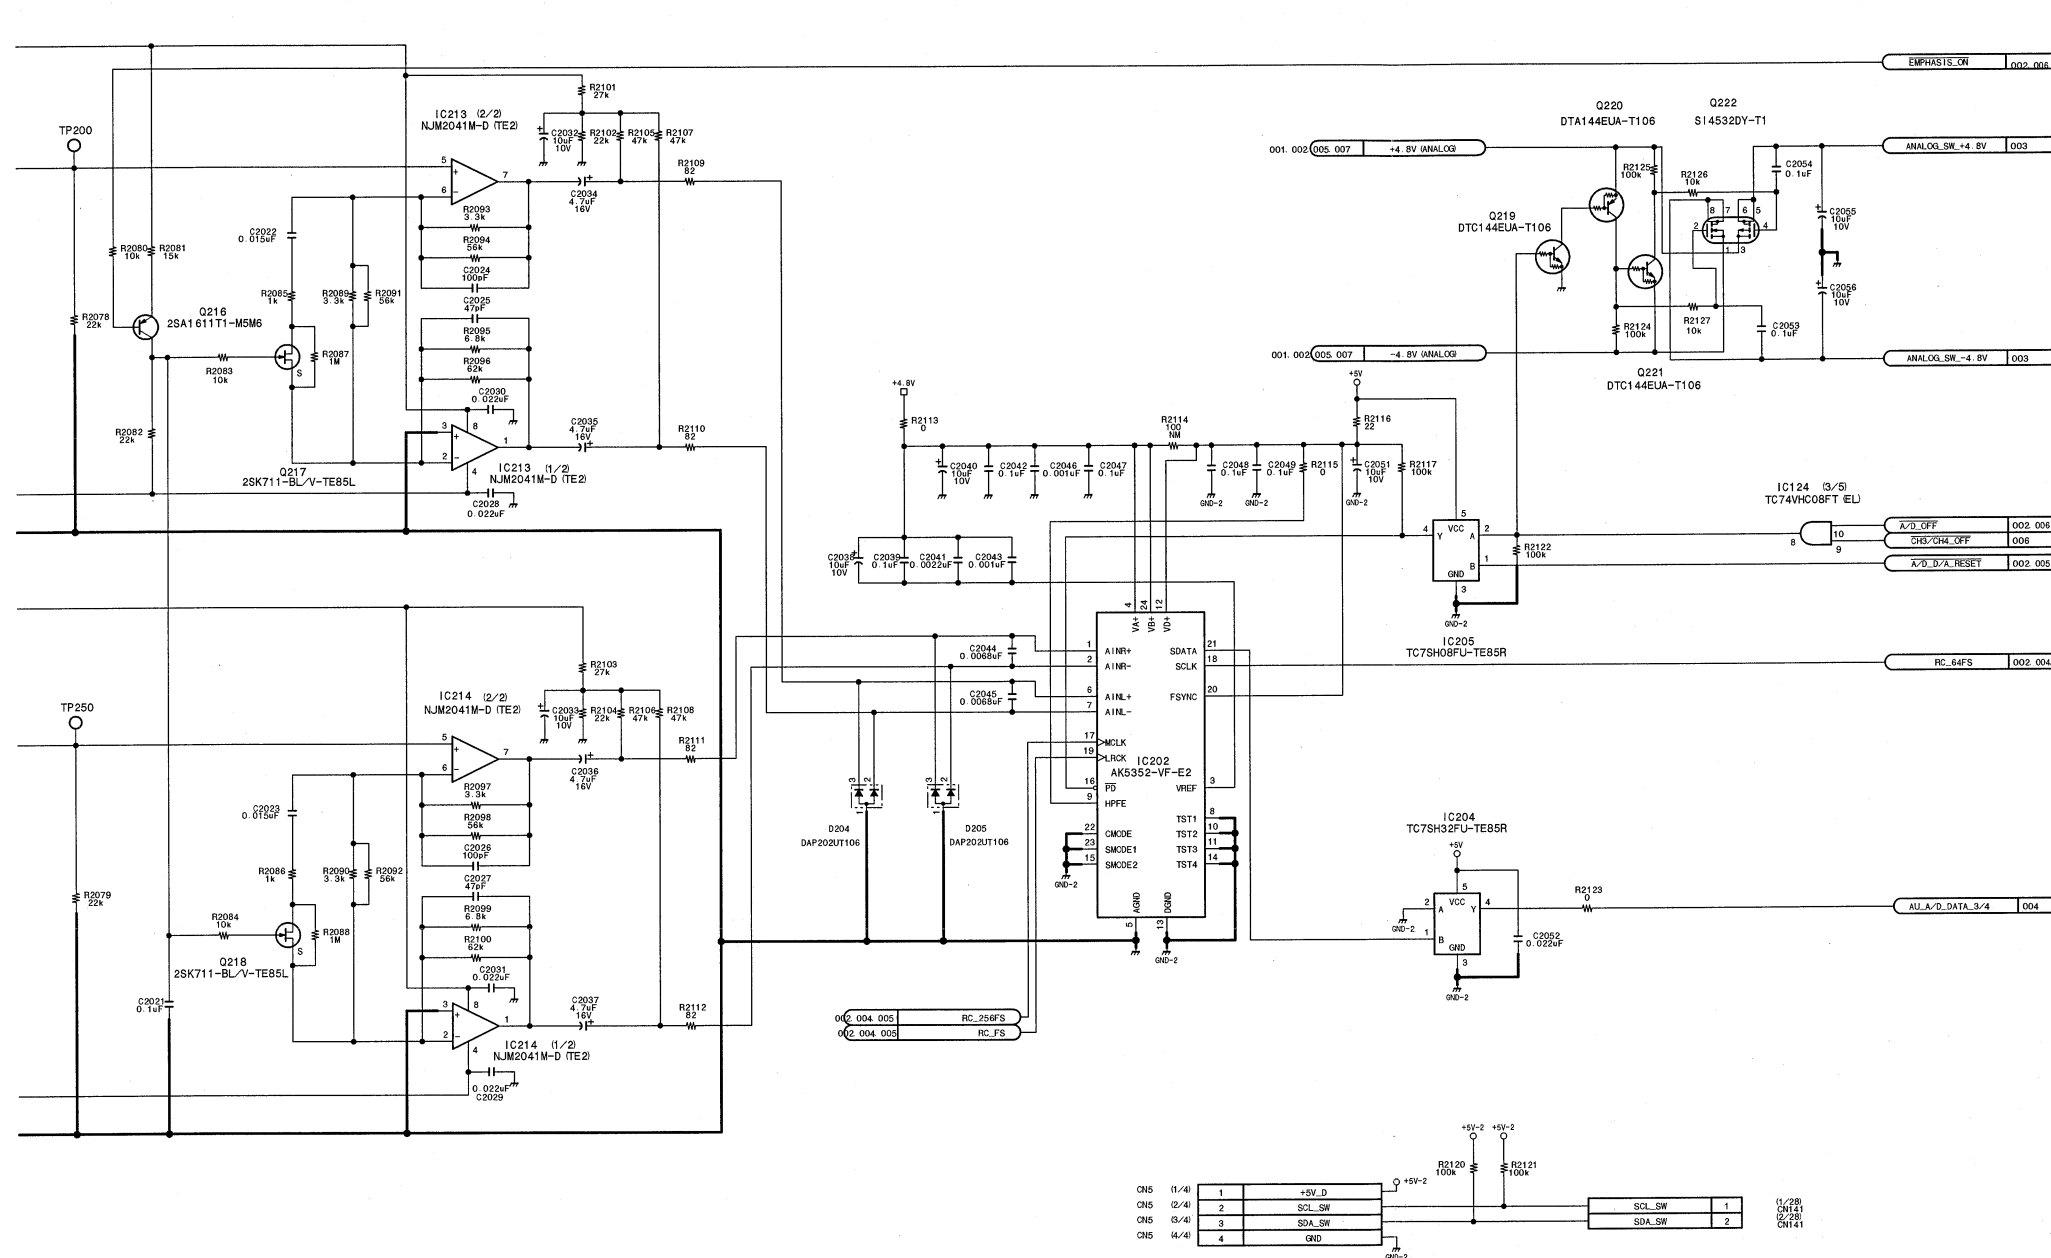


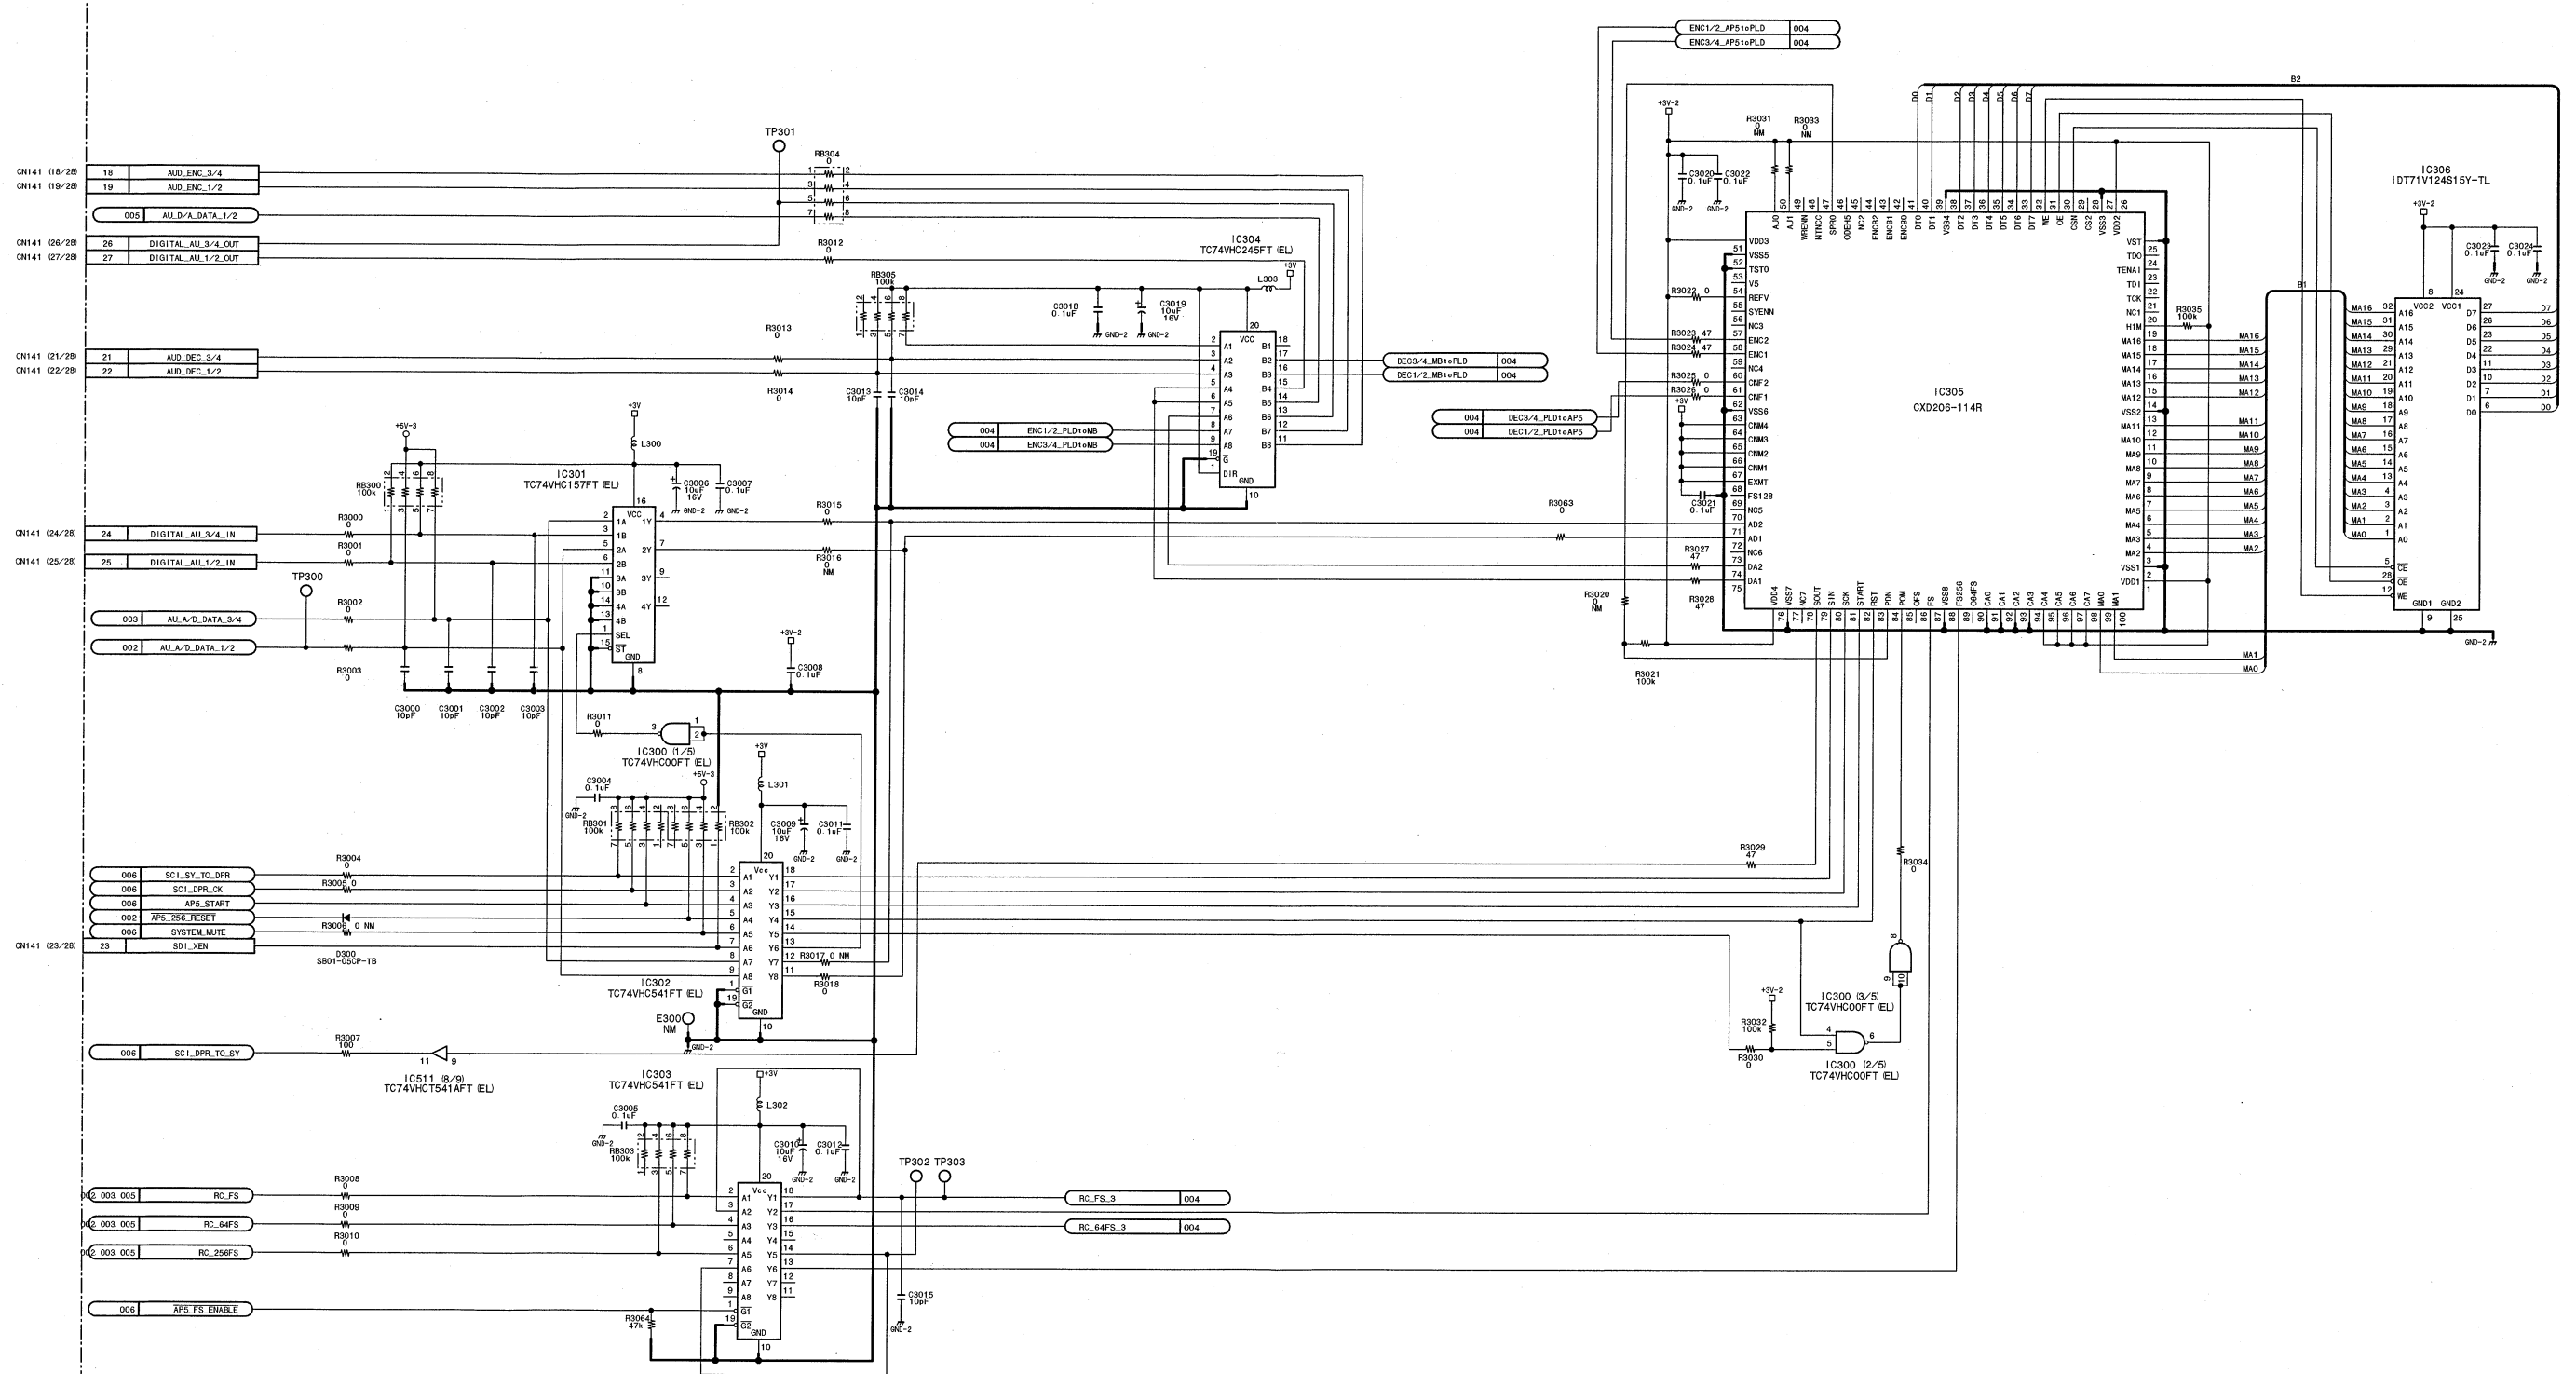




4-12 (a)

4-12 (a)


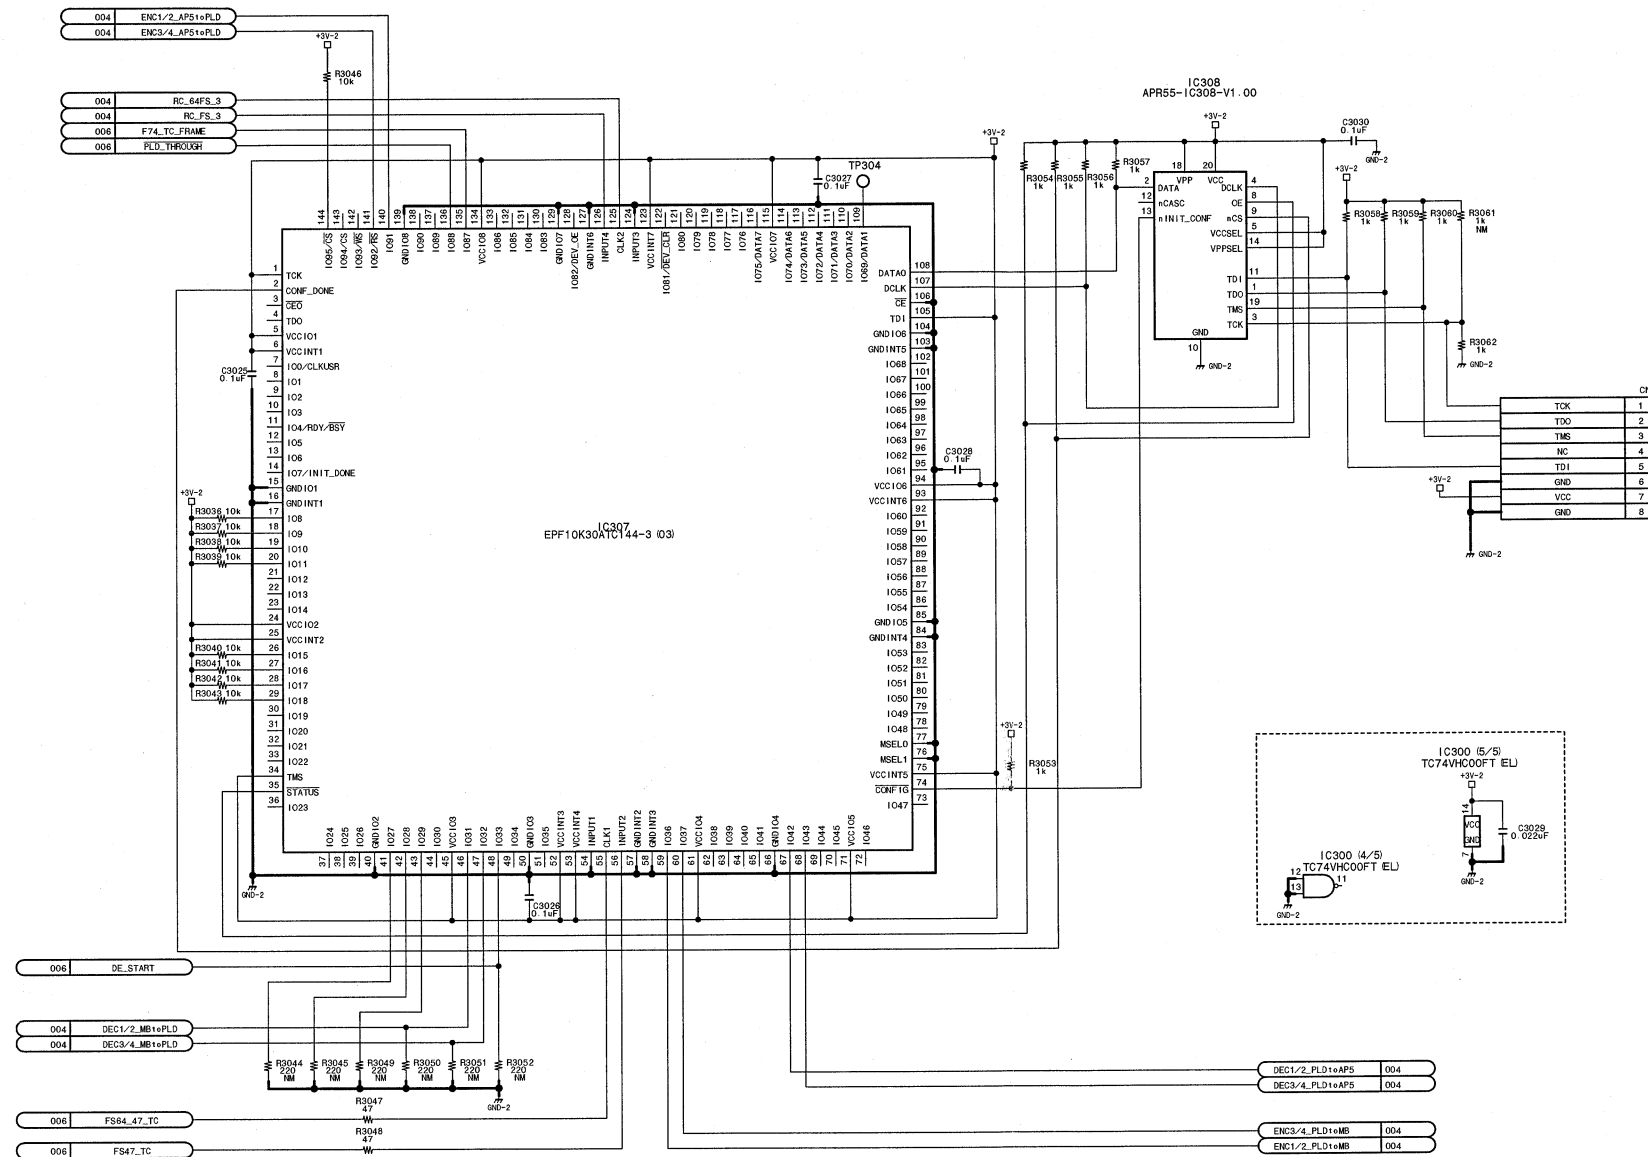


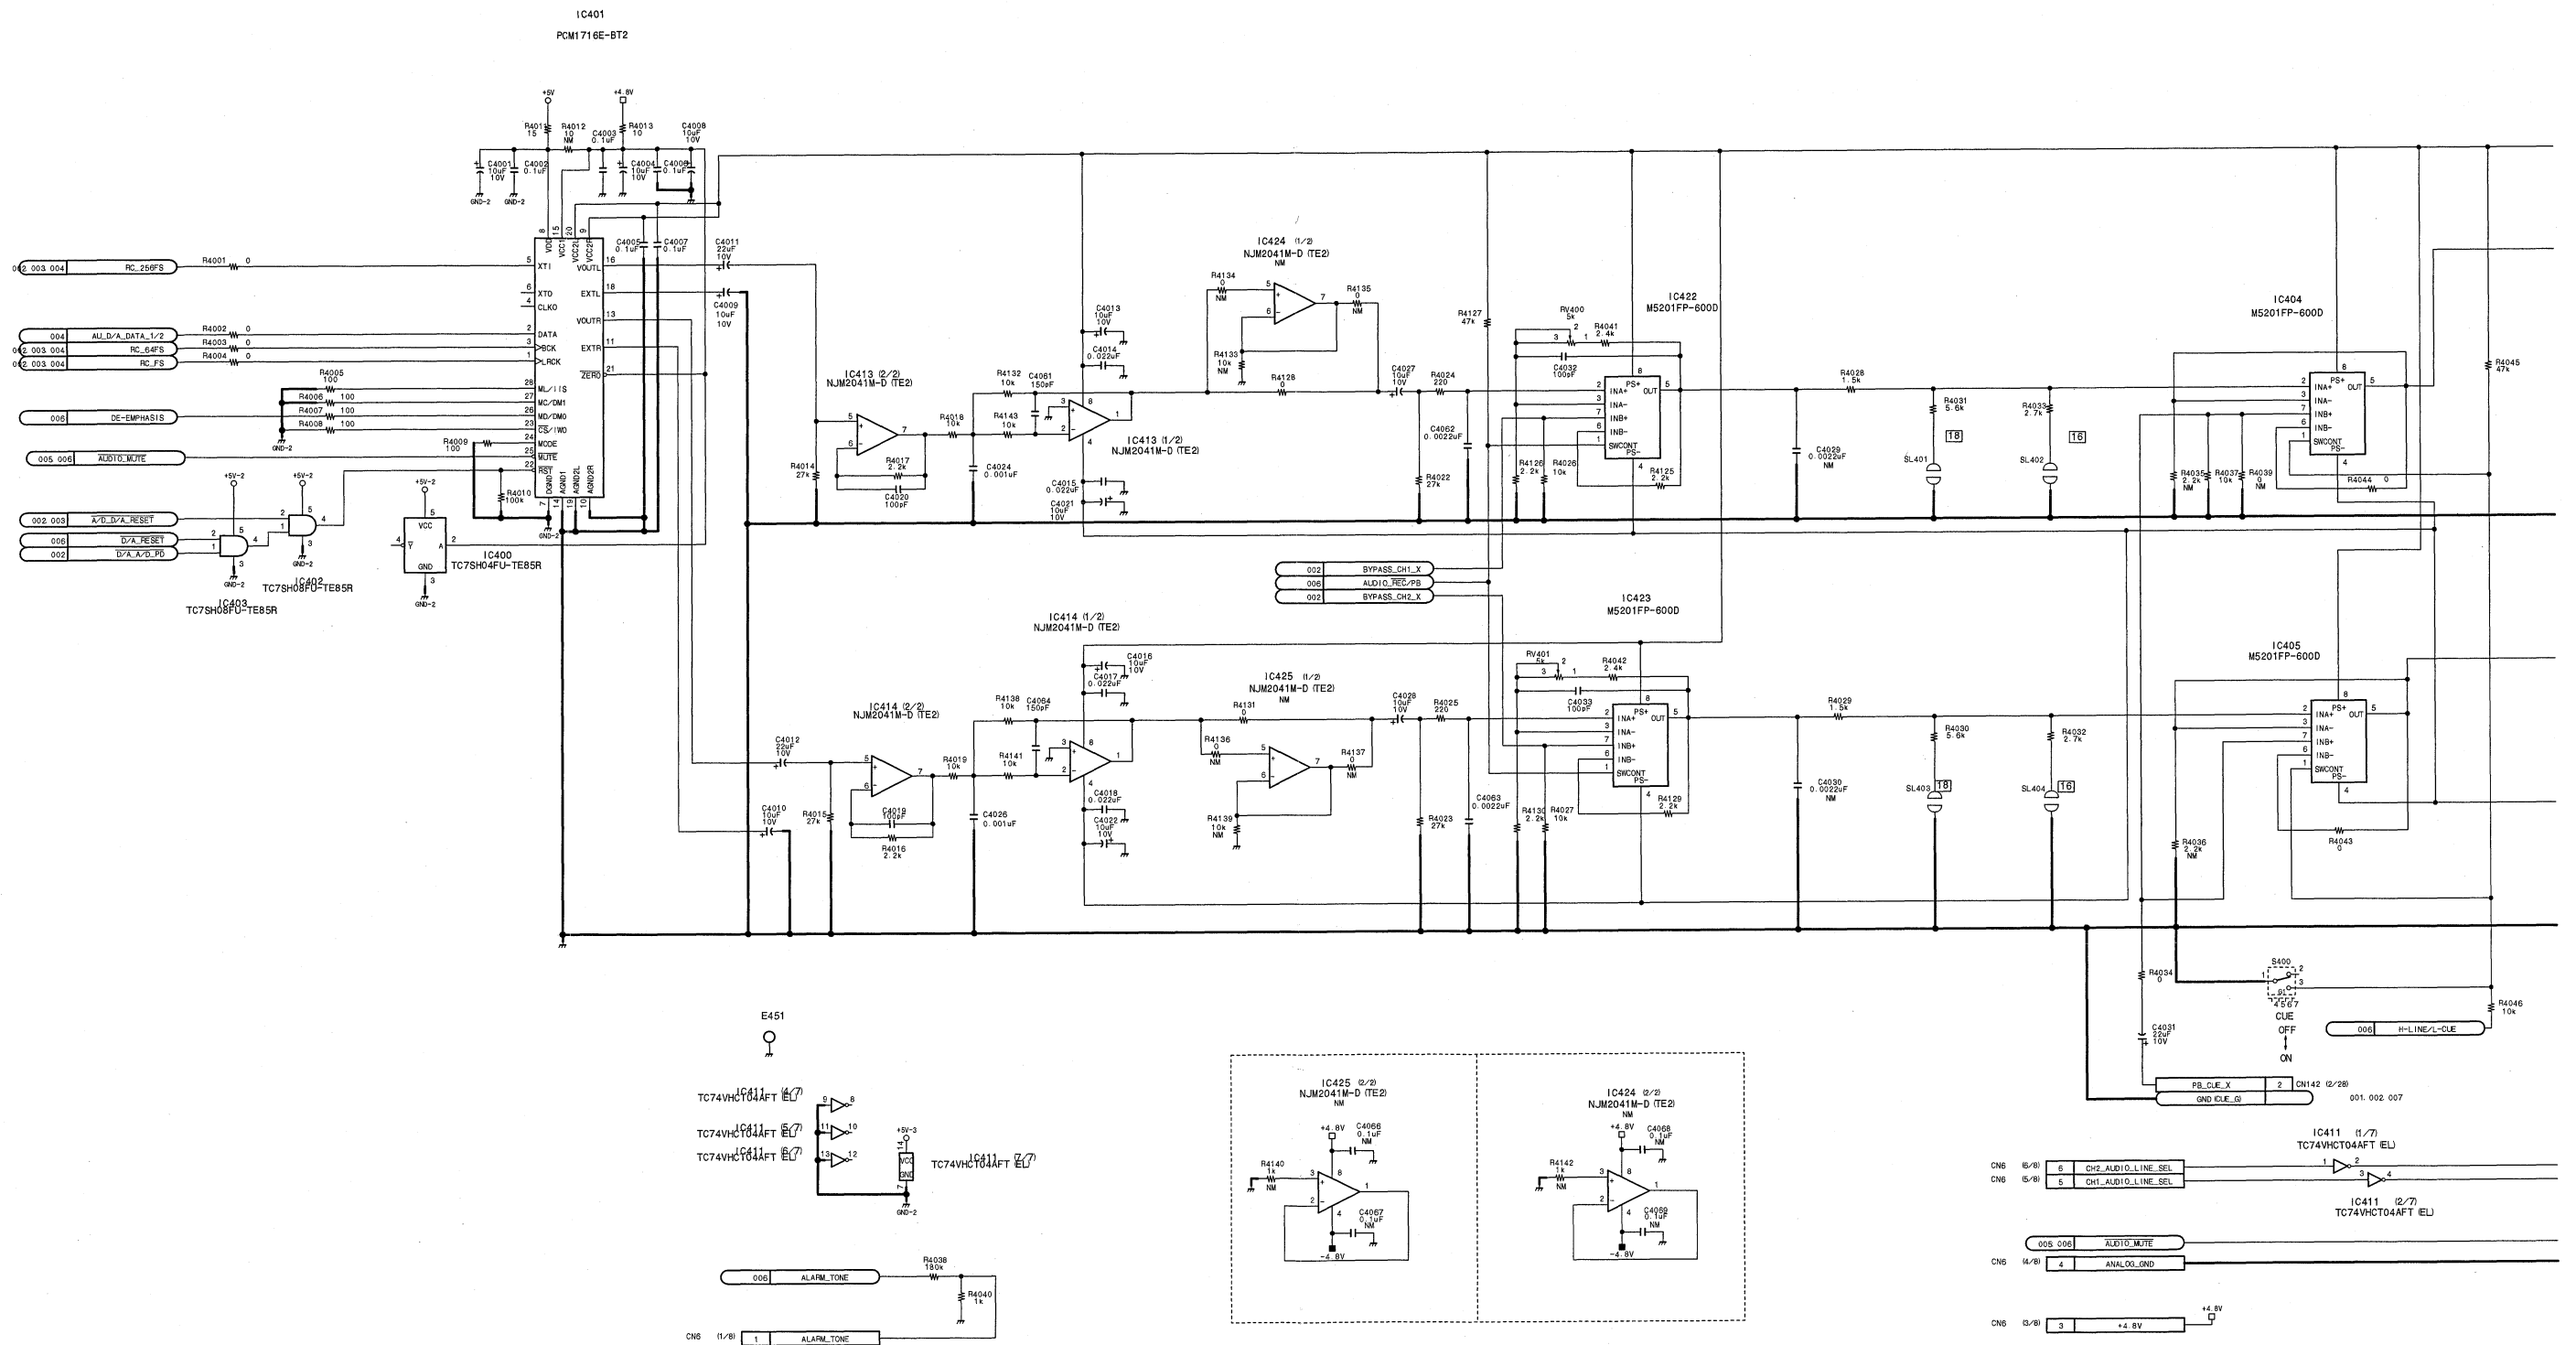

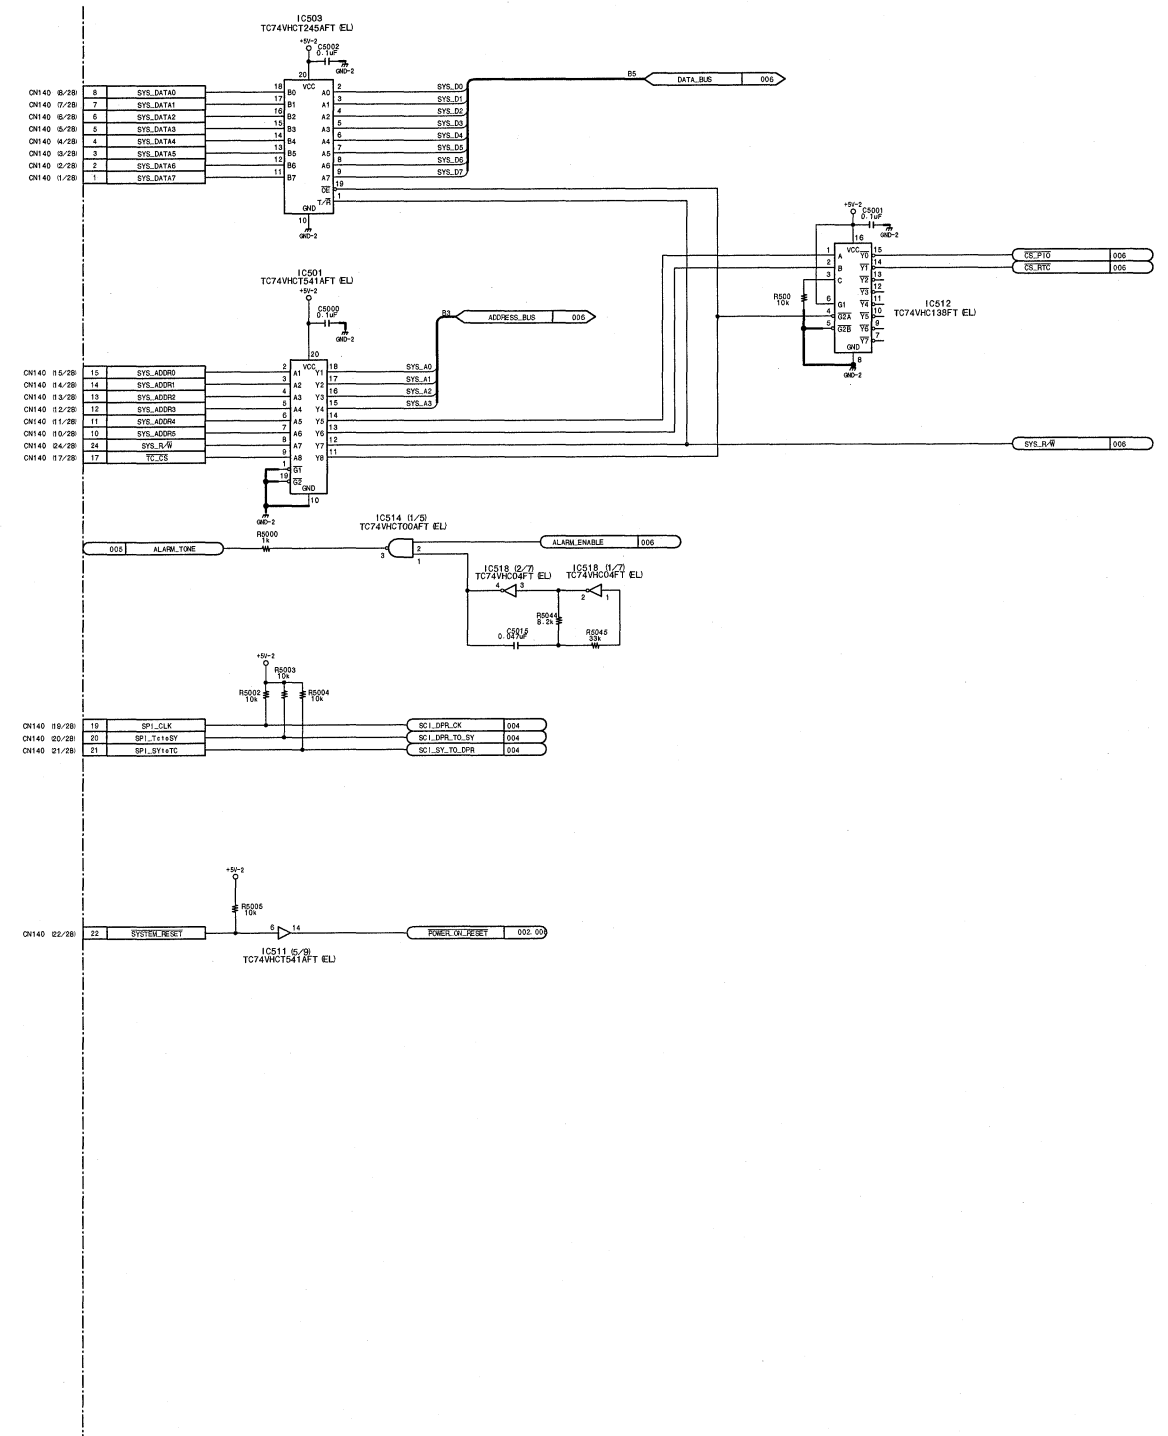


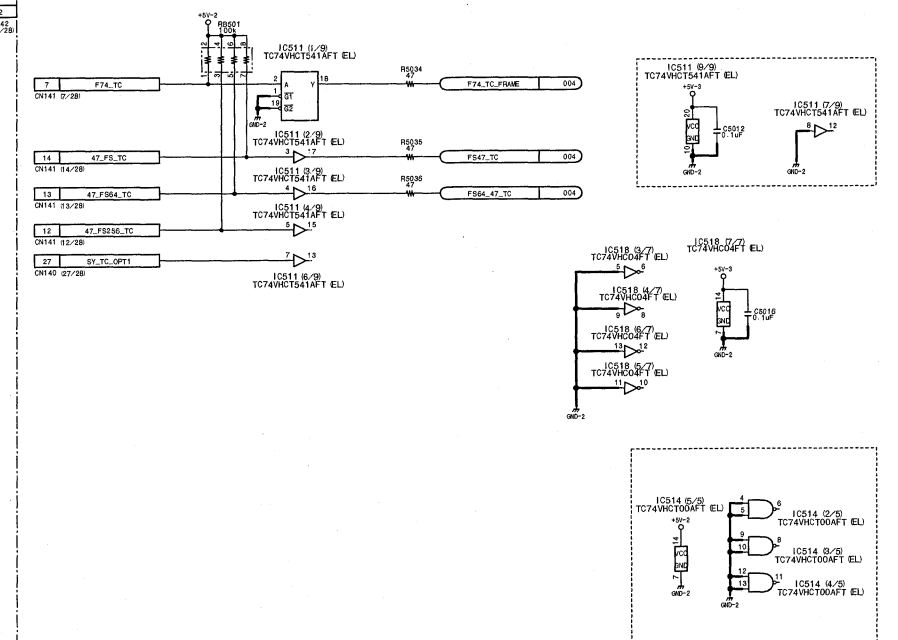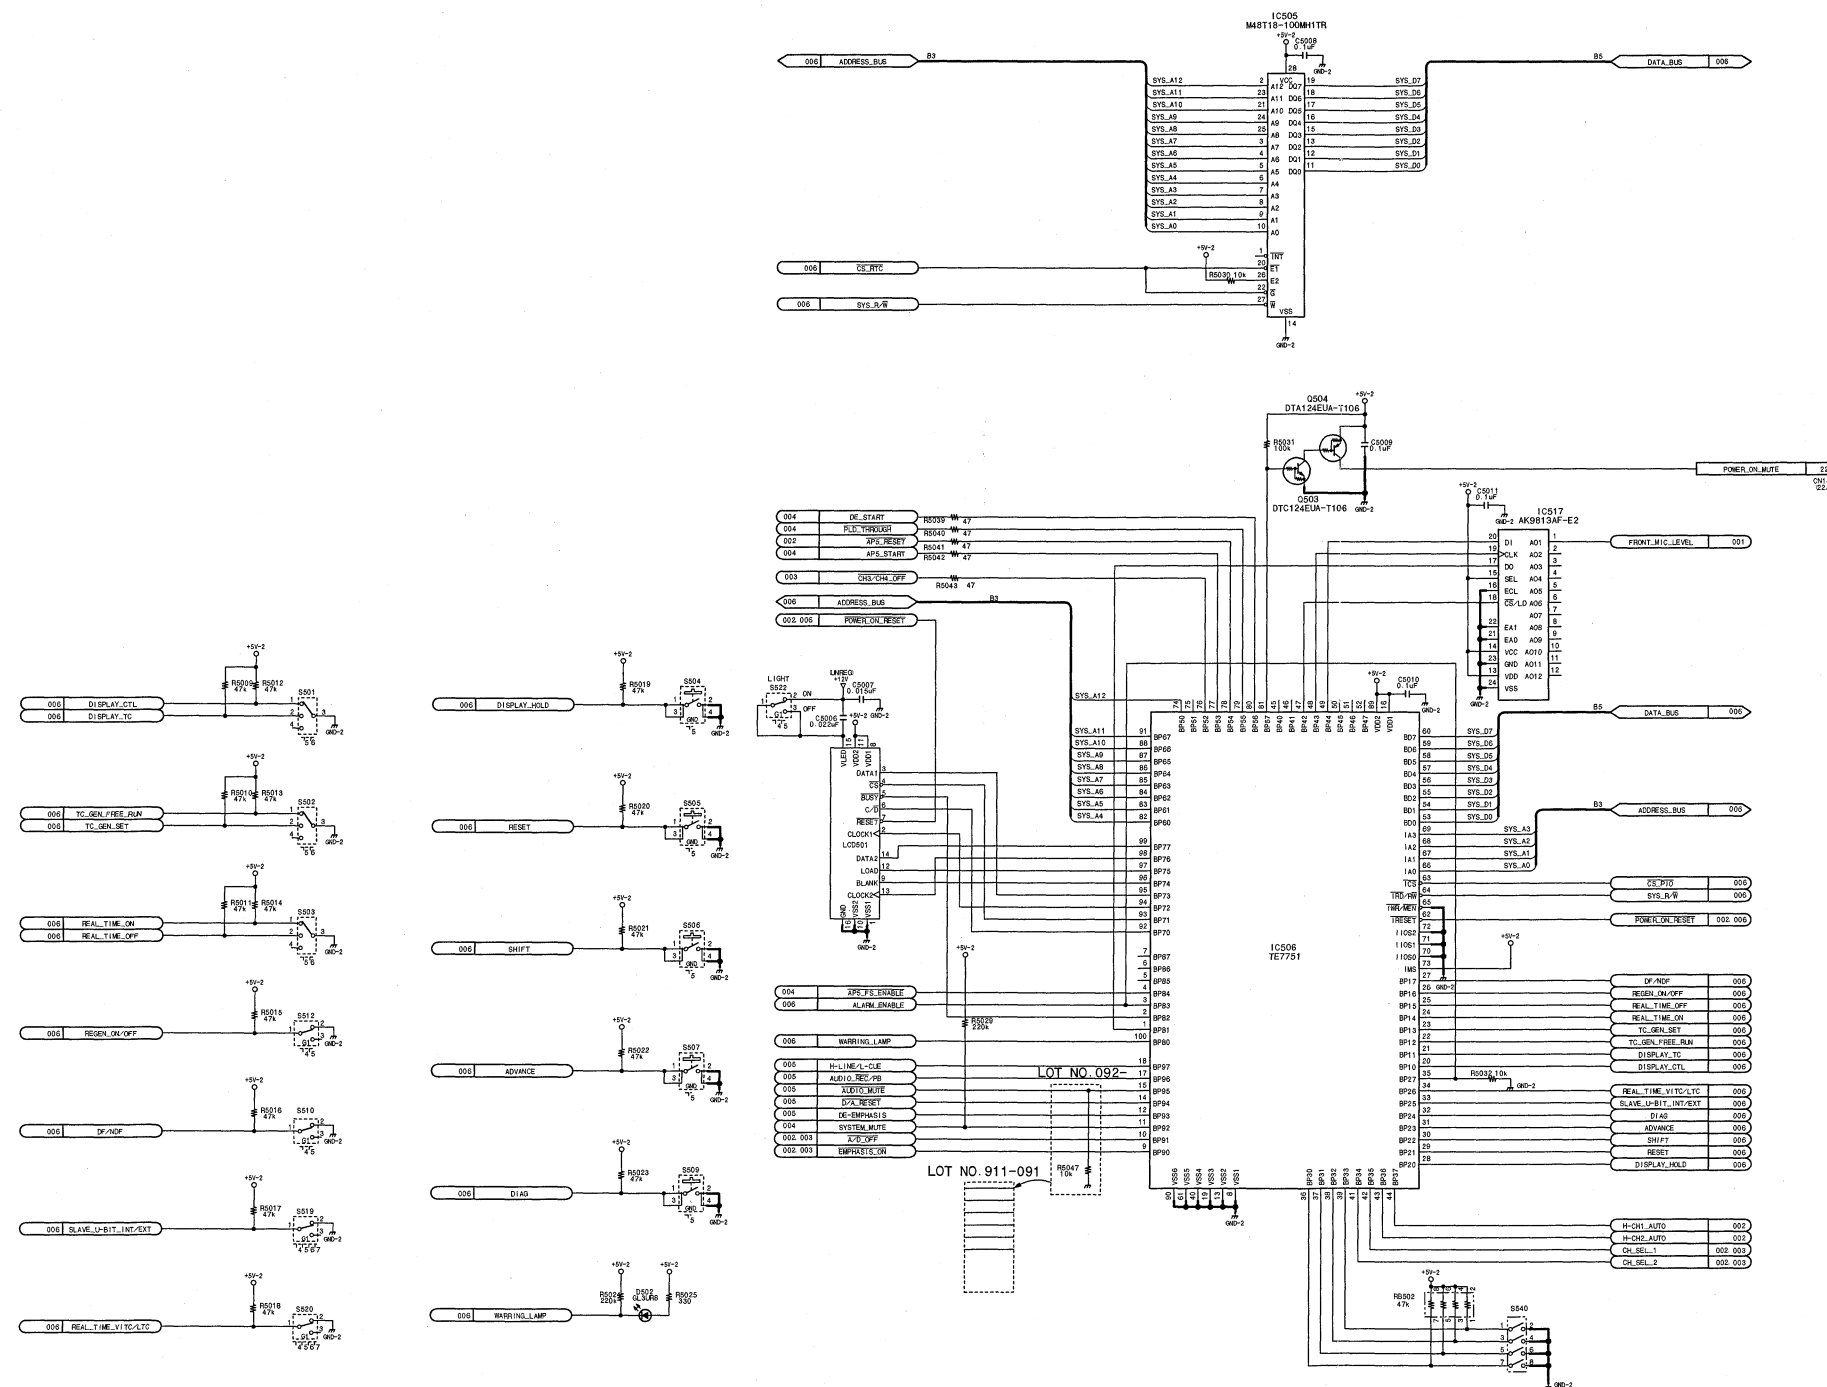


Audio processor
APR-55 (6/7)
 BOARD NO. 1-677-540-11
 LOT NO. 911-0B3
 HDW-F900V_APR-55_002_6

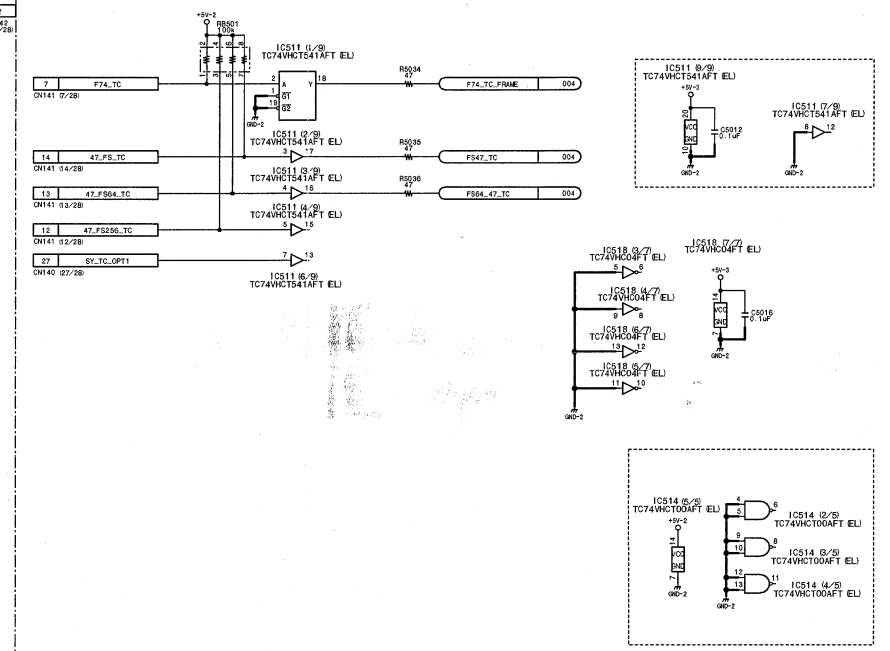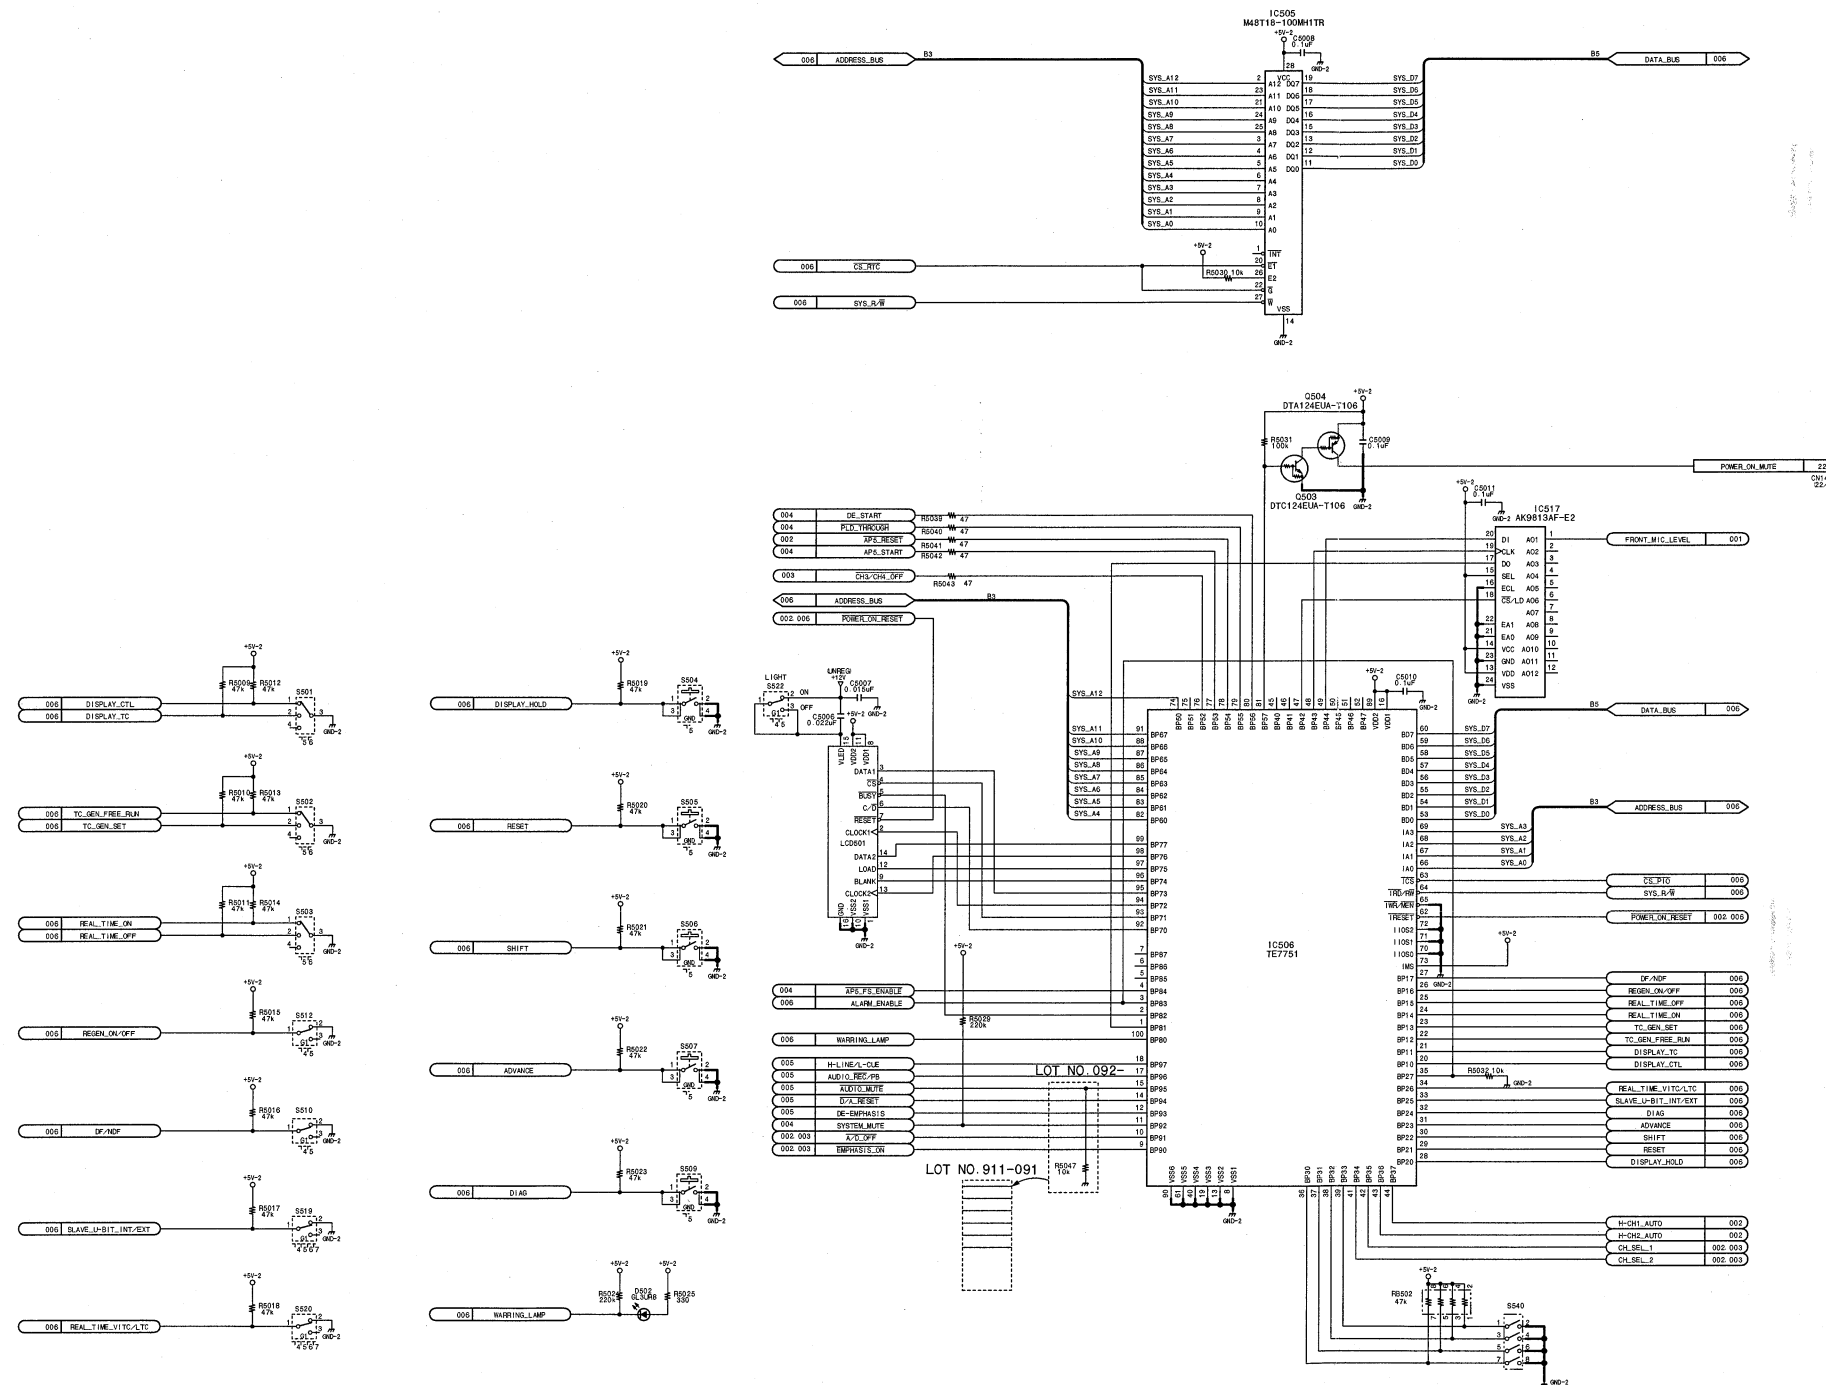

Audio processor
APR-55 (6/7)
 BOARD NO. 1-677-540-11
 LOT NO. 911-0B3
 HDW-F900V_APR-55_002_6

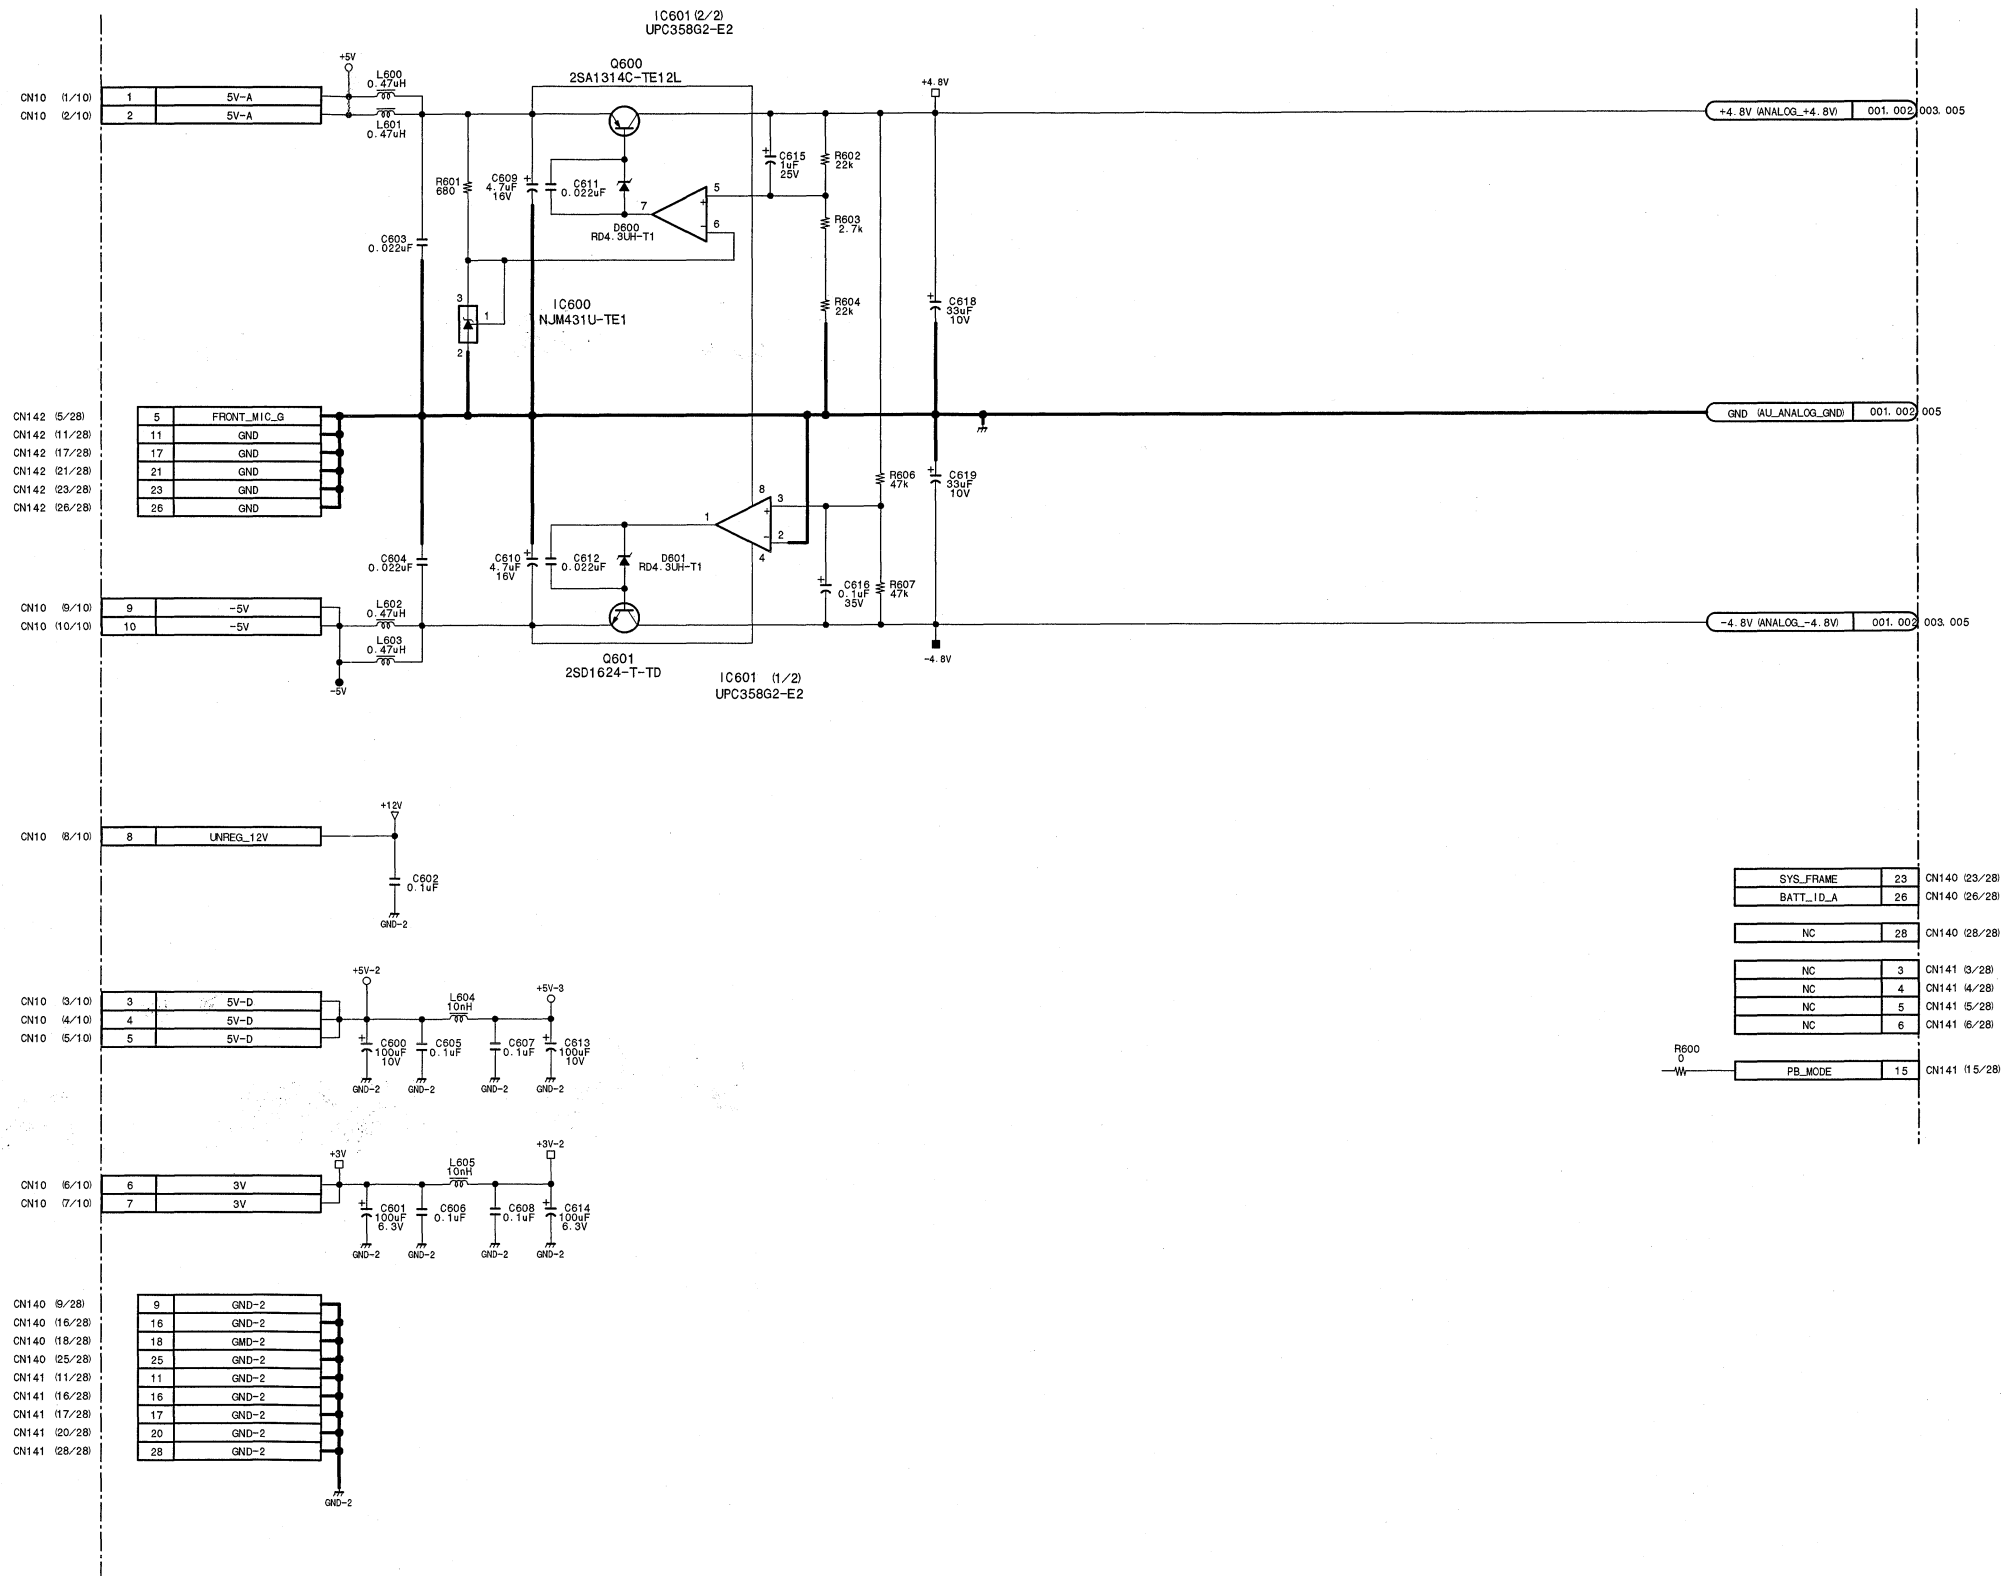


Audio processor
APR-55 (7/7)
BOARD NO. 1-677-540-11
LOT NO. 911-0B3
HDW-F900V_APR-55_002_7

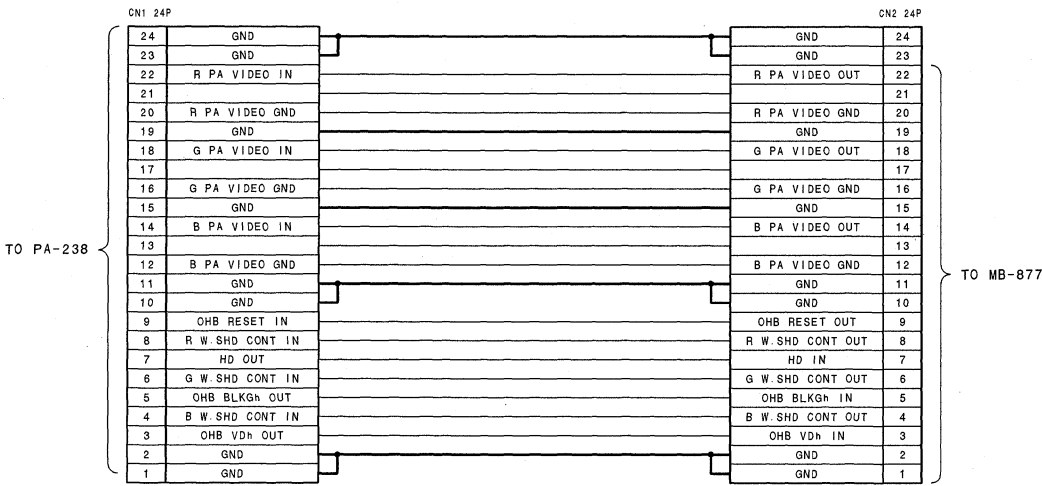


CCD block
CN-2119
BOARD NO. 1-679-132-11
LOT NO. 073-

CCD block
CN-1432
BOARD NO. 1-667-091-12
LOT NO. 911-072

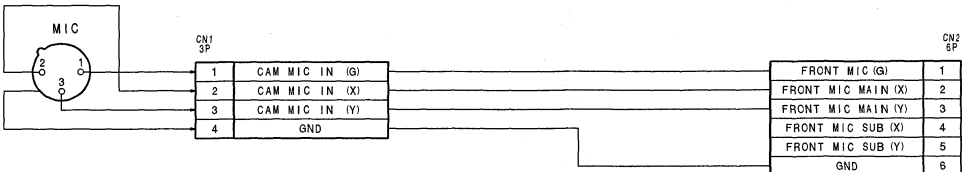


Connector board for Camera mic
CN-1642
BOARD NO. 1-667-812-11
LOT NO. 911-
B-VHDW700-CN1642-11@-S/M

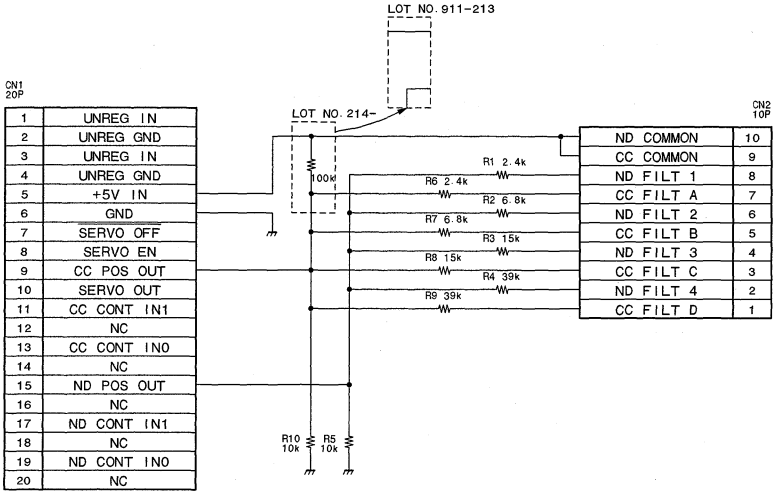

Filter
CN-1614
BOARD NO. 1-667-511-13
LOT NO. 911-
B-VHDW700-CN1614-13@-S/M


CN1	
1	FEEDBACK_BS
2	FEEDBACK_BC
3	B_VIDEO_DATA0
4	B_VIDEO_DATA1
5	B_VIDEO_DATA2
6	B_VIDEO_DATA3
7	B_VIDEO_DATA4
8	B_VIDEO_DATA5
9	B_VIDEO_DATA6
10	B_VIDEO_DATA7
11	B_VIDEO_DATA8
12	B_VIDEO_DATA9
13	B_VIDEO_DATA10
14	B_VIDEO_DATA11
15	FEEDBACK_GS
16	FEEDBACK_GC
17	G_VIDEO_DATA0
18	G_VIDEO_DATA1
19	G_VIDEO_DATA2
20	G_VIDEO_DATA3
21	G_VIDEO_DATA4
22	G_VIDEO_DATA5
23	G_VIDEO_DATA6
24	G_VIDEO_DATA7
25	G_VIDEO_DATA8
26	G_VIDEO_DATA9
27	G_VIDEO_DATA10
28	G_VIDEO_DATA11
29	FEEDBACK_RS
30	FEEDBACK_RC
31	R_VIDEO_DATA0
32	R_VIDEO_DATA1
33	R_VIDEO_DATA2
34	R_VIDEO_DATA3
35	R_VIDEO_DATA4
36	R_VIDEO_DATA5
37	R_VIDEO_DATA6
38	R_VIDEO_DATA7
39	R_VIDEO_DATA8
40	R_VIDEO_DATA9
41	R_VIDEO_DATA10
42	R_VIDEO_DATA11
43	GND
44	GND
45	CLP_SEL
46	PB_REC0
47	CVP_F_in
48	CVP_VD_in
49	PB_REC1
50	CVP_PBLKG_in
51	CVP_HD_in
52	CVP_BKG_in
53	PRST
54	B1
55	A2
56	B2
57	A3
58	B3
59	+2.5V_in
60	+2.5V_in
61	+2.5V_in
62	+2.5V_in
63	A4
64	B4
65	GND
66	GND
67	GND
68	GND
69	SCL
70	SDA


CN2	
70	SDA
69	SCL
68	GND
67	GND
66	GND
65	GND
64	B4
63	A4
62	+2.5V_in
61	+2.5V_in
60	+2.5V_in
59	+2.5V_in
58	B3
57	GND
56	A3
55	B2
54	A2
53	B1
52	PRST
51	CVP_PBLKG_in
50	CVP_HD_in
49	PB_REC1
48	CVP_VD_in
47	CVP_F_in
46	PB_REC0
45	CLP_SEL
44	GND
43	GND
42	R_VIDEO_DATA11
41	R_VIDEO_DATA10
40	R_VIDEO_DATA9
39	R_VIDEO_DATA8
38	R_VIDEO_DATA7
37	R_VIDEO_DATA6
36	R_VIDEO_DATA5
35	R_VIDEO_DATA4
34	R_VIDEO_DATA3
33	R_VIDEO_DATA2
32	R_VIDEO_DATA1
31	R_VIDEO_DATA0
30	FEEDBACK_RC
29	FEEDBACK_RS
28	G_VIDEO_DATA11
27	G_VIDEO_DATA10
26	G_VIDEO_DATA9
25	G_VIDEO_DATA8
24	G_VIDEO_DATA7
23	G_VIDEO_DATA6
22	G_VIDEO_DATA5
21	G_VIDEO_DATA4
20	G_VIDEO_DATA3
19	G_VIDEO_DATA2
18	G_VIDEO_DATA1
17	G_VIDEO_DATA0
16	FEEDBACK_GC
15	FEEDBACK_GS
14	B_VIDEO_DATA11
13	B_VIDEO_DATA10
12	B_VIDEO_DATA9
11	B_VIDEO_DATA8
10	B_VIDEO_DATA7
9	B_VIDEO_DATA6
8	B_VIDEO_DATA5
7	B_VIDEO_DATA4
6	B_VIDEO_DATA3
5	B_VIDEO_DATA2
4	B_VIDEO_DATA1
3	B_VIDEO_DATA0
2	FEEDBACK_BC
1	FEEDBACK_BS

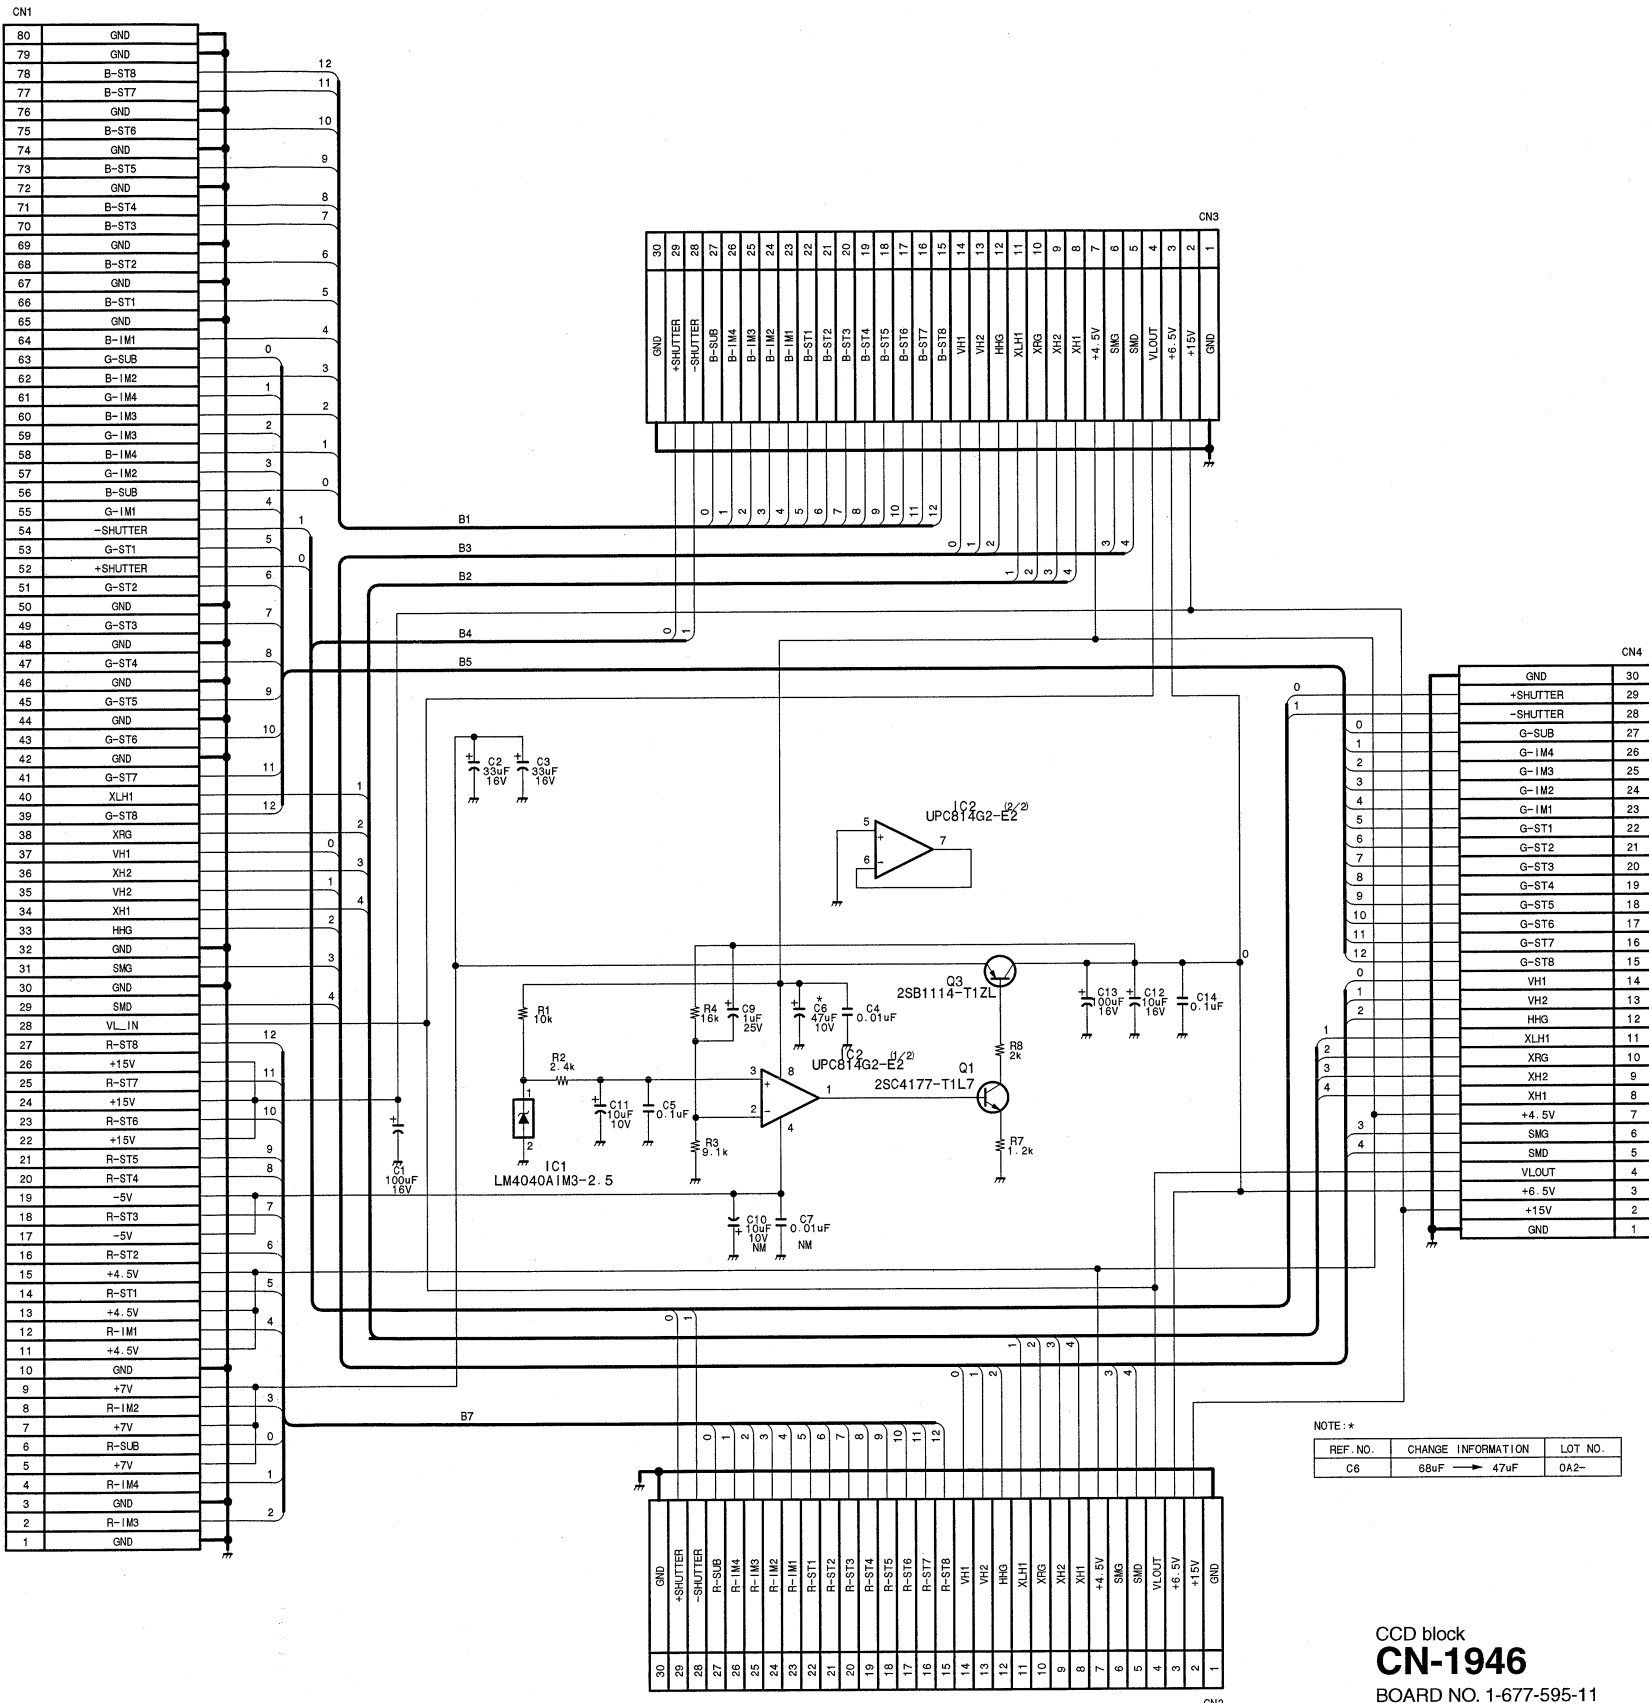


Relay board for AD-167 board and DPR-152 board
CN-1940
BOARD NO. 1-677-600-11
LOT NO. 911-
HDW-F900C_CN-1940_111_1


CCD block
CN-1946
BOARD NO. 1-677-595-11
LOT NO. 911-
HDW-F900C_CN-1946_211_1

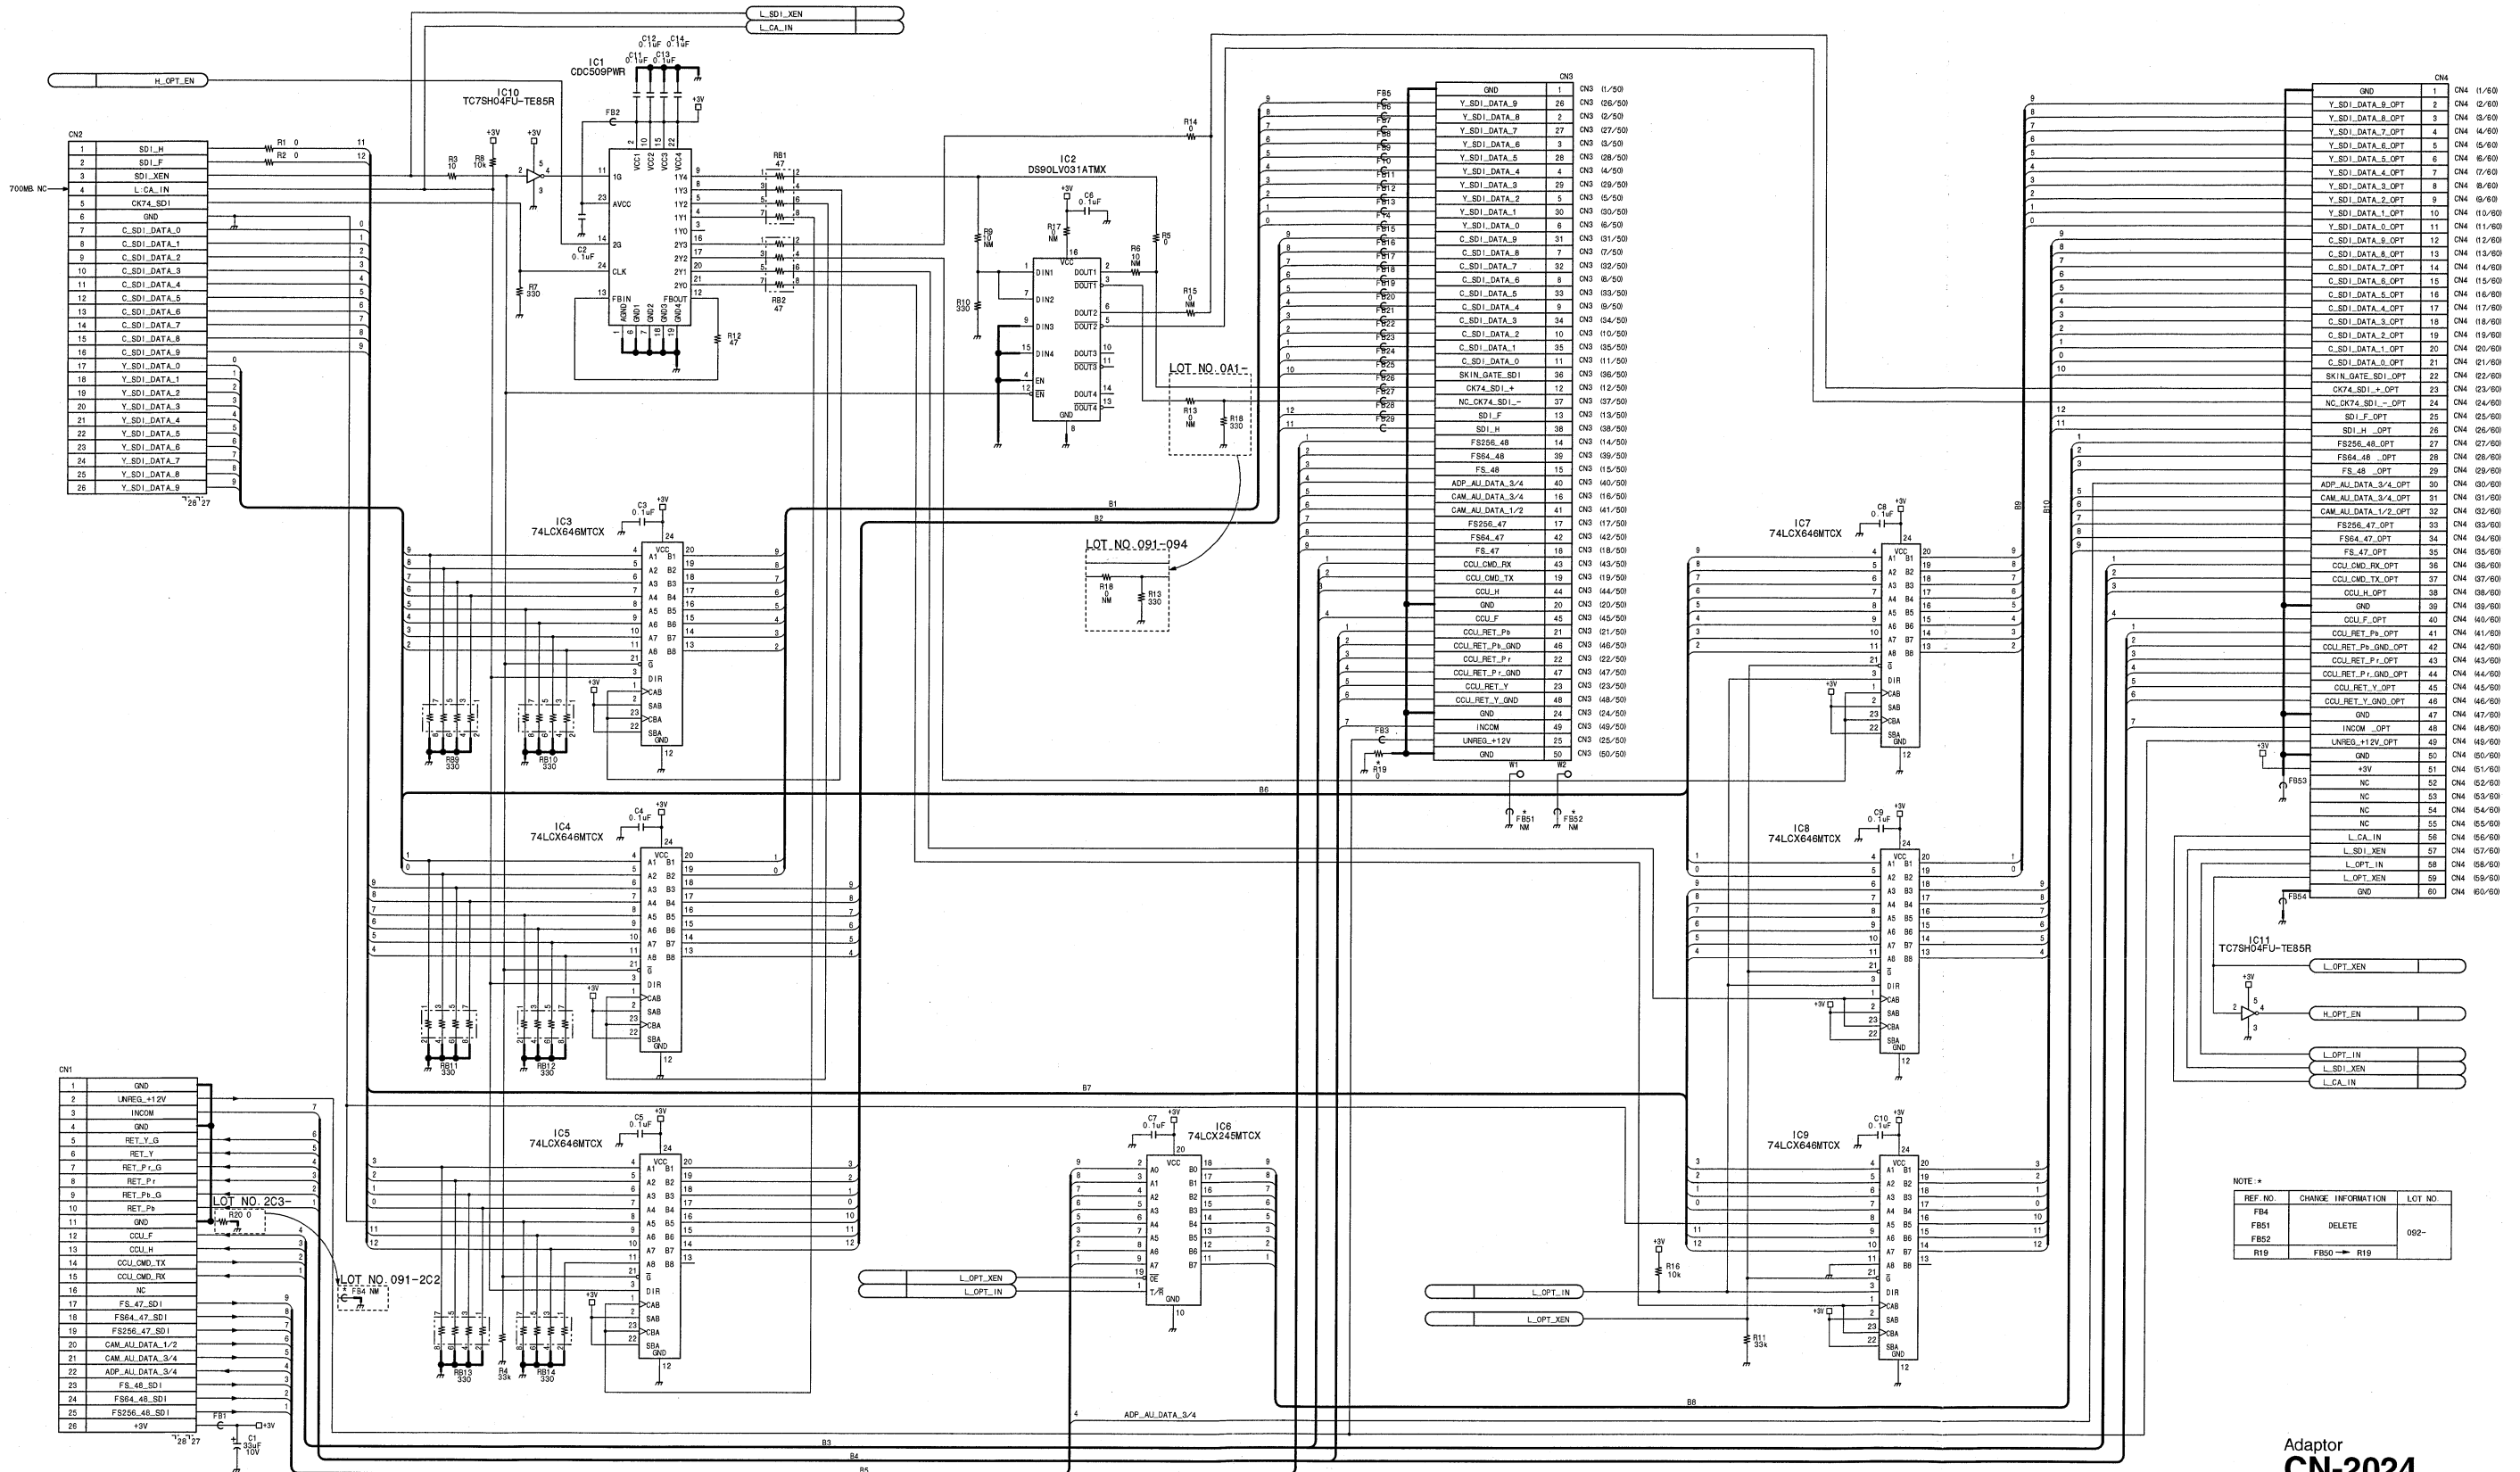

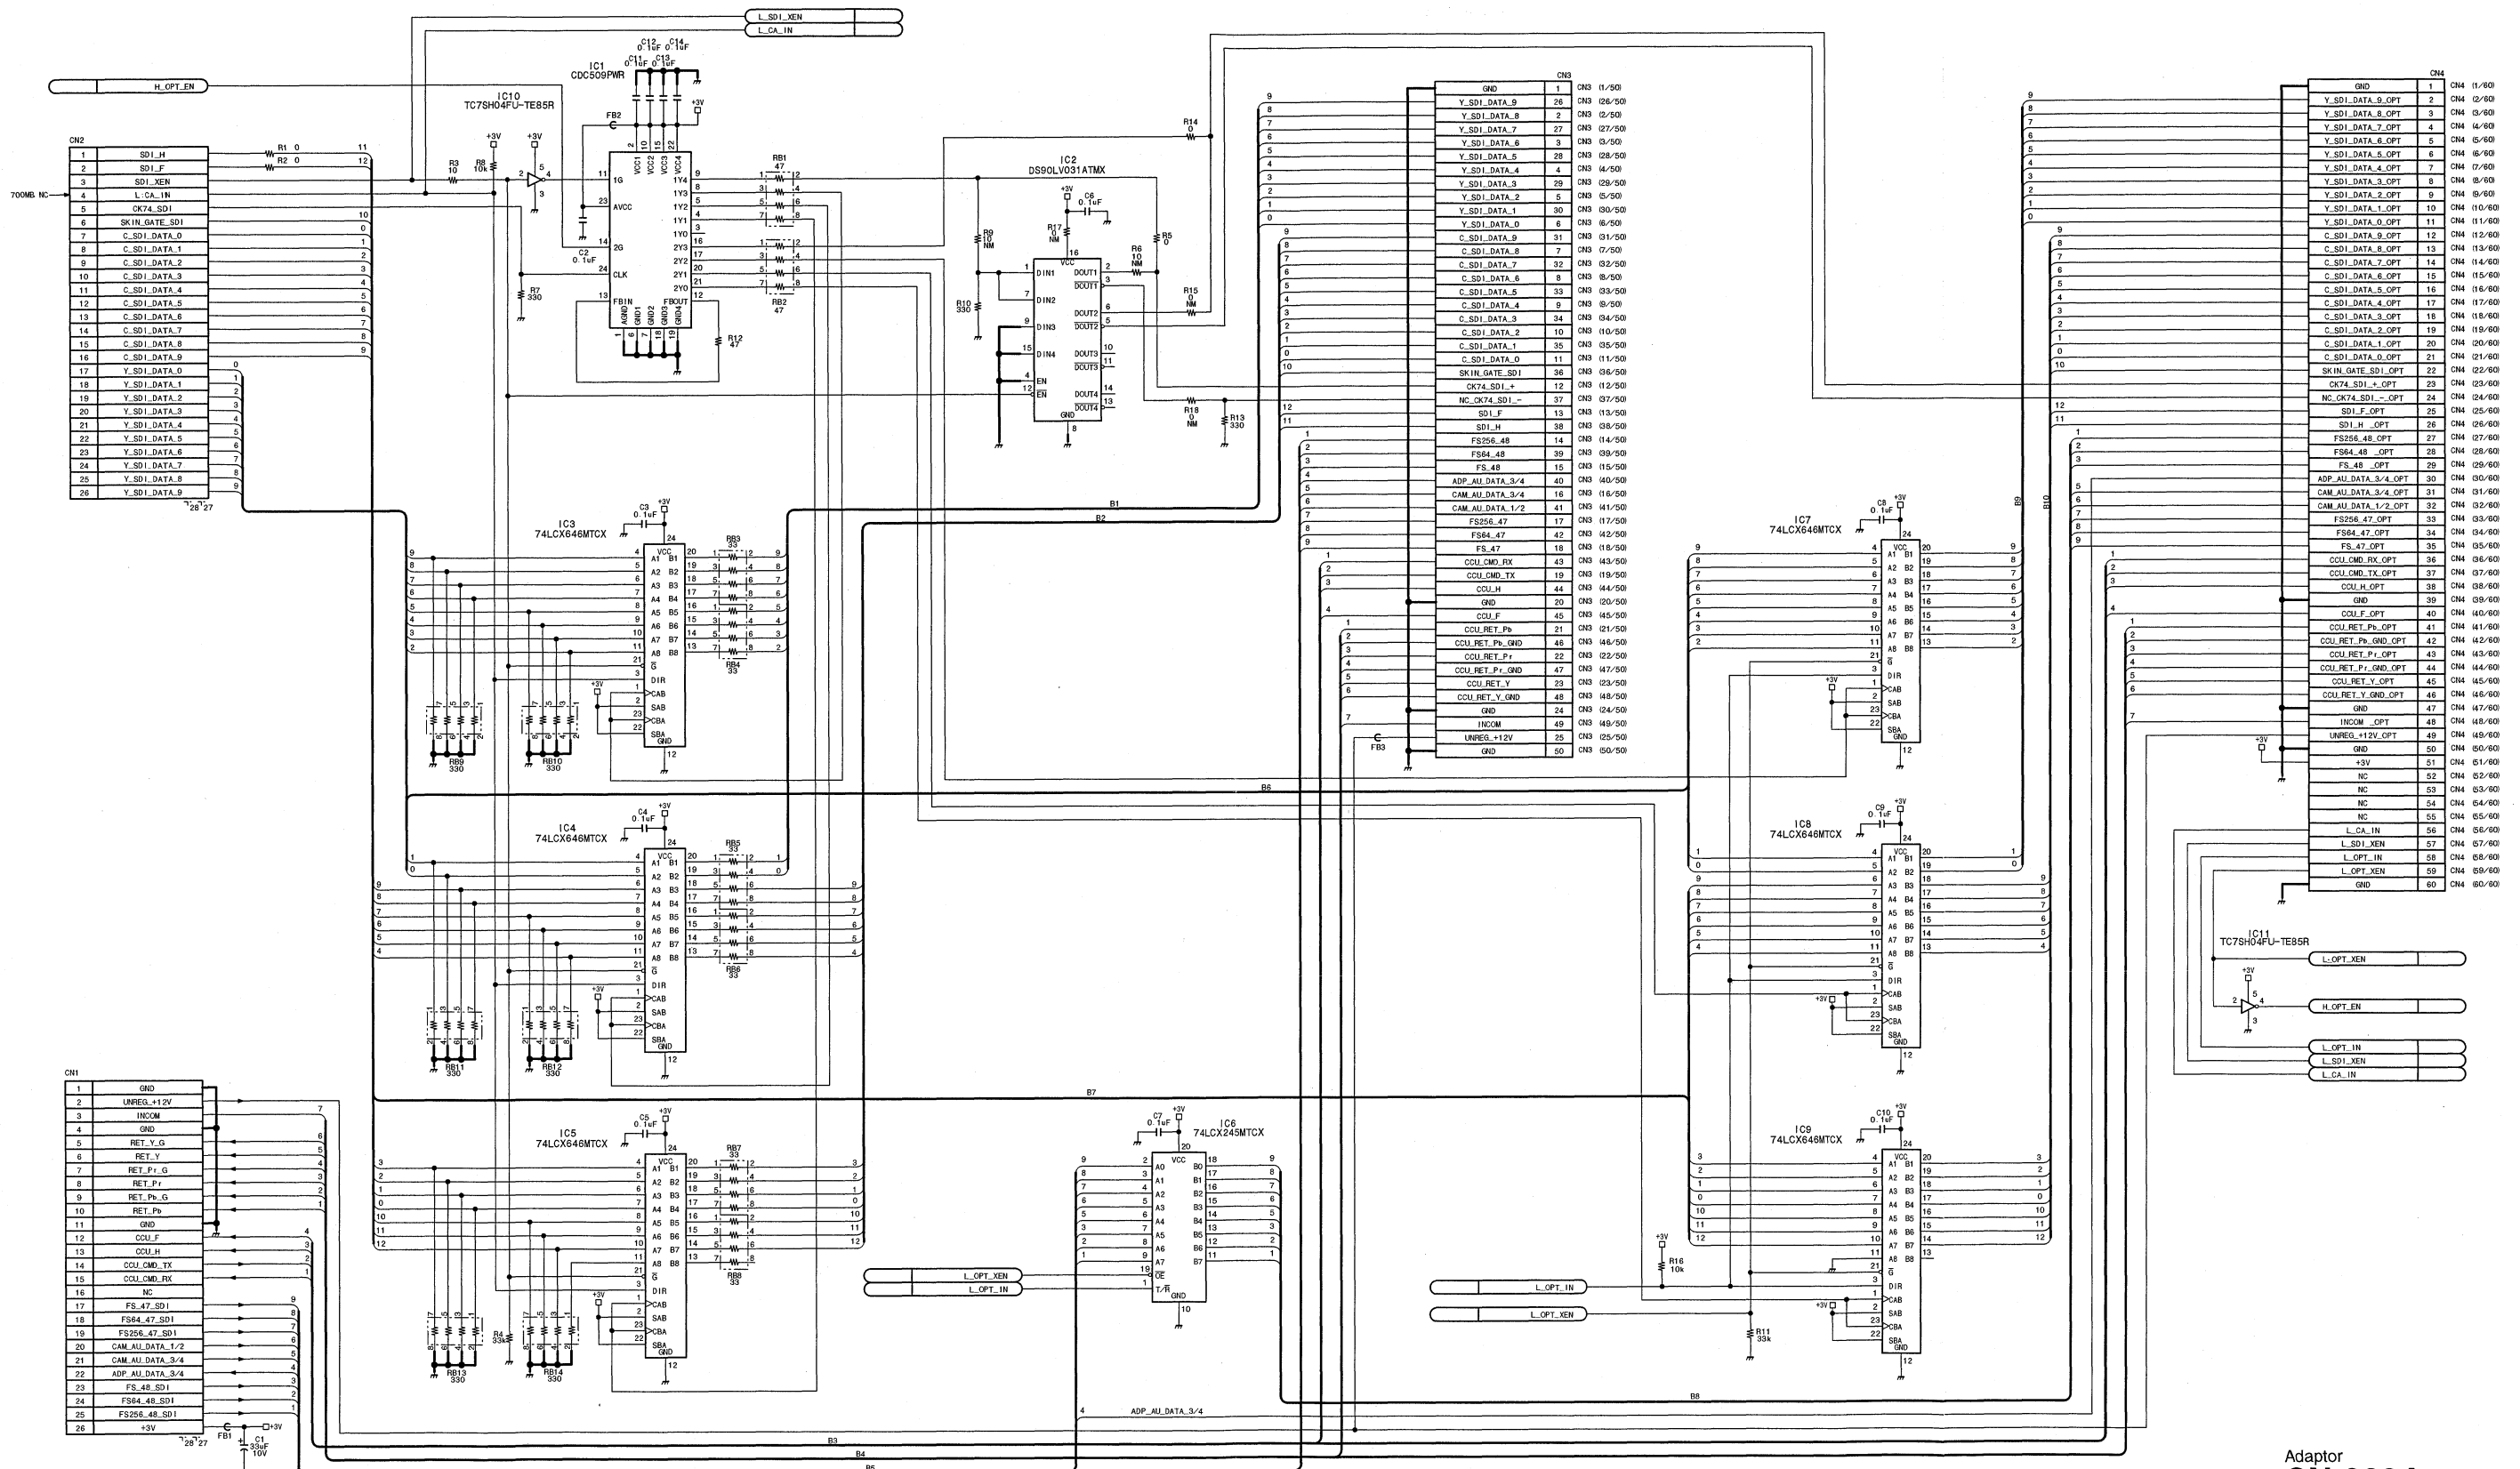


Adaptor
CN-2024
 BOARD NO. 1-677-542-11
 LOT NO. 911-085
 HDW-F900V_CN-2024_003_1

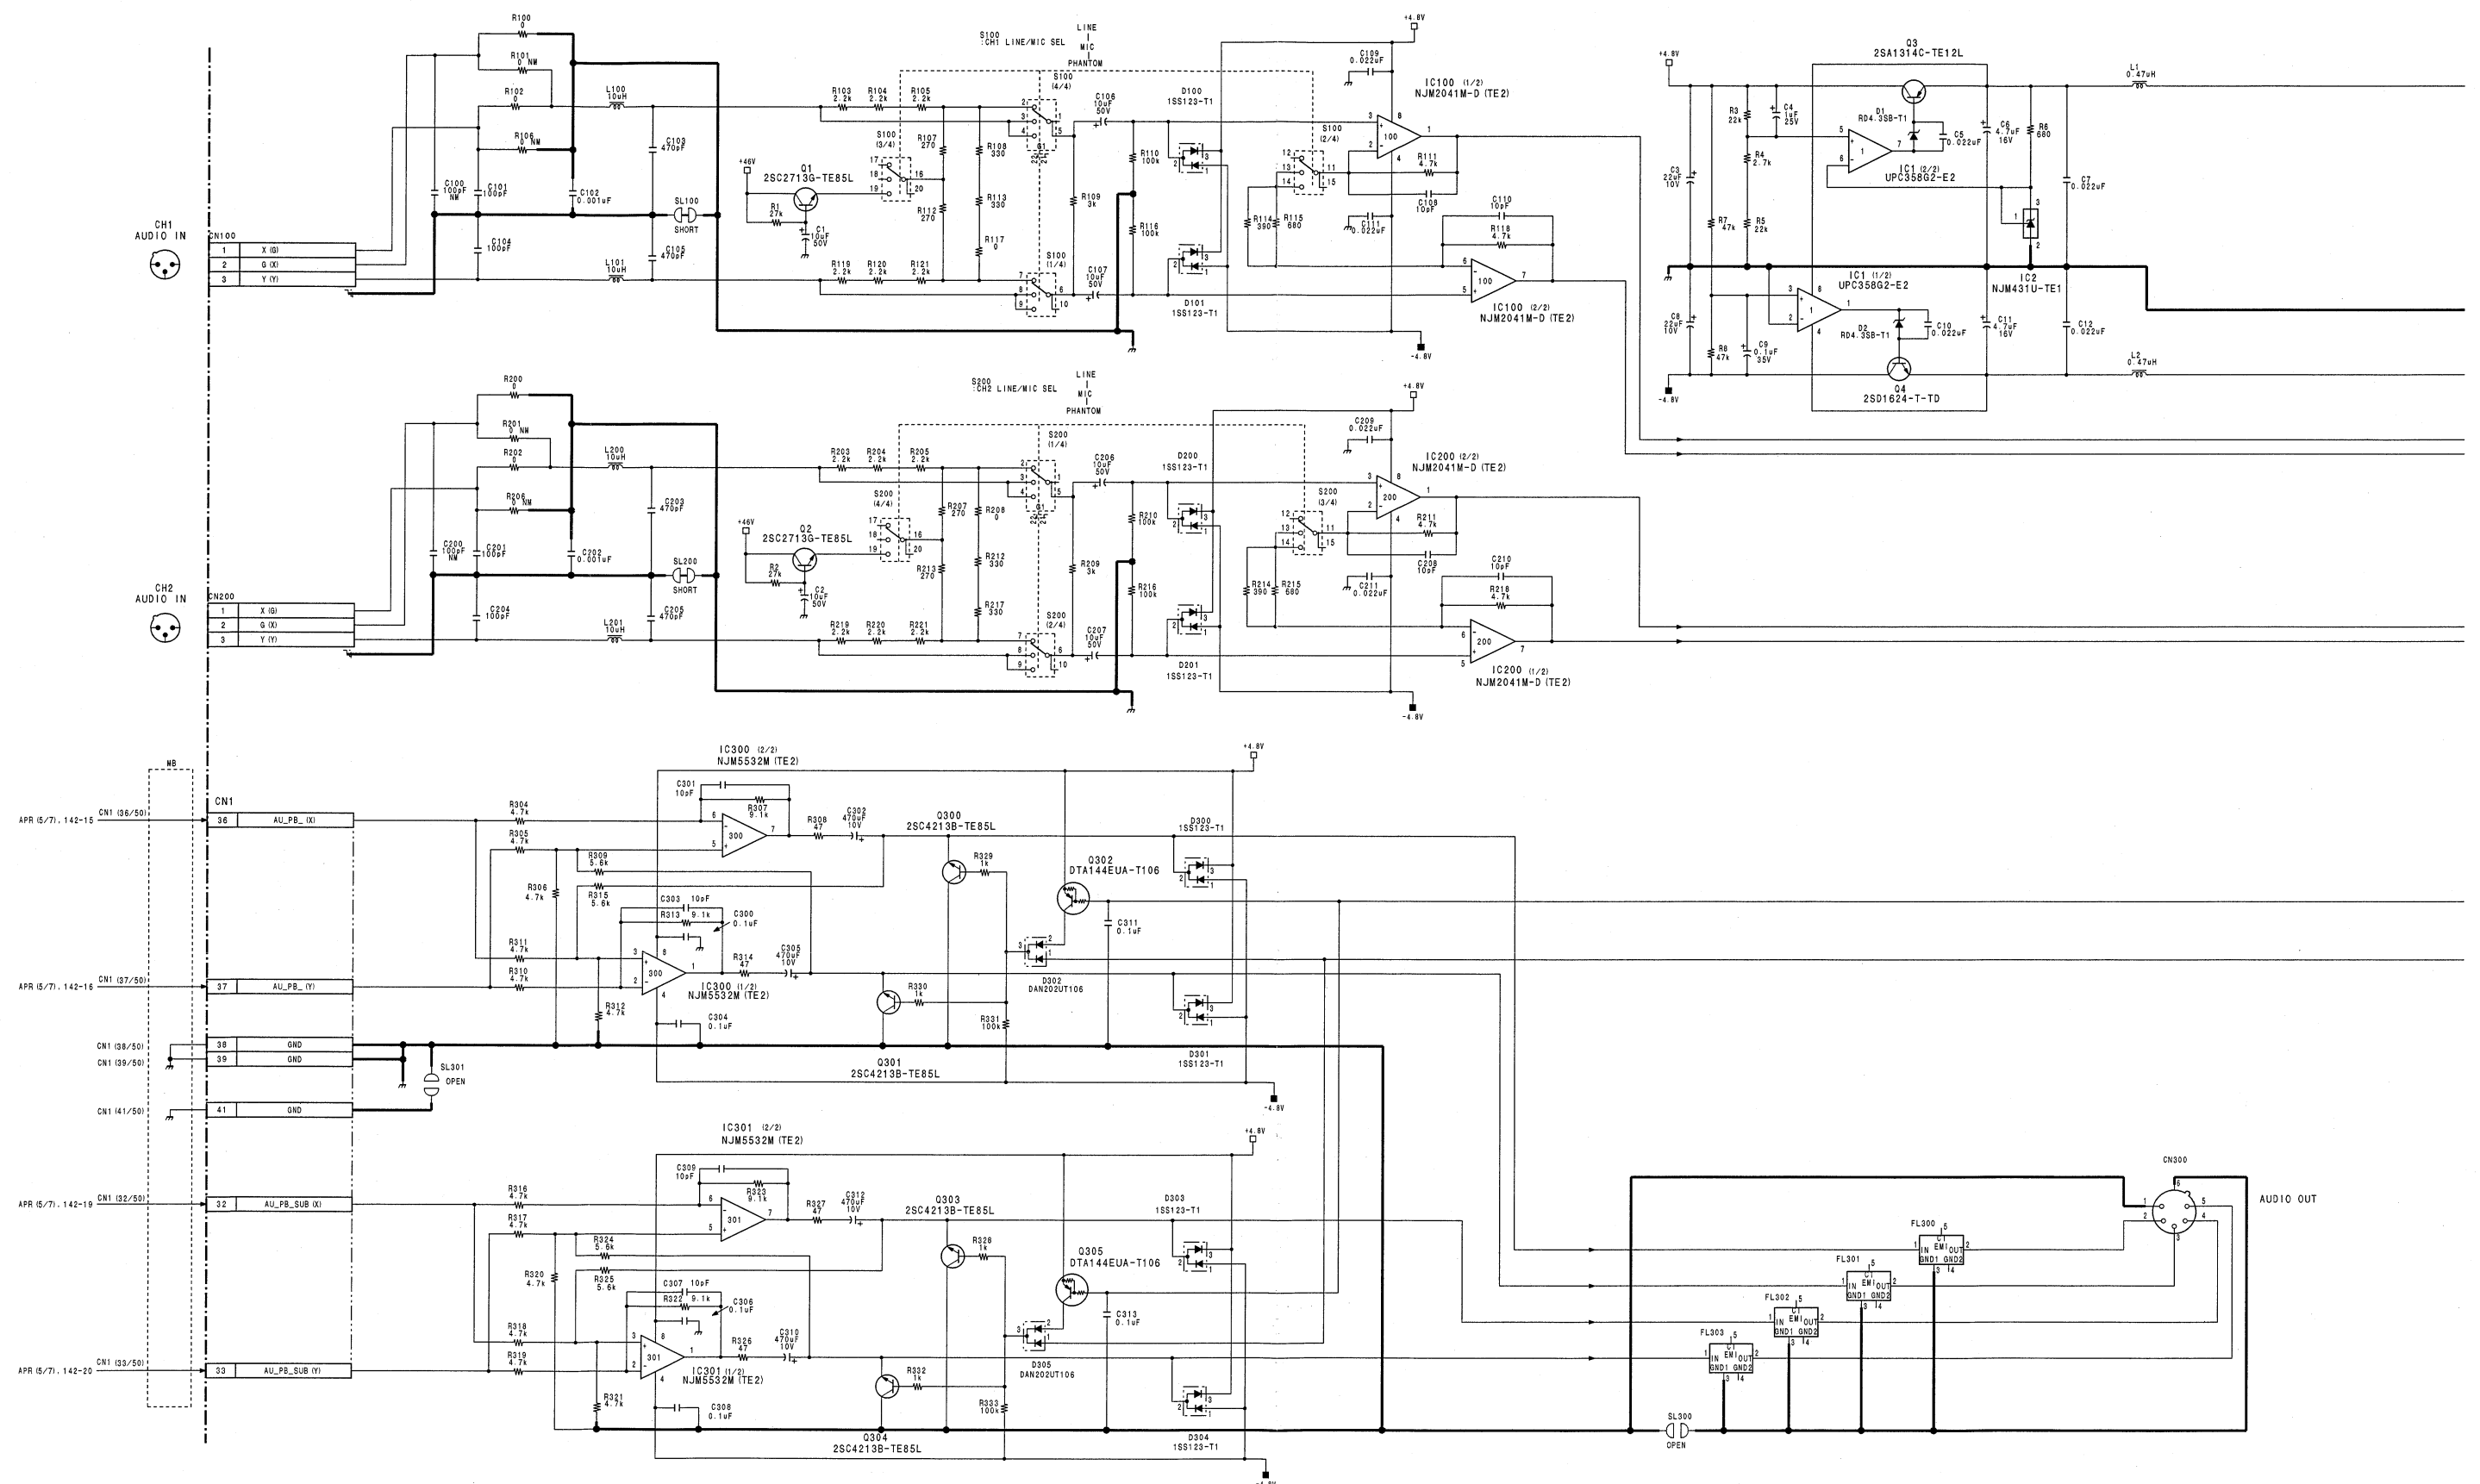

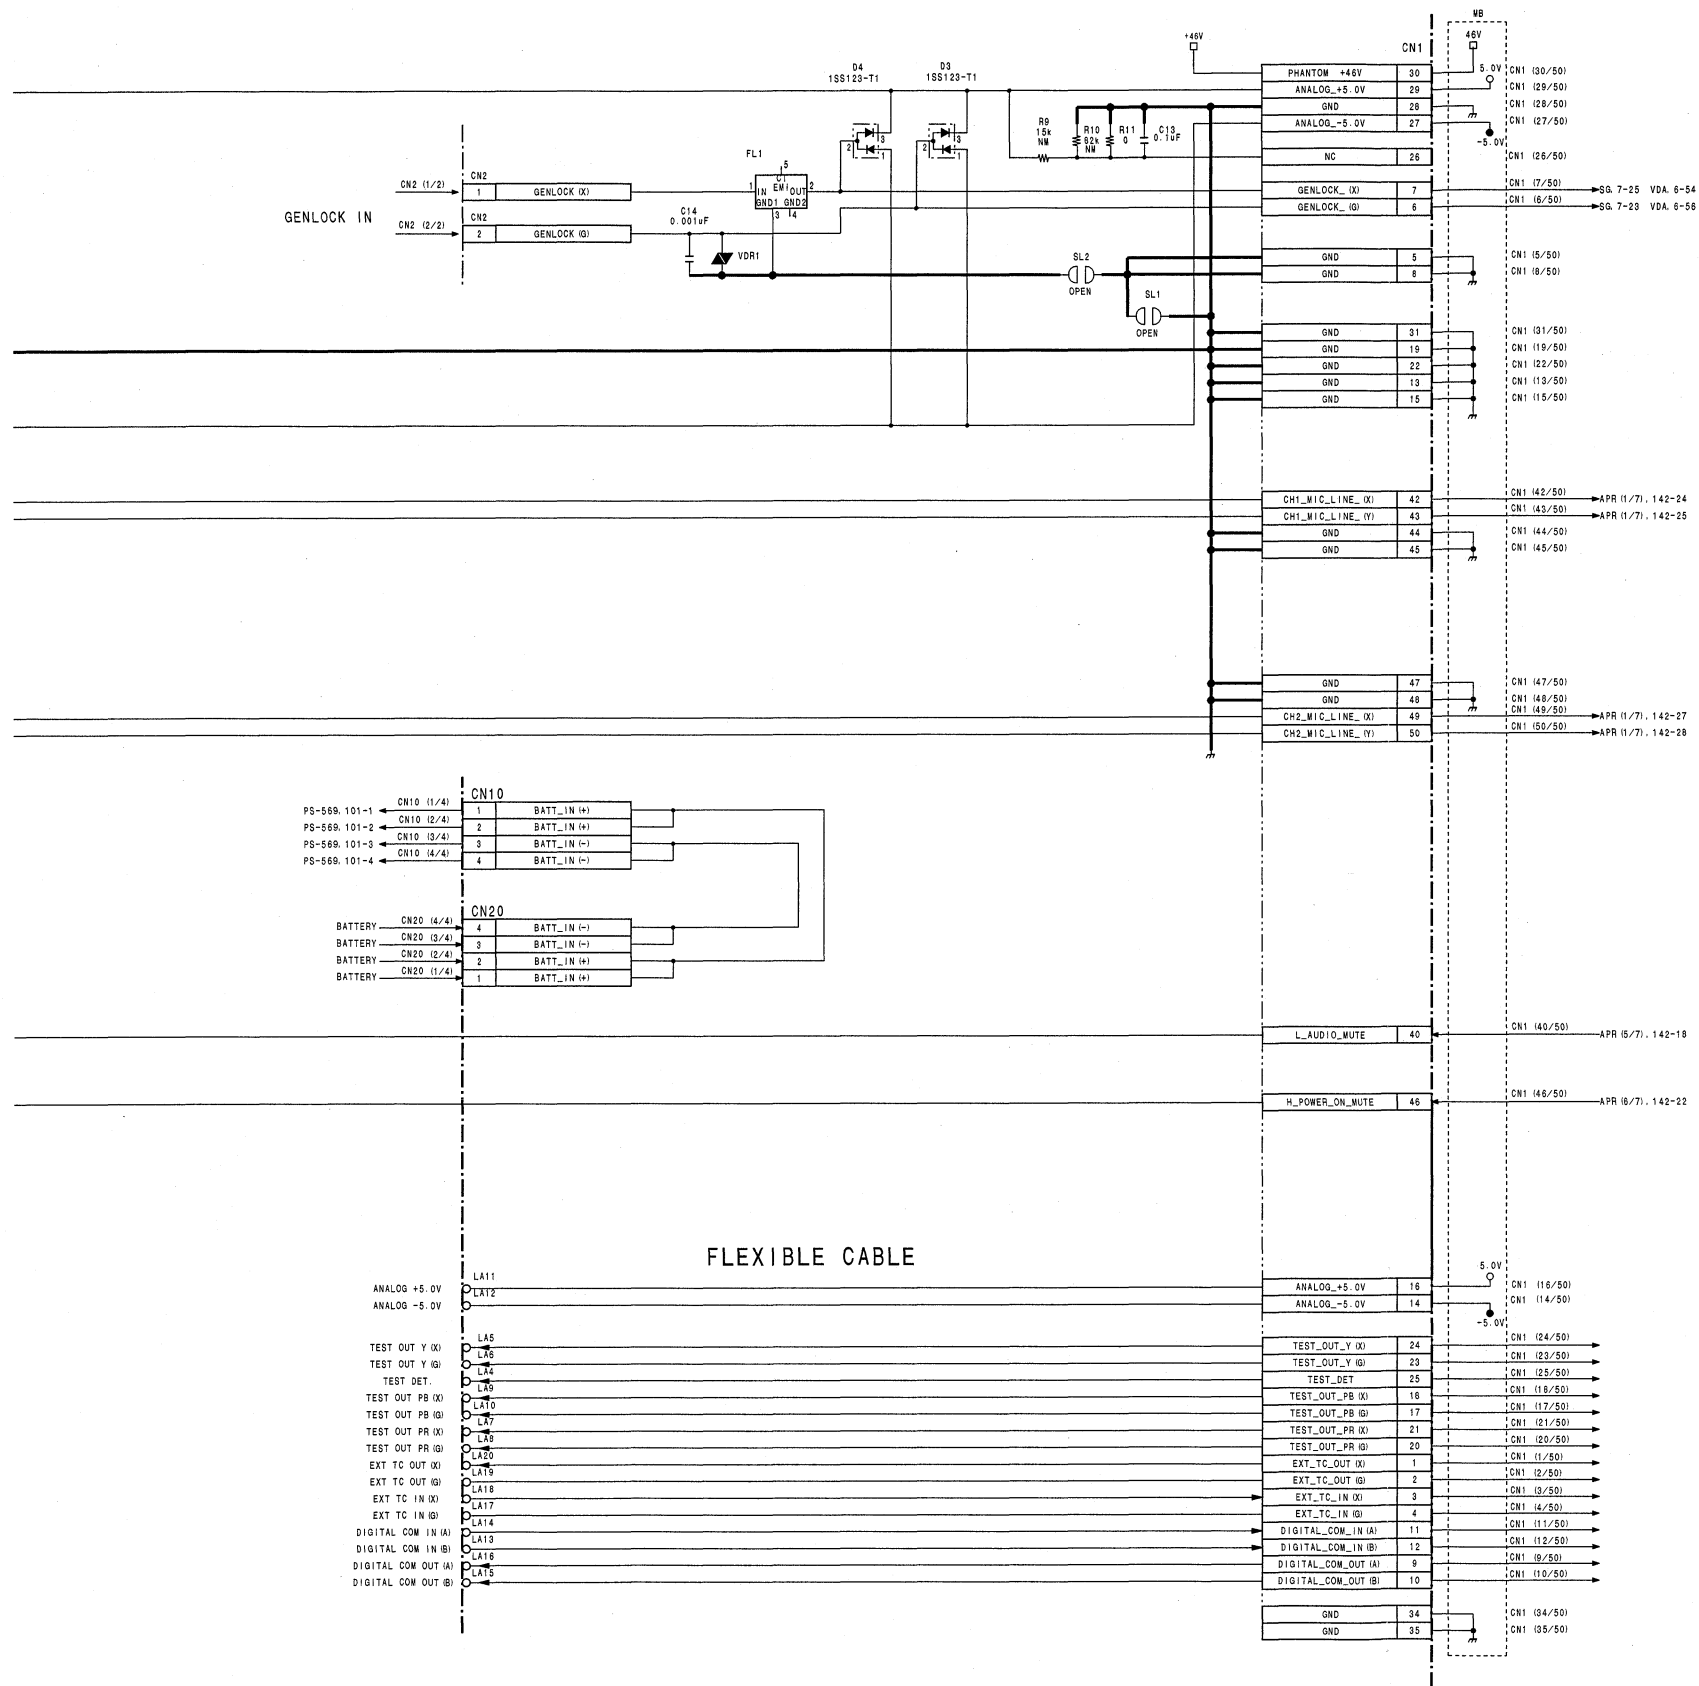

Connector board for Audio IN/OUT & EXT DC IN/OUT
CN-2025
 BOARD NO. 1-677-544-11, 12
 LOT NO. 911-
 HDW-F900_CN-2025_006_1

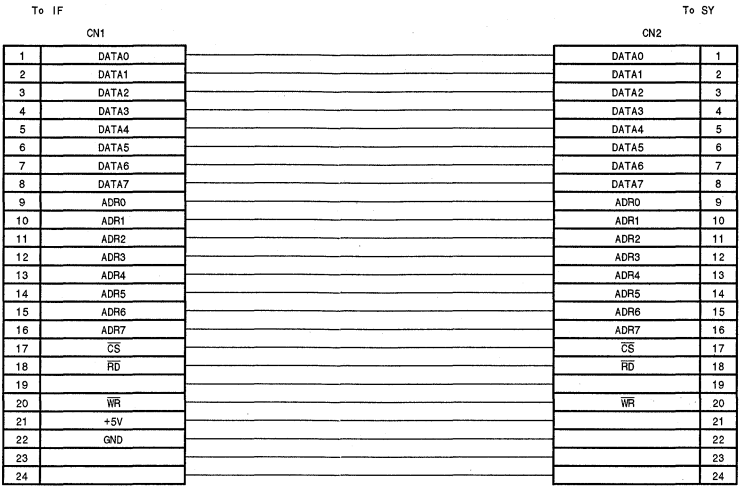


Relay board for IF-819 board and SY-285 board

CN-2044

BOARD NO. 1-677-603-11

LOT NO. 911-

HDW-F900C_CN-2044_111_1

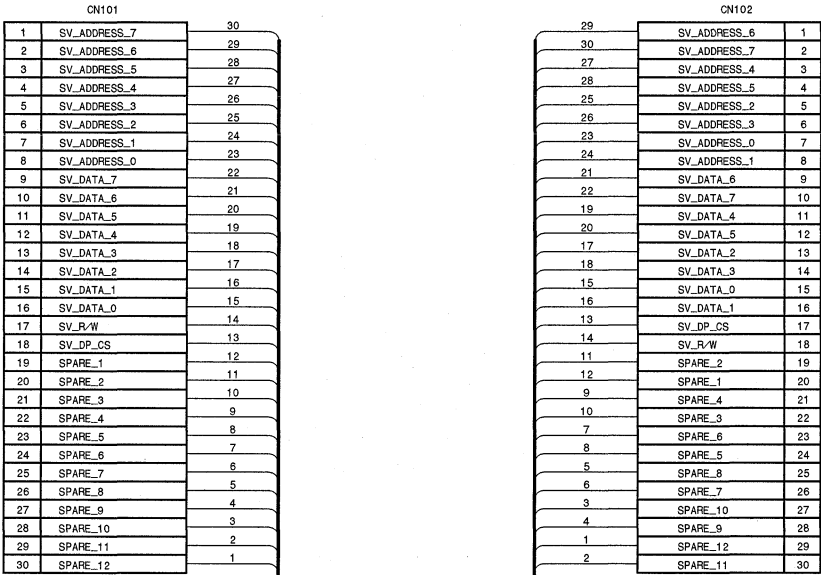


Relay board for SV-218 board and SY-285 board

CN-2078

BOARD NO. 1-577-546-11

LOT NO. 911-

HDW-F900V_CN-2078_002_1

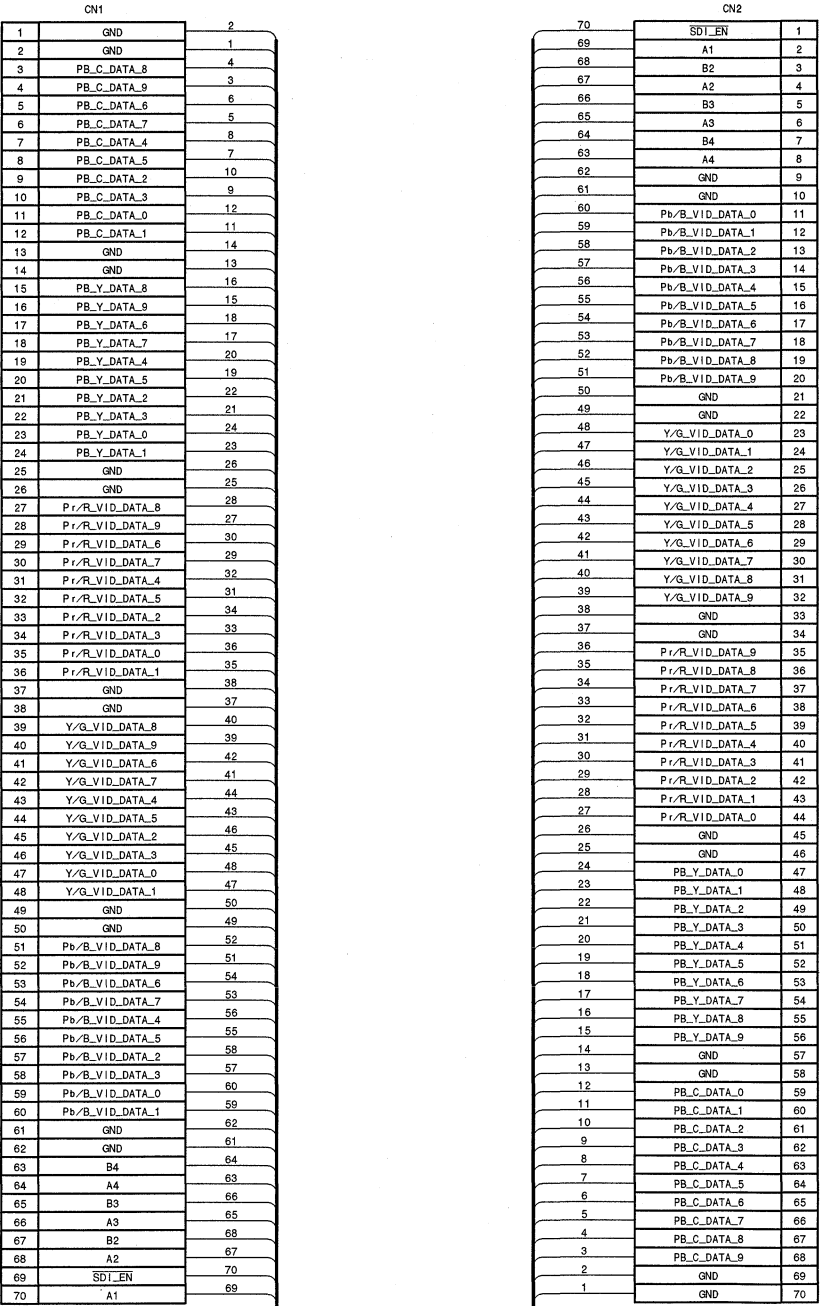


Relay board for DPR-152 board and DA-148 board

CN-2085

BOARD NO. 1-677-840-11

LOT NO. 911-

HDW-F900C_CN-2085_111_1

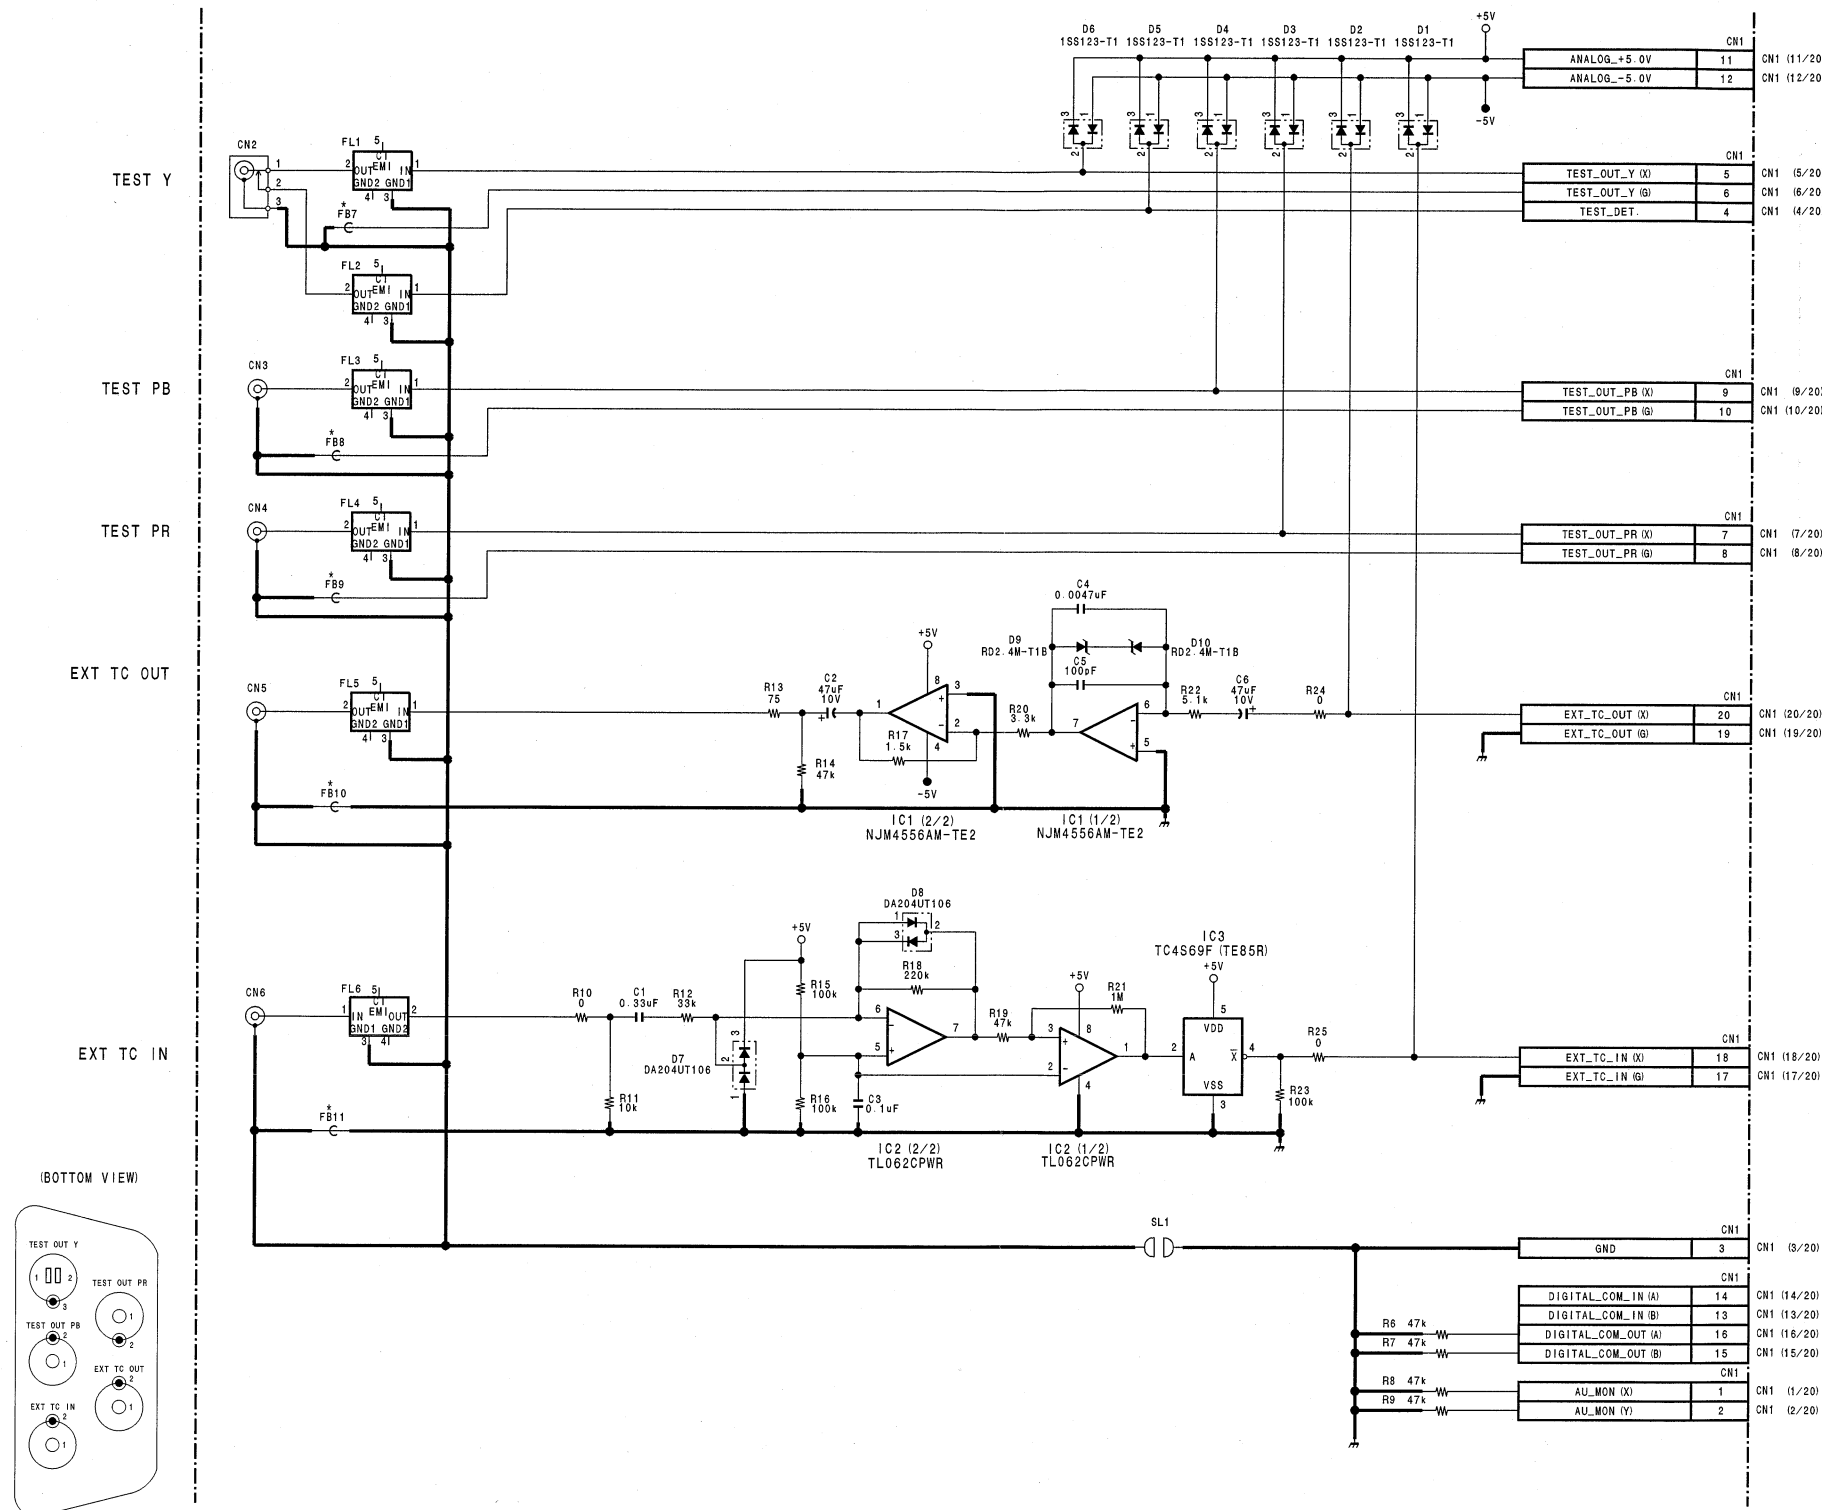


NOTE: *

REF. NO.	CHANGE INFORMATION	SERIAL/LOT NO.
FB7	R1 → FB7	091-90001-
FB8	R2 → FB8	
FB9	R3 → FB9	
FB10	R4 → FB10	
FB11	R5 → FB11	


Connector board for Monitor OUT, EXT TC IN/OUT
CN-2046
 BOARD NO. 1-677-737-11
 LOT NO. 911-
 HDW-F900_CN-2046_111_1



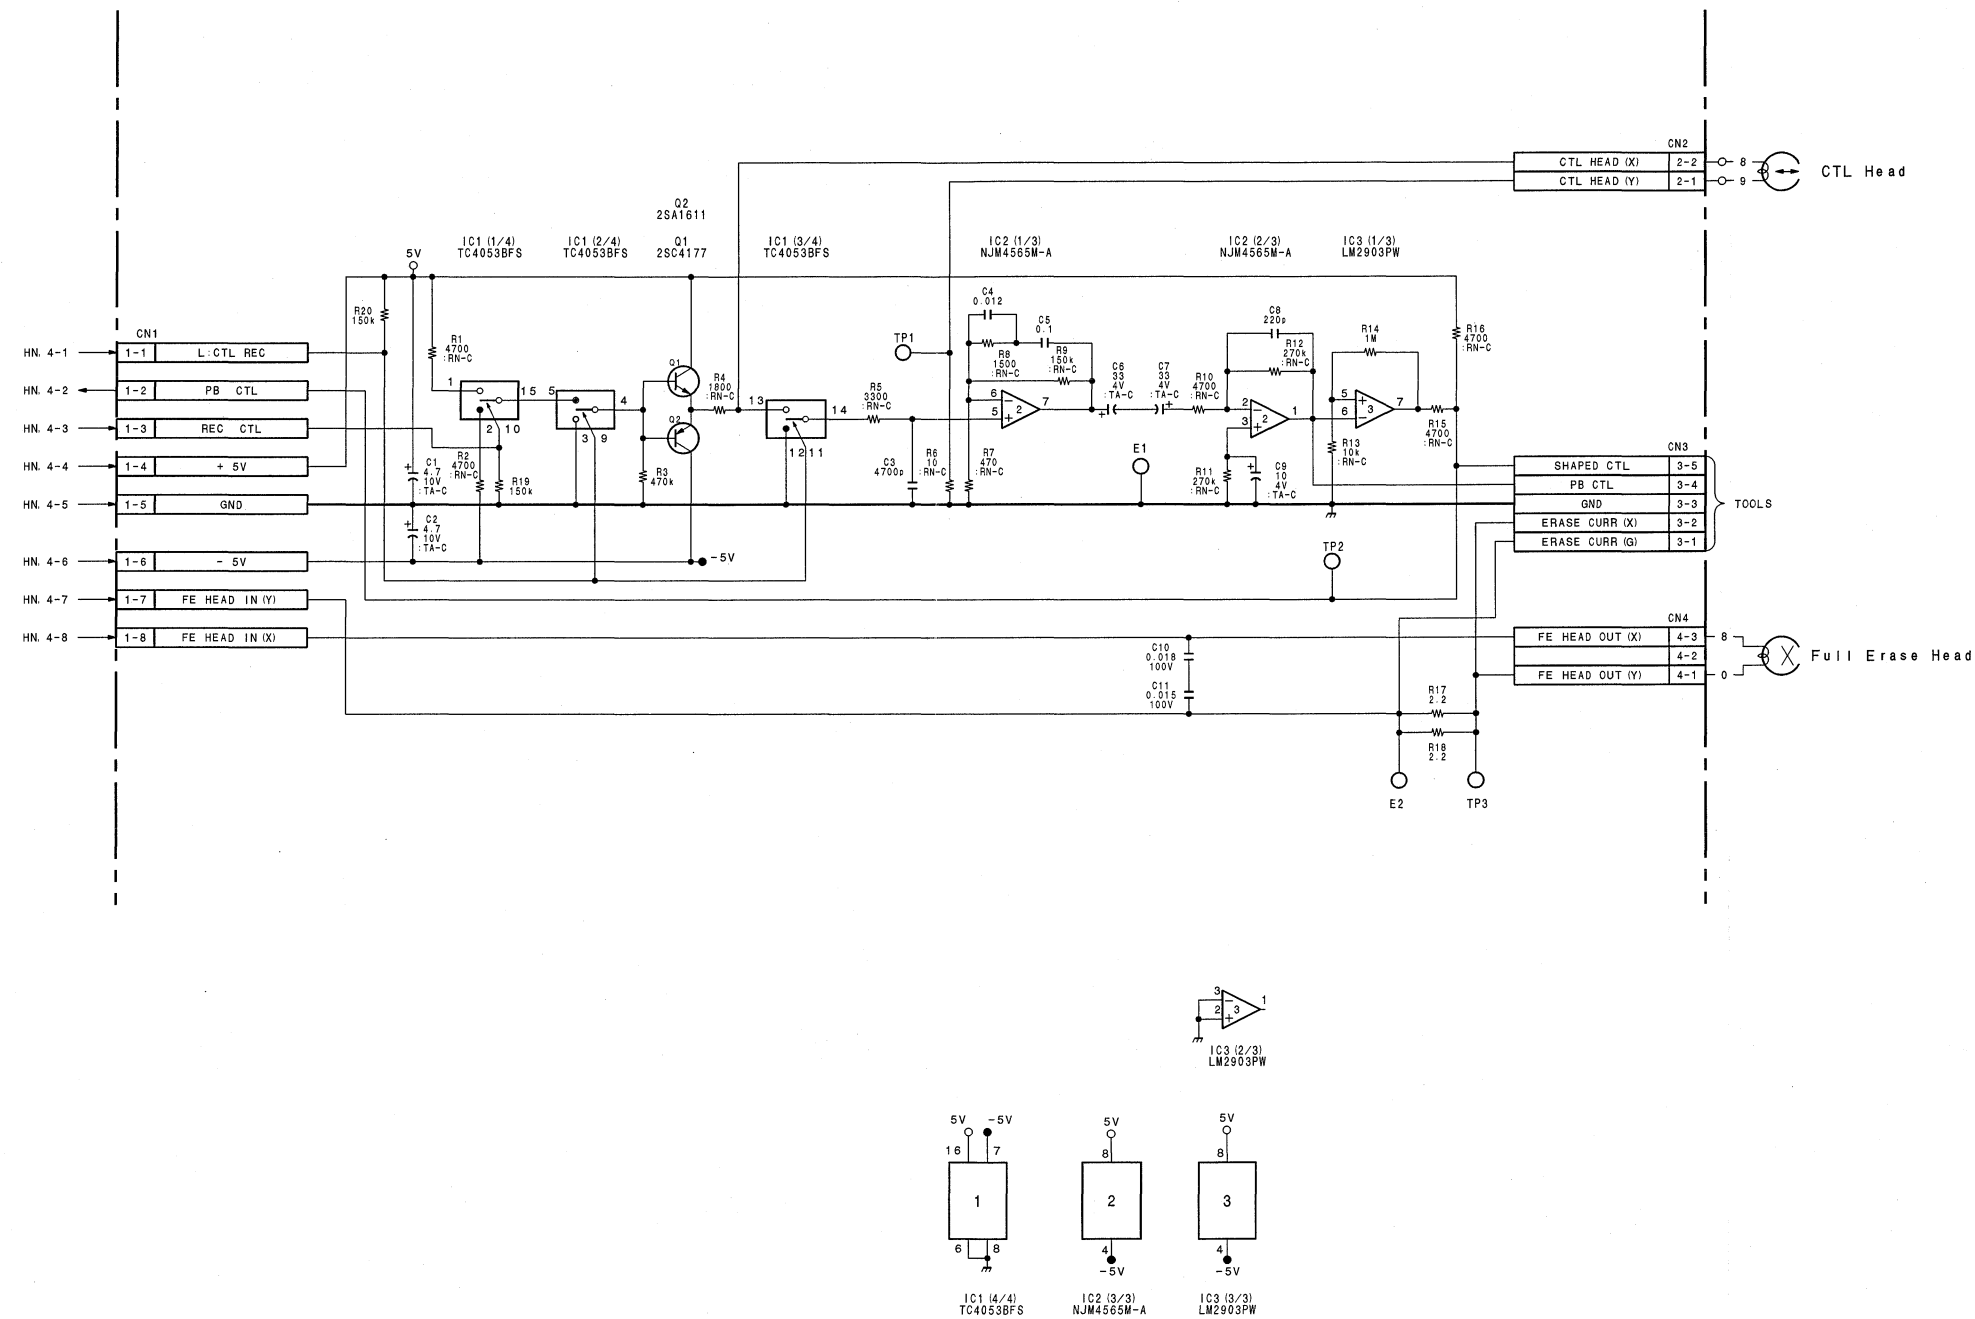


CTL head amp
CTL-10
 BOARD NO. 1-652-765-11
 LOT NO. 911-
 B-WHDW700-CTL10-X1-S/M

CUE-2 CUE-2

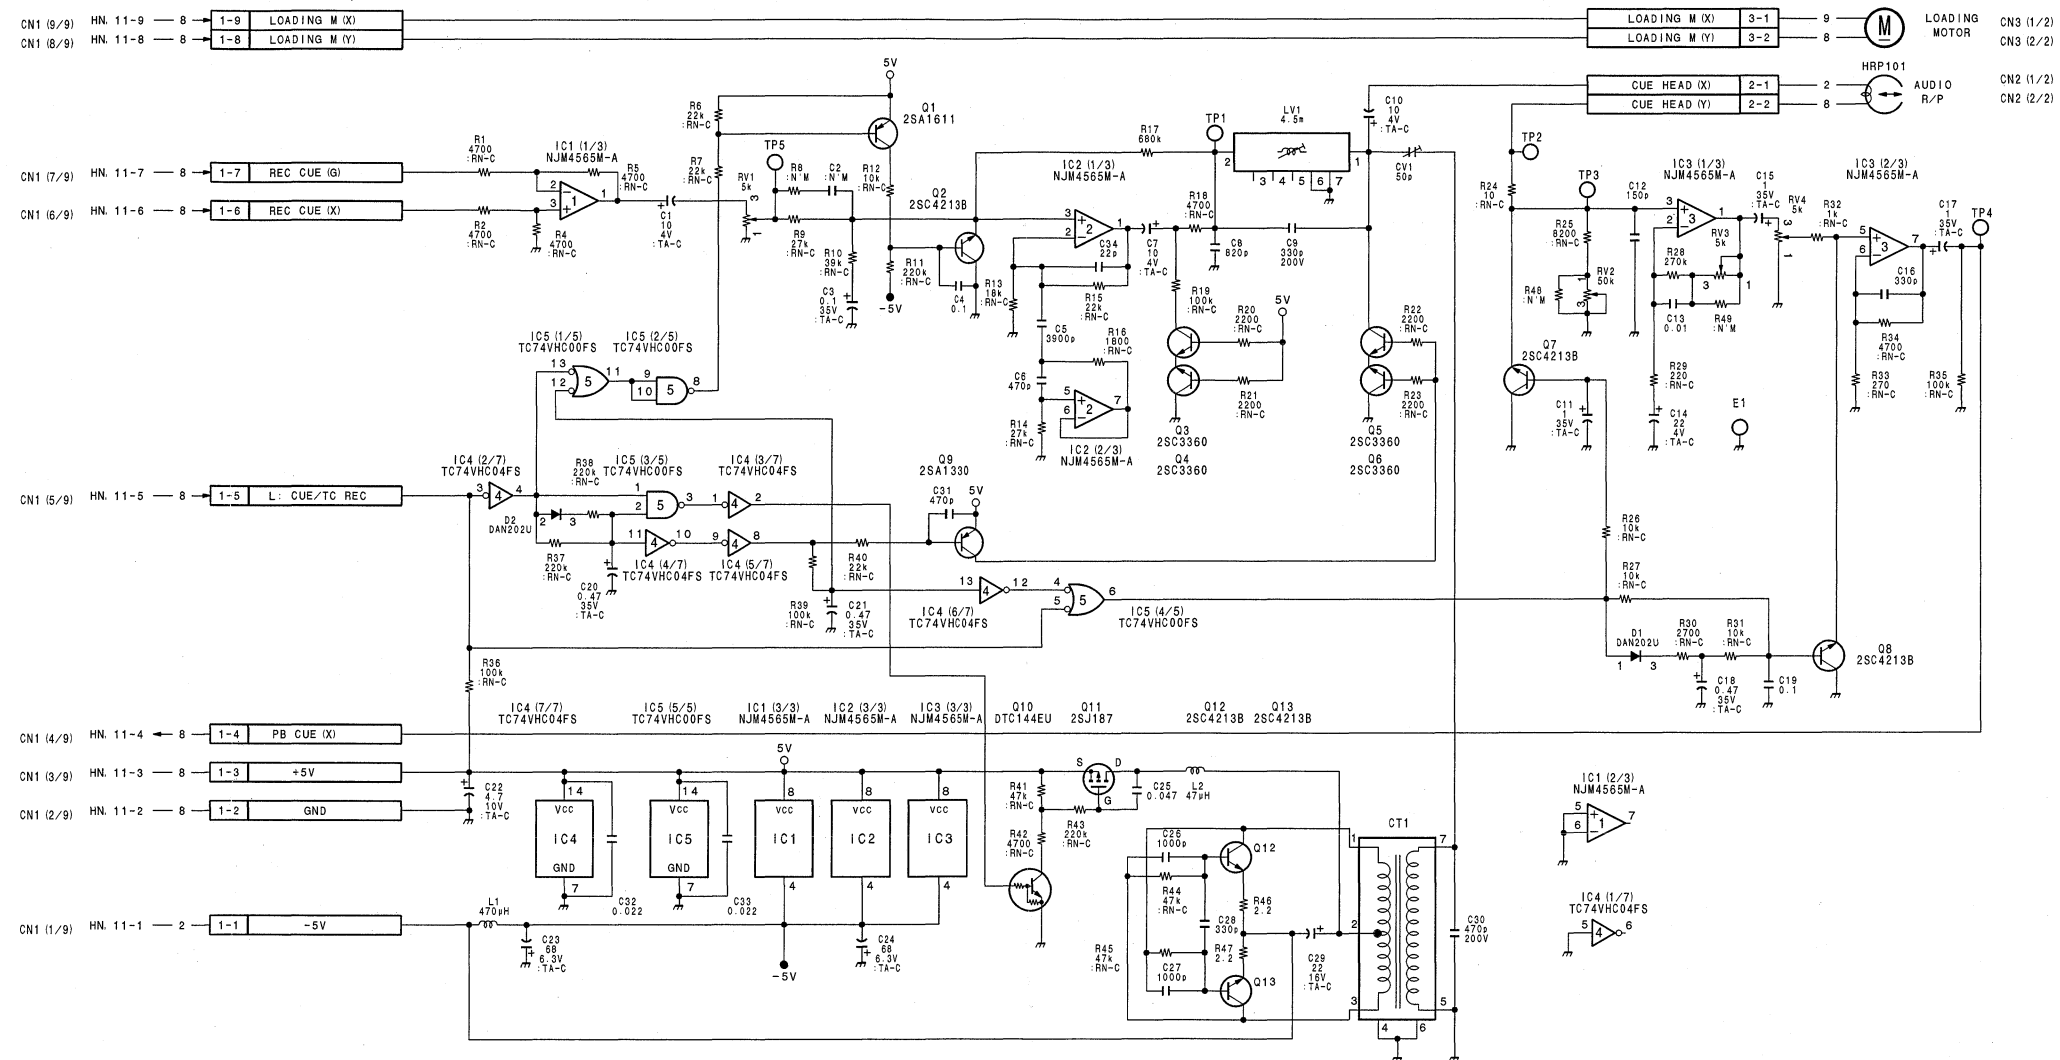


CUE head amp
CUE-2
 BOARD NO. 1-652-778-12
 LOT NO. 911-
 B-WHDW700-CUE2-X2-S/M




Post filter, D/A converter
DA-148 (1/2)

BOARD NO. 1-677-841-11, 12
LOT NO. 911-


HDW-F900C_DA-148_211_1

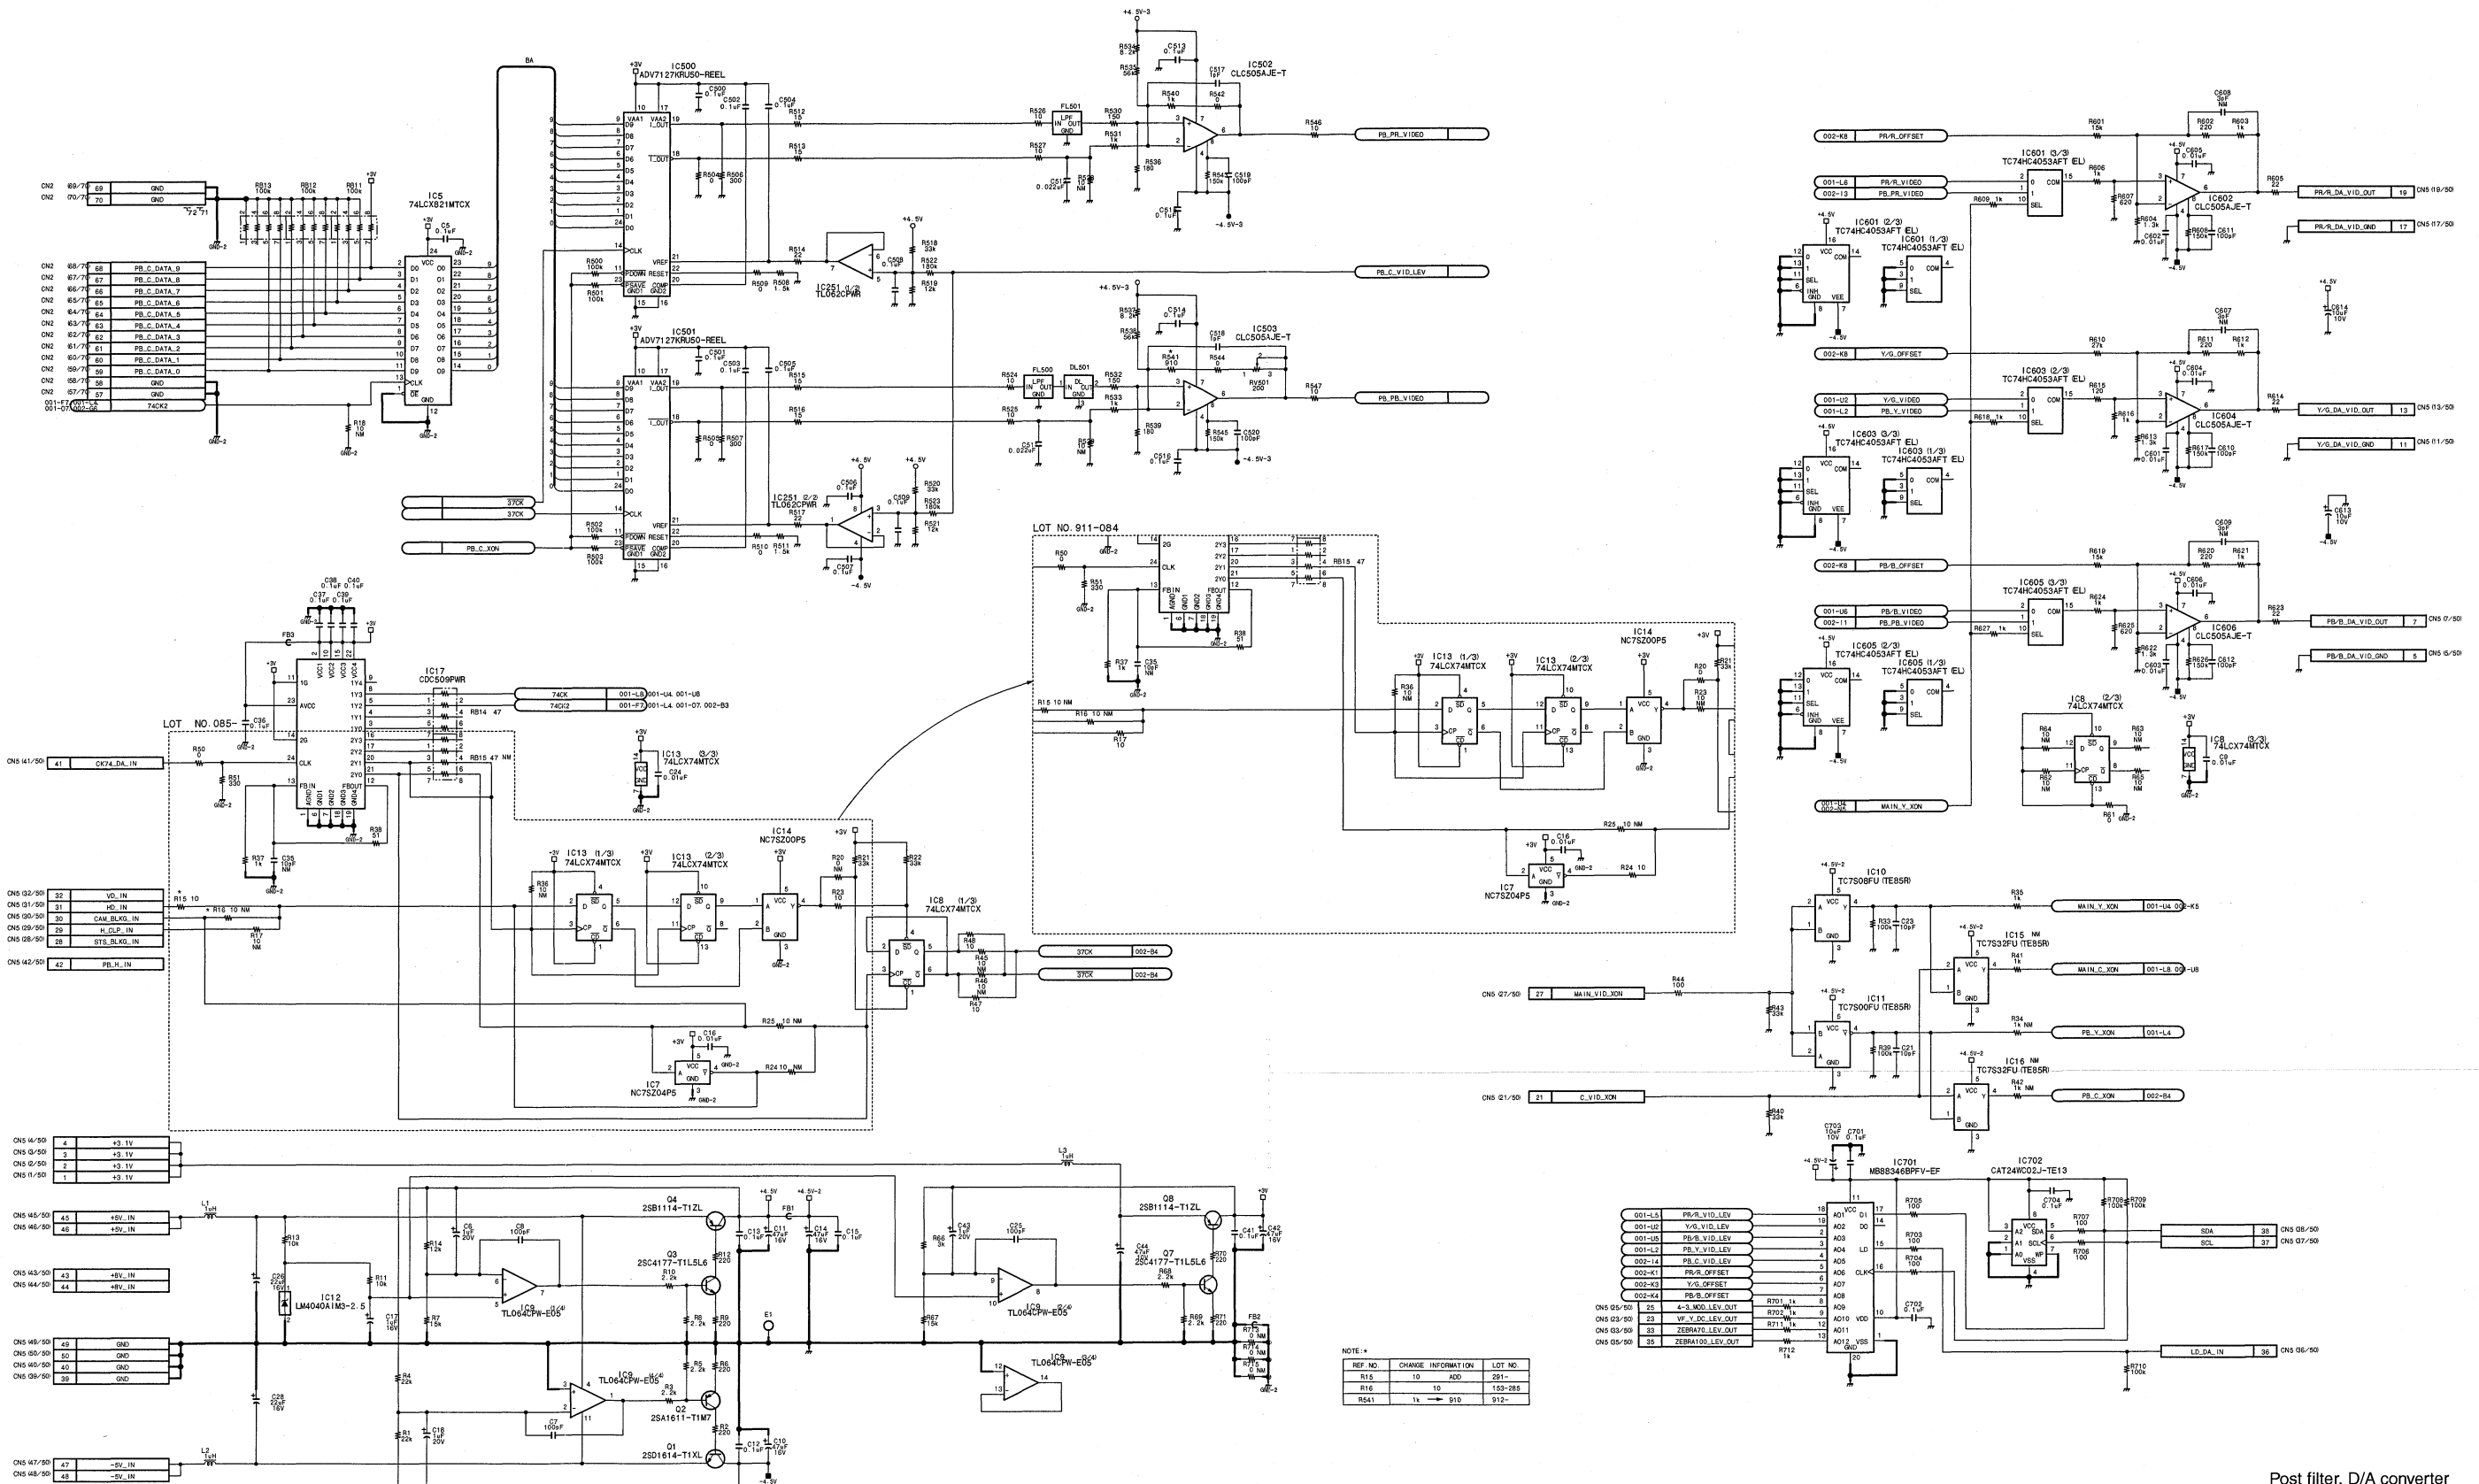


Post filter, D/A converter
DA-148 (2/2)
BOARD NO. 1-677-841-11, 12
LOT NO. 911-
HDW-F900C-DA-148_211_2

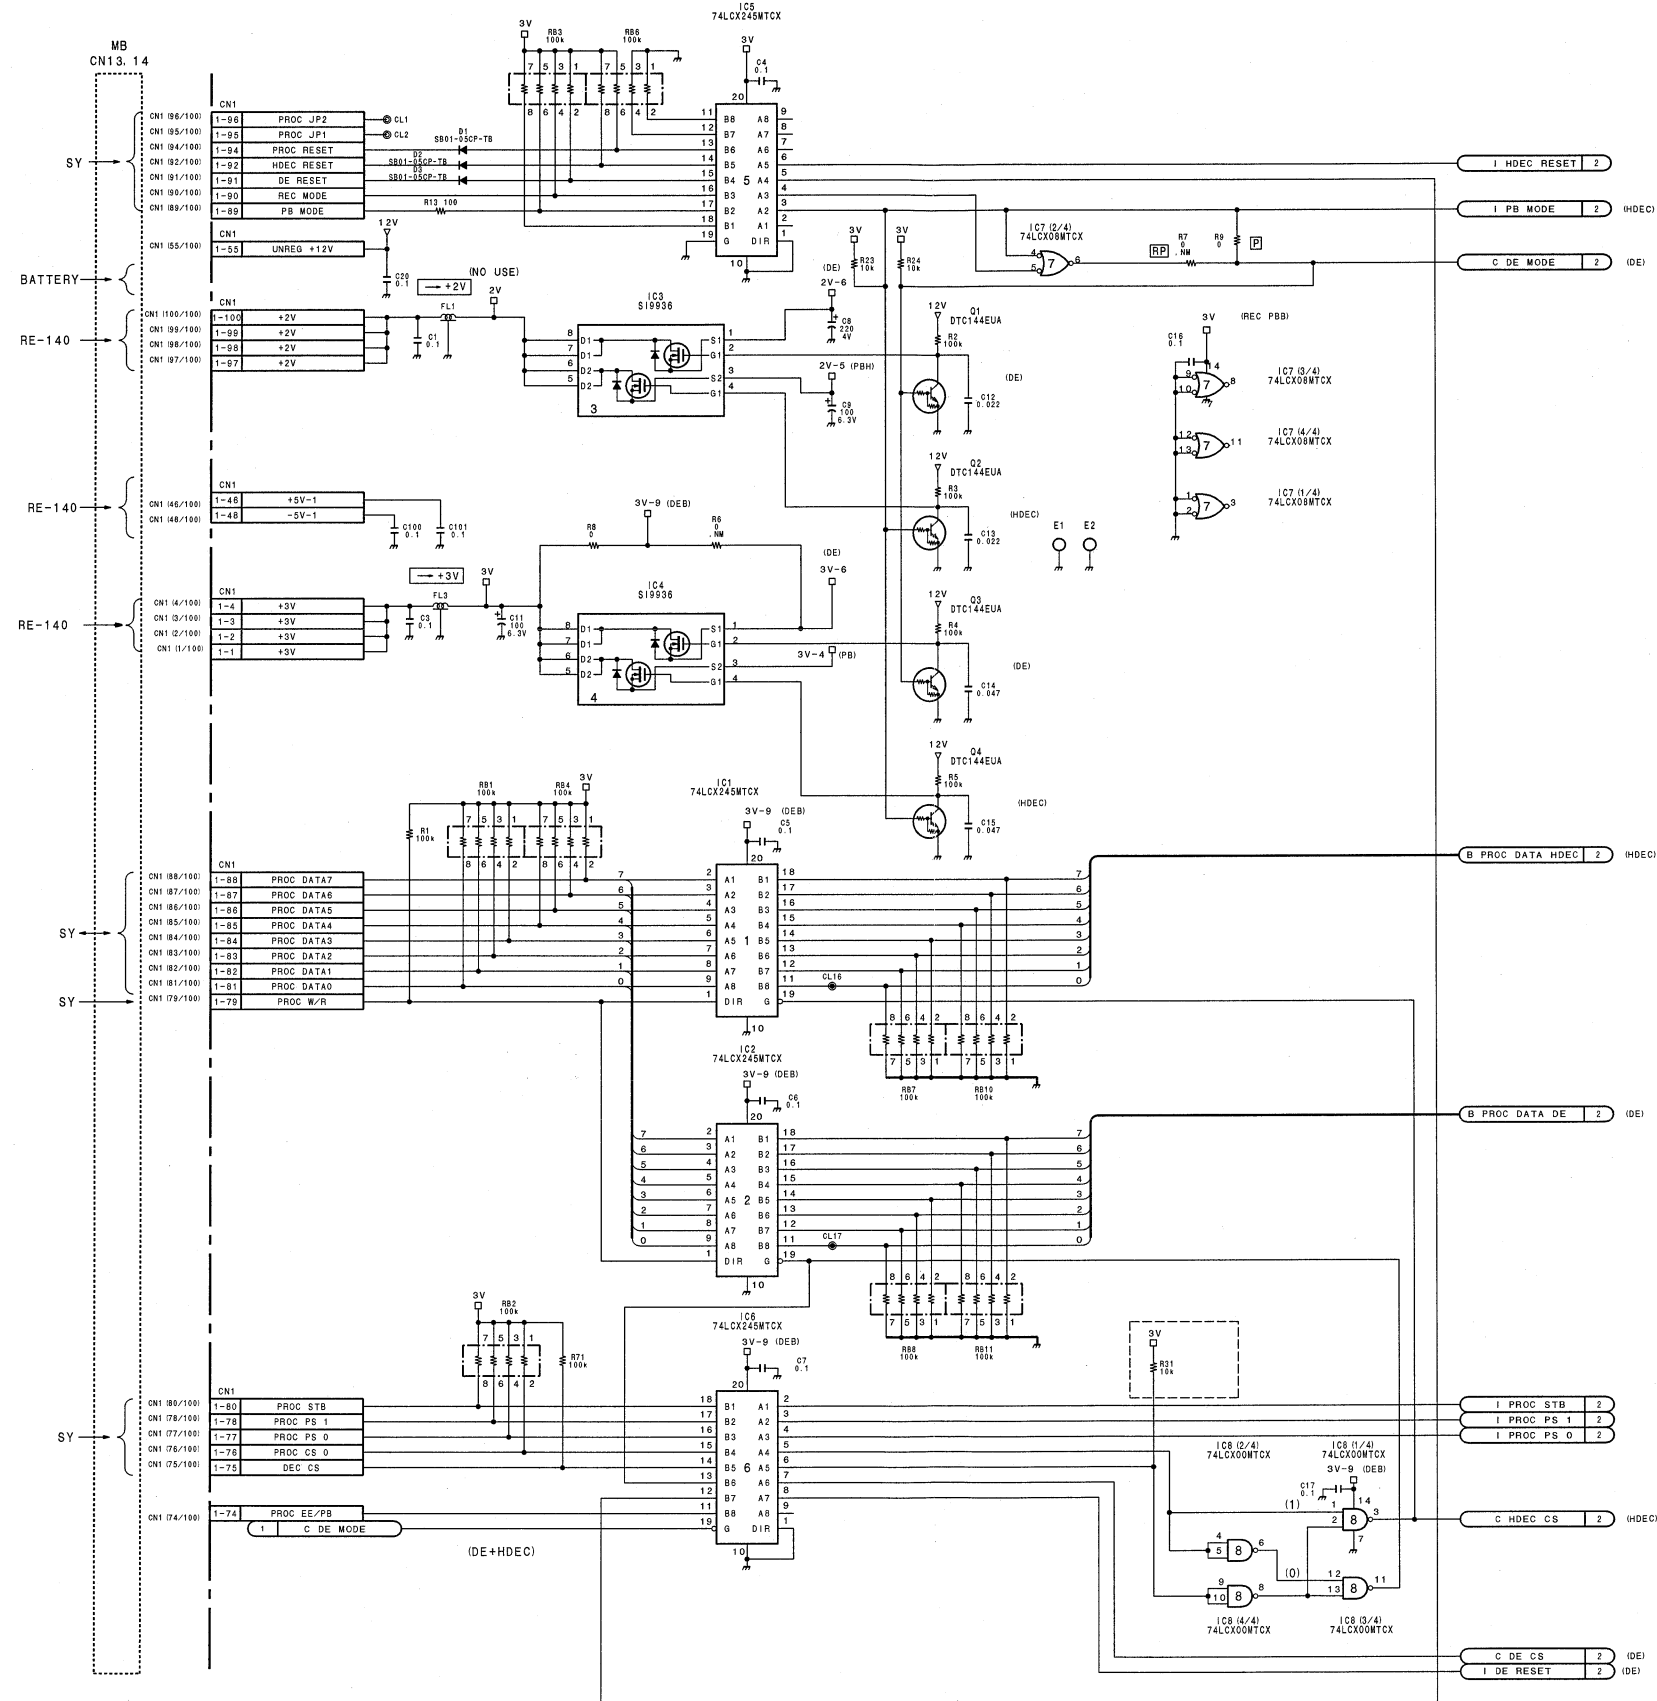


CN13. 14		MB	
1-9	CN1	1-9	CN1
1-10	CN1	1-10	CN1
1-11	CN1	1-11	CN1
1-12	CN1	1-12	CN1
1-13	CN1	1-13	CN1
1-14	CN1	1-14	CN1
1-15	CN1	1-15	CN1
1-16	CN1	1-16	CN1
1-17	CN1	1-17	CN1
1-18	CN1	1-18	CN1
1-19	CN1	1-19	CN1
1-20	CN1	1-20	CN1
1-21	CN1	1-21	CN1
1-22	CN1	1-22	CN1
1-23	CN1	1-23	CN1
1-24	CN1	1-24	CN1
1-25	CN1	1-25	CN1
1-26	CN1	1-26	CN1
1-27	CN1	1-27	CN1
1-28	CN1	1-28	CN1
1-29	CN1	1-29	CN1
1-30	CN1	1-30	CN1
1-31	CN1	1-31	CN1
1-32	CN1	1-32	CN1
1-33	CN1	1-33	CN1
1-34	CN1	1-34	CN1
1-35	CN1	1-35	CN1
1-36	CN1	1-36	CN1
1-37	CN1	1-37	CN1
1-38	CN1	1-38	CN1
1-39	CN1	1-39	CN1
1-40	CN1	1-40	CN1
1-41	CN1	1-41	CN1
1-42	CN1	1-42	CN1
1-43	CN1	1-43	CN1
1-44	CN1	1-44	CN1
1-45	CN1	1-45	CN1
1-46	CN1	1-46	CN1
1-47	CN1	1-47	CN1
1-48	CN1	1-48	CN1
1-49	CN1	1-49	CN1
1-50	CN1	1-50	CN1
1-51	CN1	1-51	CN1
1-52	CN1	1-52	CN1
1-53	CN1	1-53	CN1
1-54	CN1	1-54	CN1
1-55	CN1	1-55	CN1
1-56	CN1	1-56	CN1
1-57	CN1	1-57	CN1
1-58	CN1	1-58	CN1
1-59	CN1	1-59	CN1
1-60	CN1	1-60	CN1
1-61	CN1	1-61	CN1
1-62	CN1	1-62	CN1
1-63	CN1	1-63	CN1
1-64	CN1	1-64	CN1
1-65	CN1	1-65	CN1
1-66	CN1	1-66	CN1
1-67	CN1	1-67	CN1
1-68	CN1	1-68	CN1
1-69	CN1	1-69	CN1
1-70	CN1	1-70	CN1
1-71	CN1	1-71	CN1
1-72	CN1	1-72	CN1
1-73	CN1	1-73	CN1
1-74	CN1	1-74	CN1
1-75	CN1	1-75	CN1
1-76	CN1	1-76	CN1
1-77	CN1	1-77	CN1
1-78	CN1	1-78	CN1
1-79	CN1	1-79	CN1
1-80	CN1	1-80	CN1
1-81	CN1	1-81	CN1
1-82	CN1	1-82	CN1
1-83	CN1	1-83	CN1
1-84	CN1	1-84	CN1
1-85	CN1	1-85	CN1
1-86	CN1	1-86	CN1
1-87	CN1	1-87	CN1
1-88	CN1	1-88	CN1
1-89	CN1	1-89	CN1
1-90	CN1	1-90	CN1
1-91	CN1	1-91	CN1
1-92	CN1	1-92	CN1
1-93	CN1	1-93	CN1
1-94	CN1	1-94	CN1
1-95	CN1	1-95	CN1
1-96	CN1	1-96	CN1
1-97	CN1	1-97	CN1
1-98	CN1	1-98	CN1
1-99	CN1	1-99	CN1
1-100	CN1	1-100	CN1







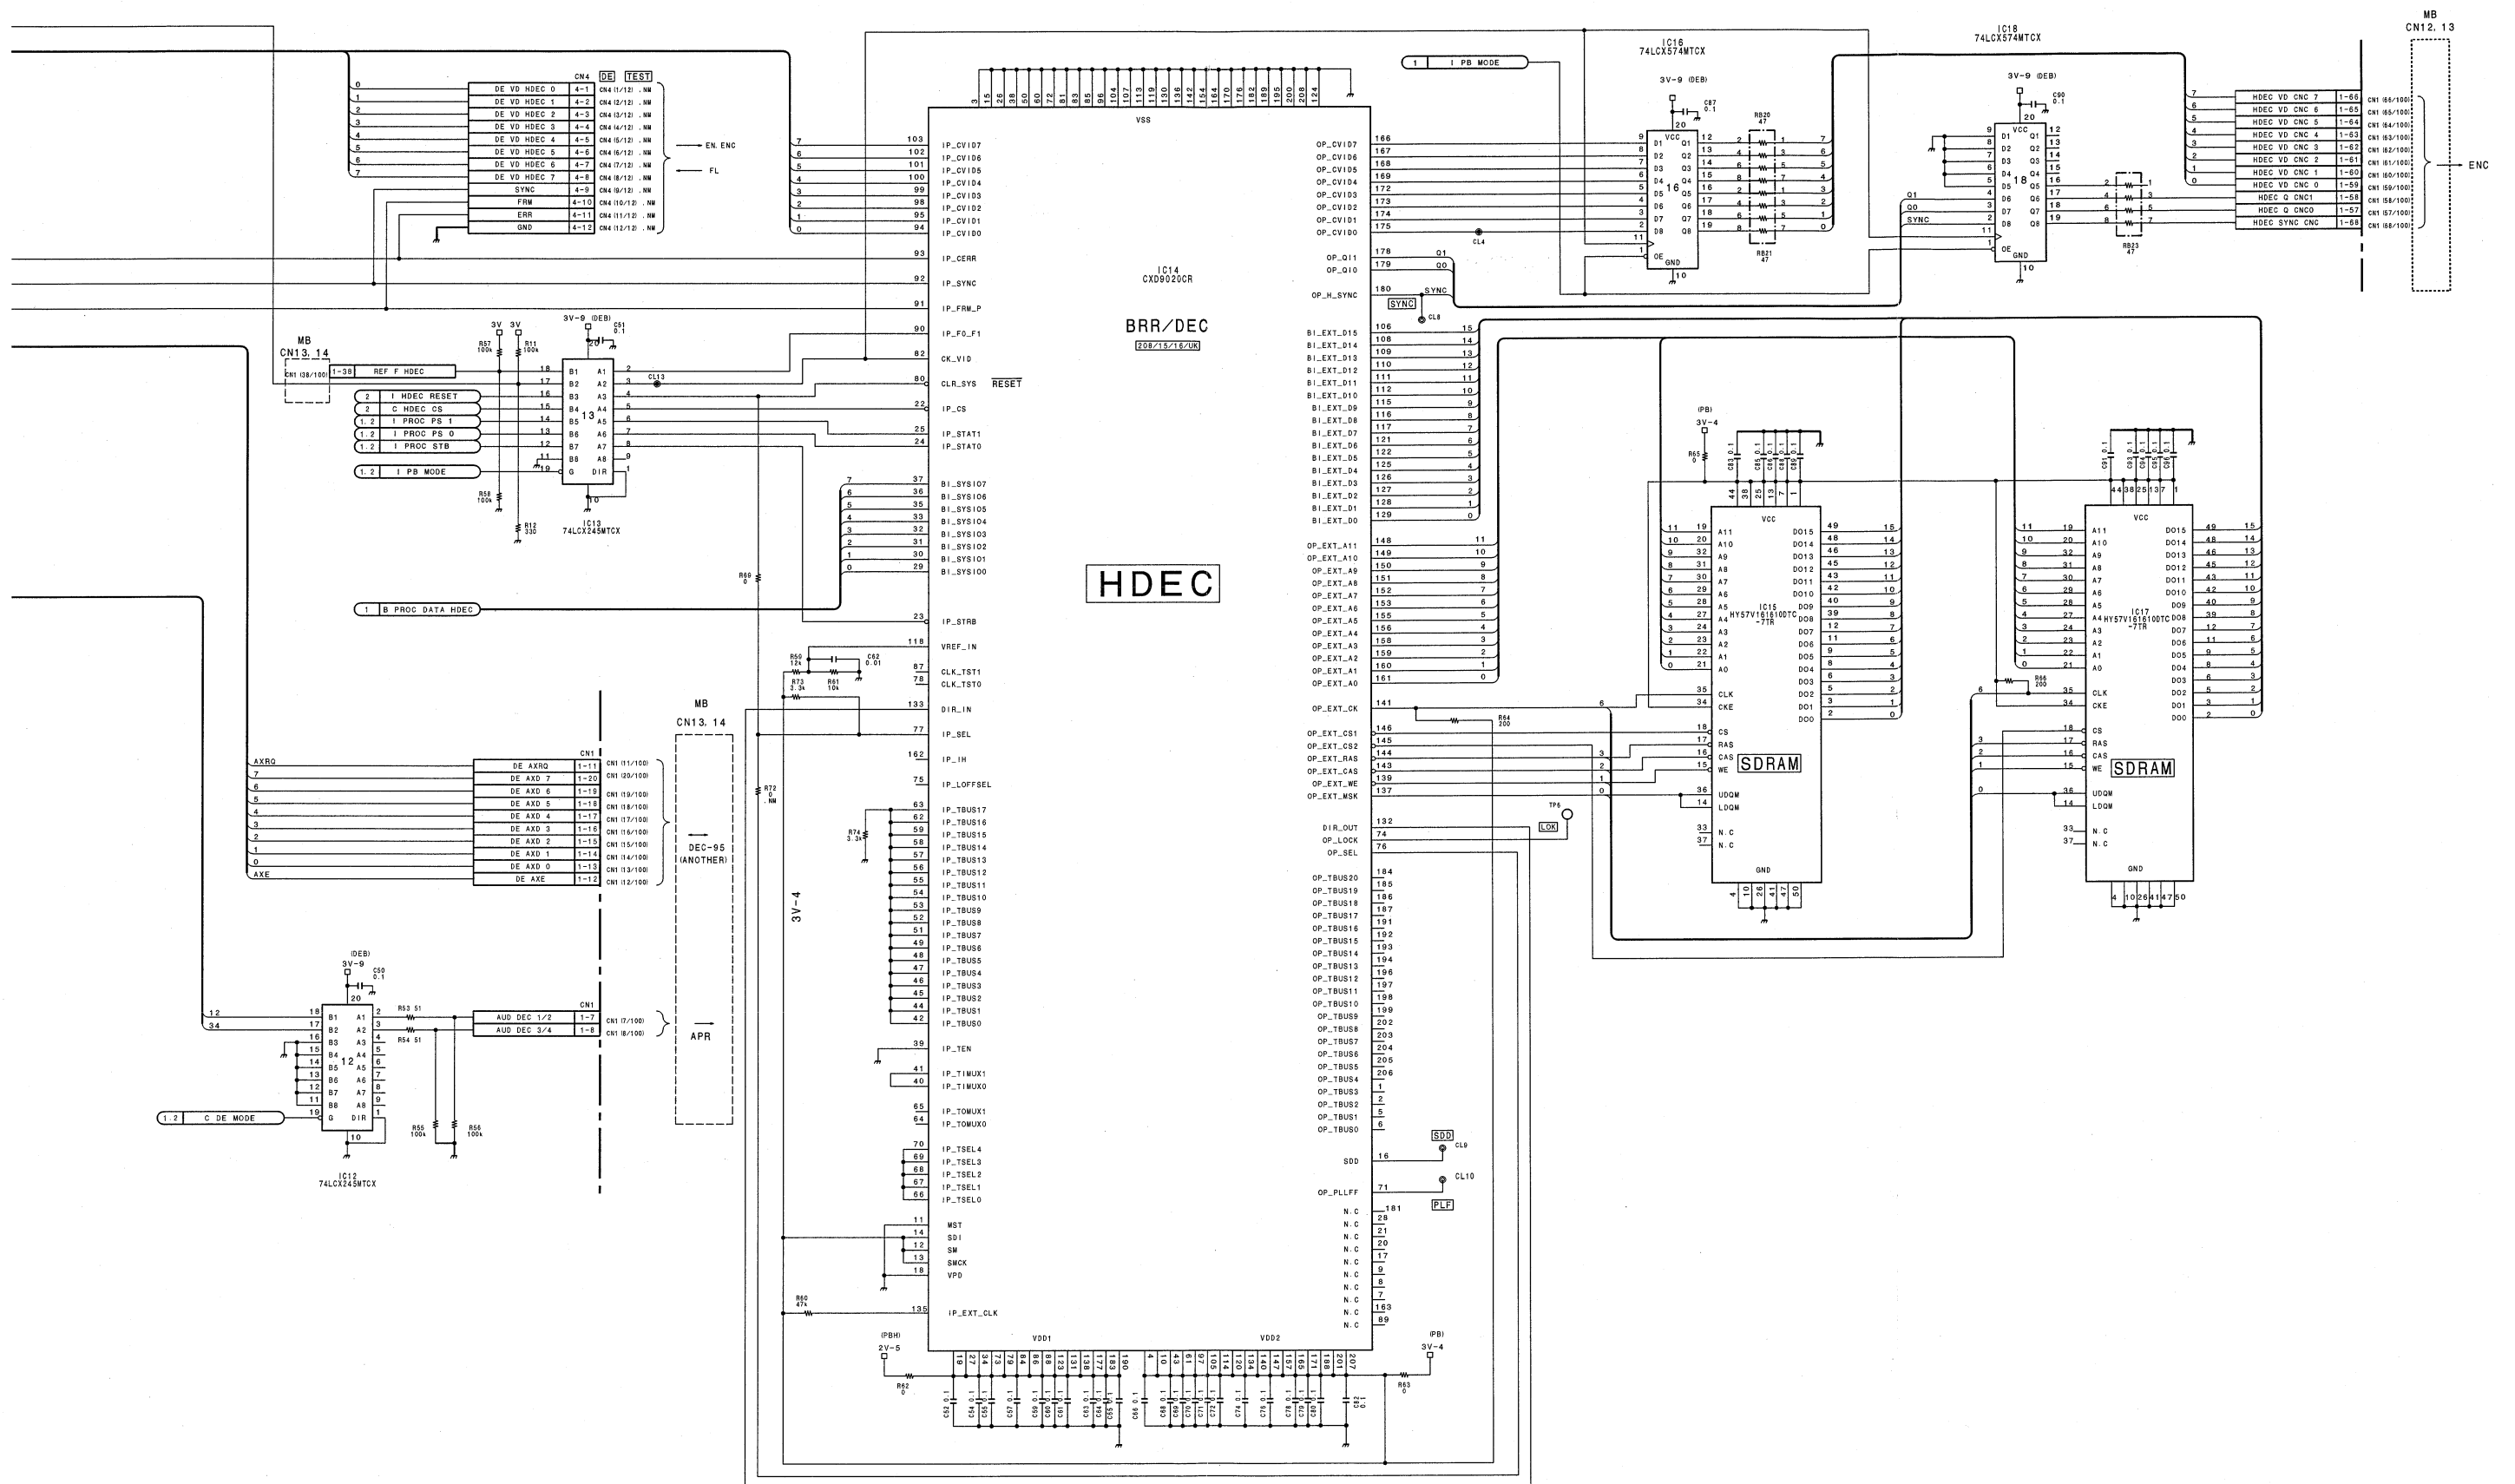


ECC/BRR decoder
DEC-95 (2/2)
 BOARD NO. 1-667-423-11
 LOT NO. 911-

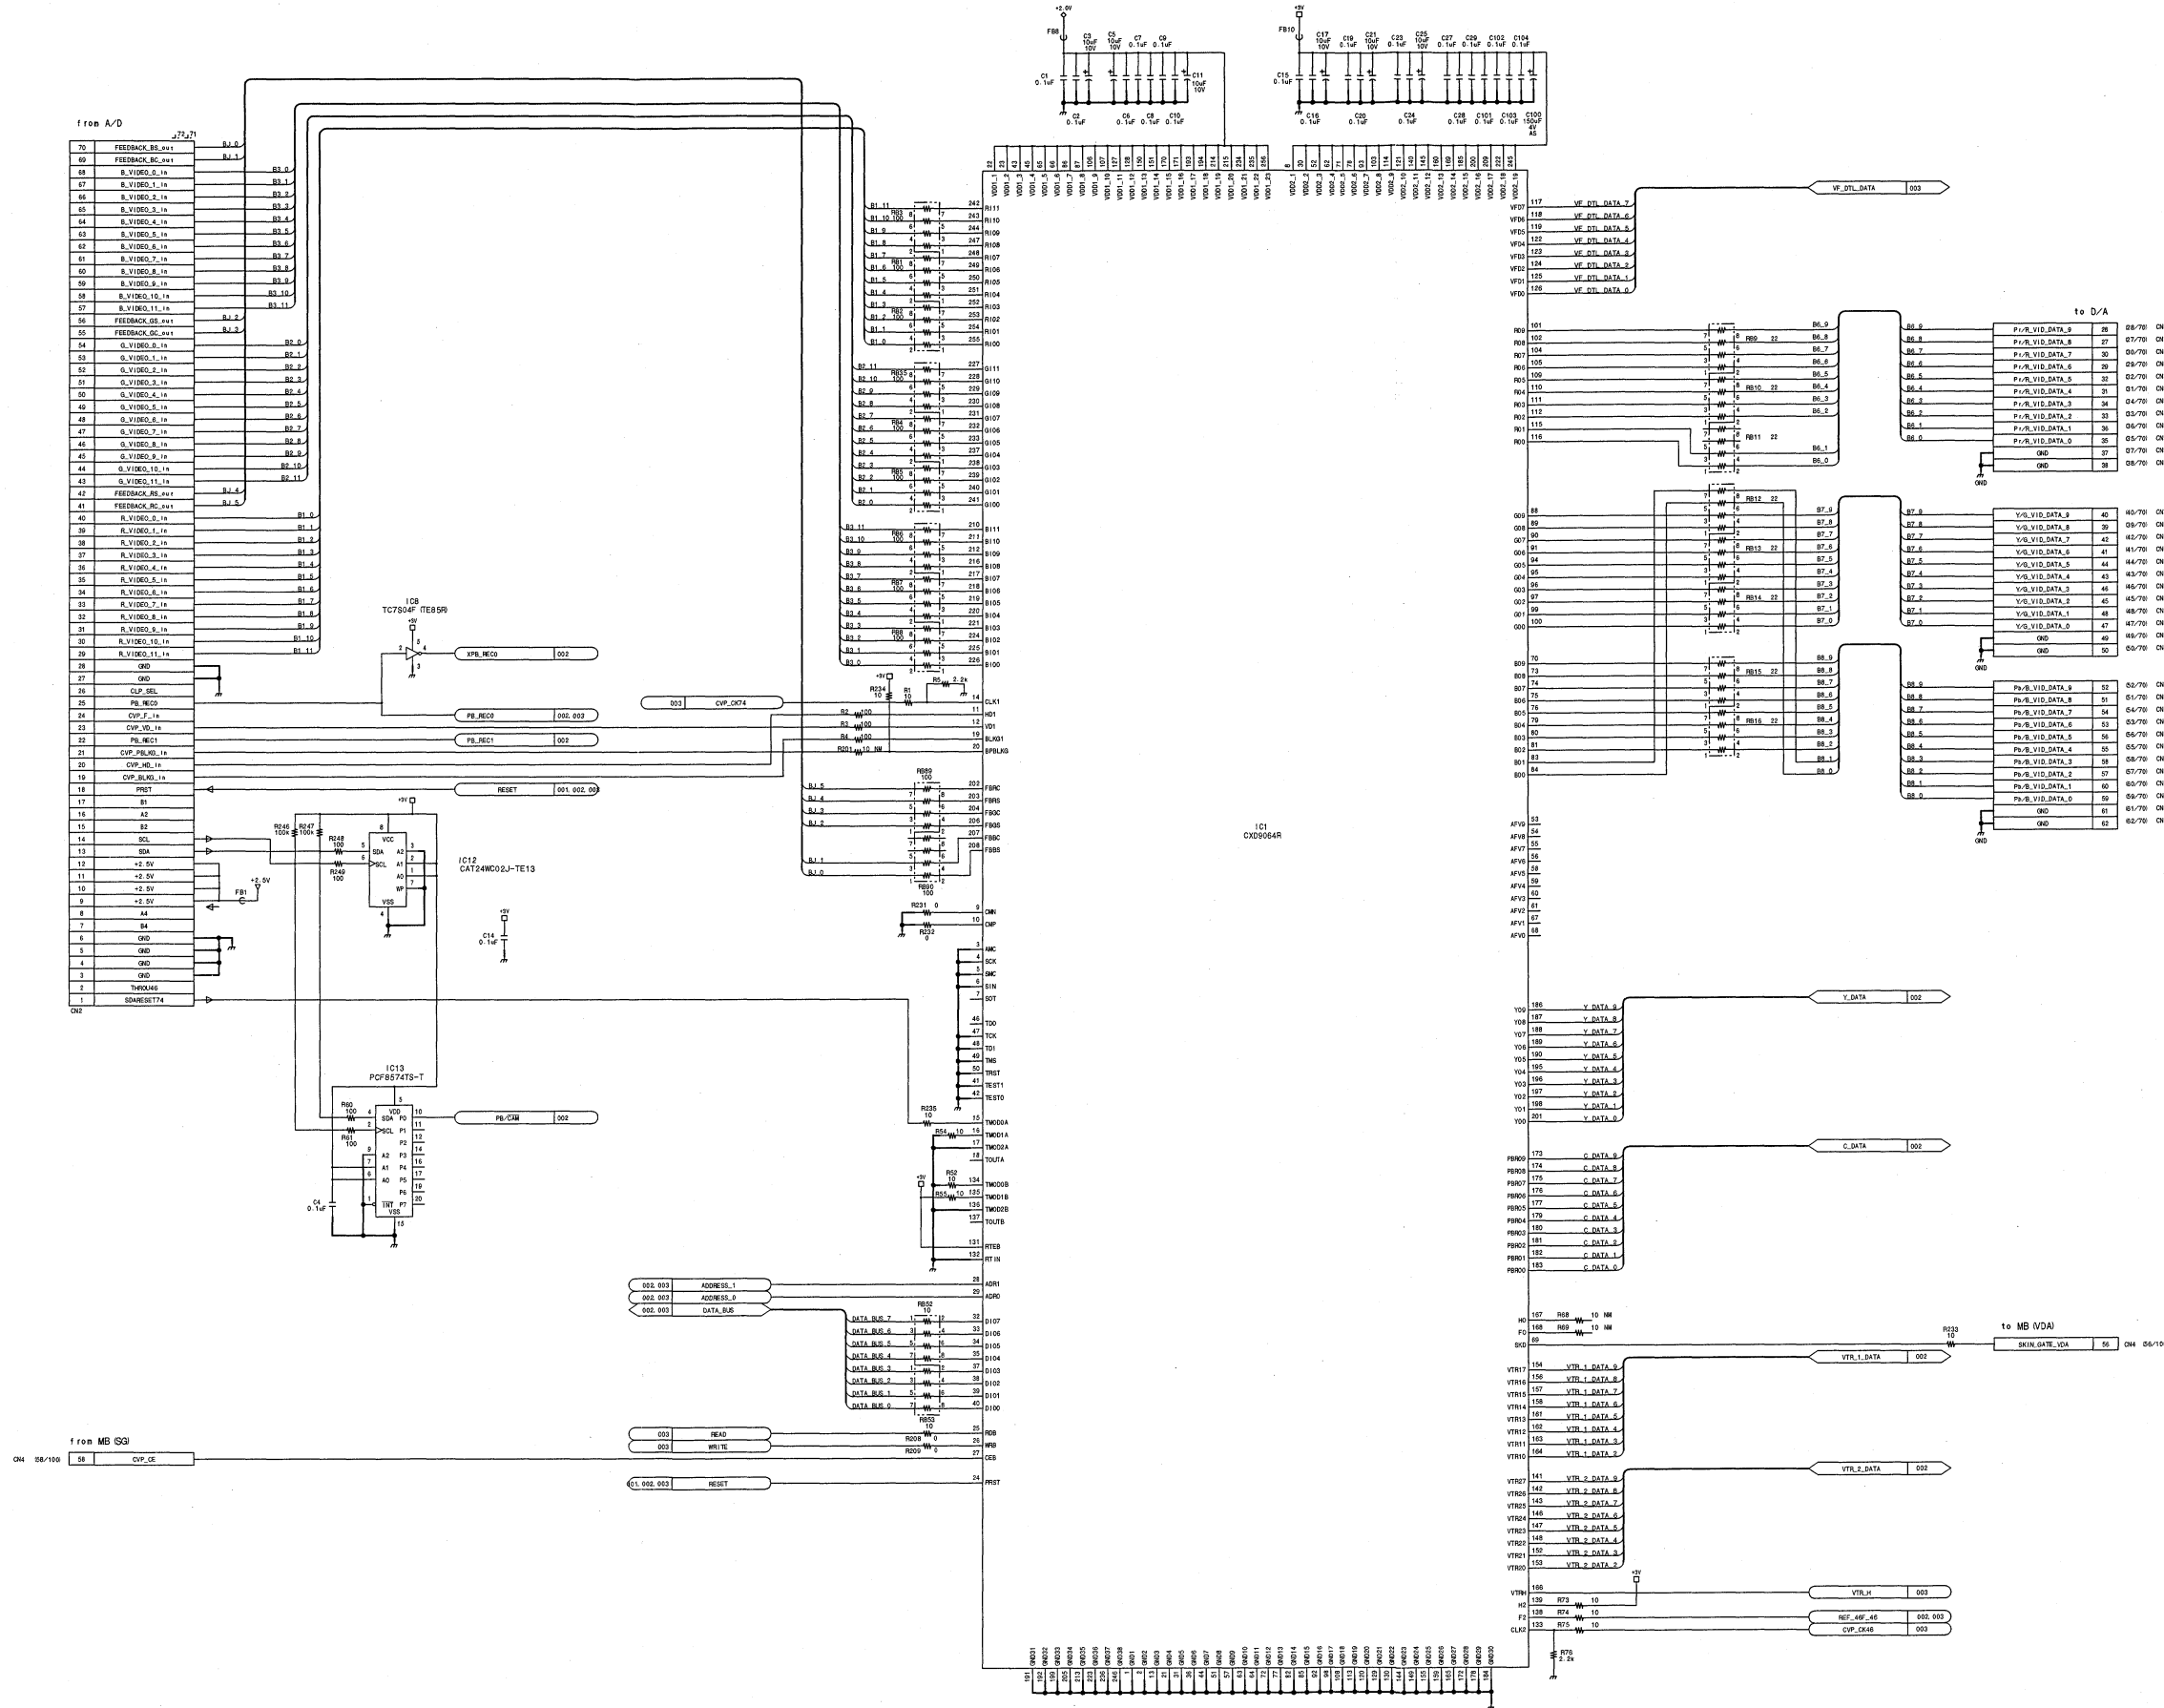


SCVP (Digital processing), VFS (Frame rate converter)
DPR-227 (1/3)
 BOARD NO. 1-685-660-12
 LOT NO. 2A3-
 HDW-F900_DPR-227_120_1

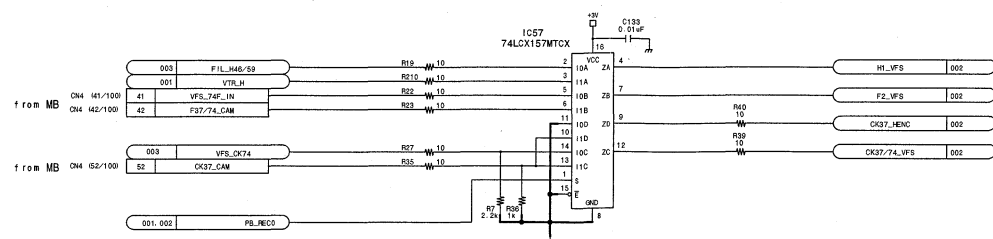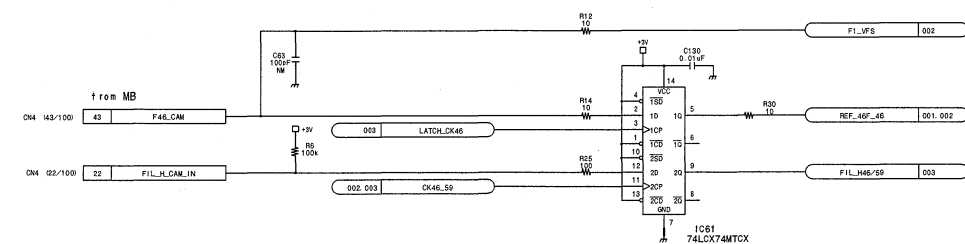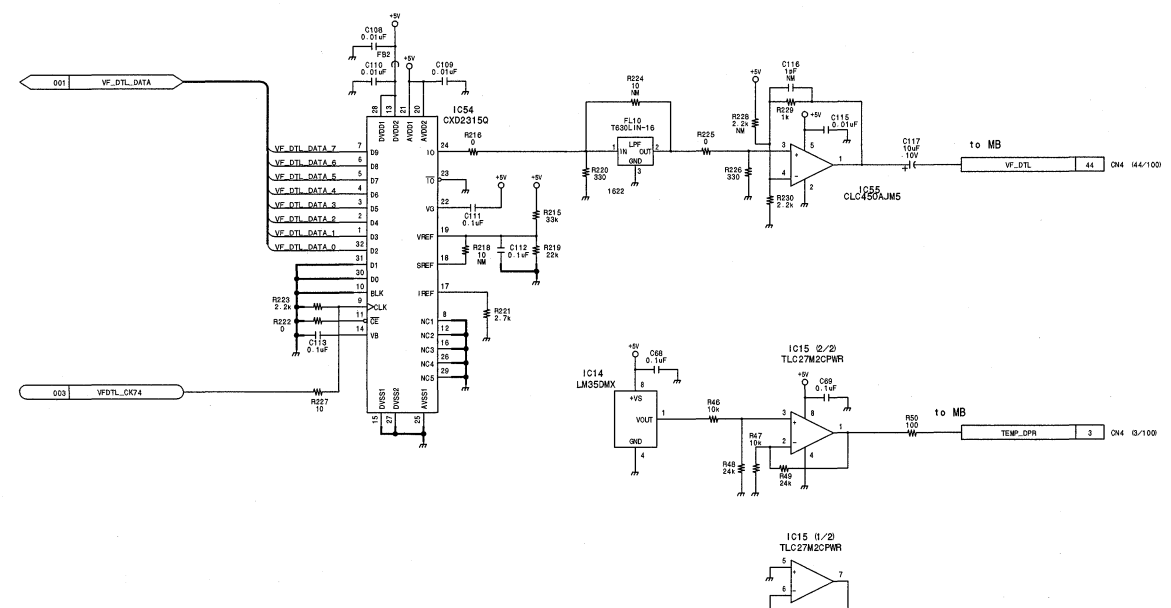





SCVP (Digital processing), VFS (Frame rate converter)
DPR-227 (3/3)
 BOARD NO. 1-685-660-12
 LOT NO. 2A3-
 HDW-F900_DPR-227_120_3

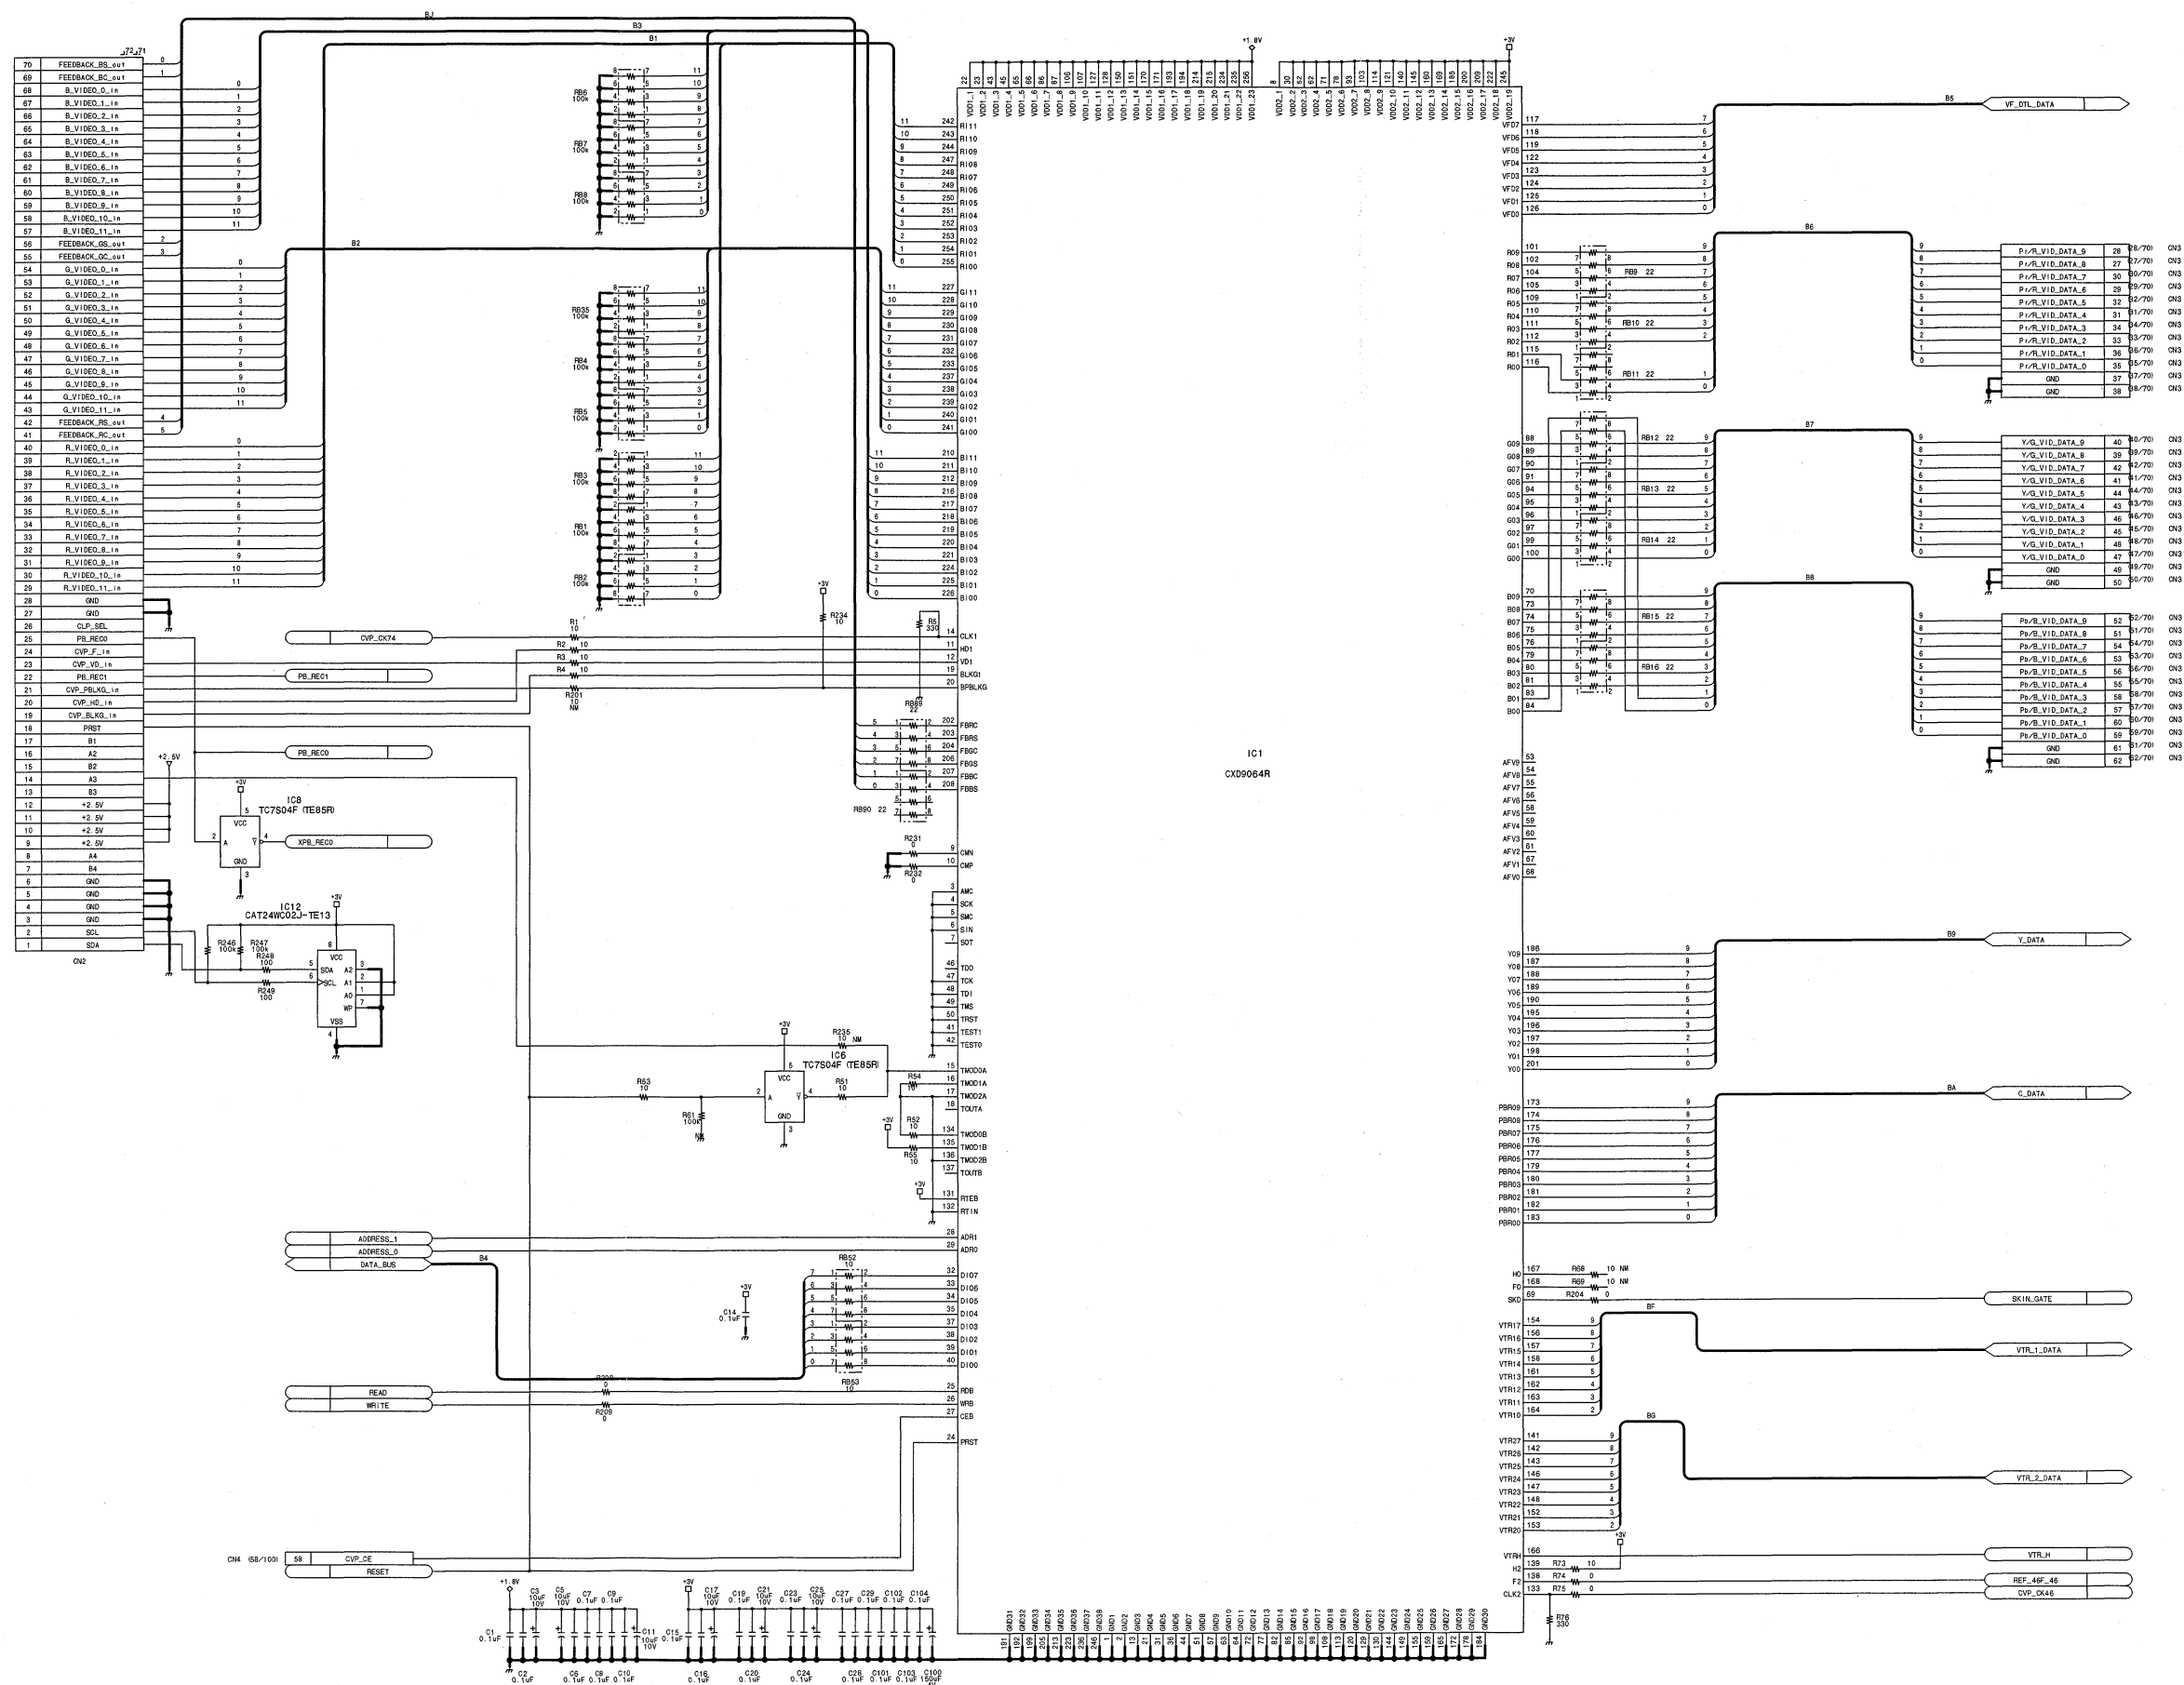



SCVP (Digital processing), VFS (Frame rate converter)
DPR-152 (1/3)
 BOARD NO. 1-677-606-12
 LOT NO. 003-2A2
 HDW-F900_DPR-152_312_1

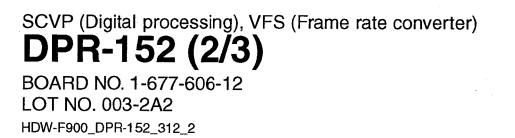


1




2

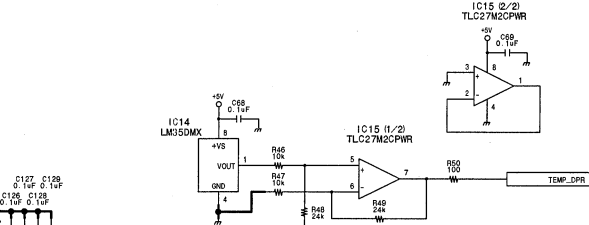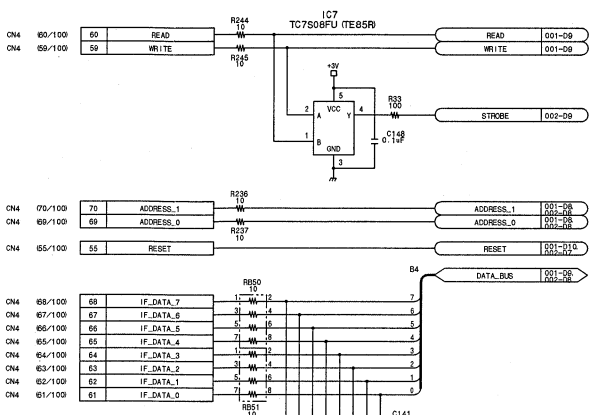





3

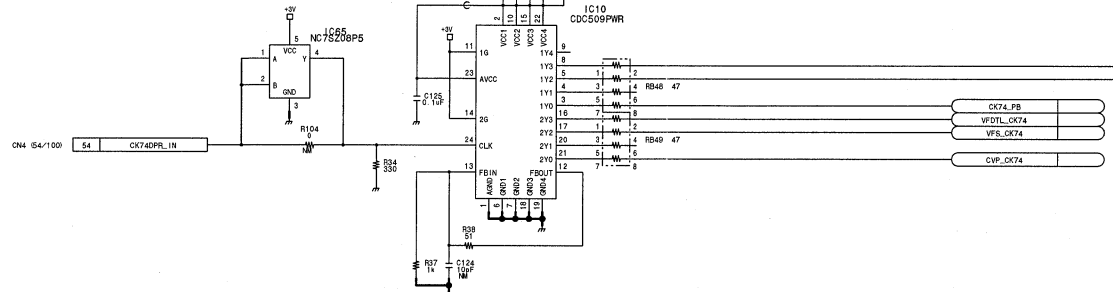

4

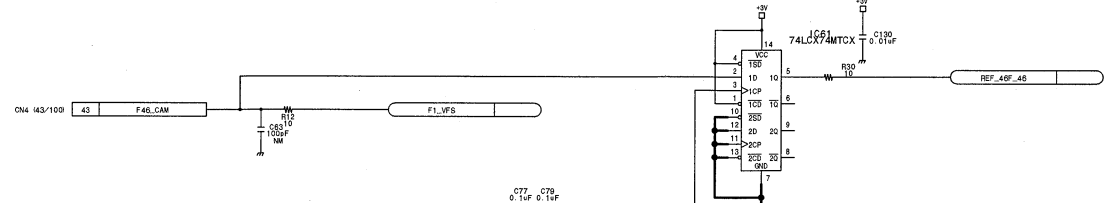

5

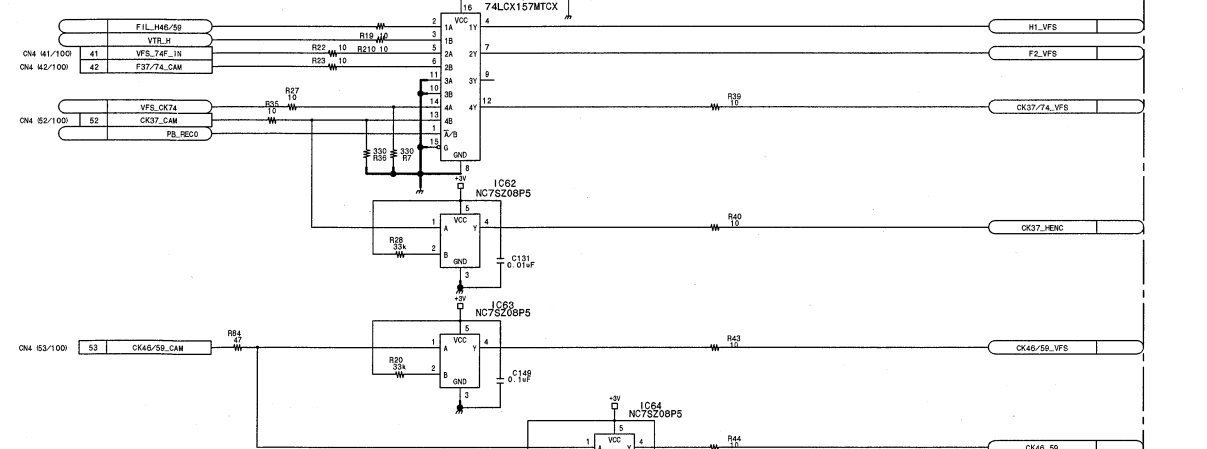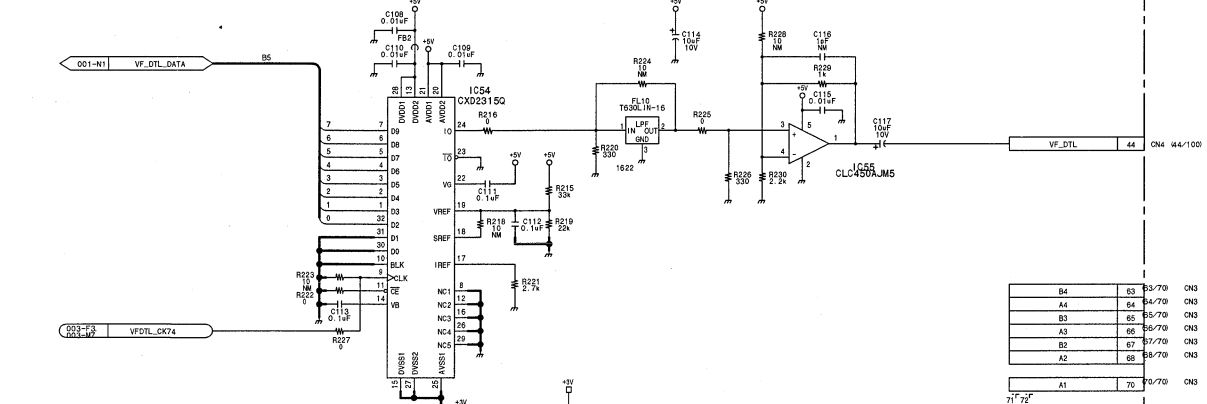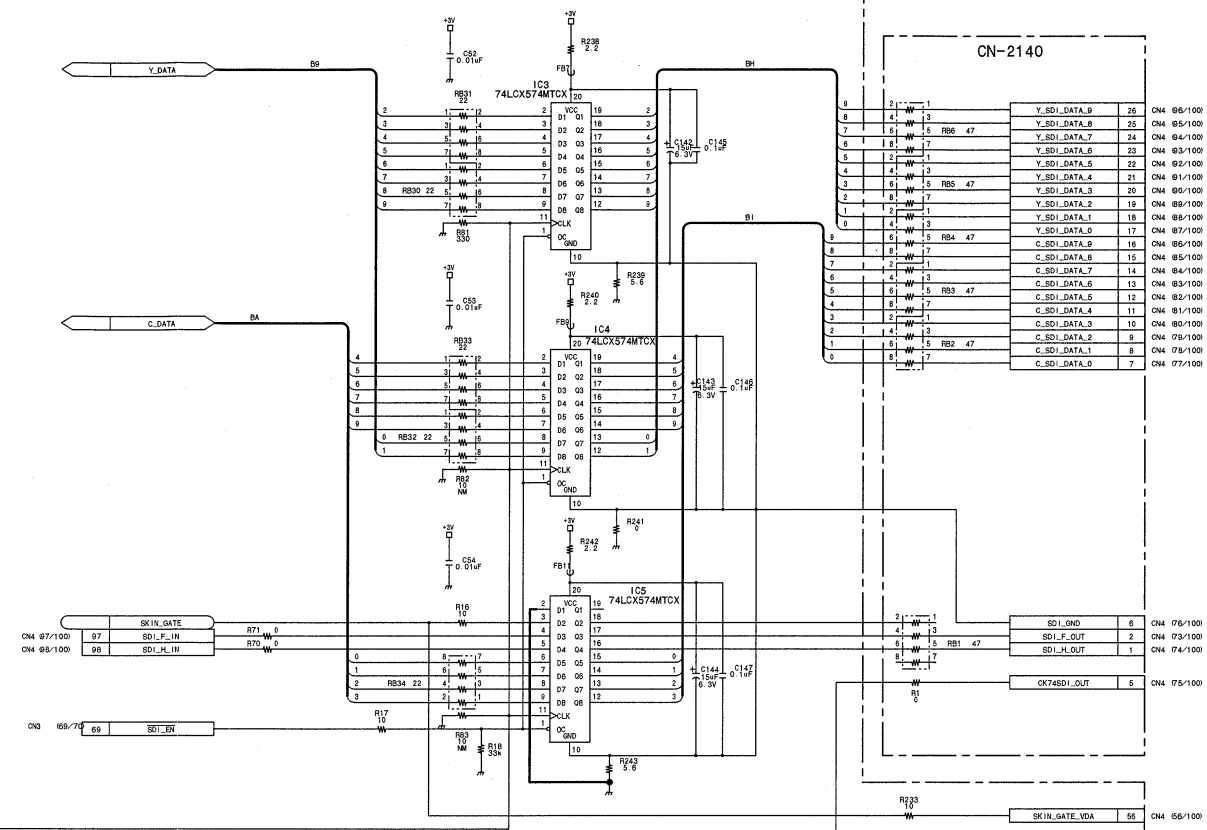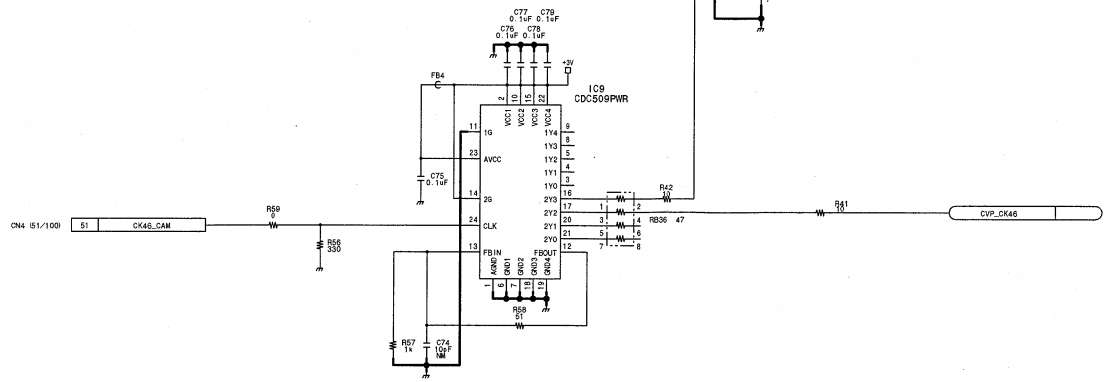

Connector Board
CN-2140

BOARD NO. 1-679-960-11
LOT NO. 911-2A2

SCVP (Digital processing),
VFS (Frame rate converter)
DPR-152 (3/3)


BOARD NO. 1-677-606-12
LOT NO. 003-2A2

HDW-F900_DPR-152_312_3


4-36 (b)

4-36 (b)


HDW-F900 P2V2




HDW-F900 P2V2

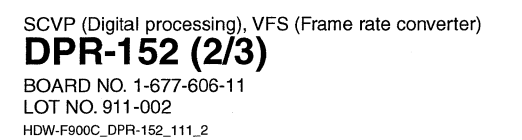


1

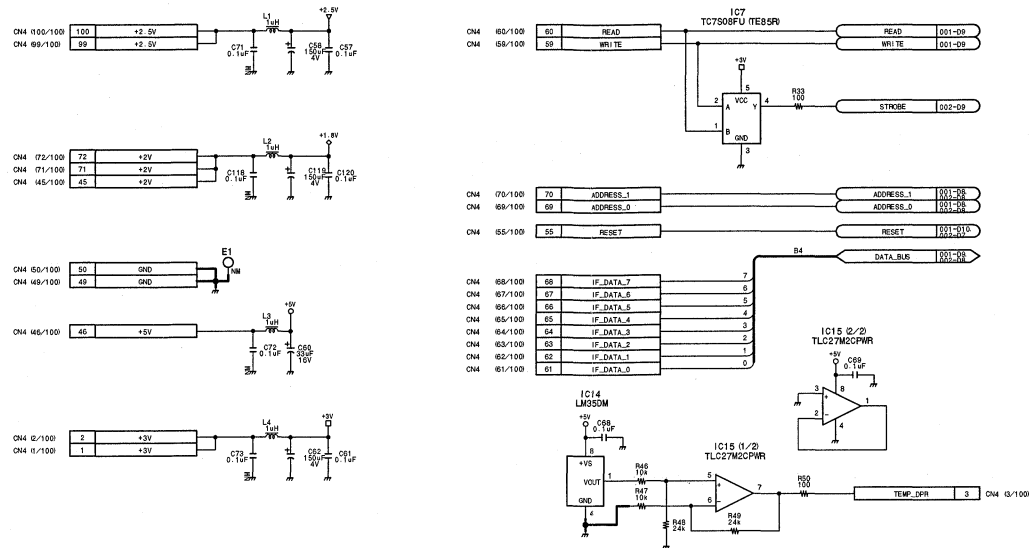


2

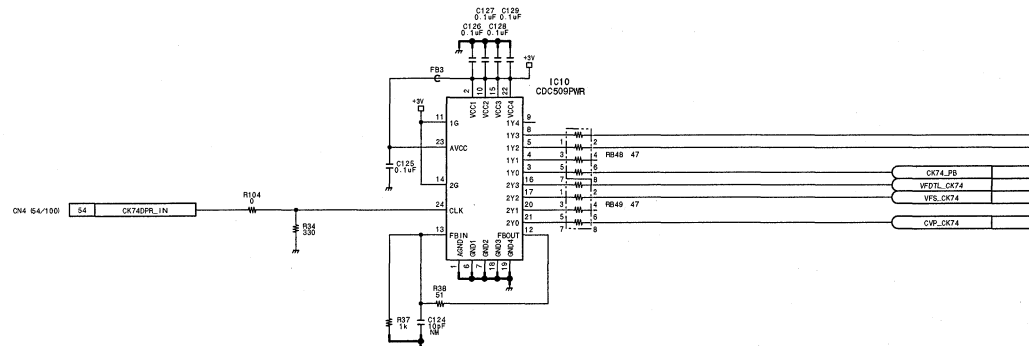


3

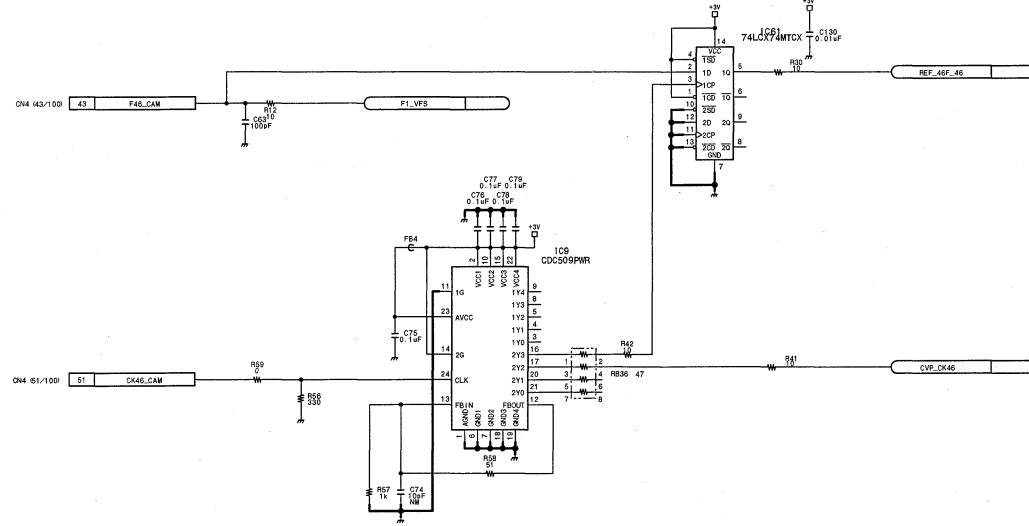

4

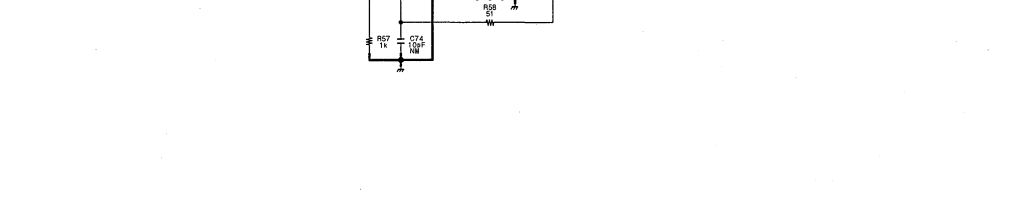


5

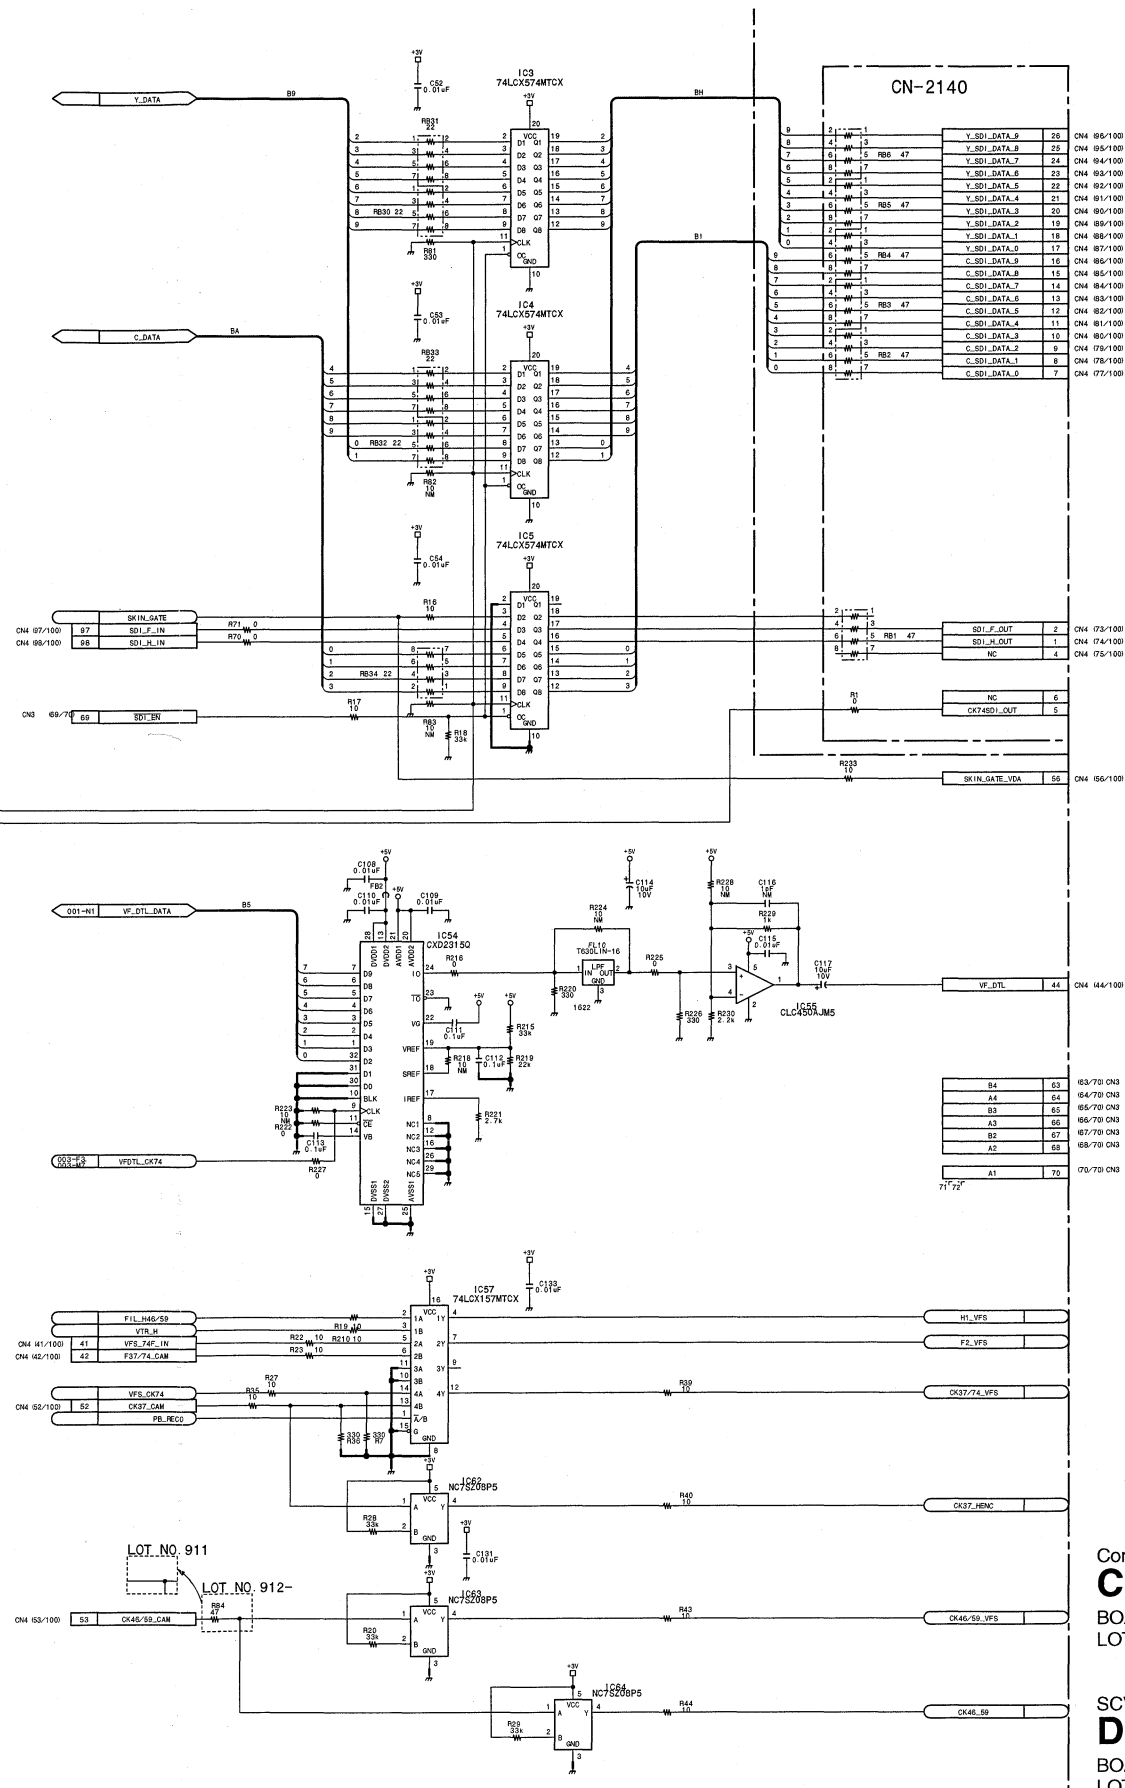


Connector Board
CN-2140
BOARD NO. 1-679-960-11
LOT NO. 911-

SCVP (Digital processing), VFS (Frame rate converter)
DPR-152 (3/3)
BOARD NO. 1-677-606-11
LOT NO. 911-002
HDW-F900C-DPR-152_111_3

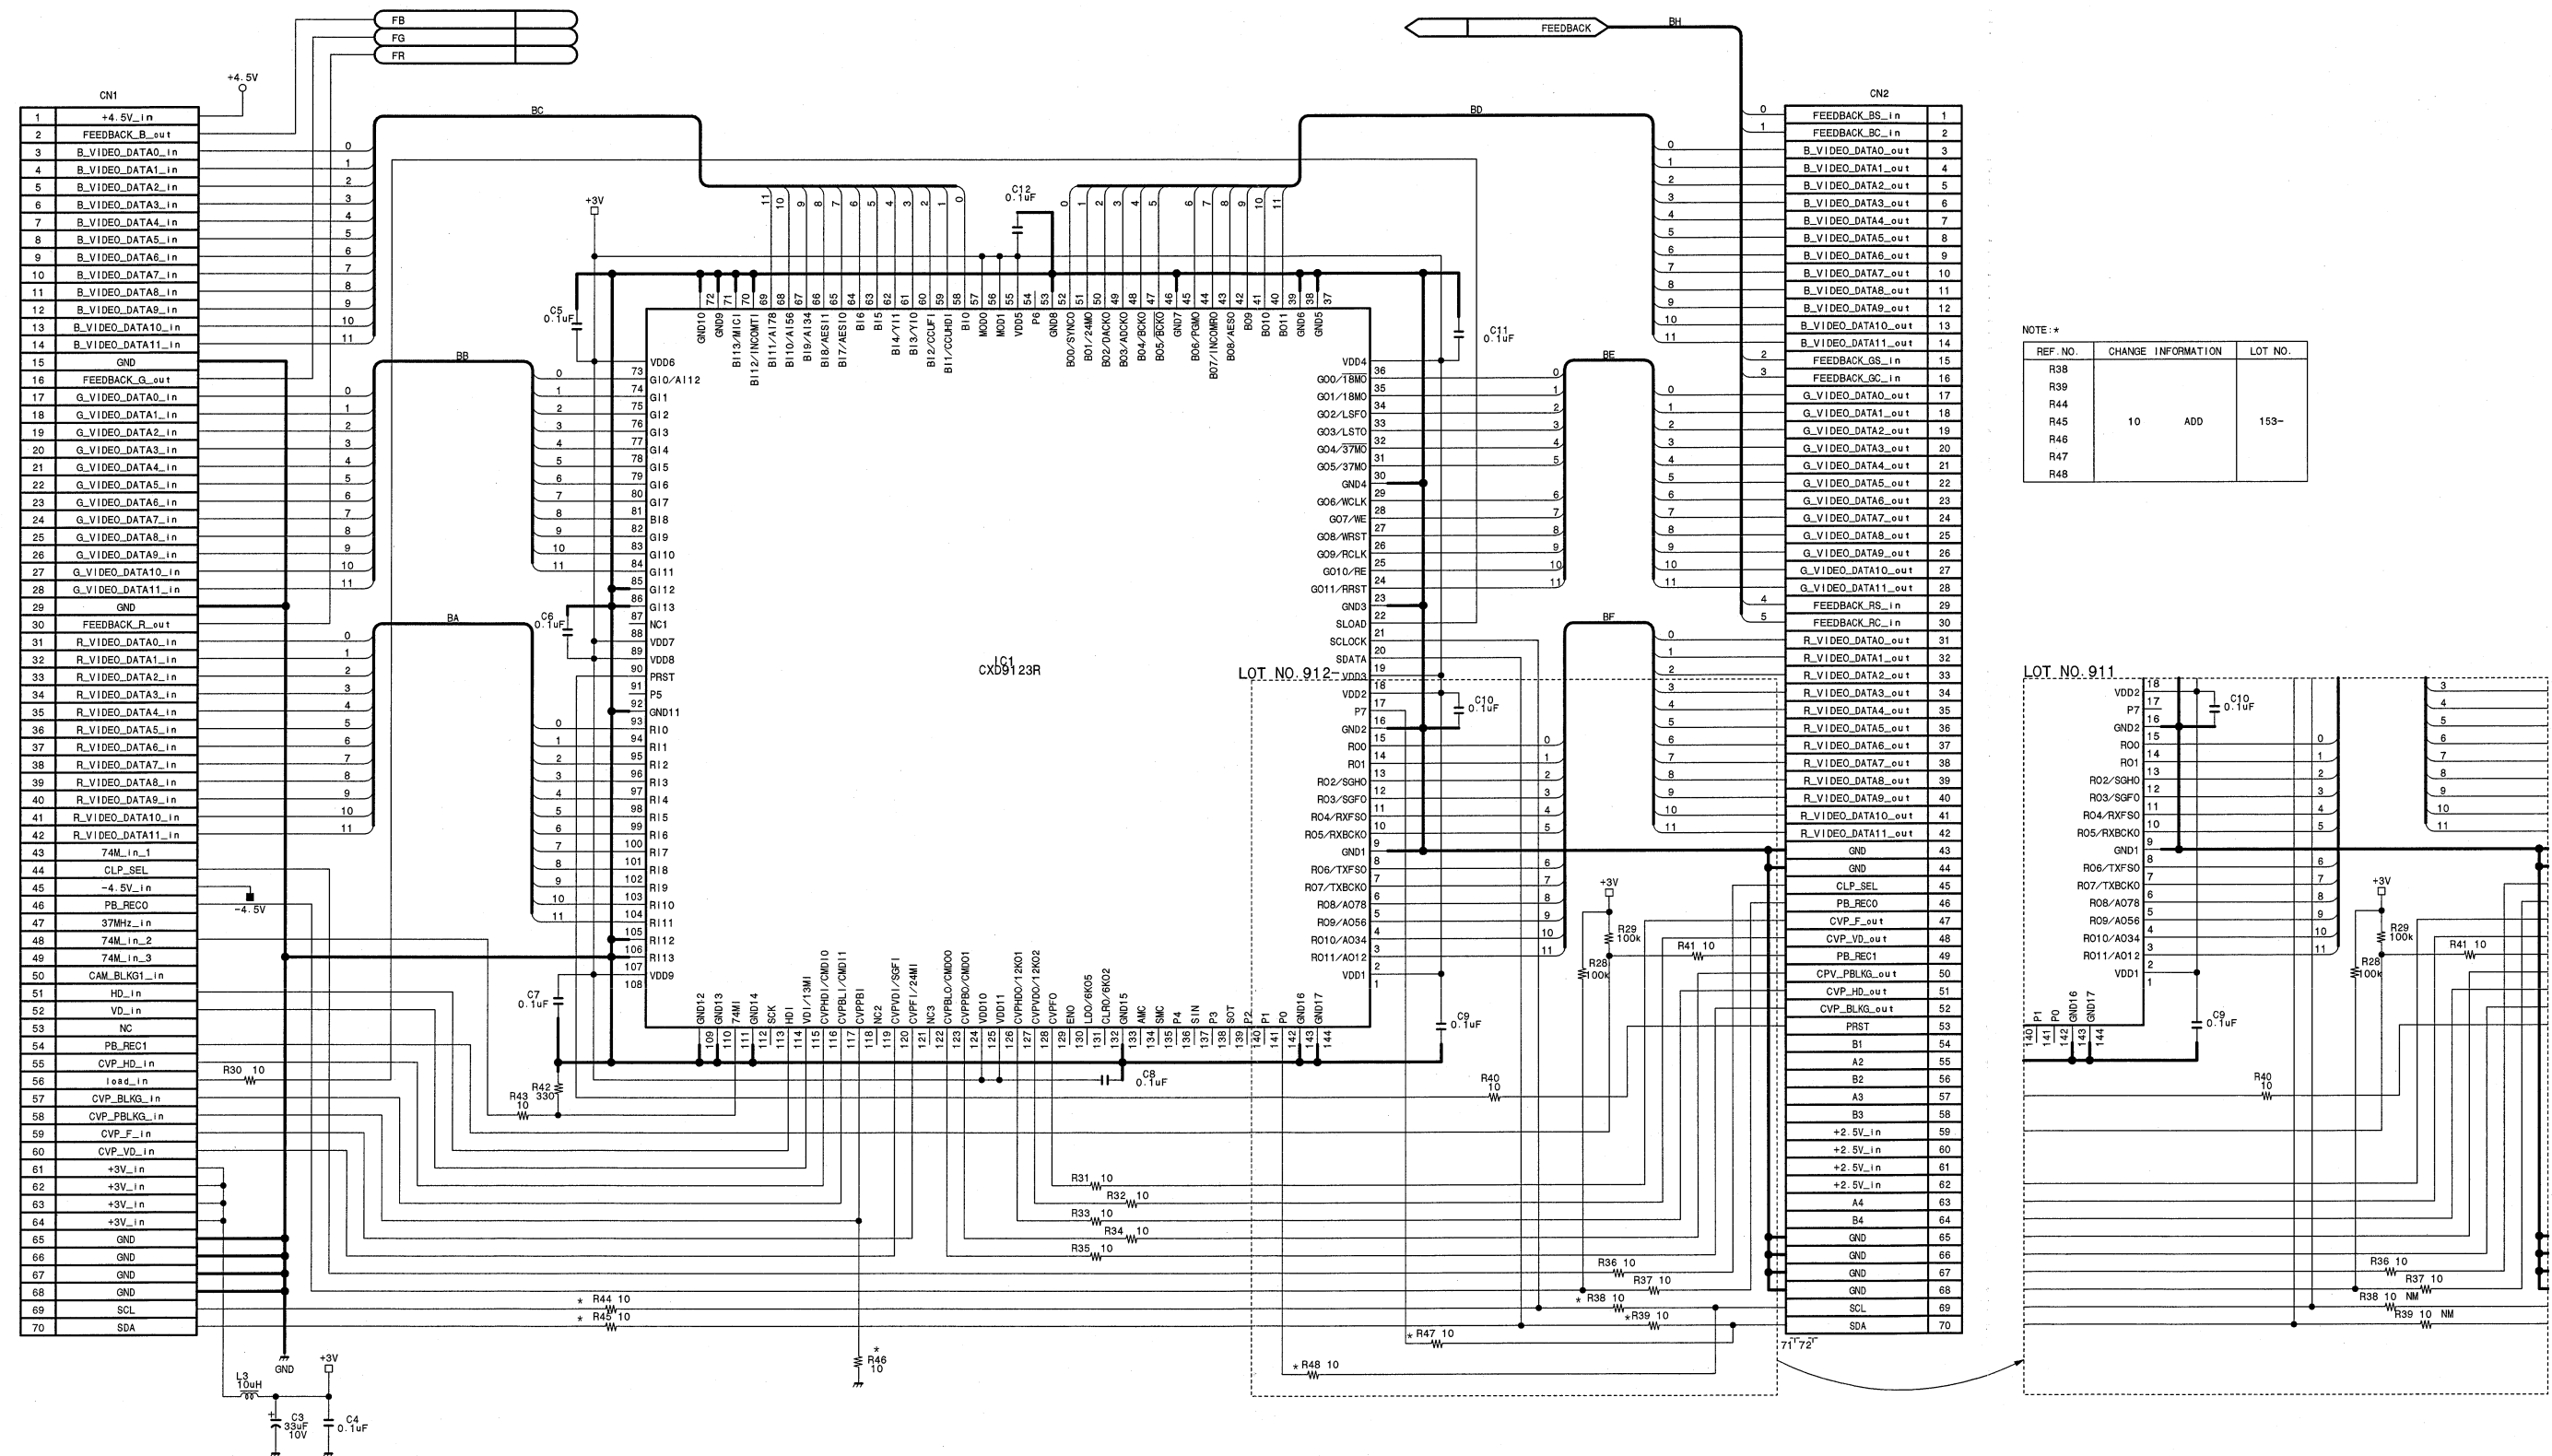


NOTE: *


REF. NO.	CHANGE INFORMATION	LOT NO.
R38		
R39		
R44	10 ADD	153~
R45		
R46		
R47		
R48		

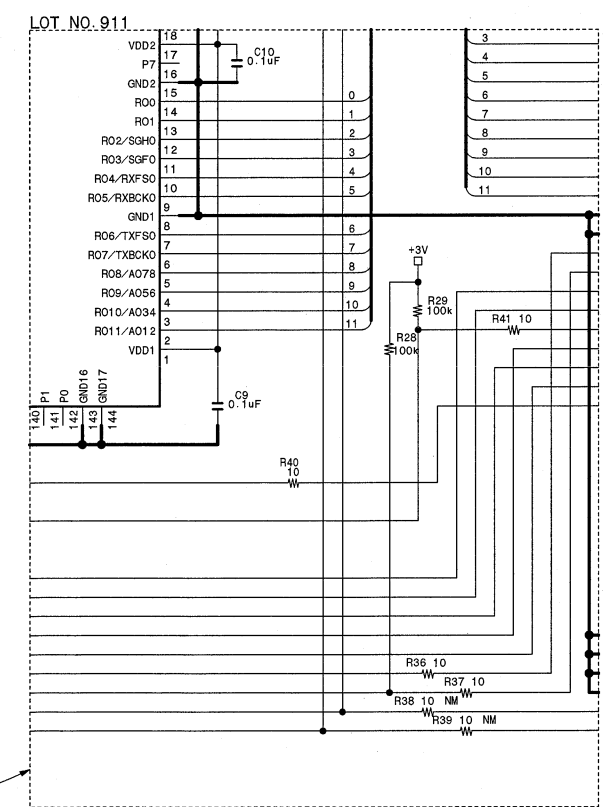

Digital processing
DPR-157 (1/2)
 BOARD NO. 1-677-607-11, 12
 LOT NO. 911-
 HDW-F900C DPR-157_111_1

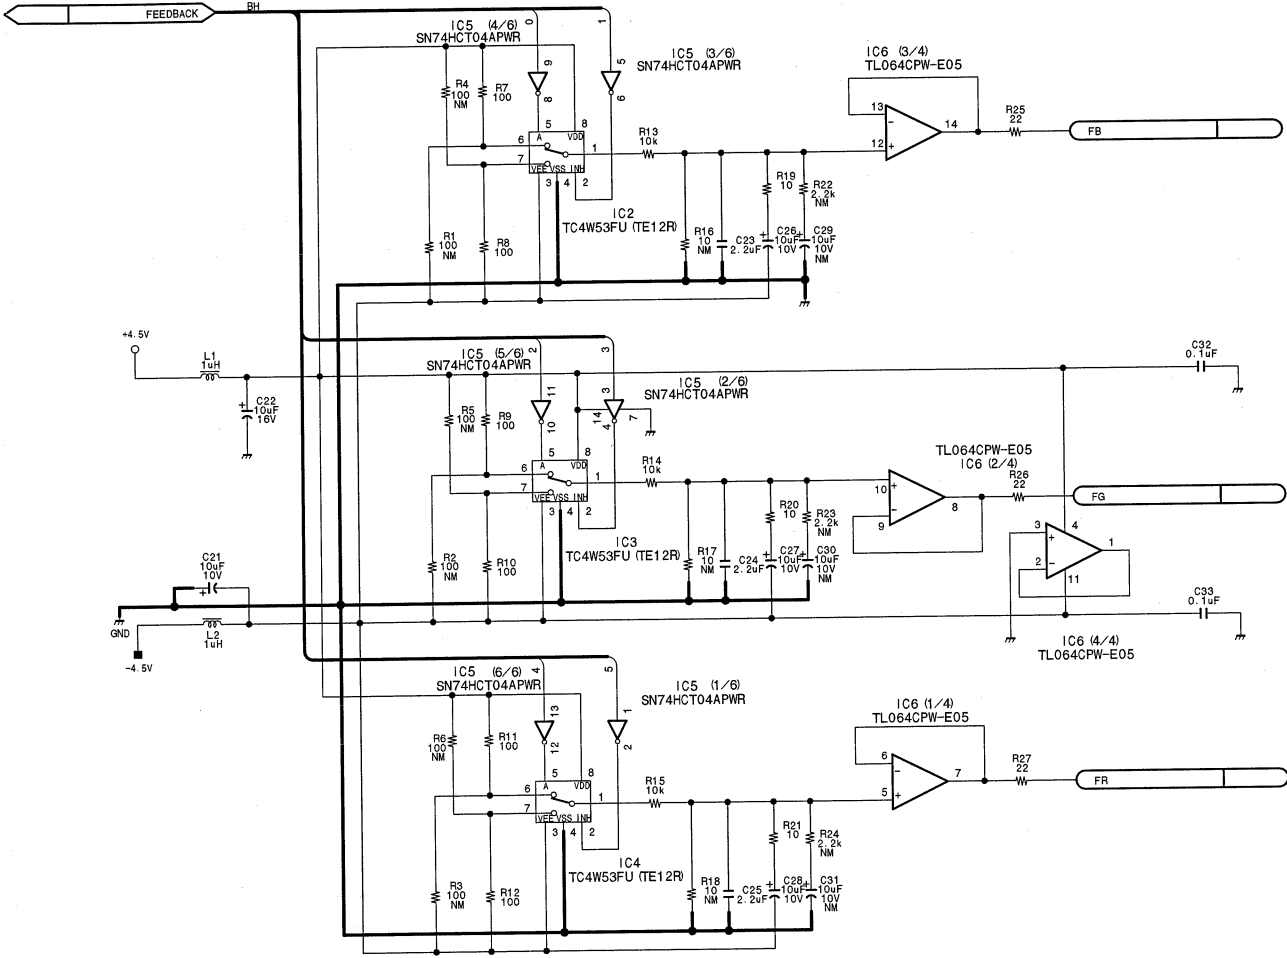


Digital processing
DPR-157 (2/2)
BOARD NO. 1-677-607-11, 12
LOT NO. 911-
HDW-F900C_DPR-157_111_2

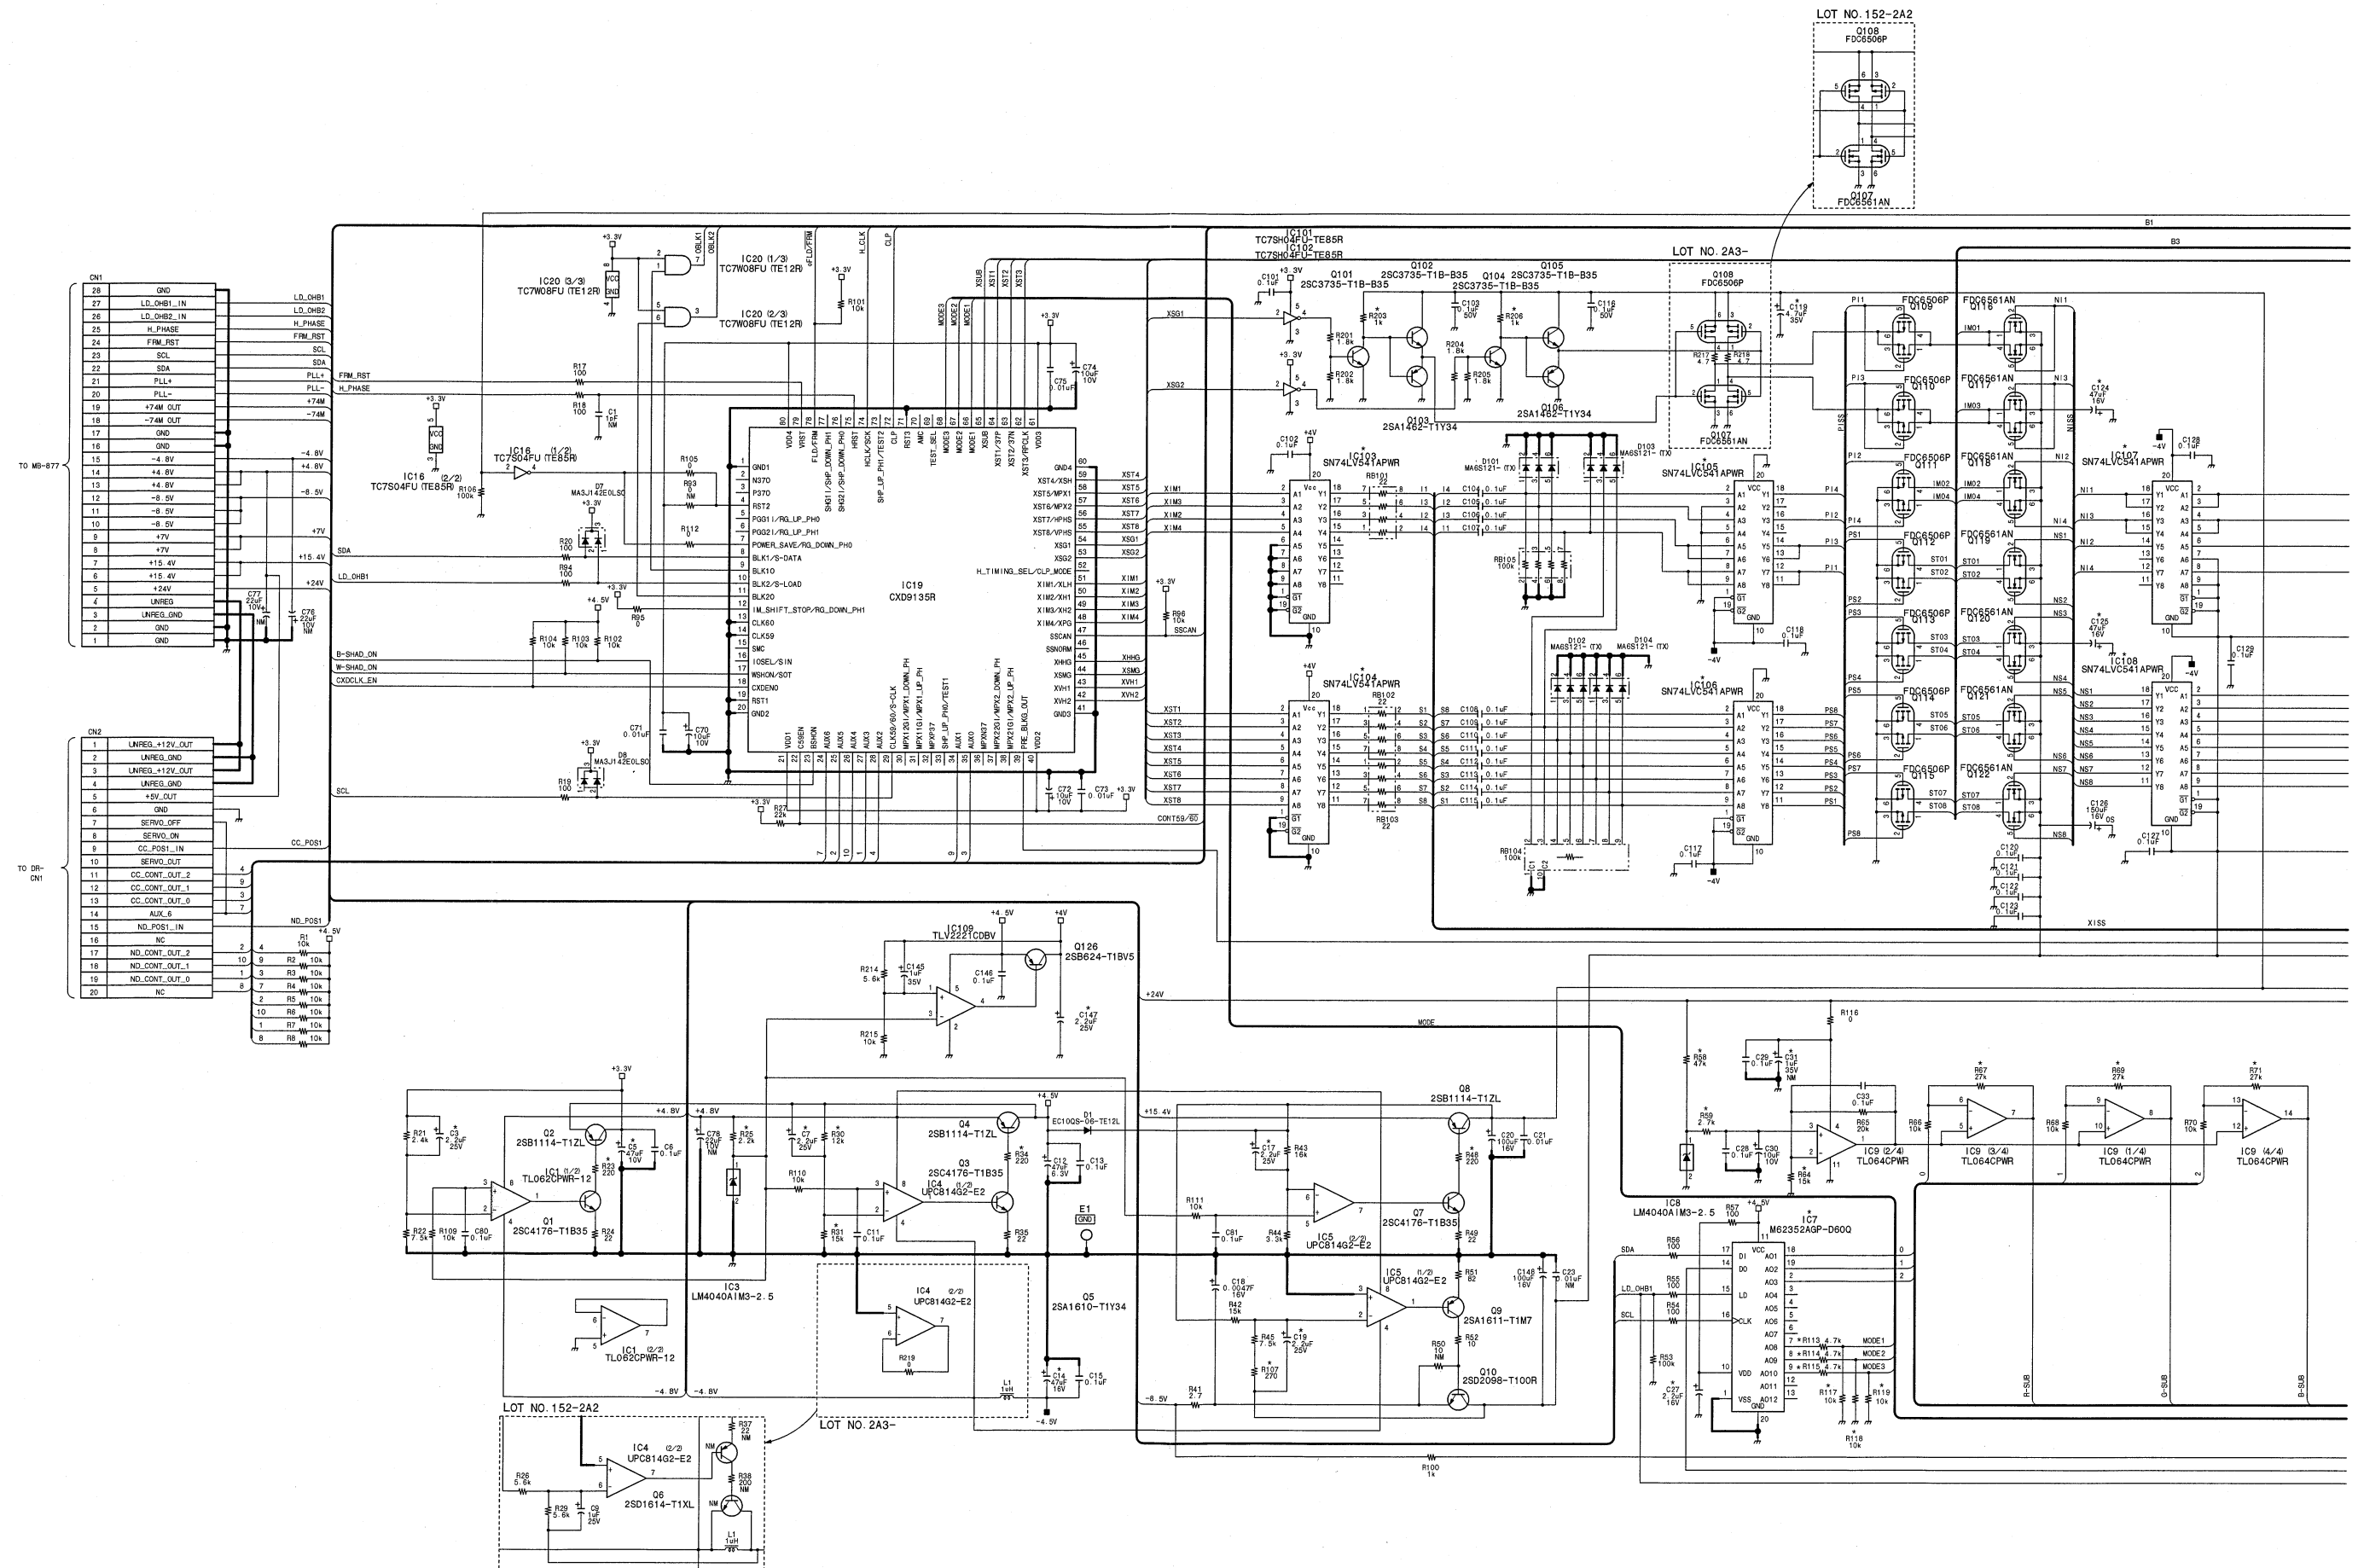


4-40 (b)

4-40 (b)

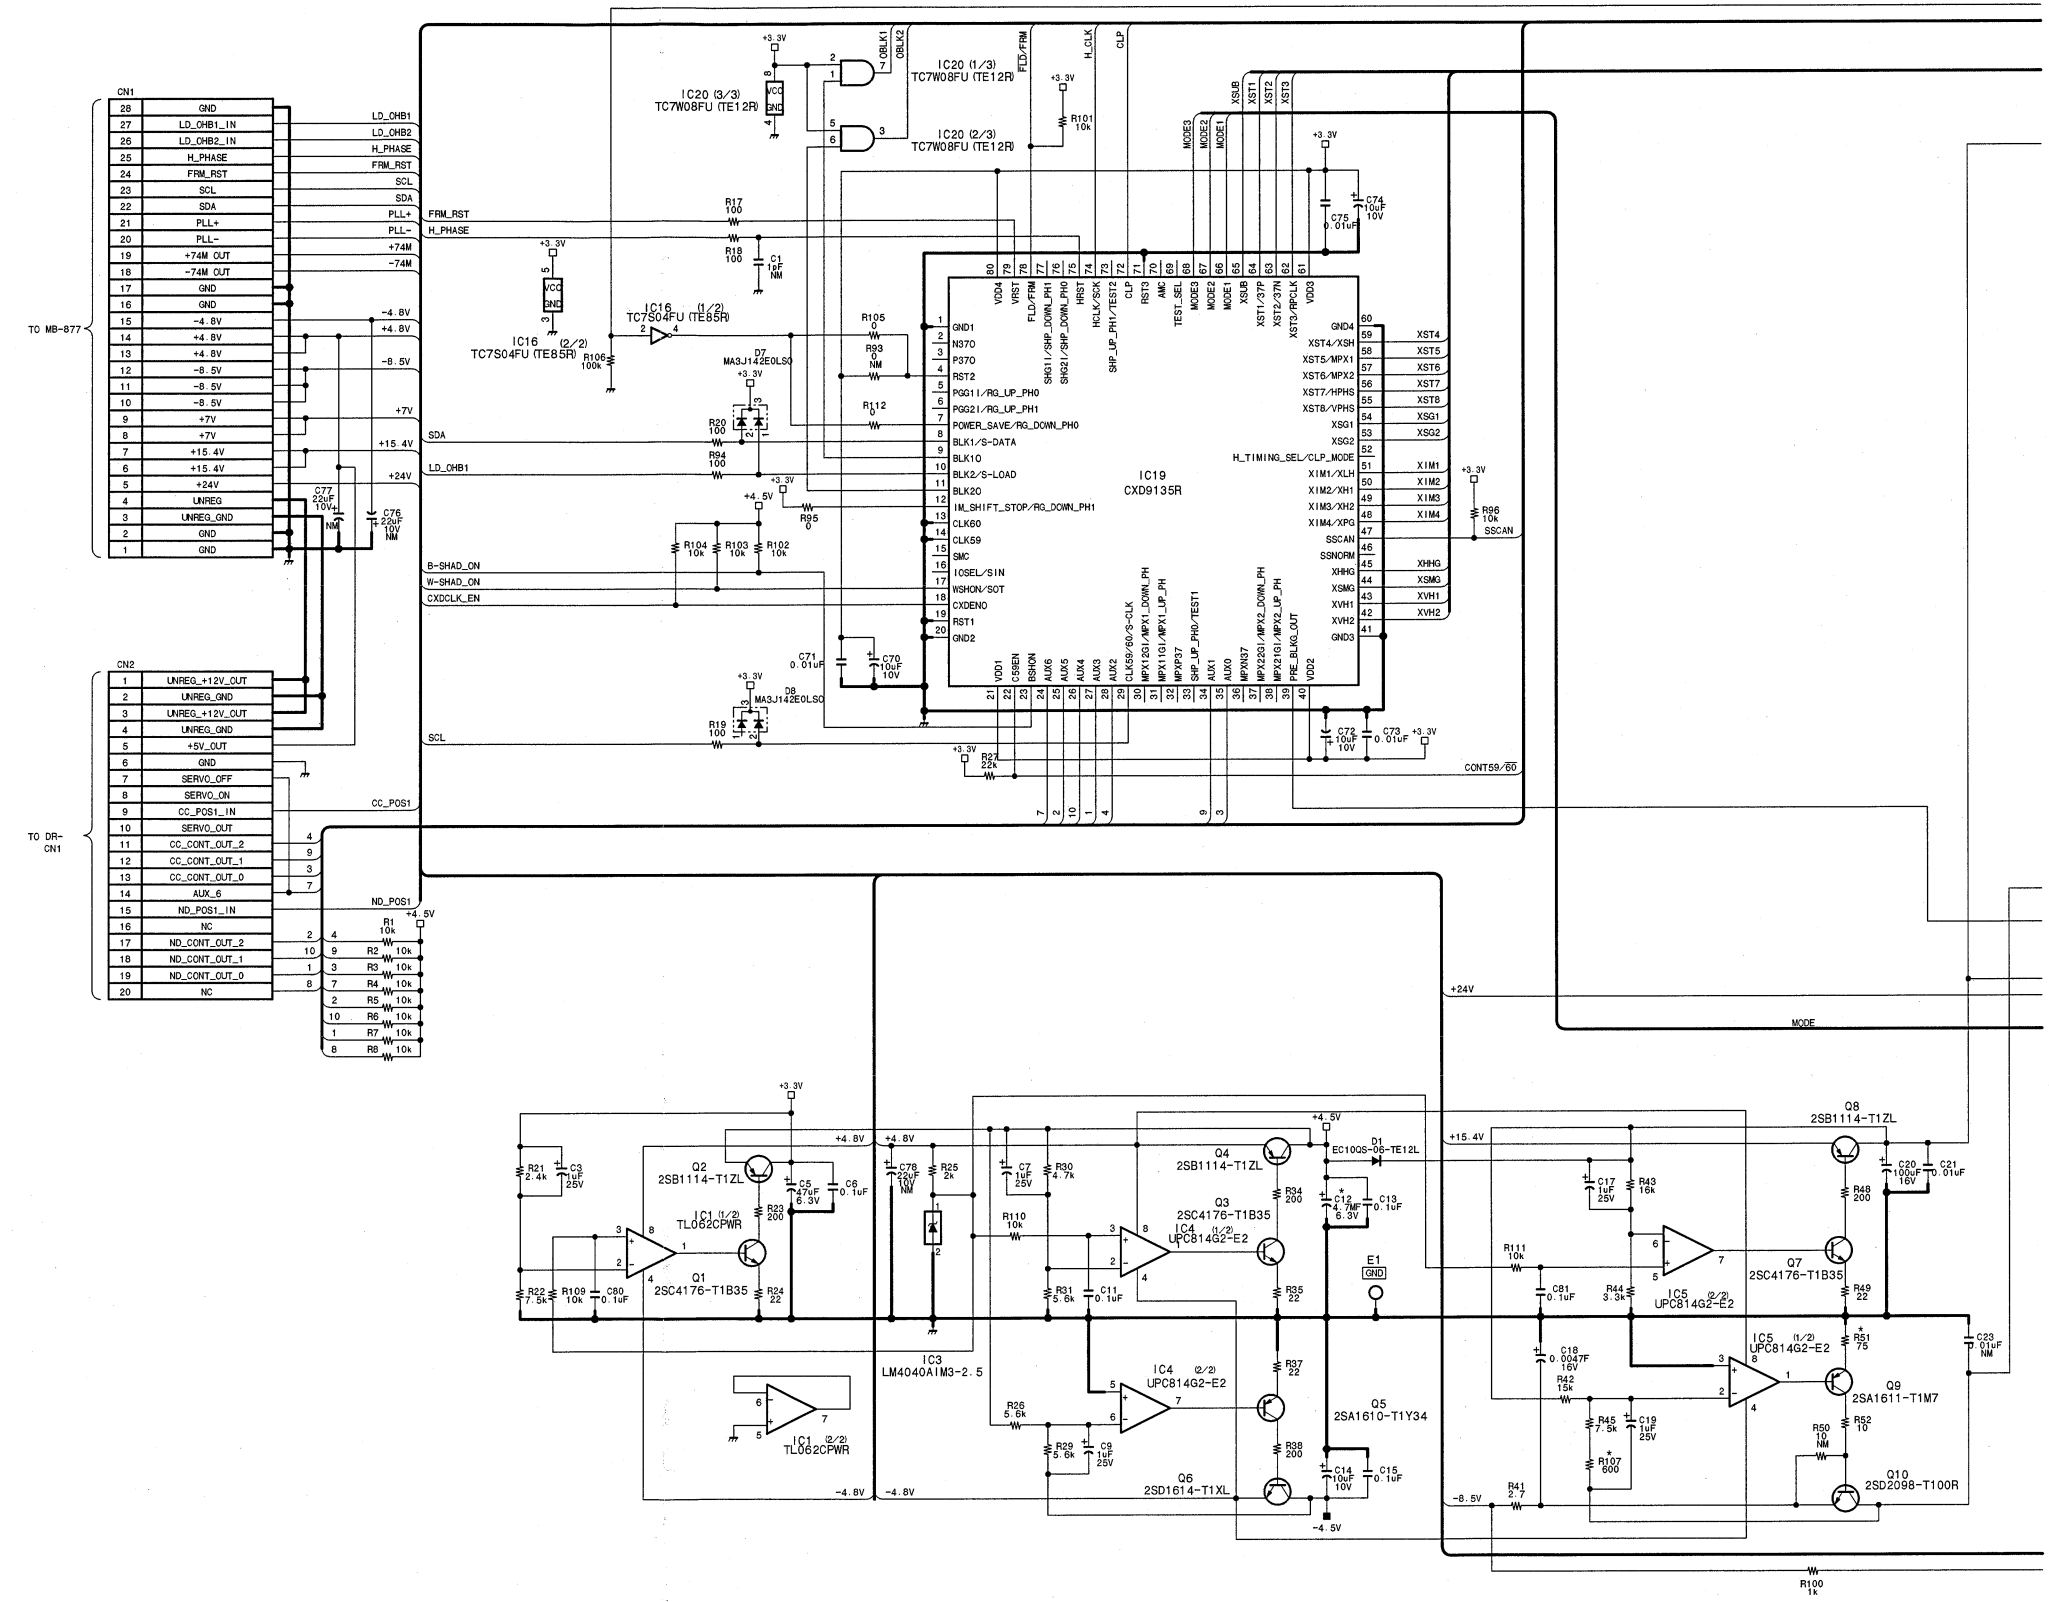


4-40 (a)

4-40 (a)

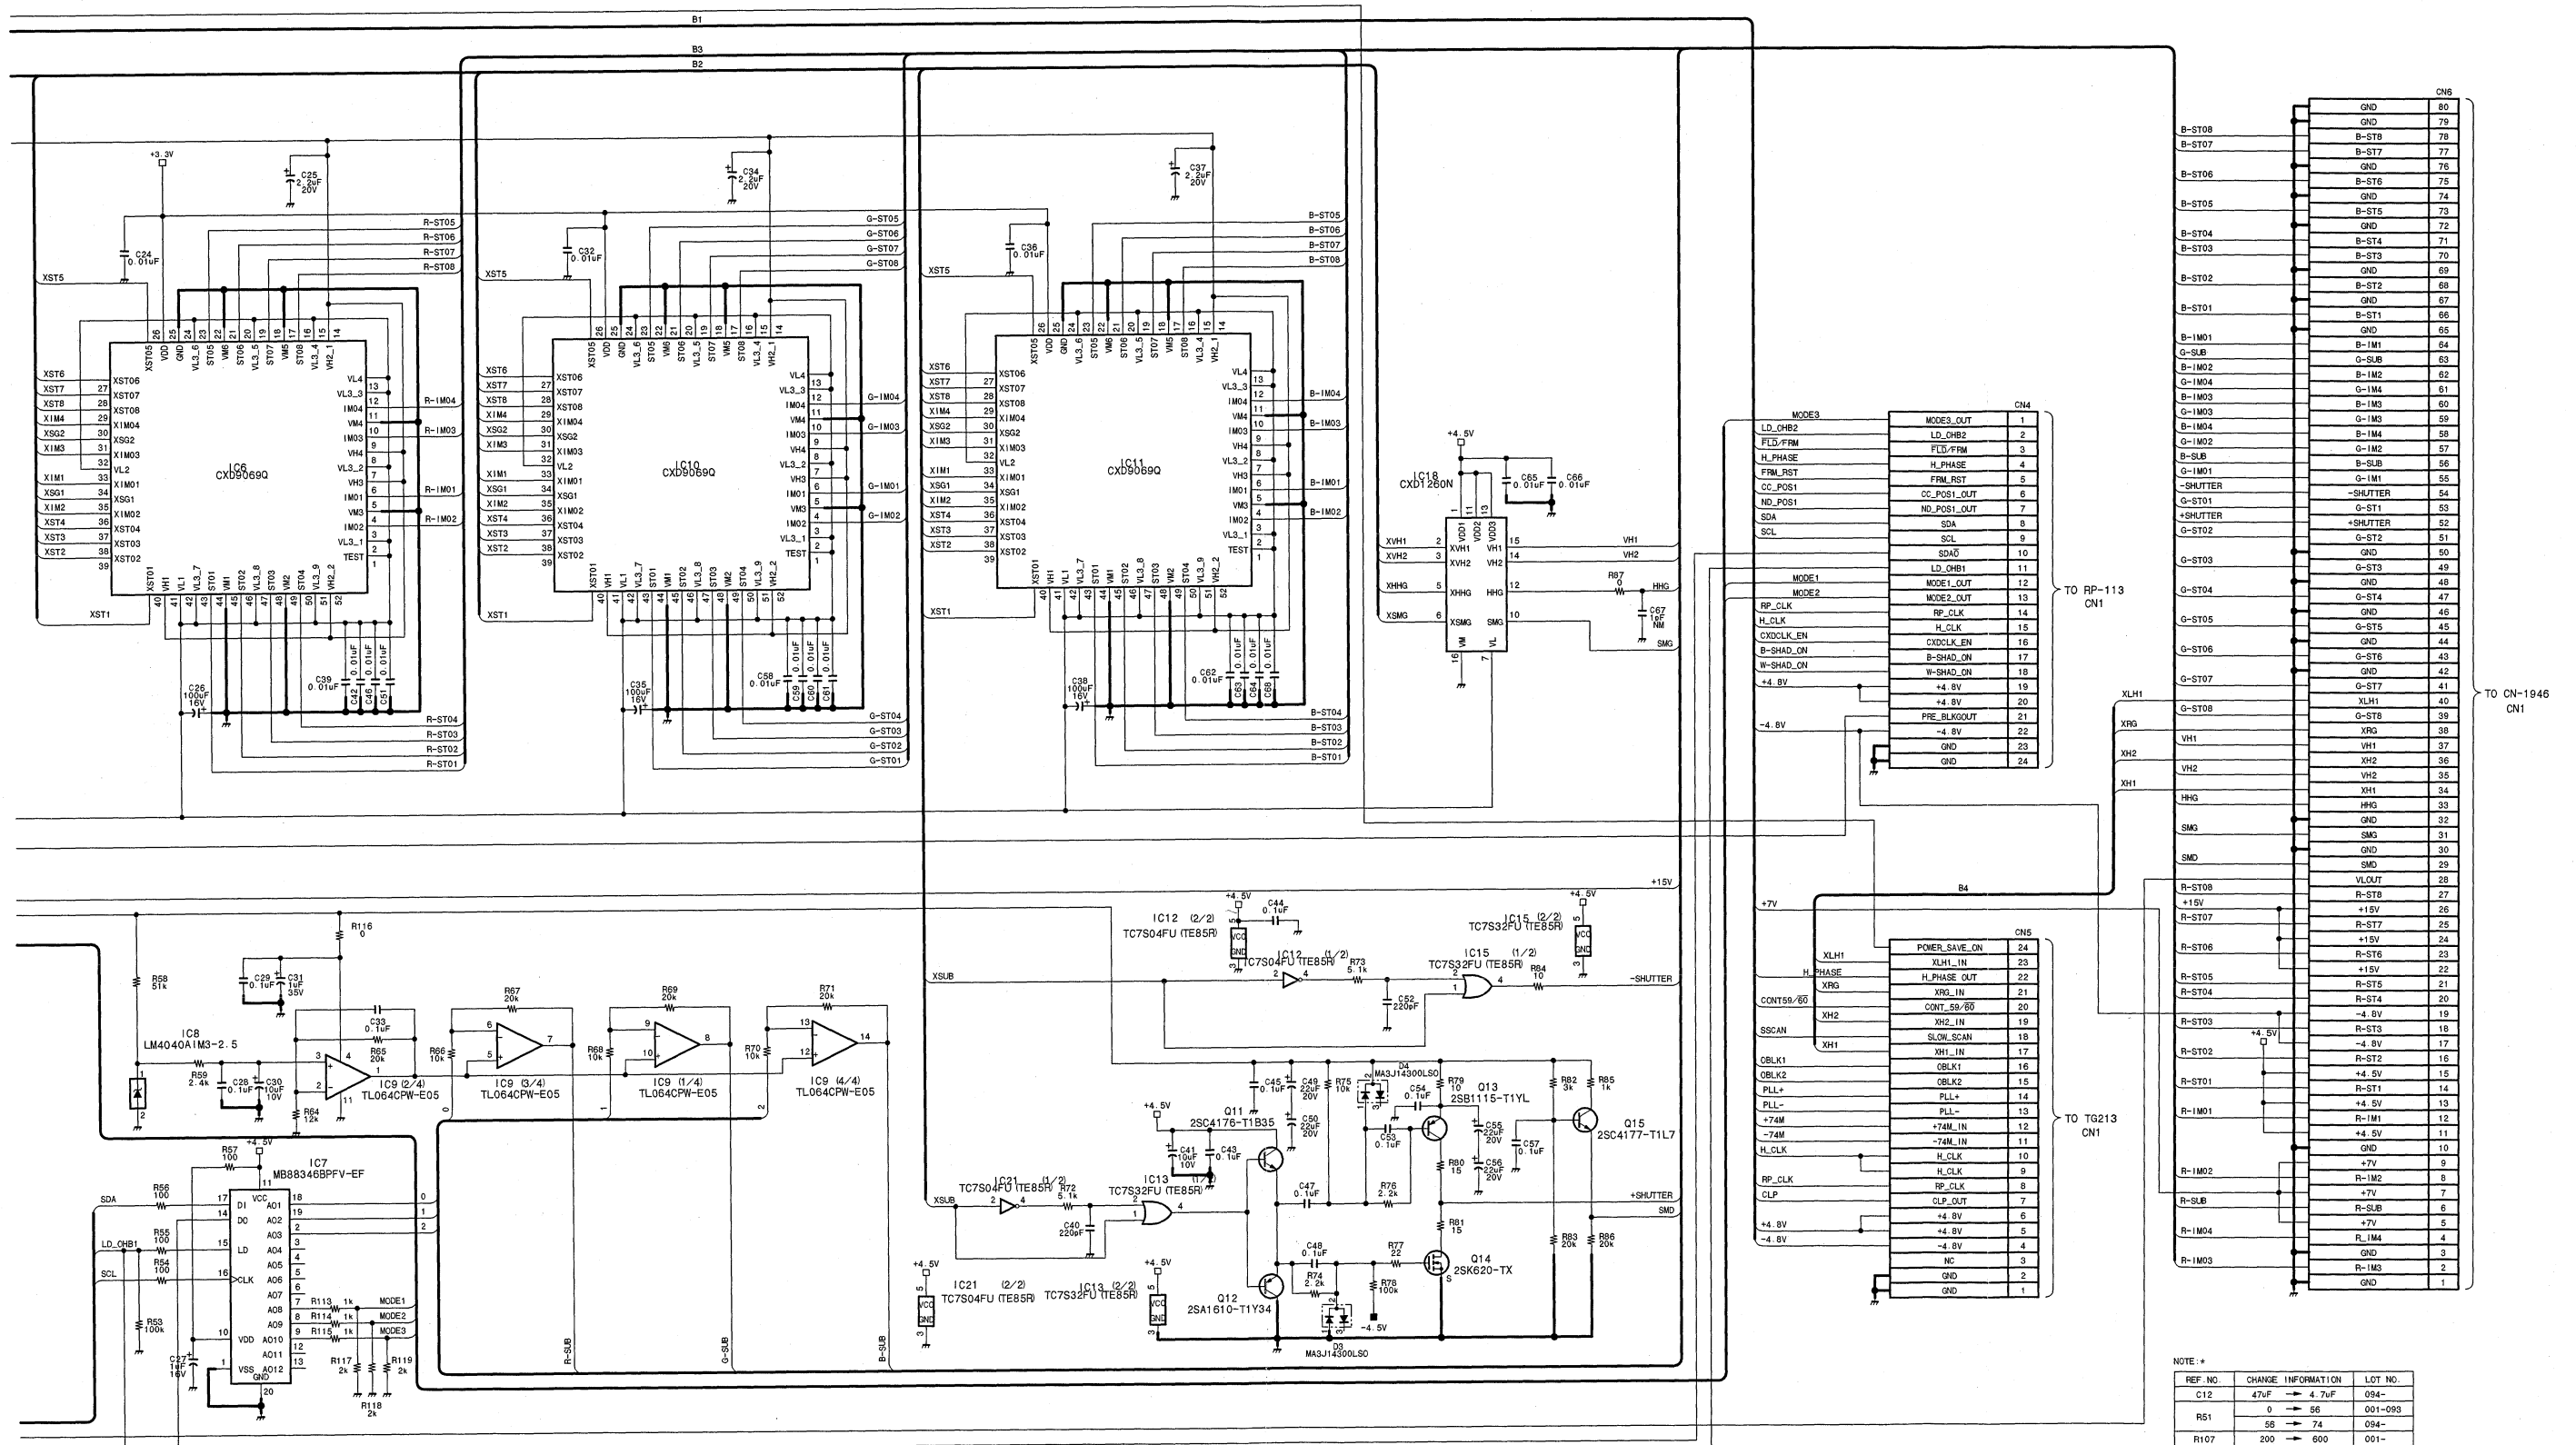

CCD driver, Timing generator
DR-411

BOARD NO. 1-677-597-11
LOT NO. 911-151
HDW-F900C_DR-411_211_1

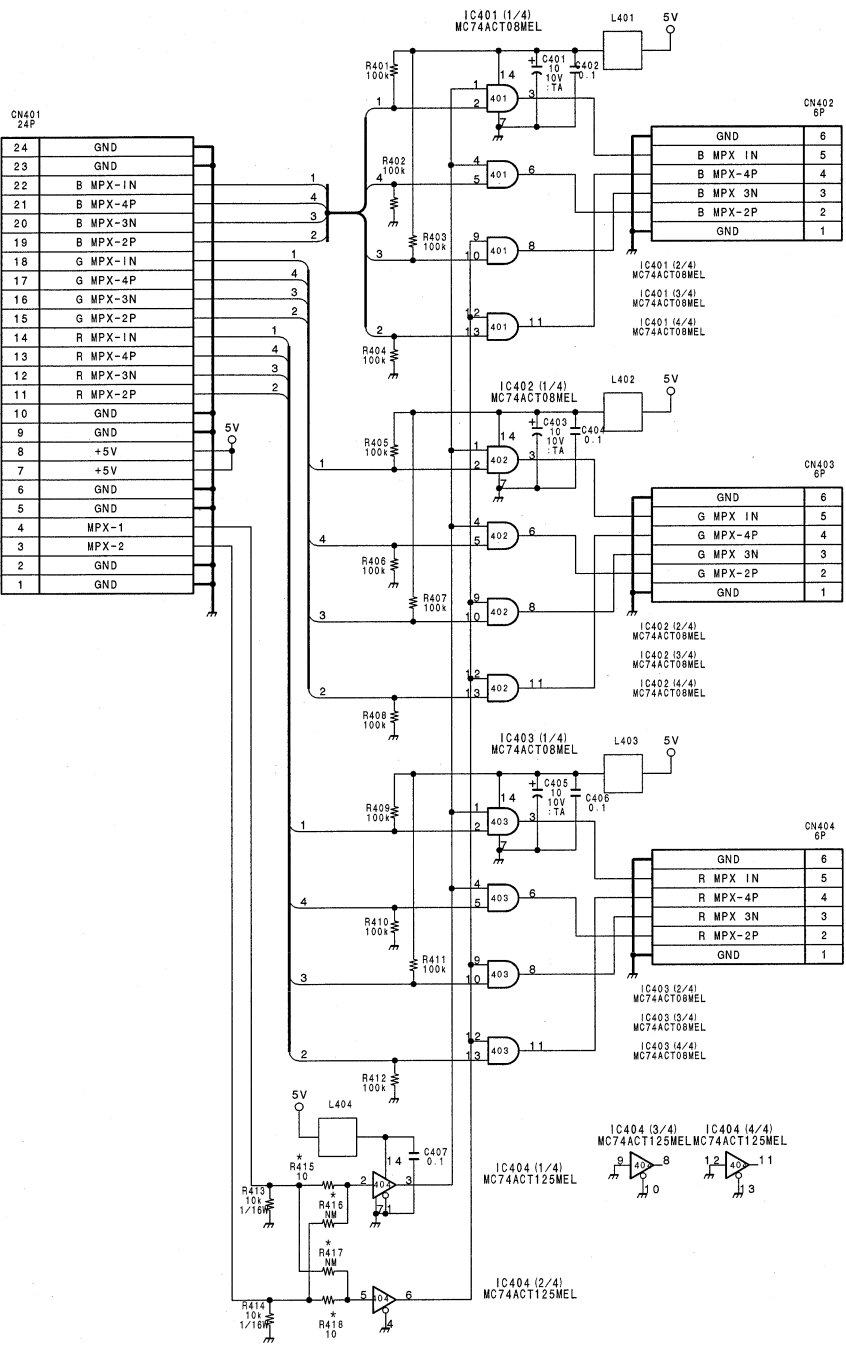



NOTE : *


REF. NO	CHANGE INFORMATION	LOT NO.
R415	10 ADD	073-
R418		
R416	0 DELETE	091-
R417		

Connector Board
DU-68
BOARD NO. 1-679-131-11
LOT NO. 073-


Connector Board
DU-19
BOARD NO. 1-677-092-11
LOT NO. 911-072
B-3HDW700A-DU19-11-S/M




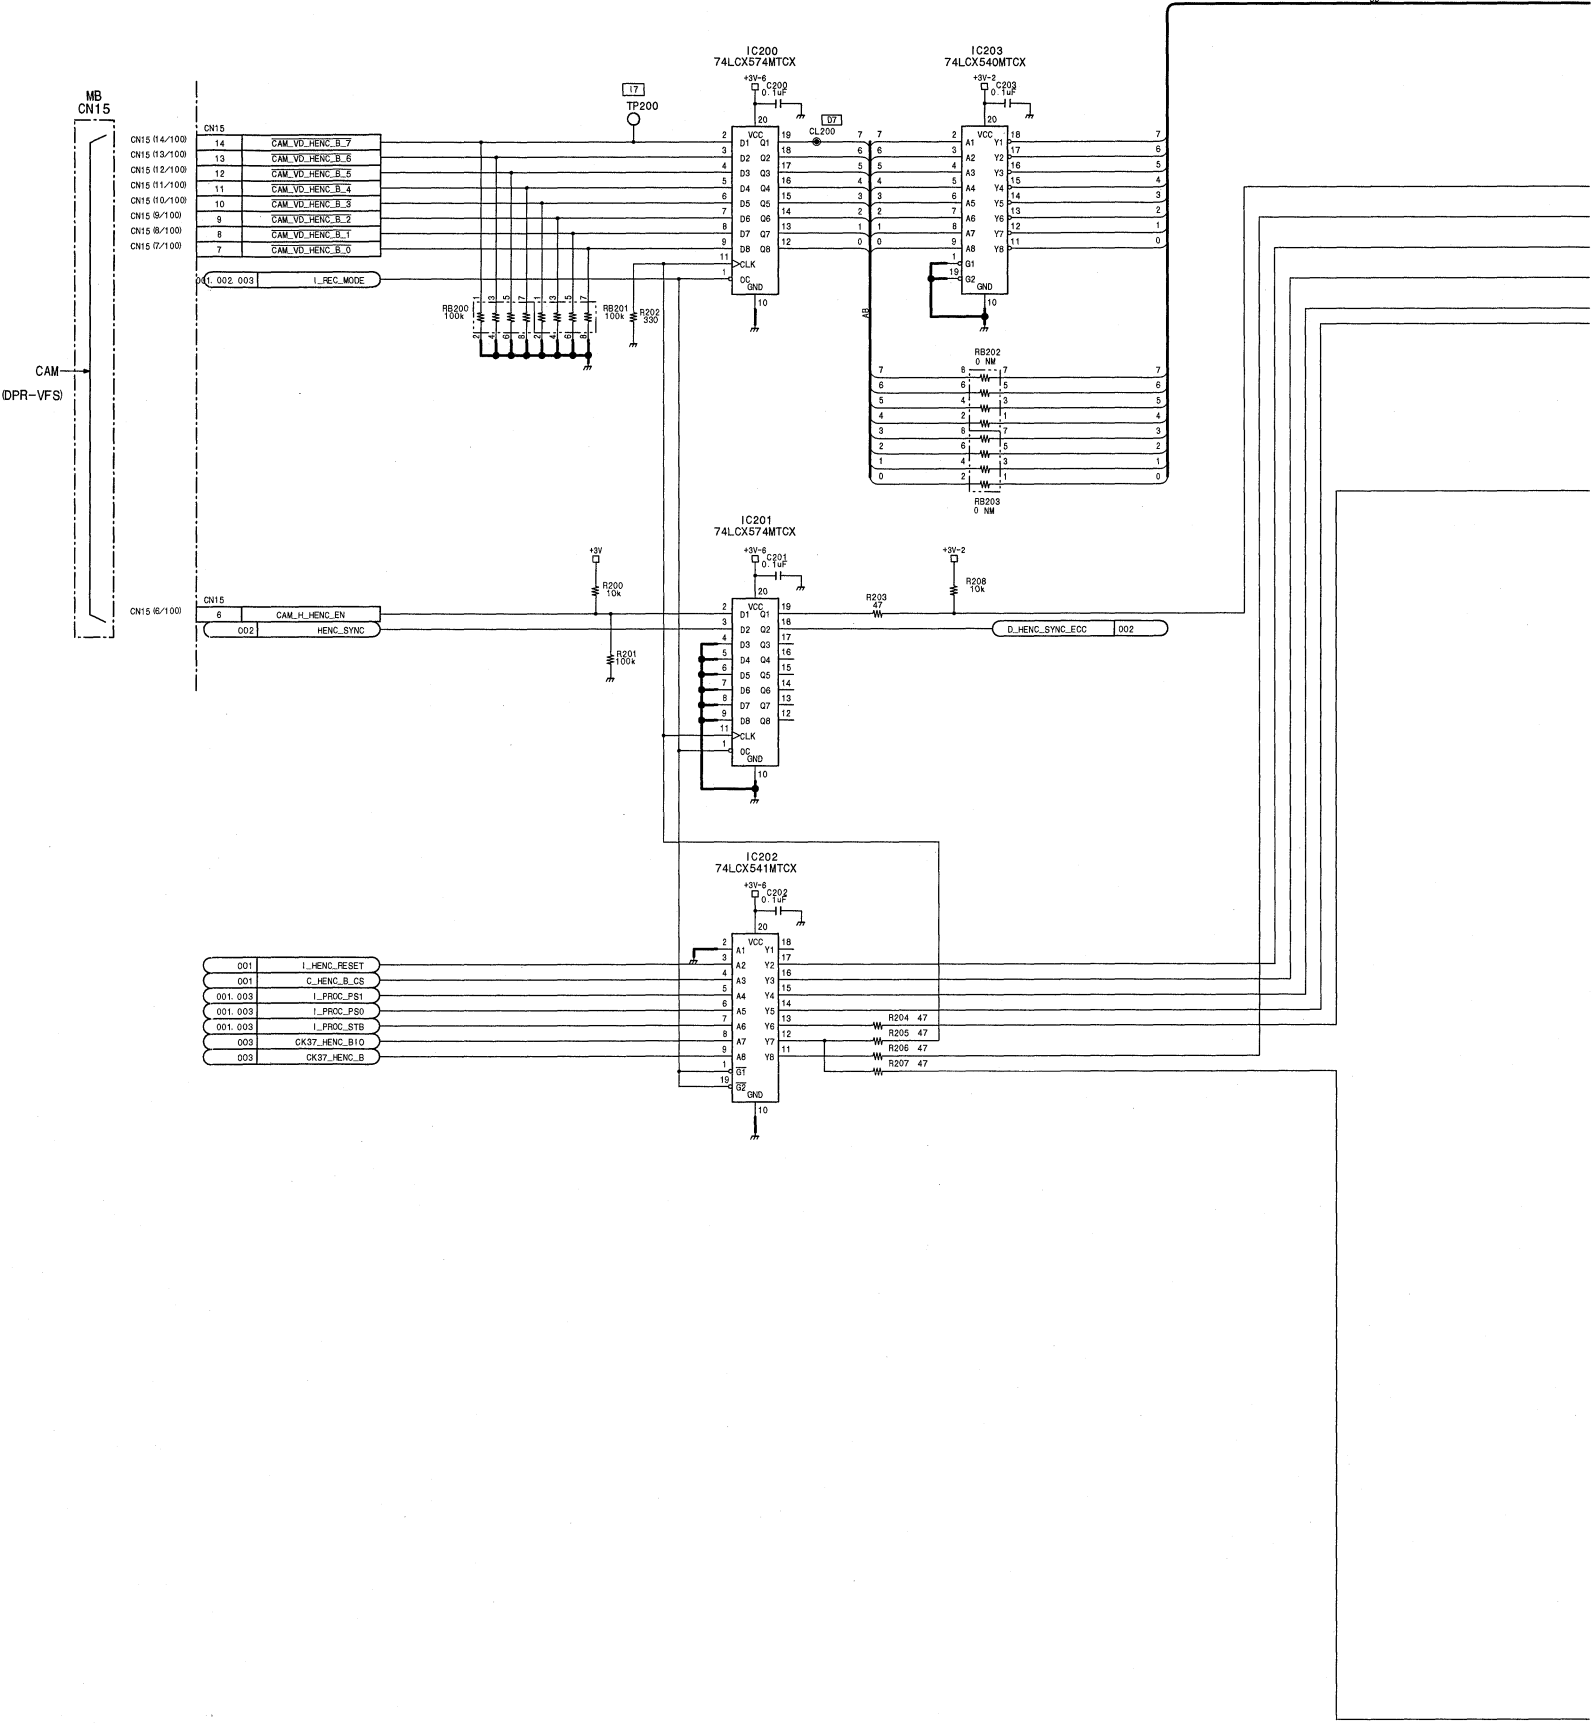

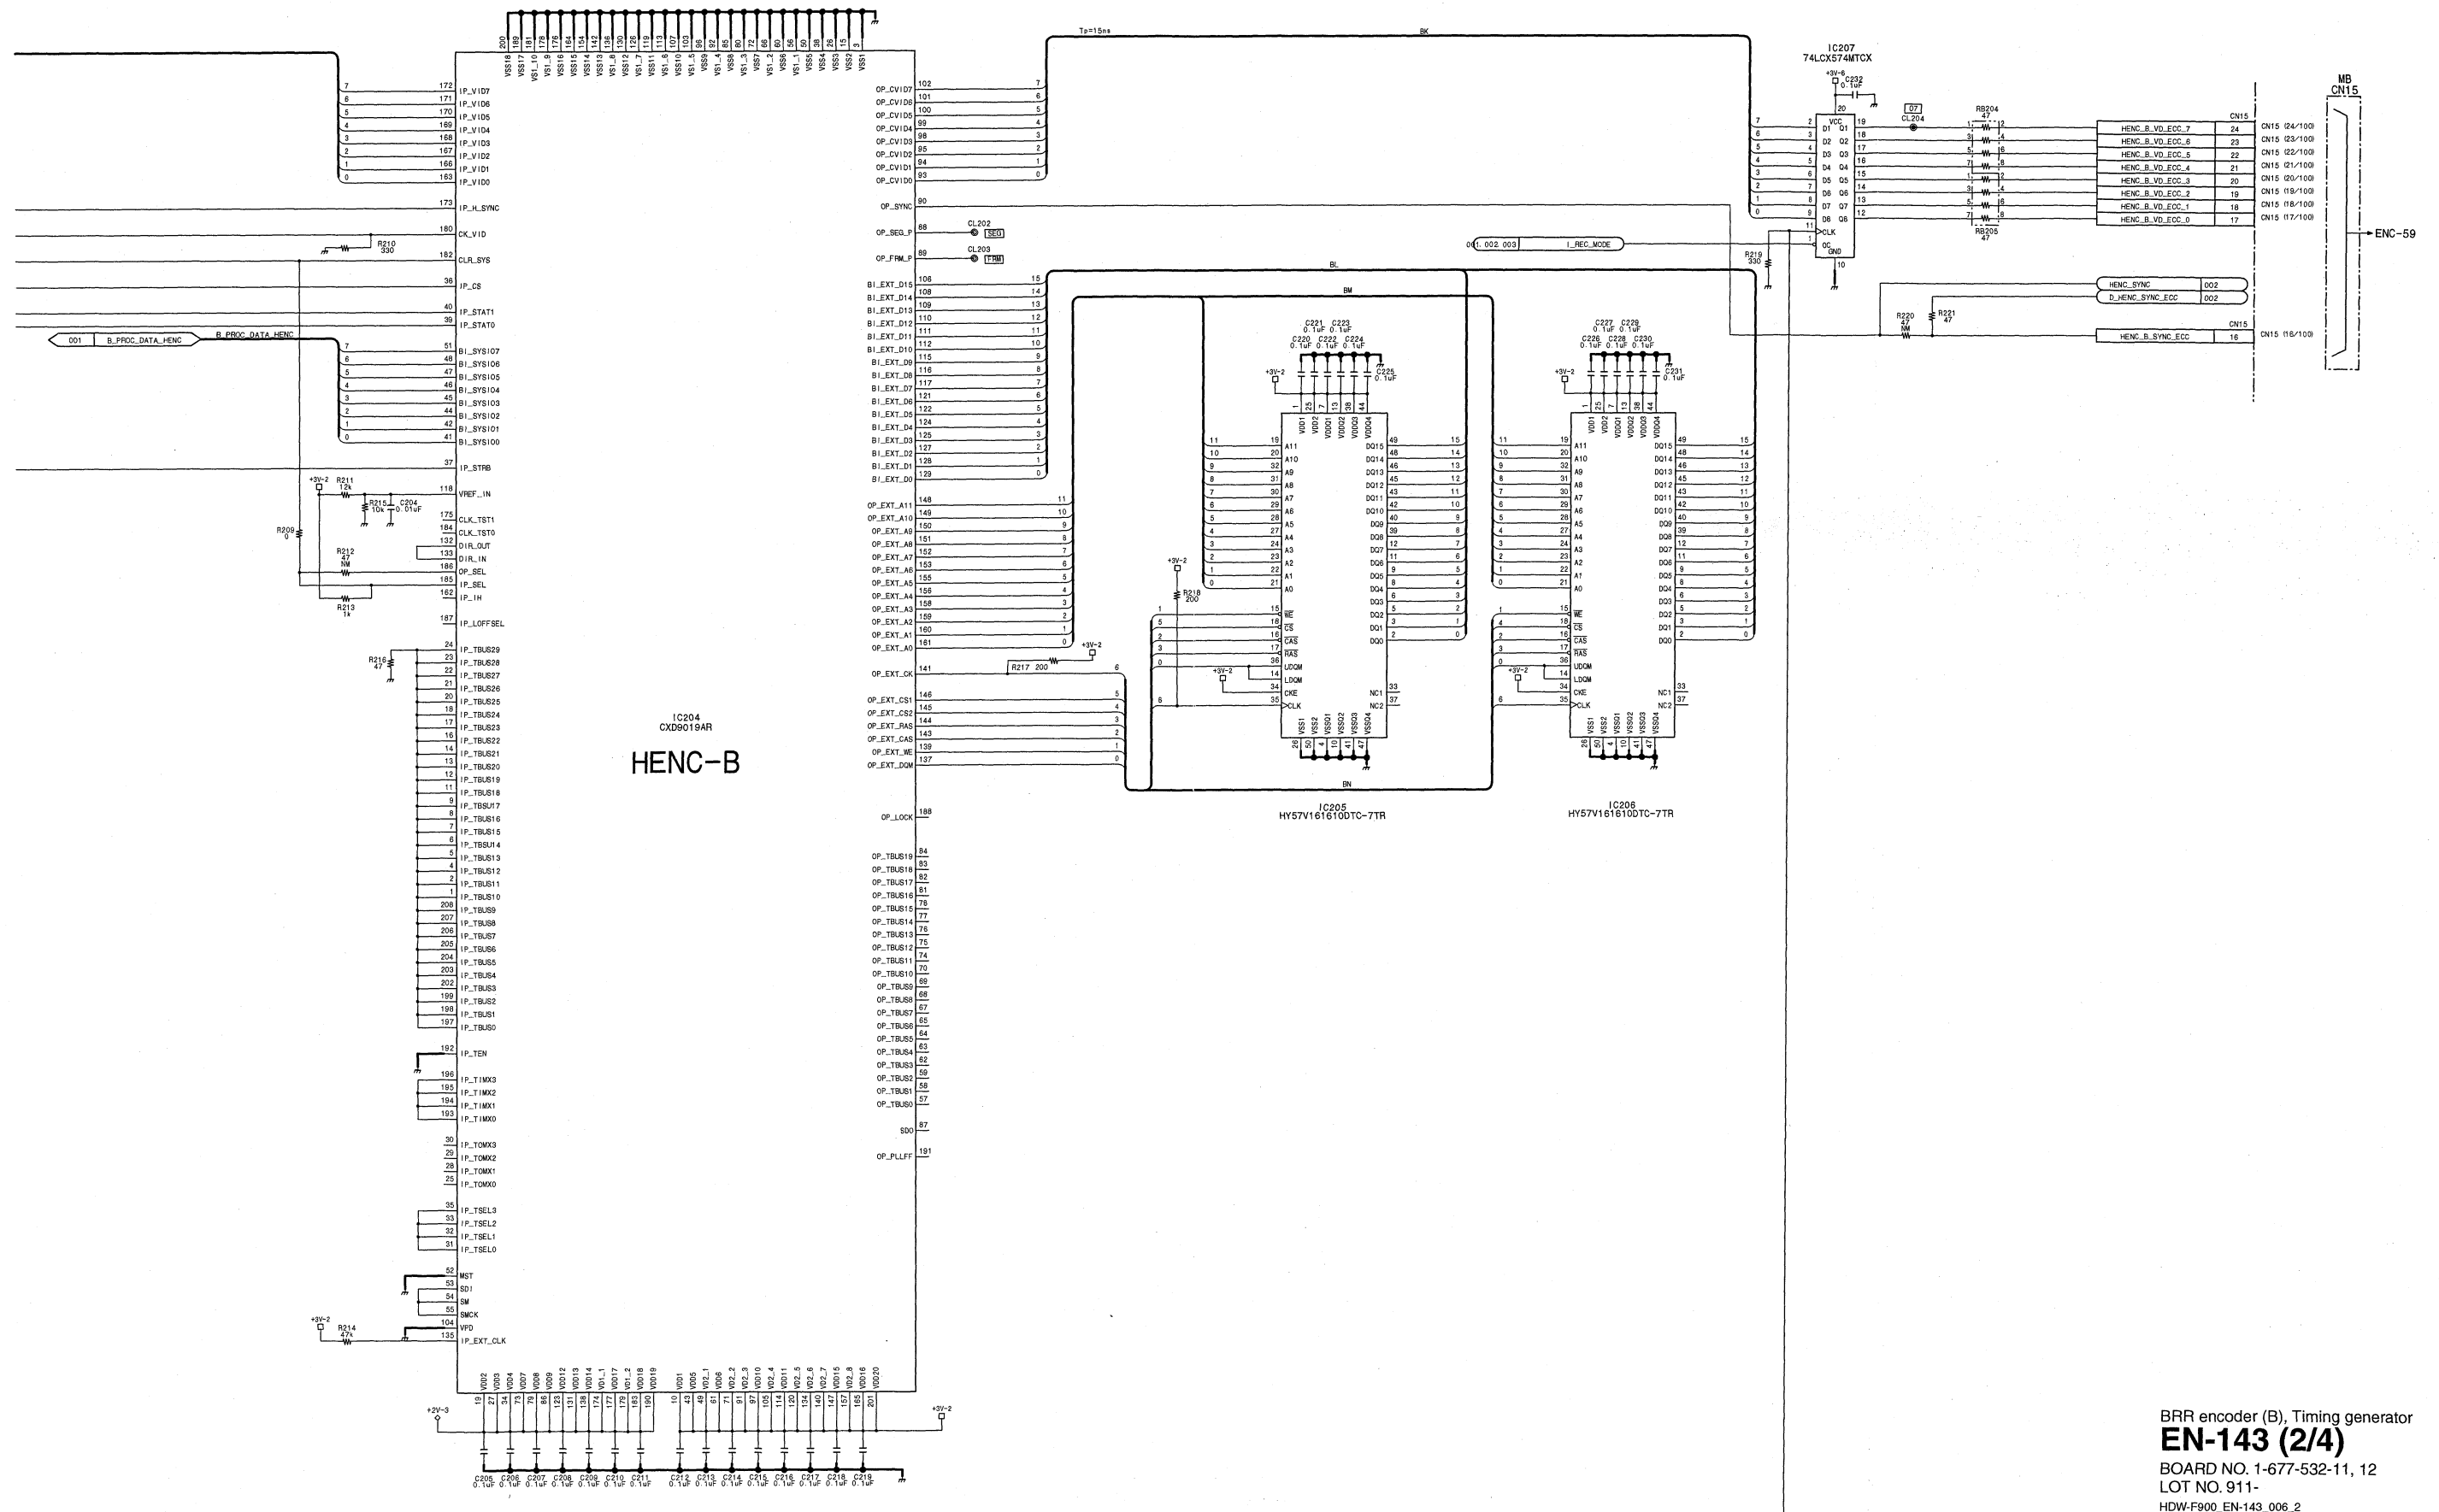

BRR encoder (B), Timing generator
EN-143 (2/4)
 BOARD NO. 1-677-532-11, 12
 LOT NO. 911-
 HDW-F900_EN-143_006.2


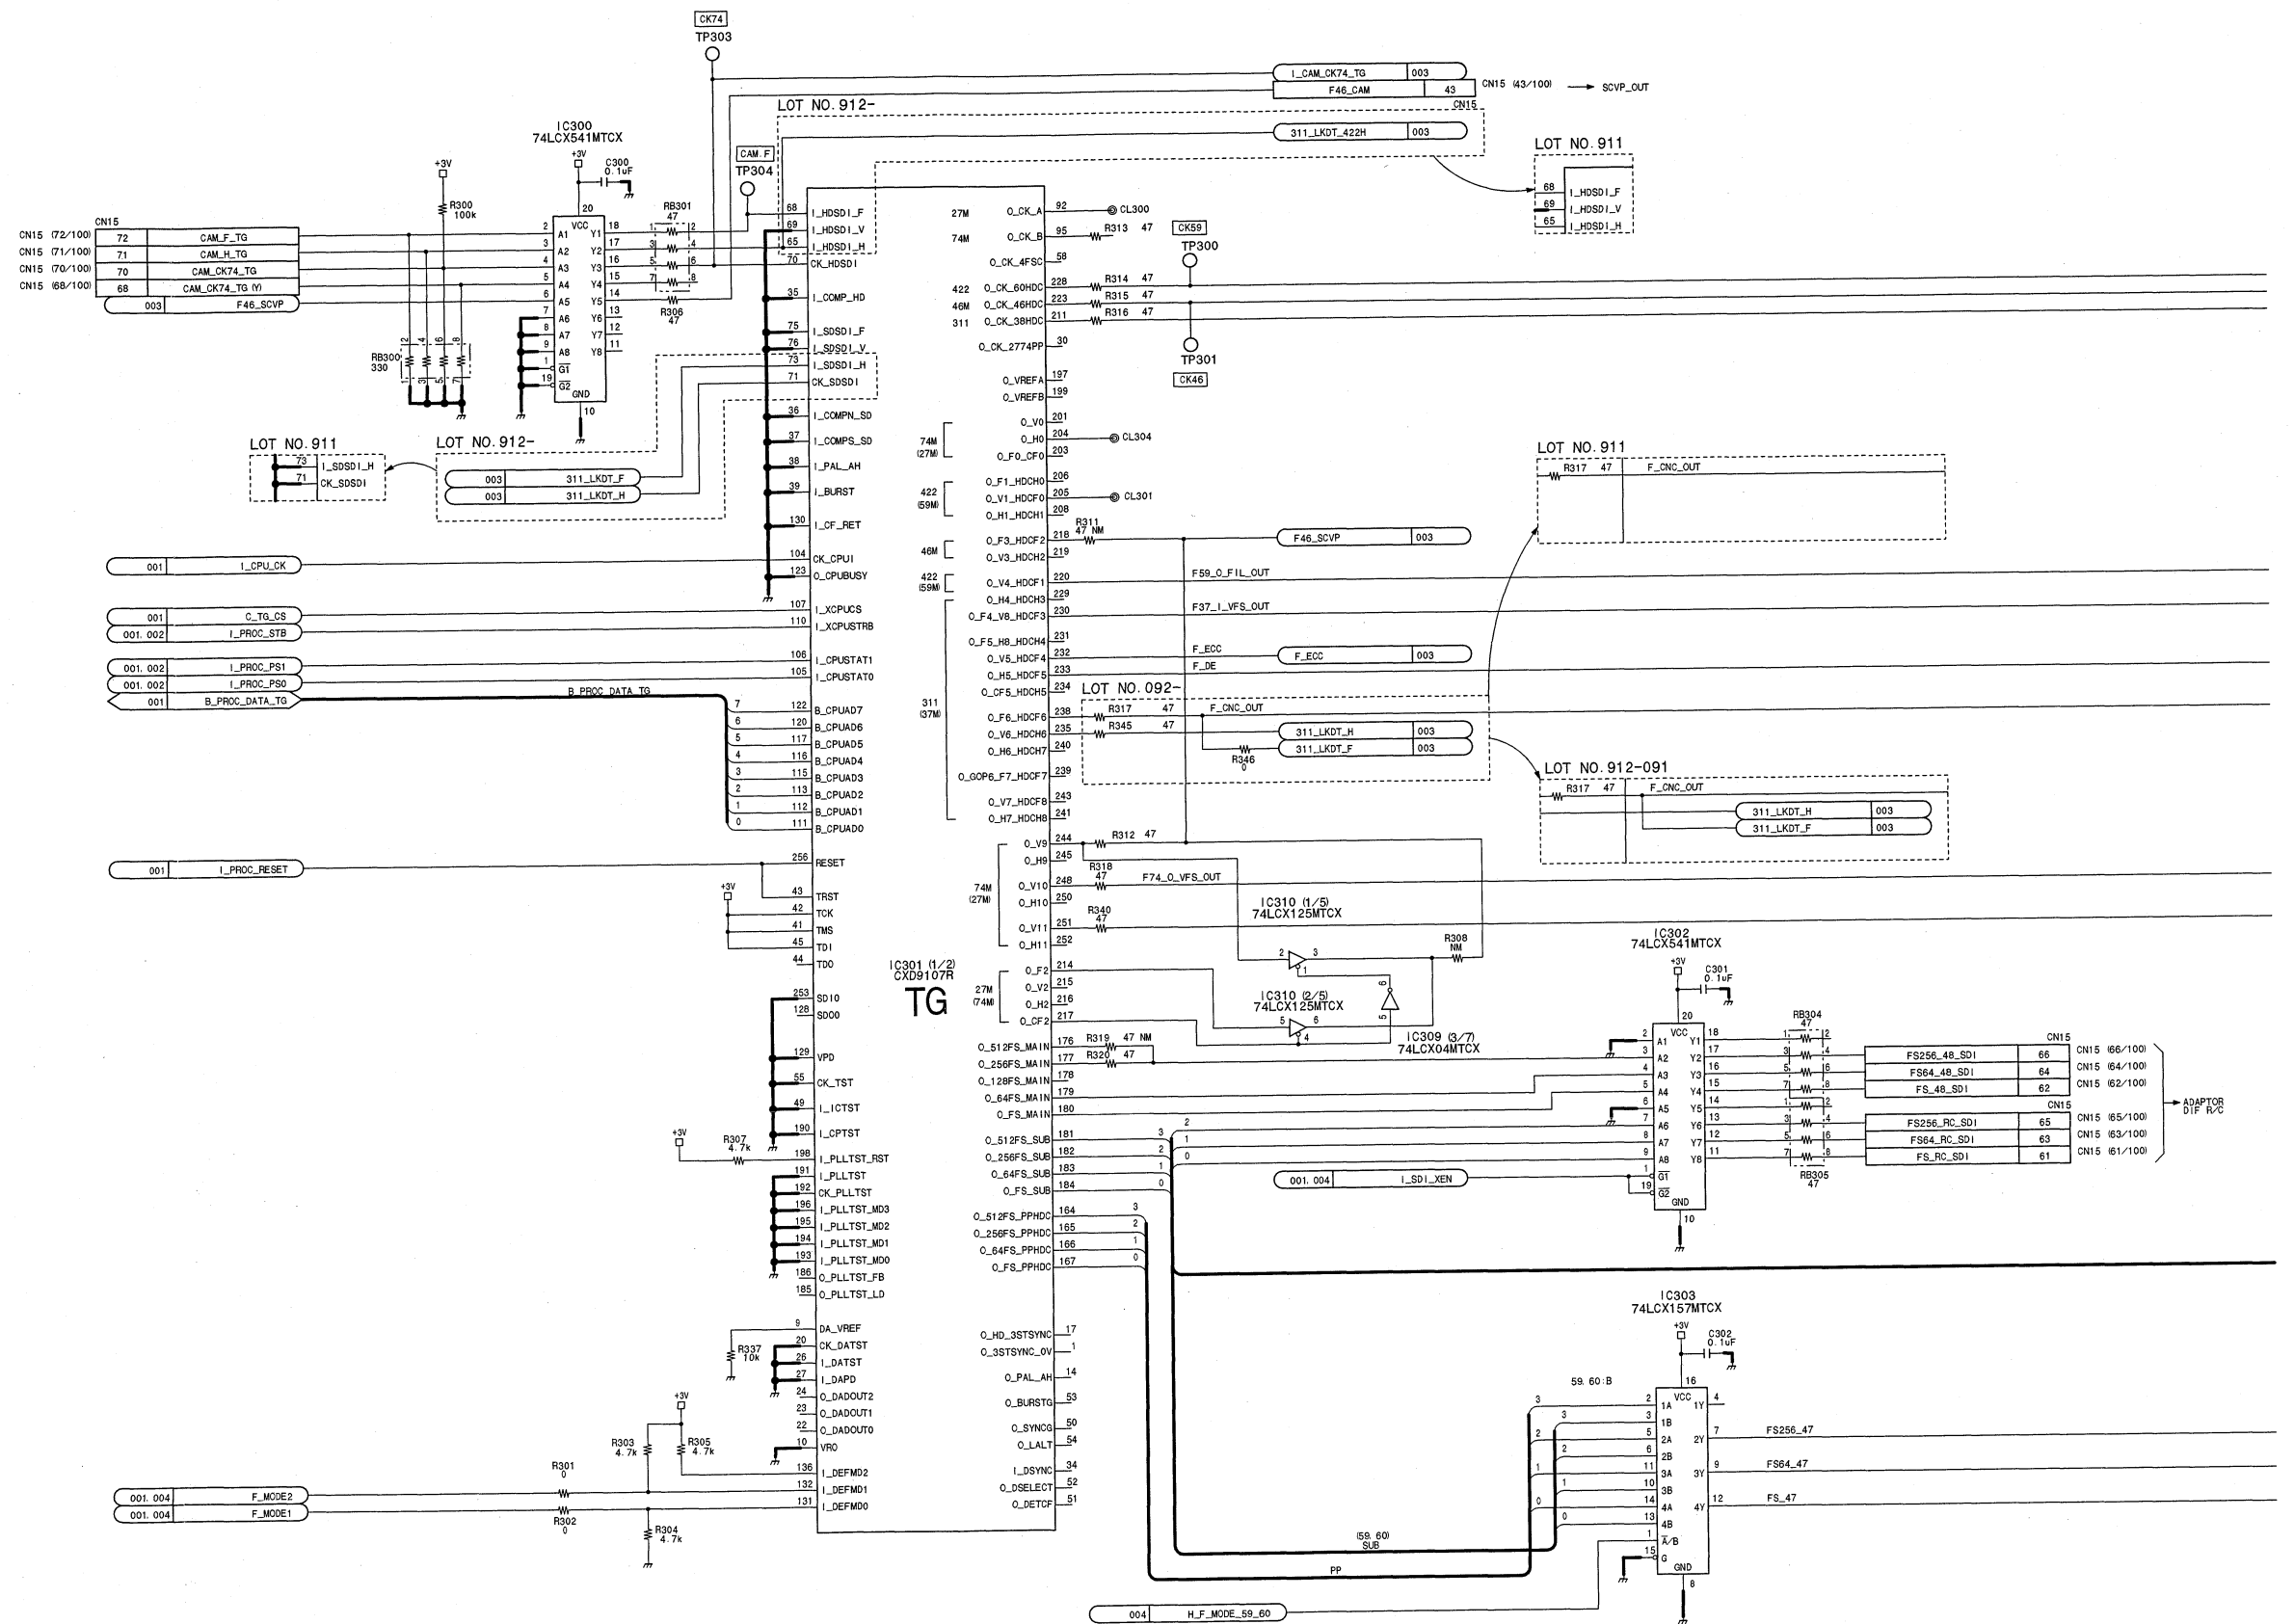


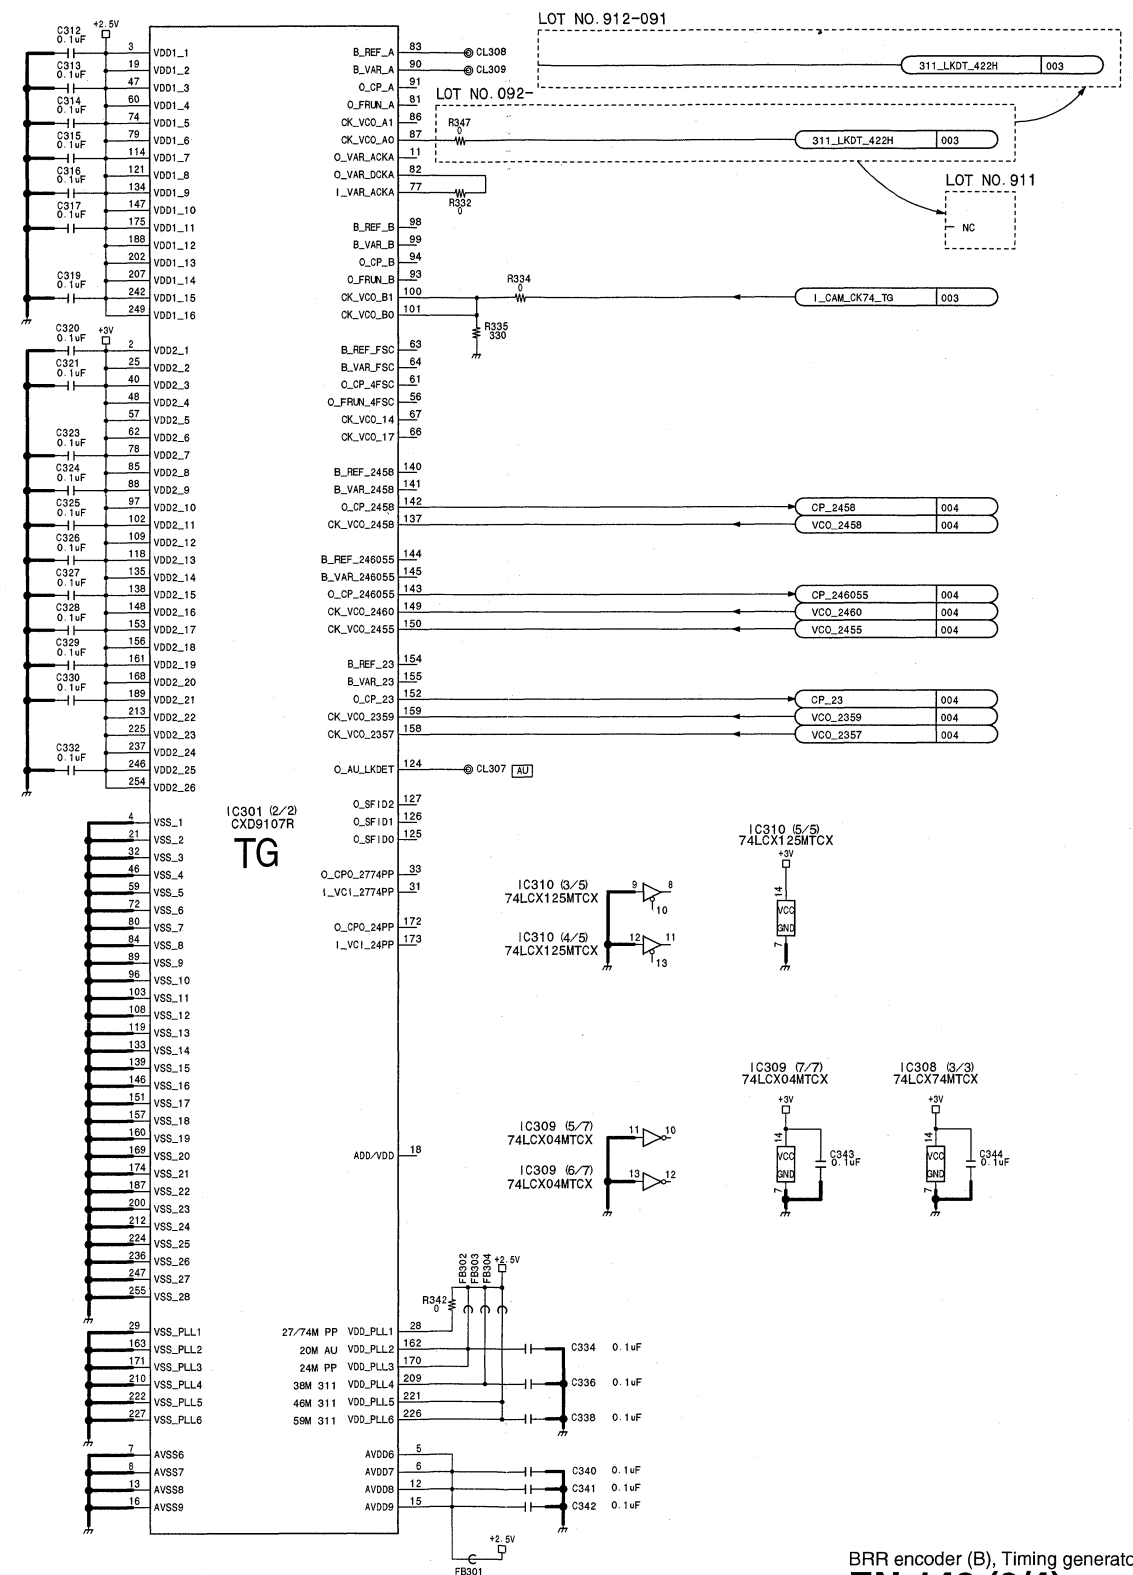


HDW-F900 P2V2

4-47


I	J	K	L	M	N	O	P
---	---	---	---	---	---	---	---

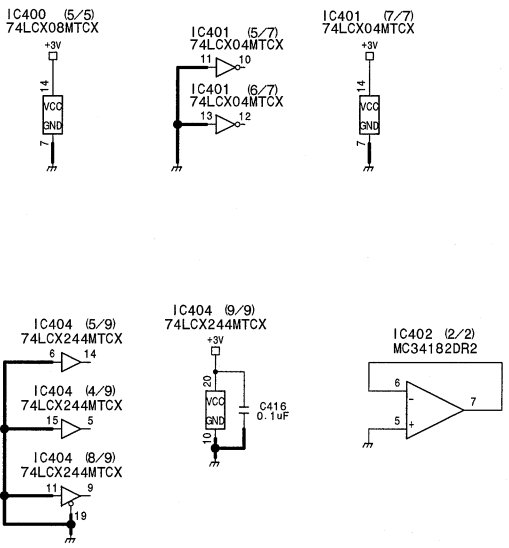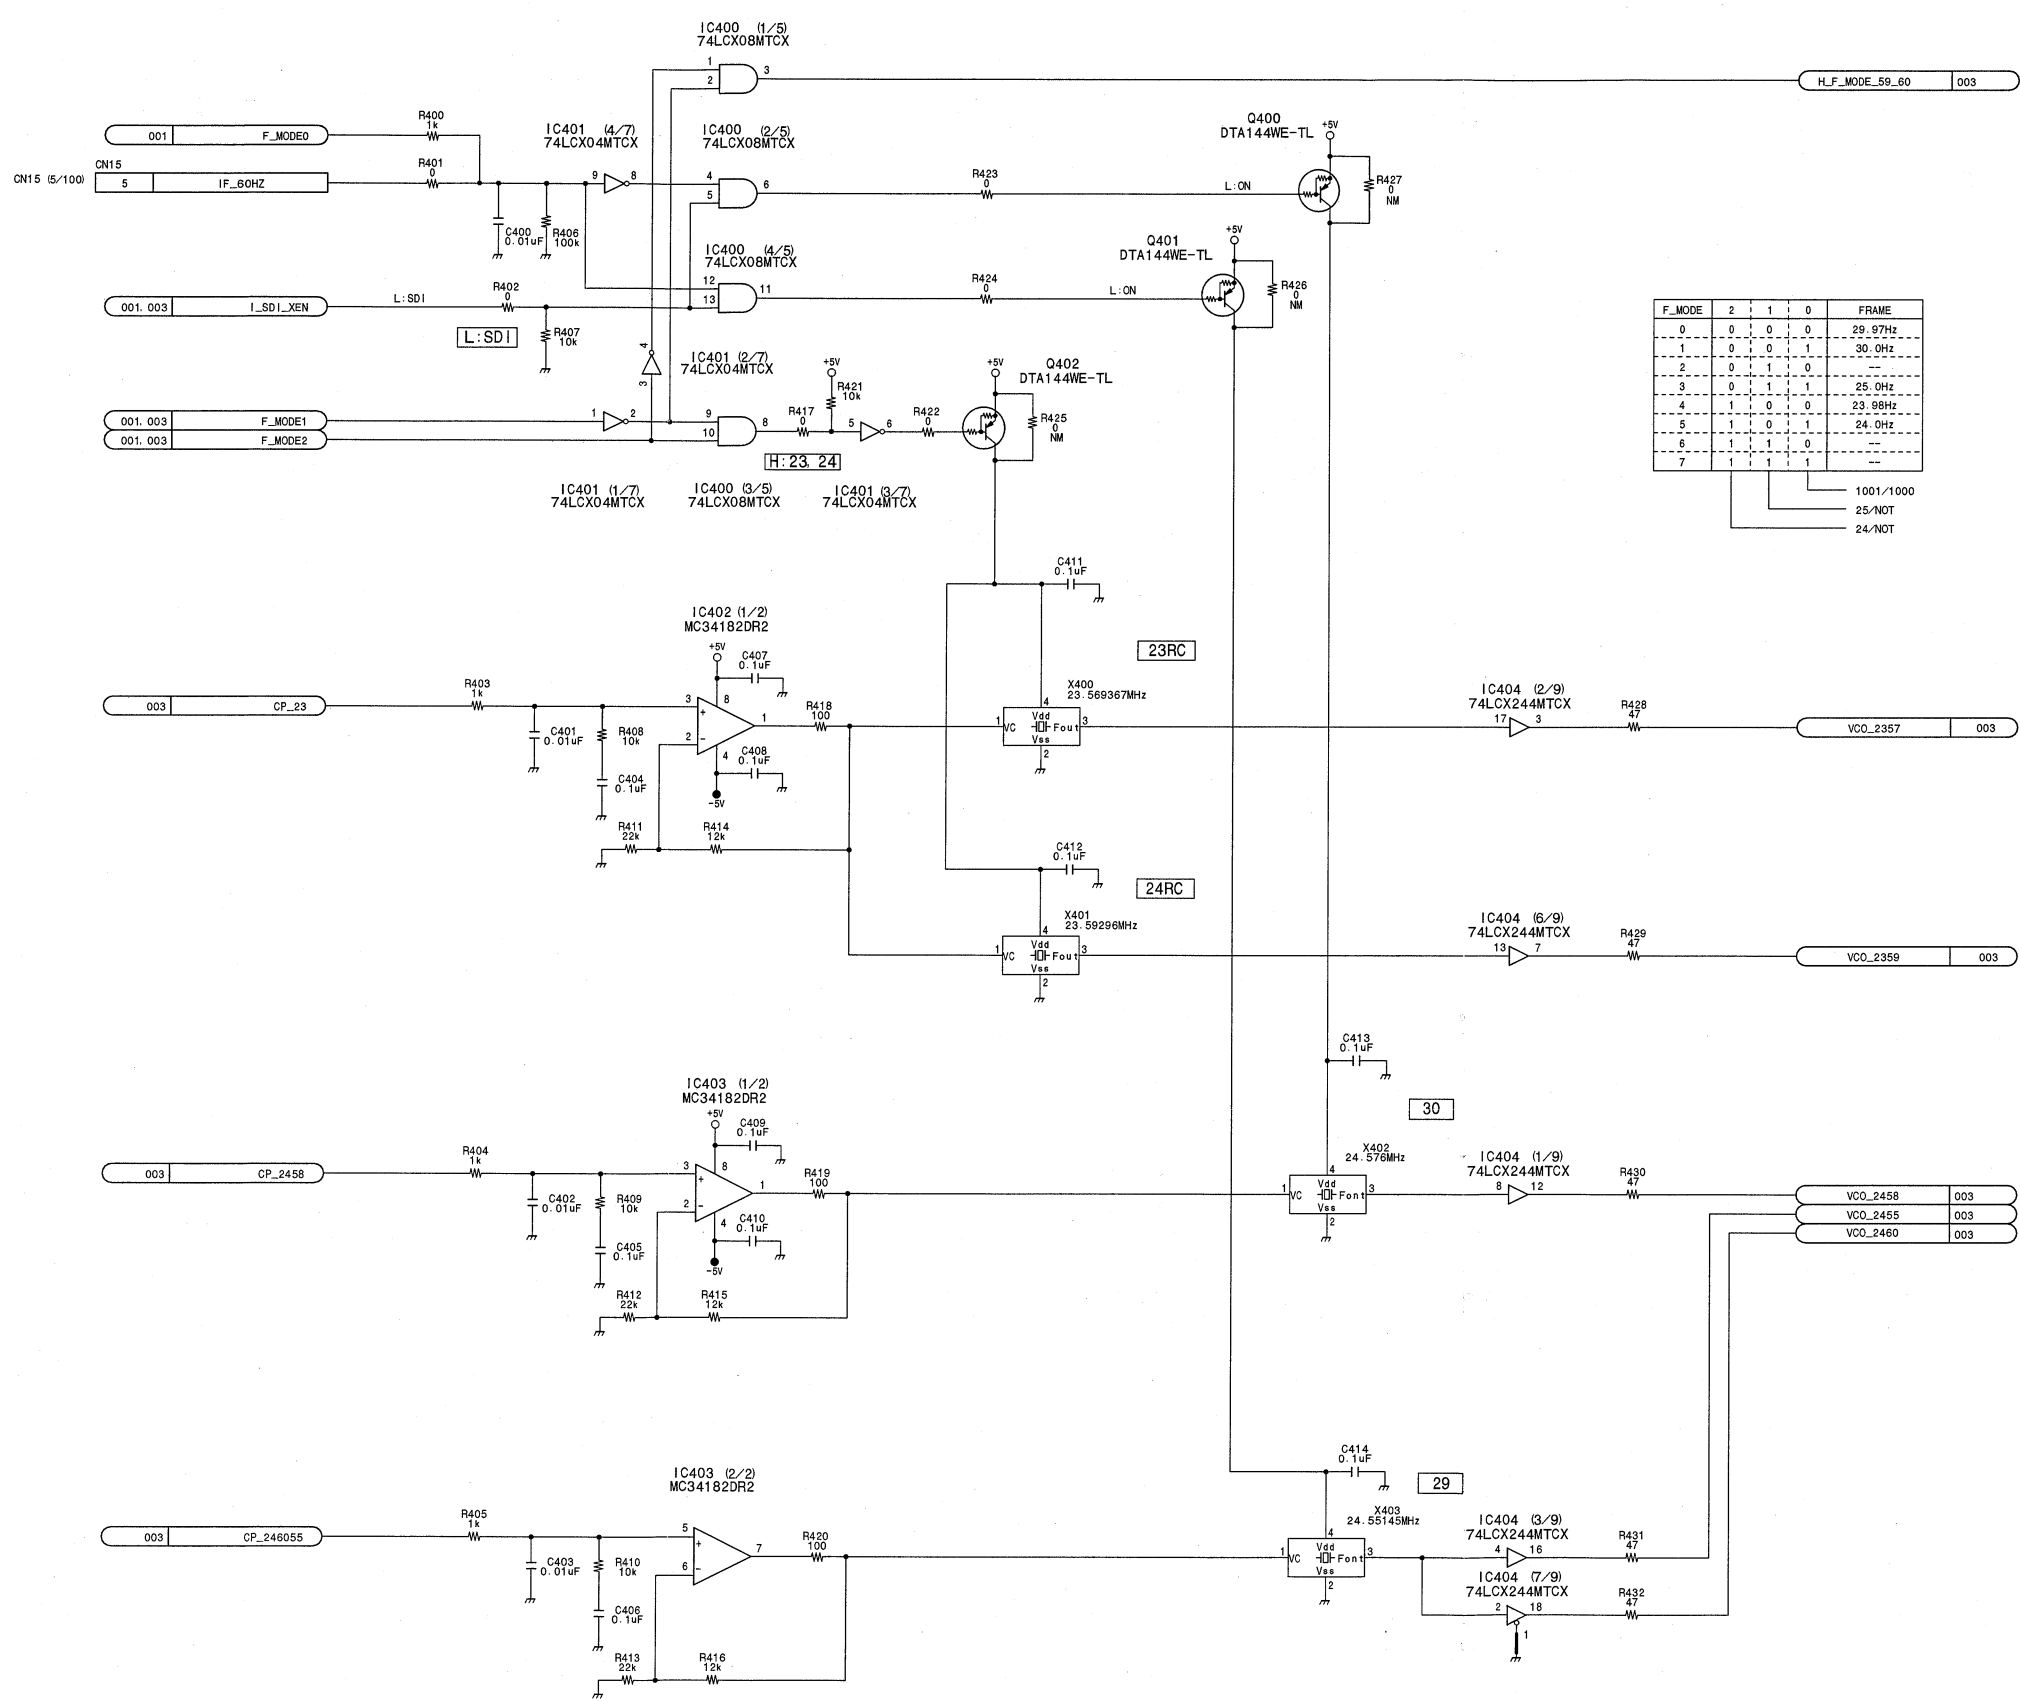


BRR encoder (B), Timing generator
EN-143 (4/4)
BOARD NO. 1-677-532-11, 12
LOT NO. 911-
HDW-F900_EN-143_006_4

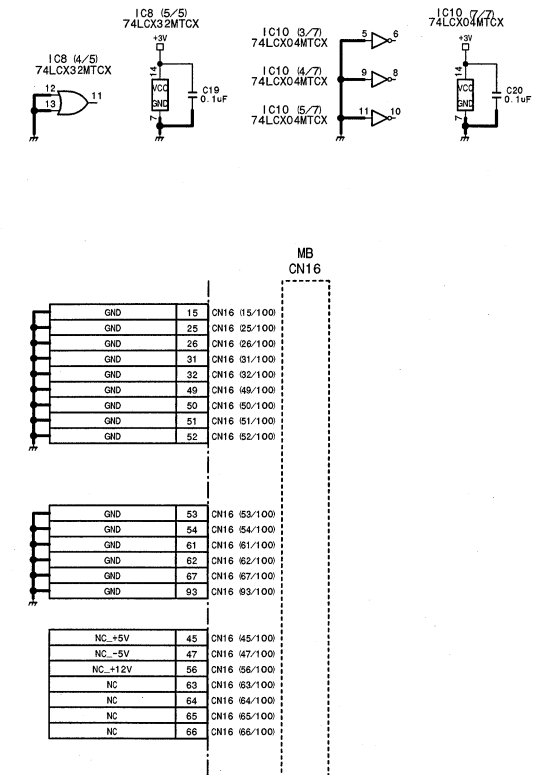



BRR encoder (A), ECC encoder
ENC-59 (1/3)
 BOARD NO. 1-677-533-11
 LOT NO. 911-
 HDW-F900V_ENC-59_004_1




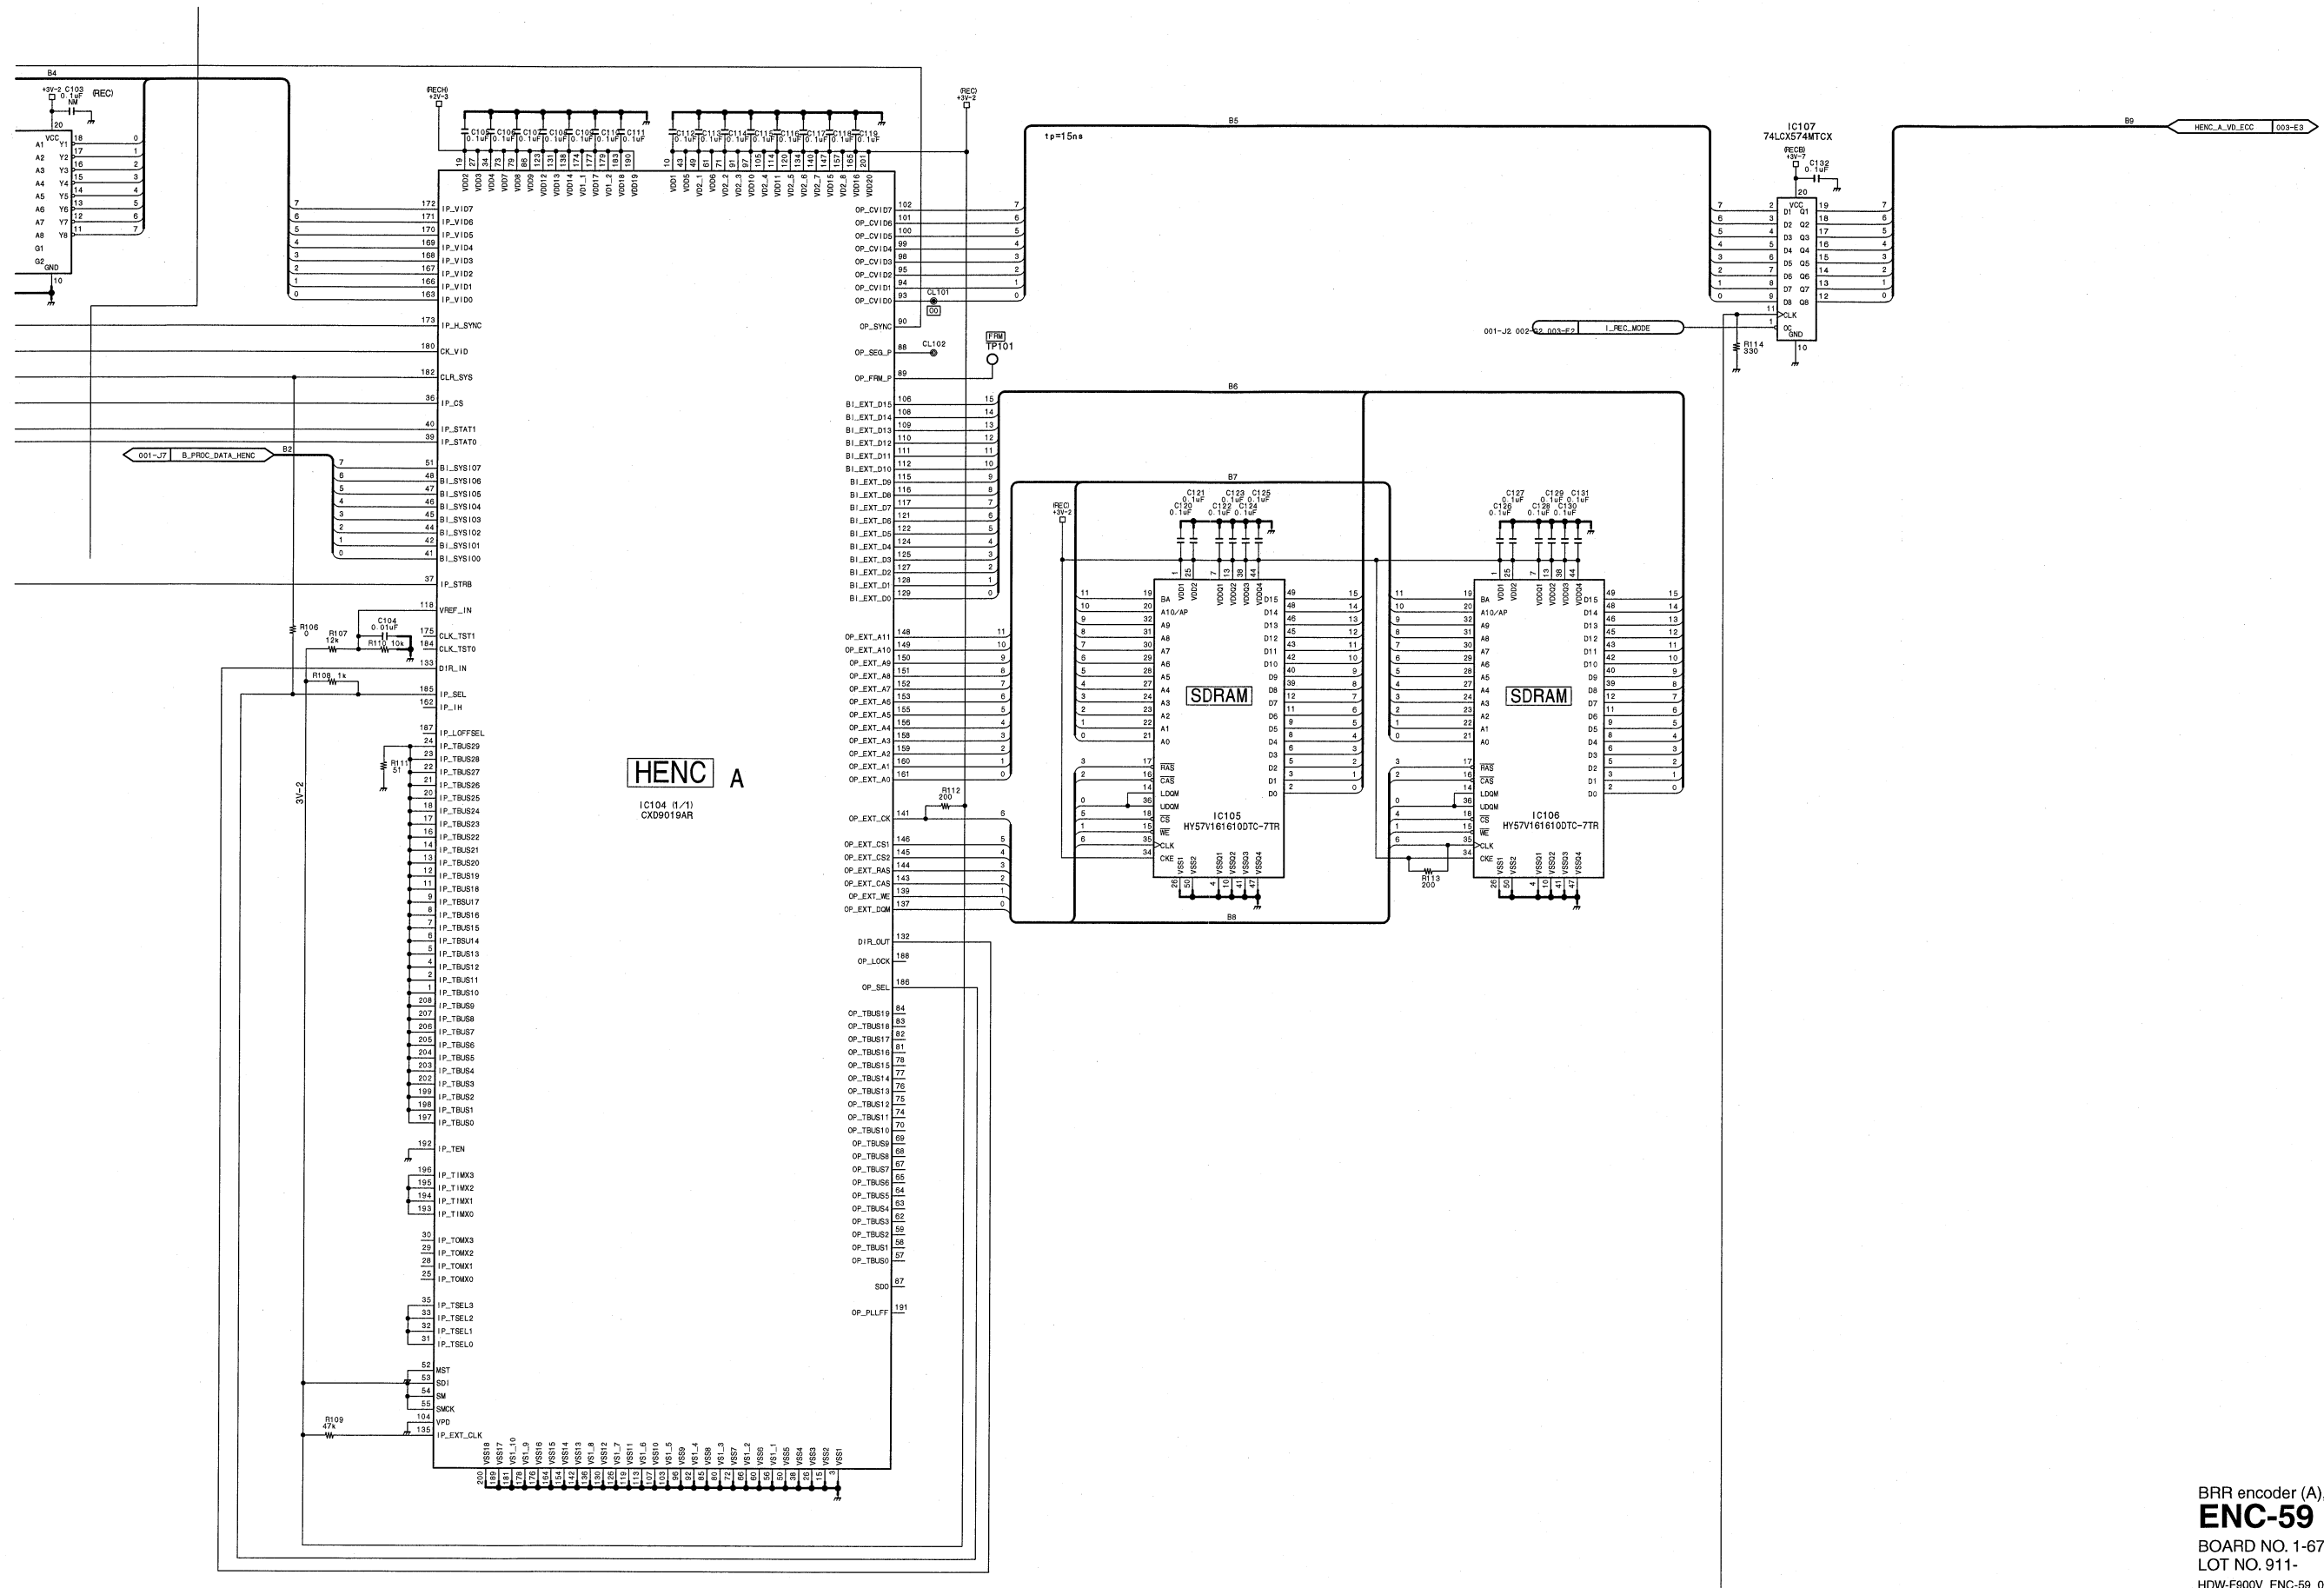



BRR encoder (A), ECC encoder
ENC-59 (2/3)
BOARD NO. 1-677-533-11
LOT NO. 911-
HDW-F900V_ENC-59_004_2














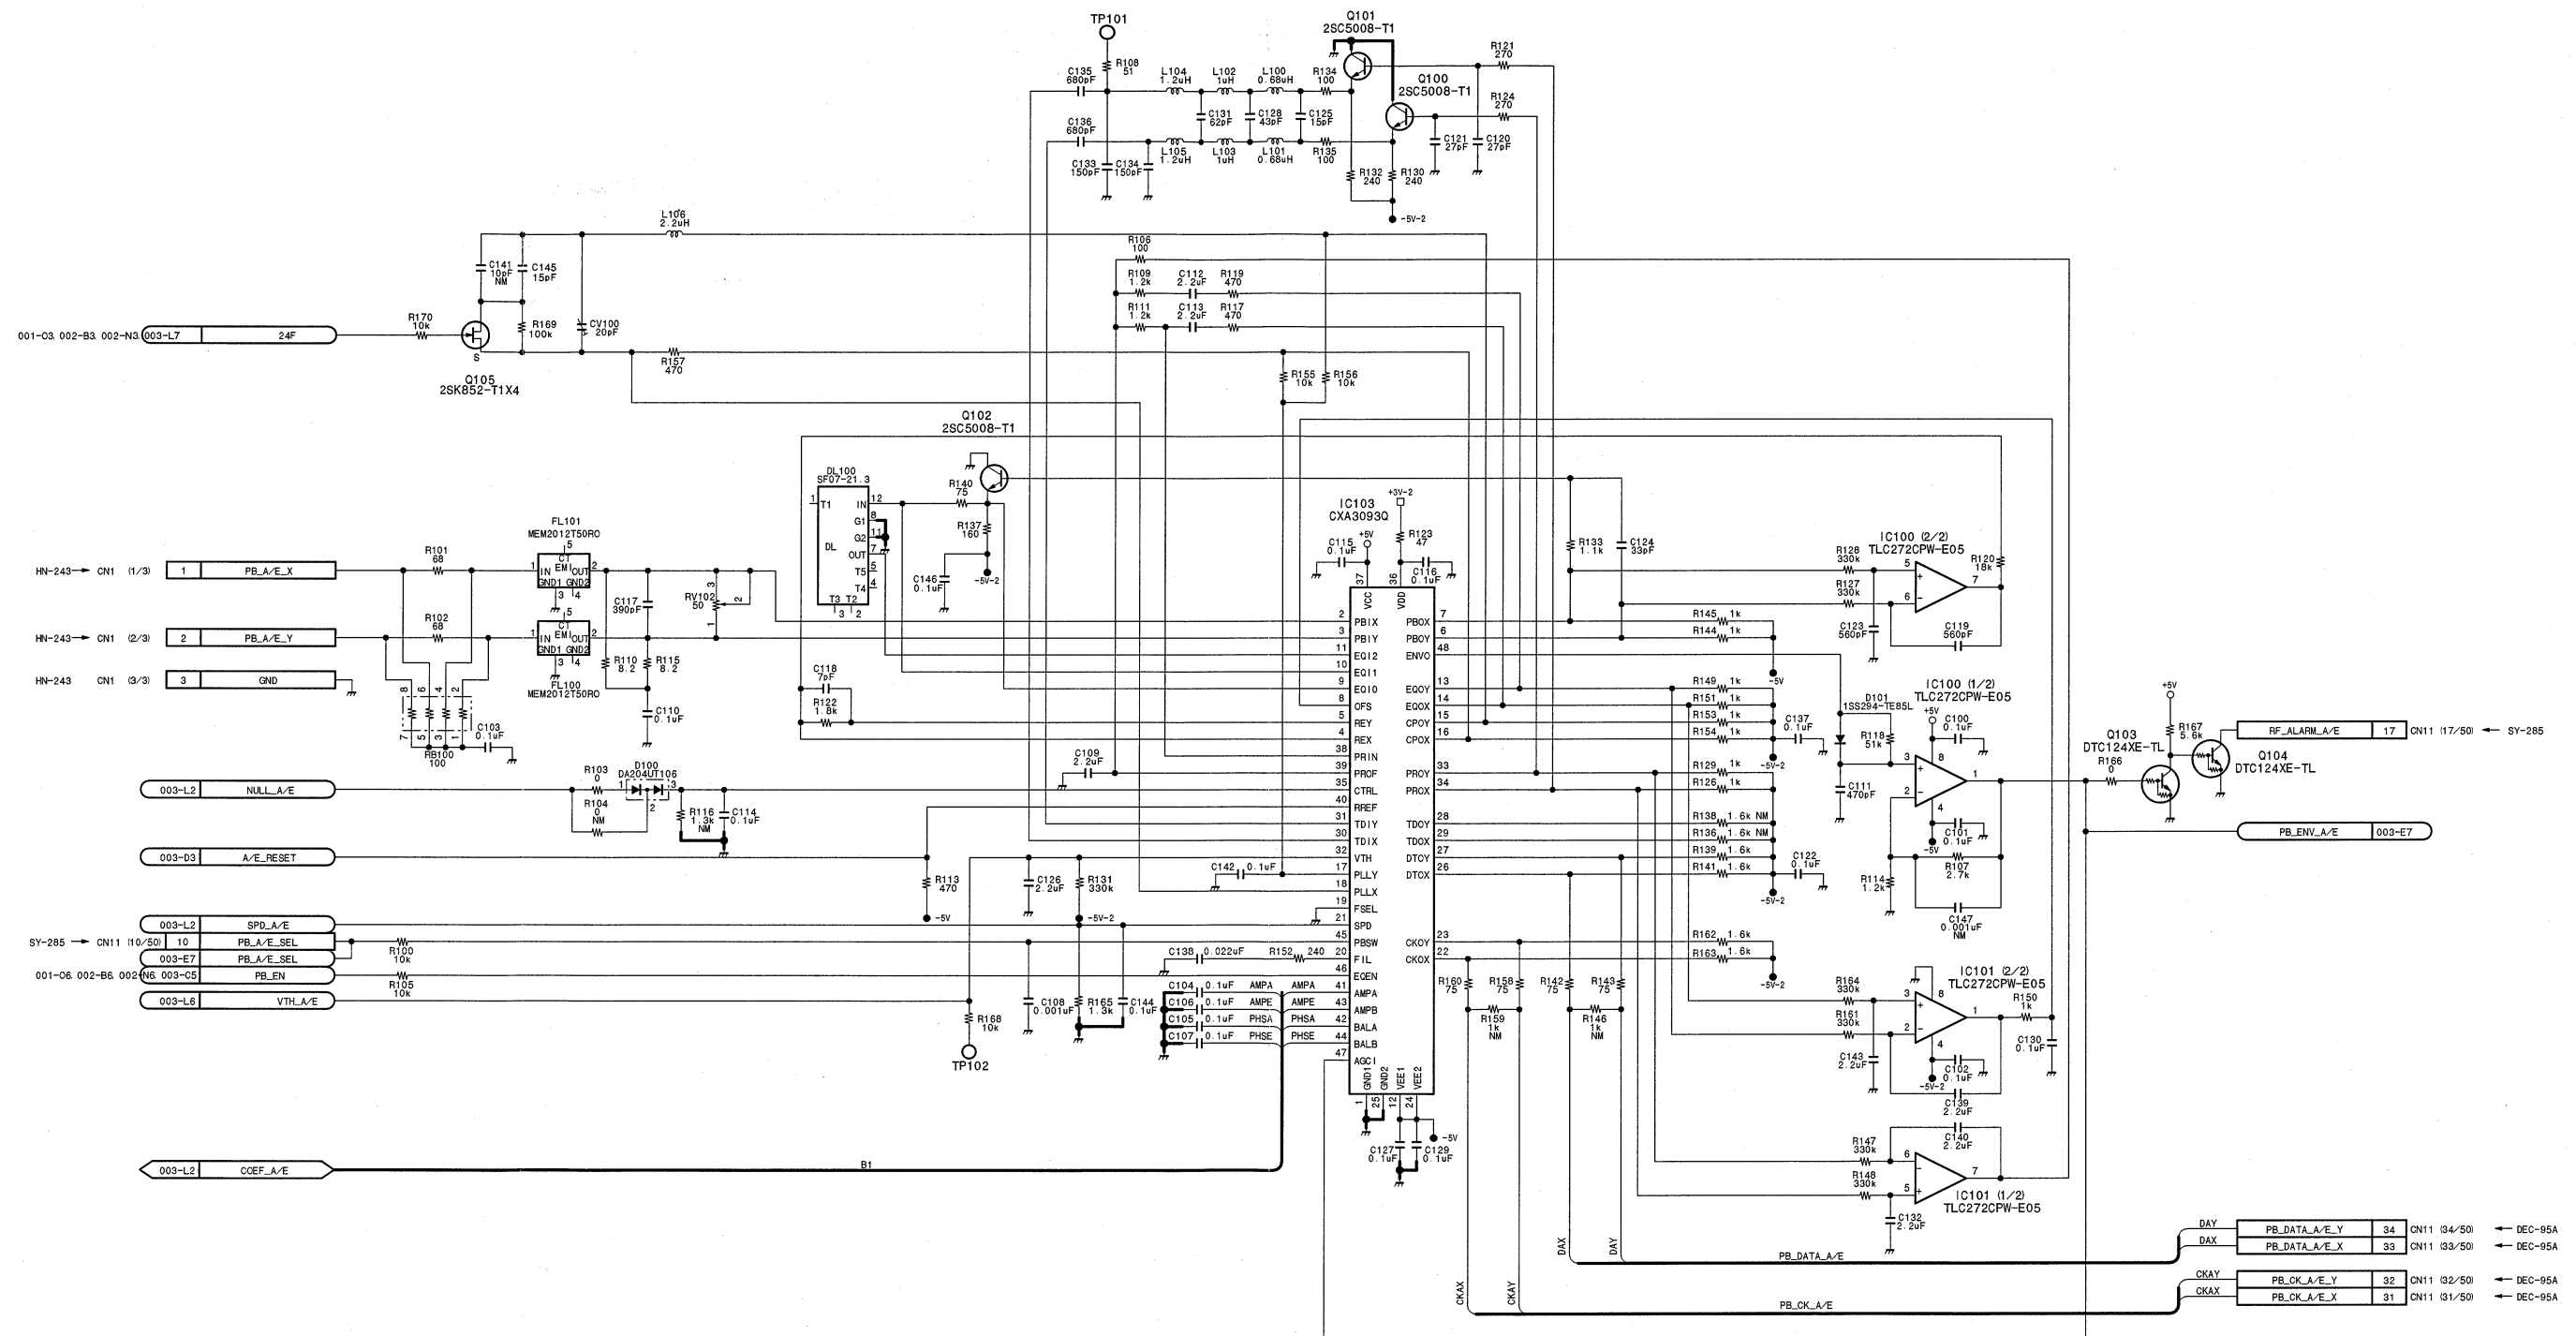





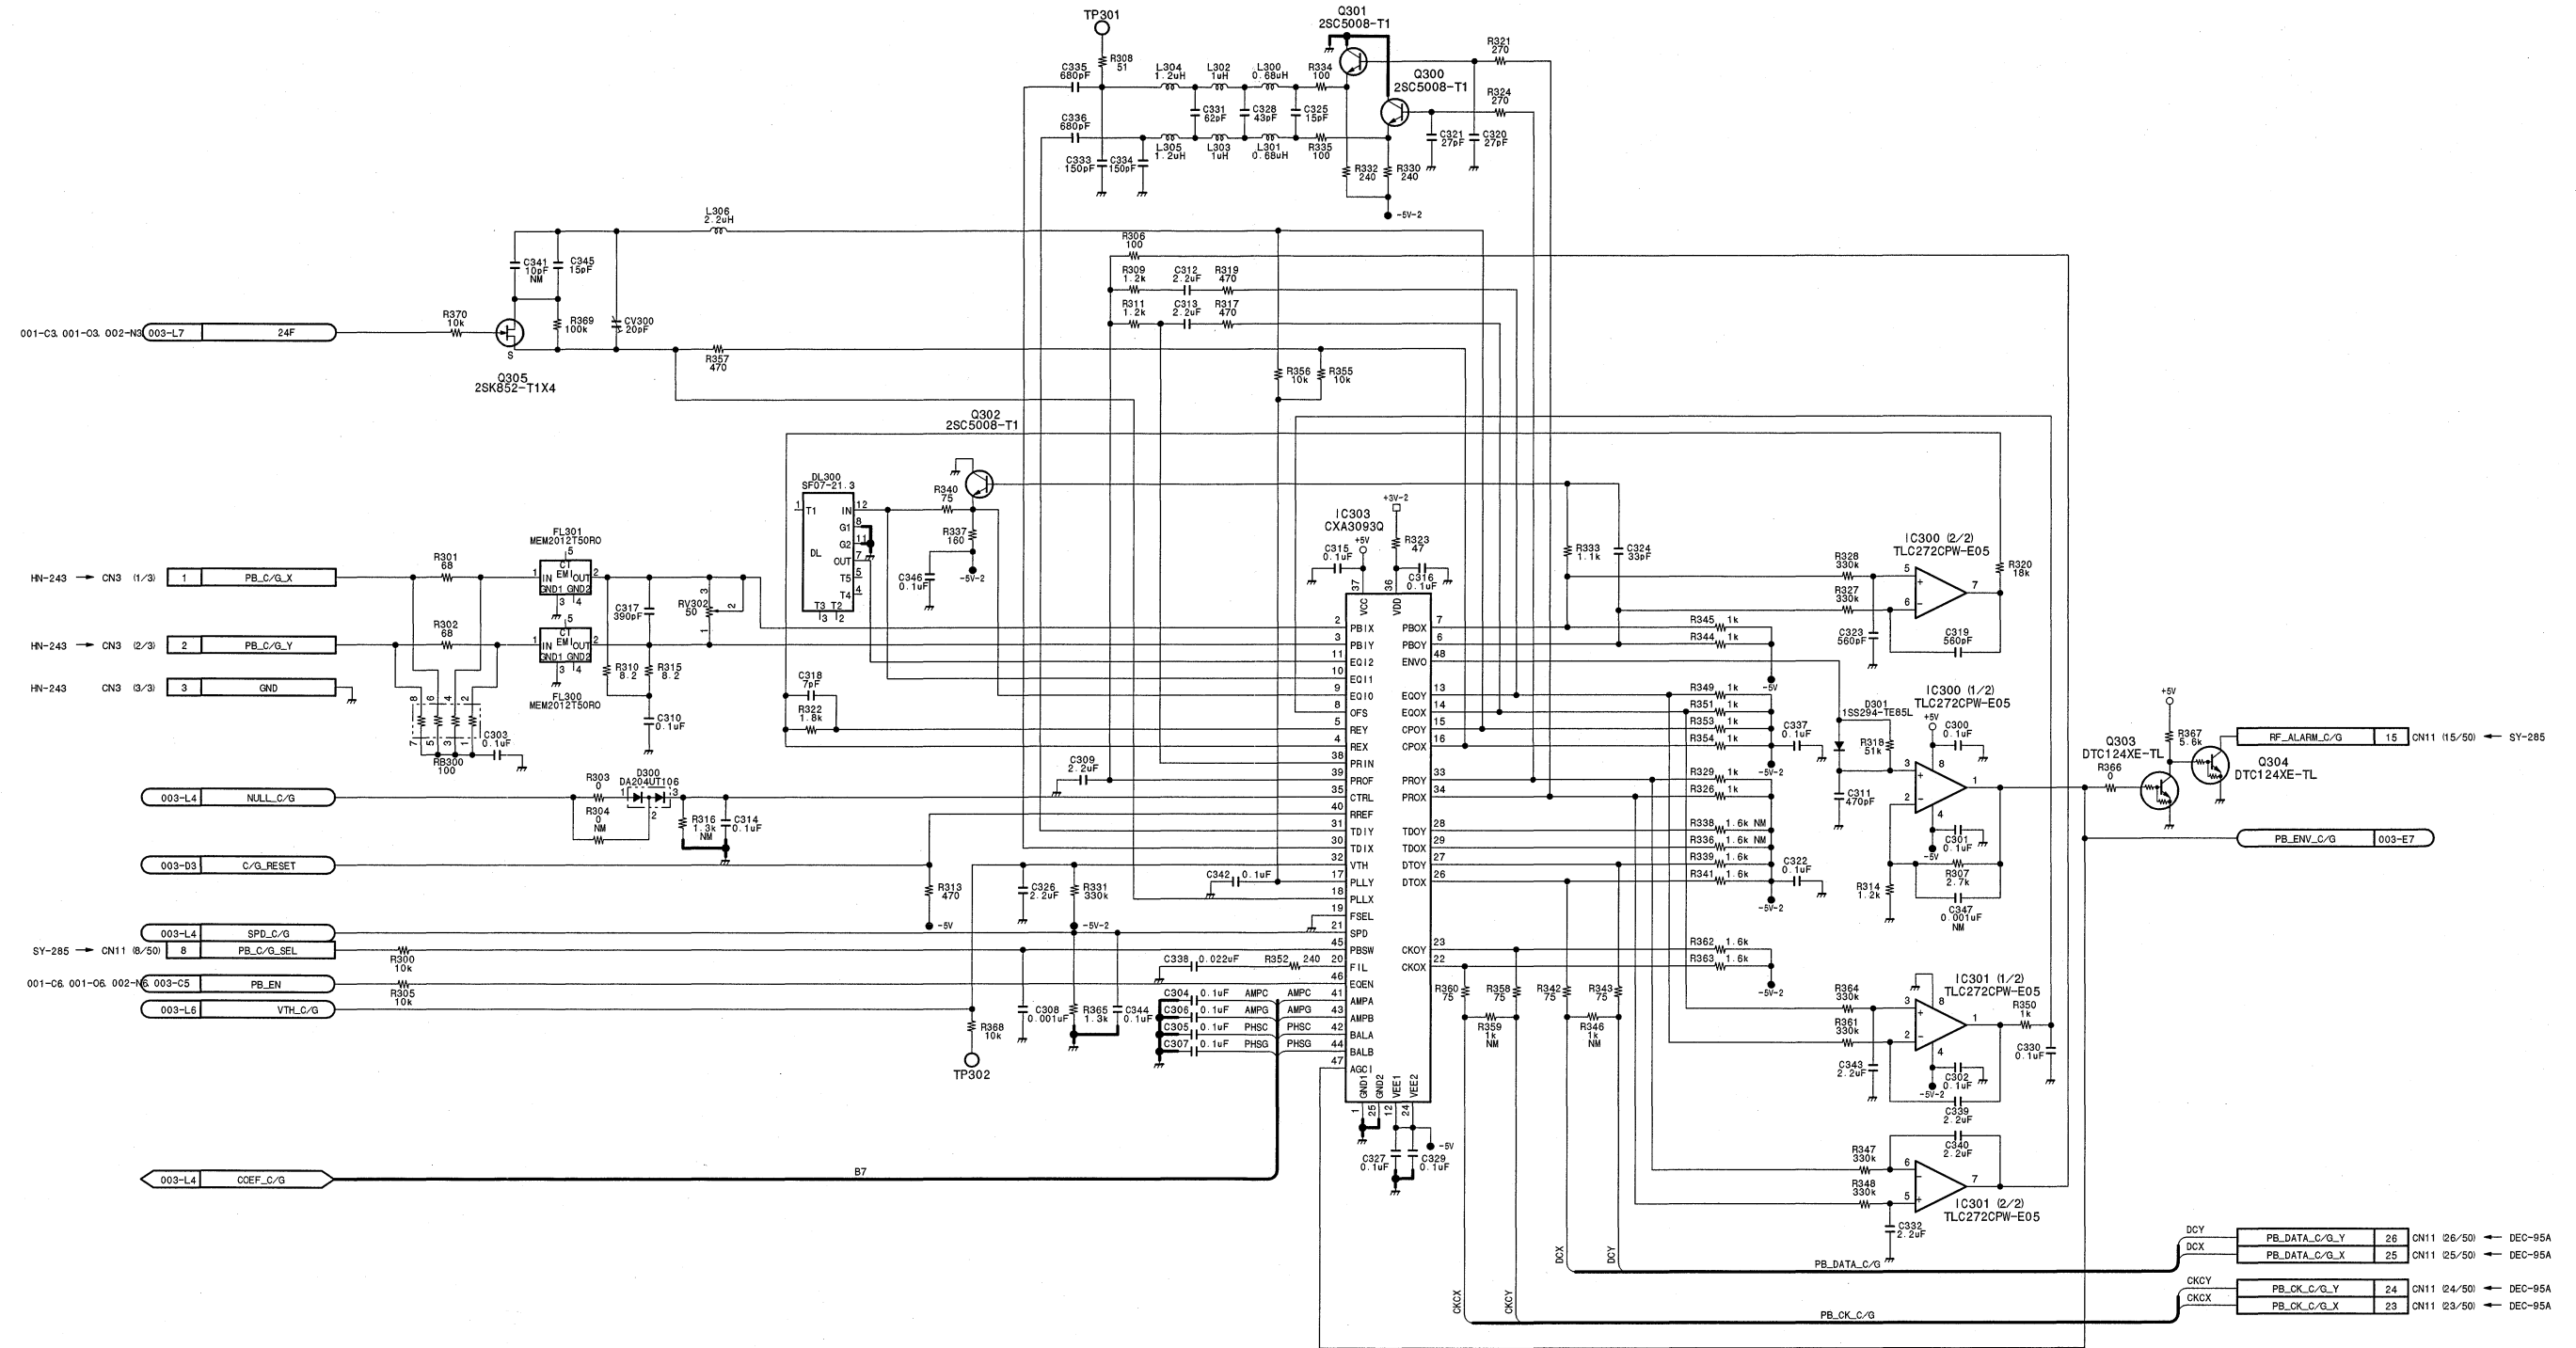







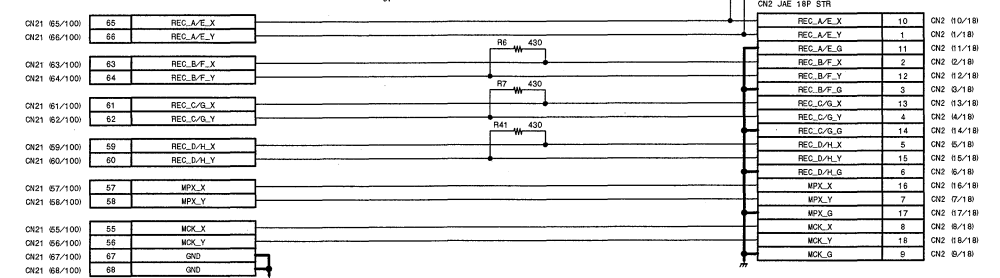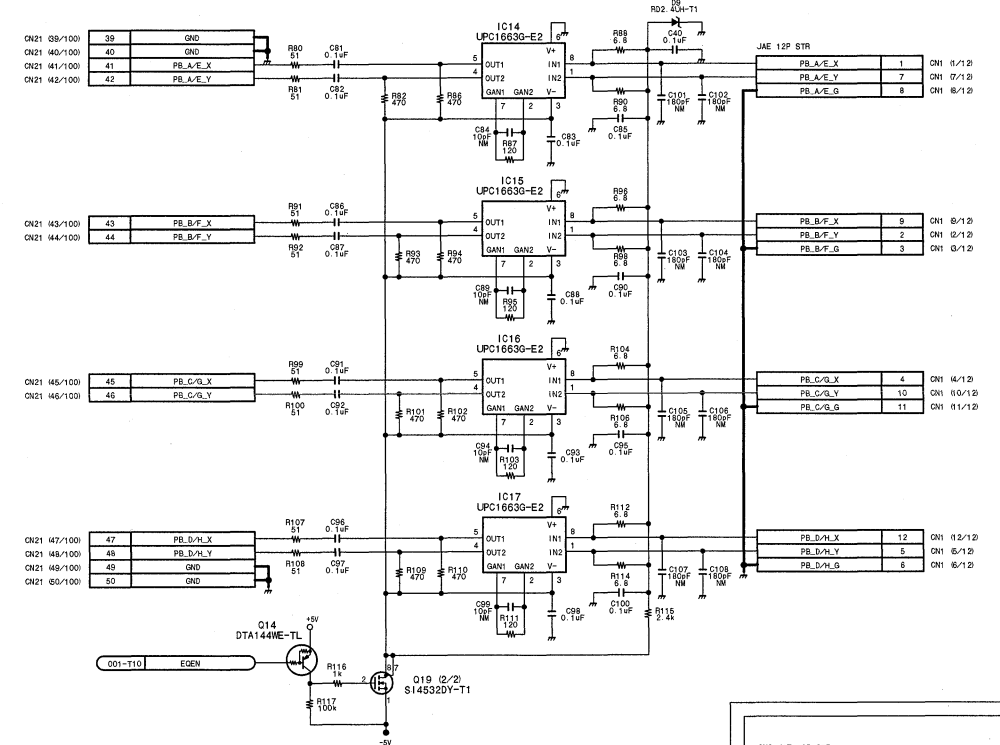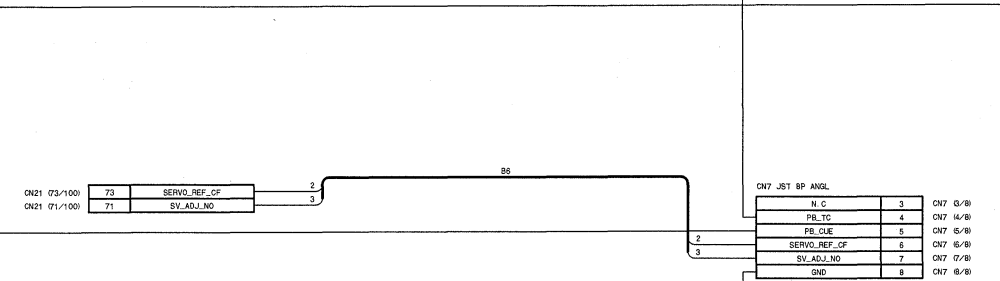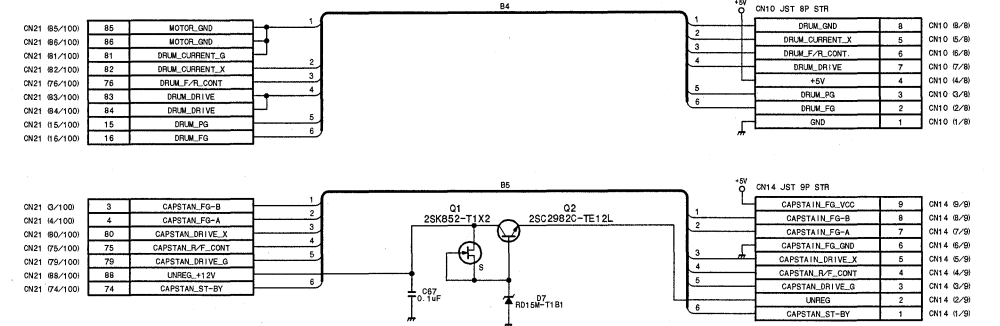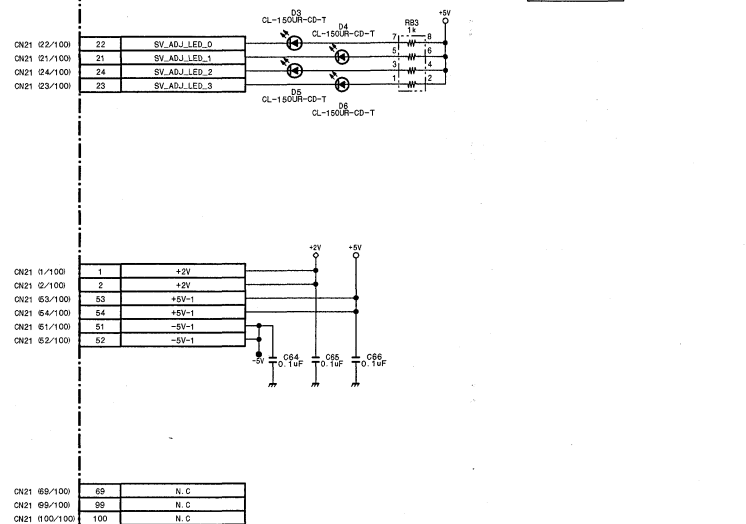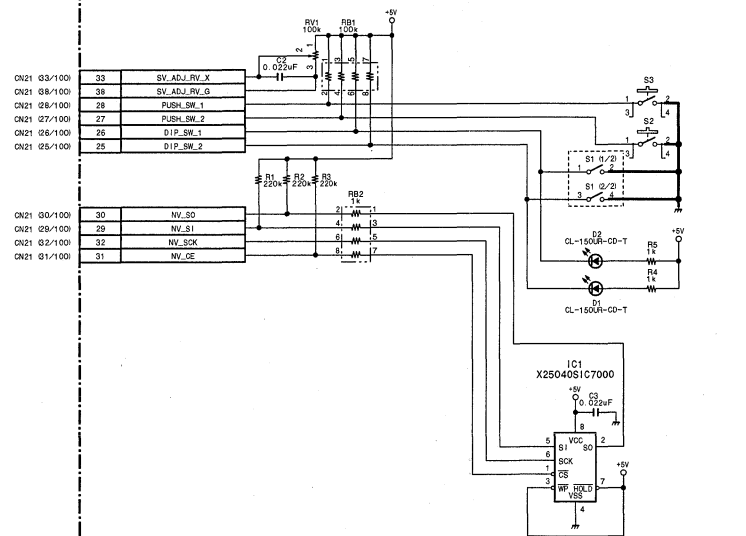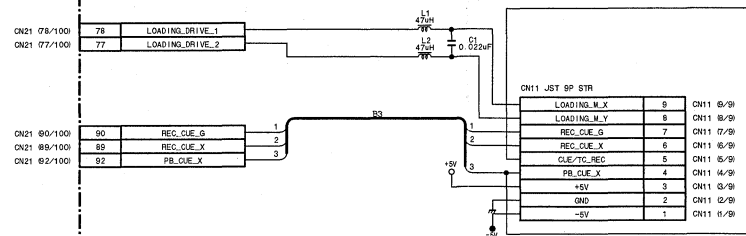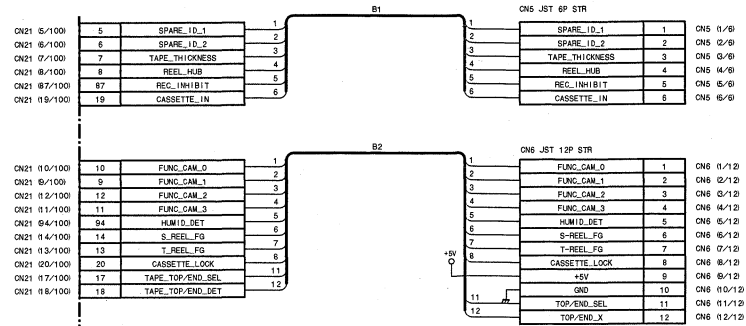





Harness, Erase head amp, TC head amp
HN-243
 BOARD NO. 1-667-429-12
 LOT NO. 911-
 HDW-700_HN-243_002_1

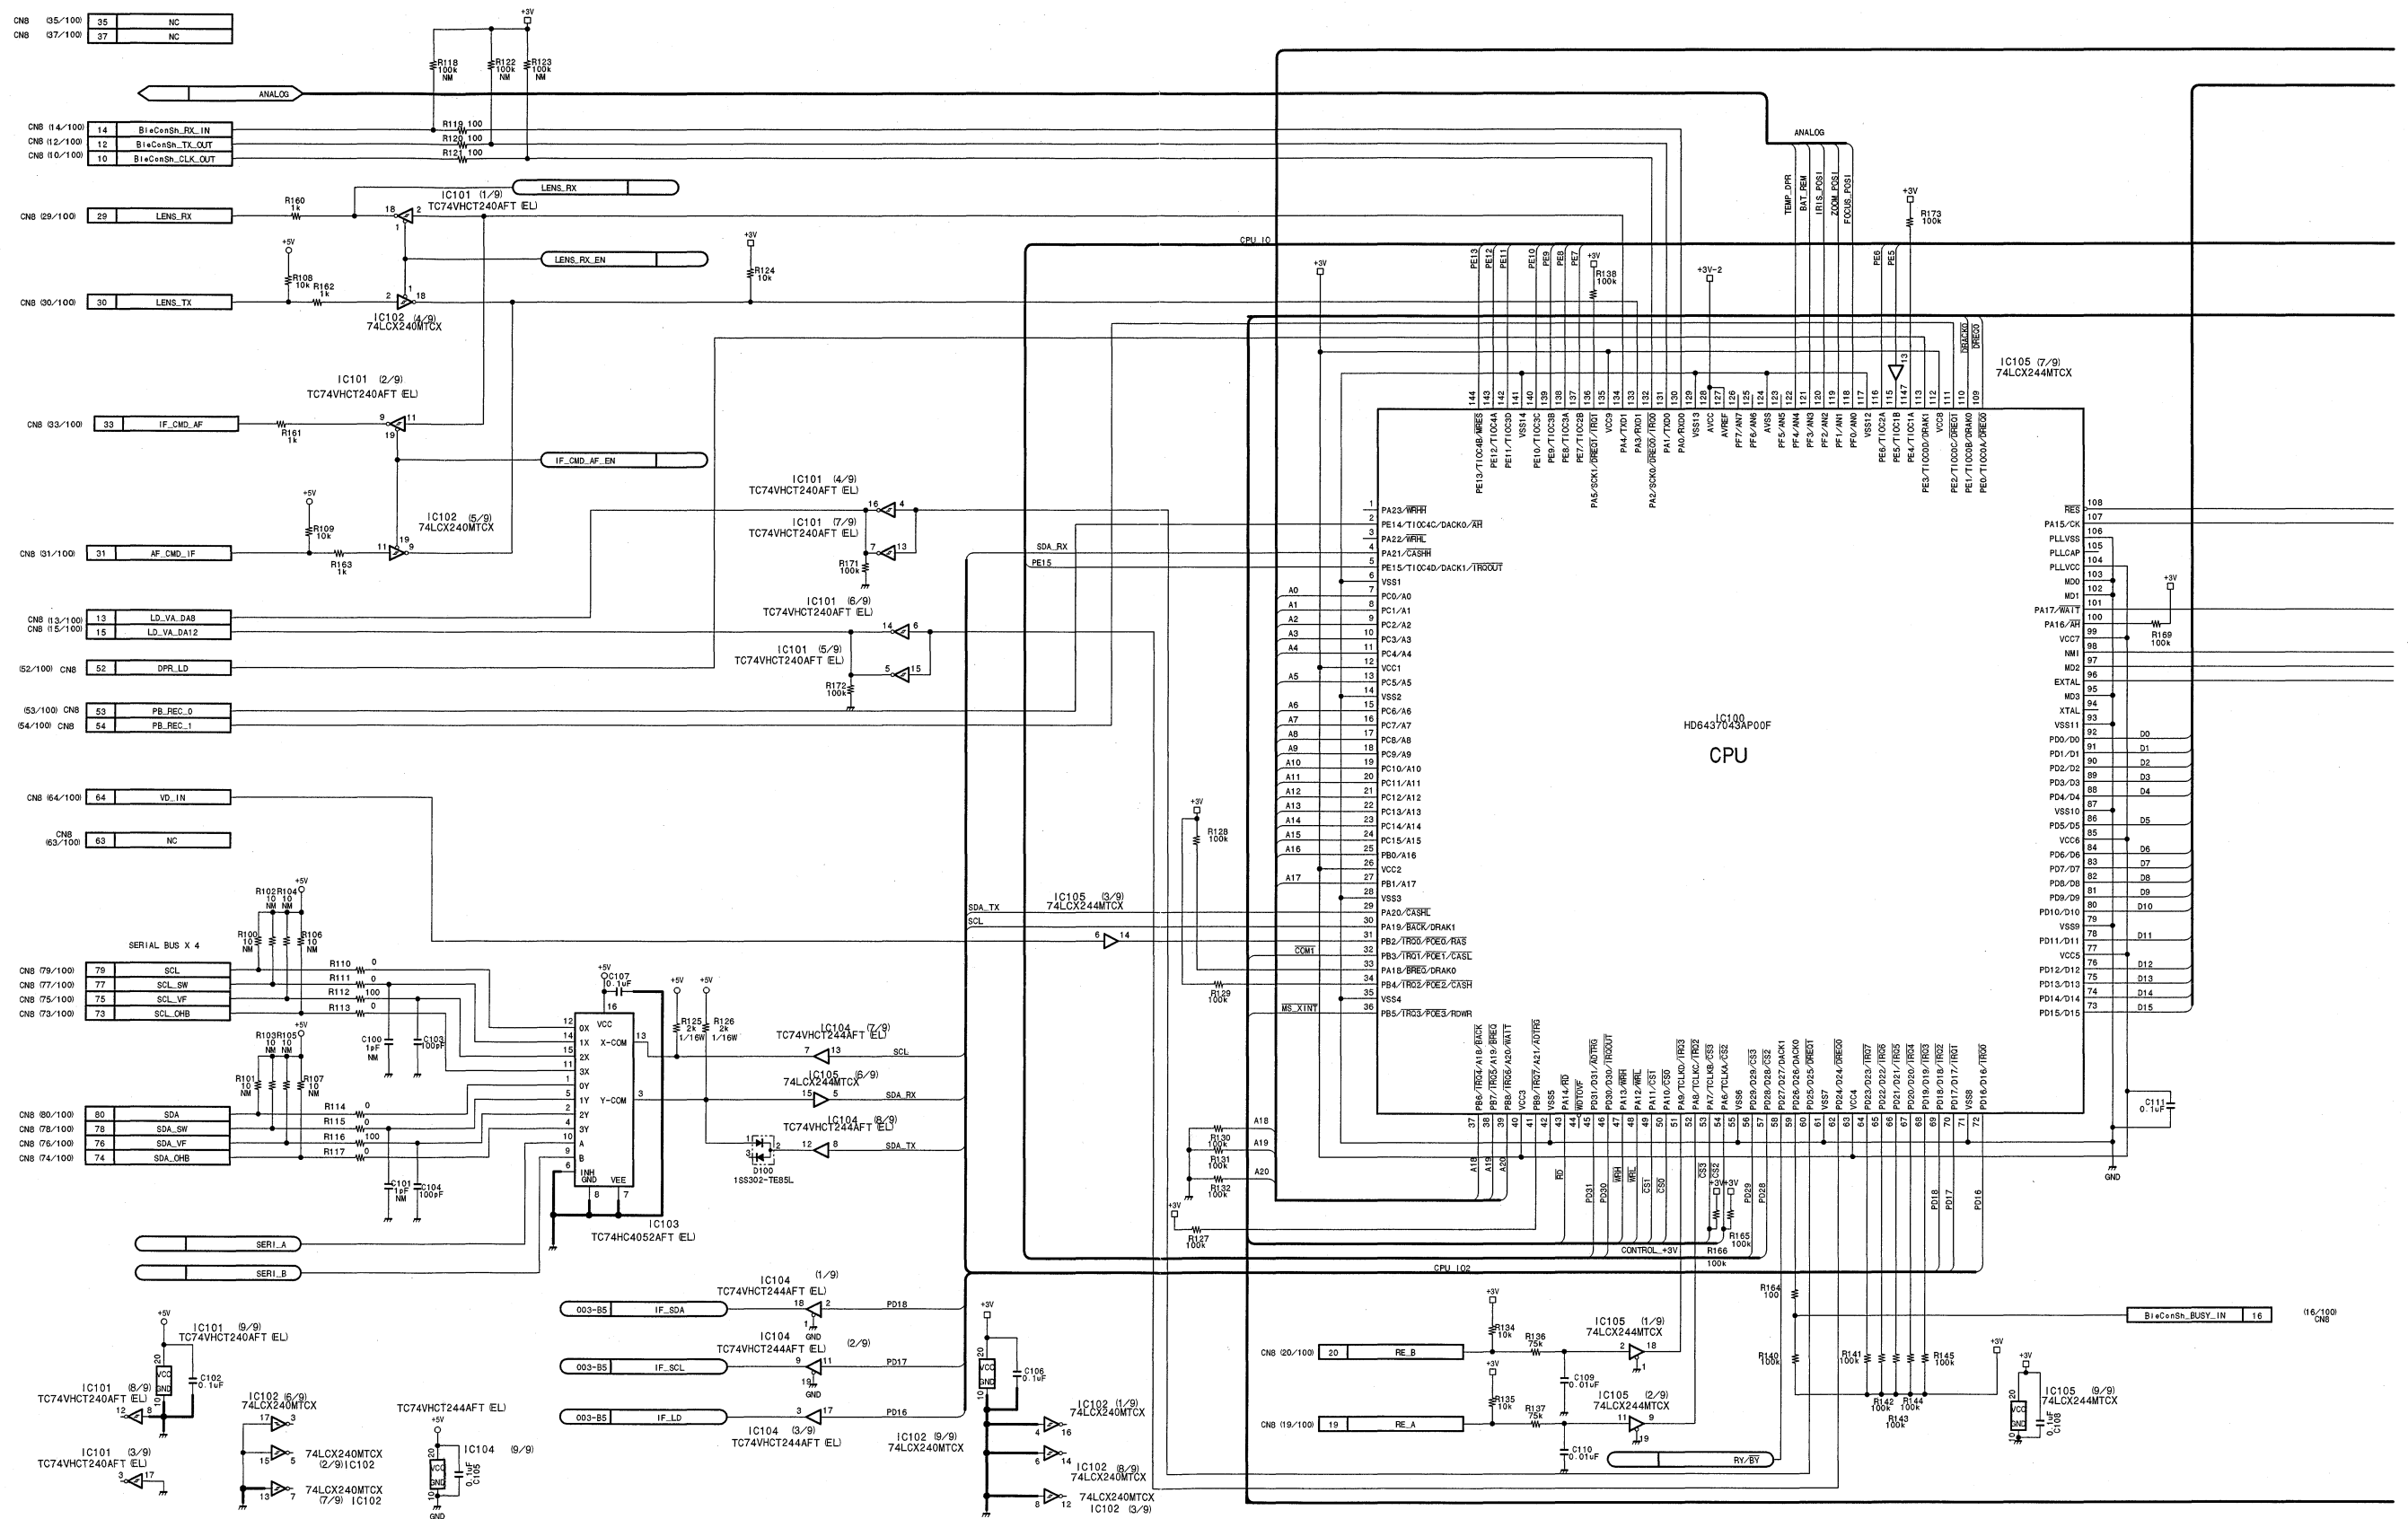

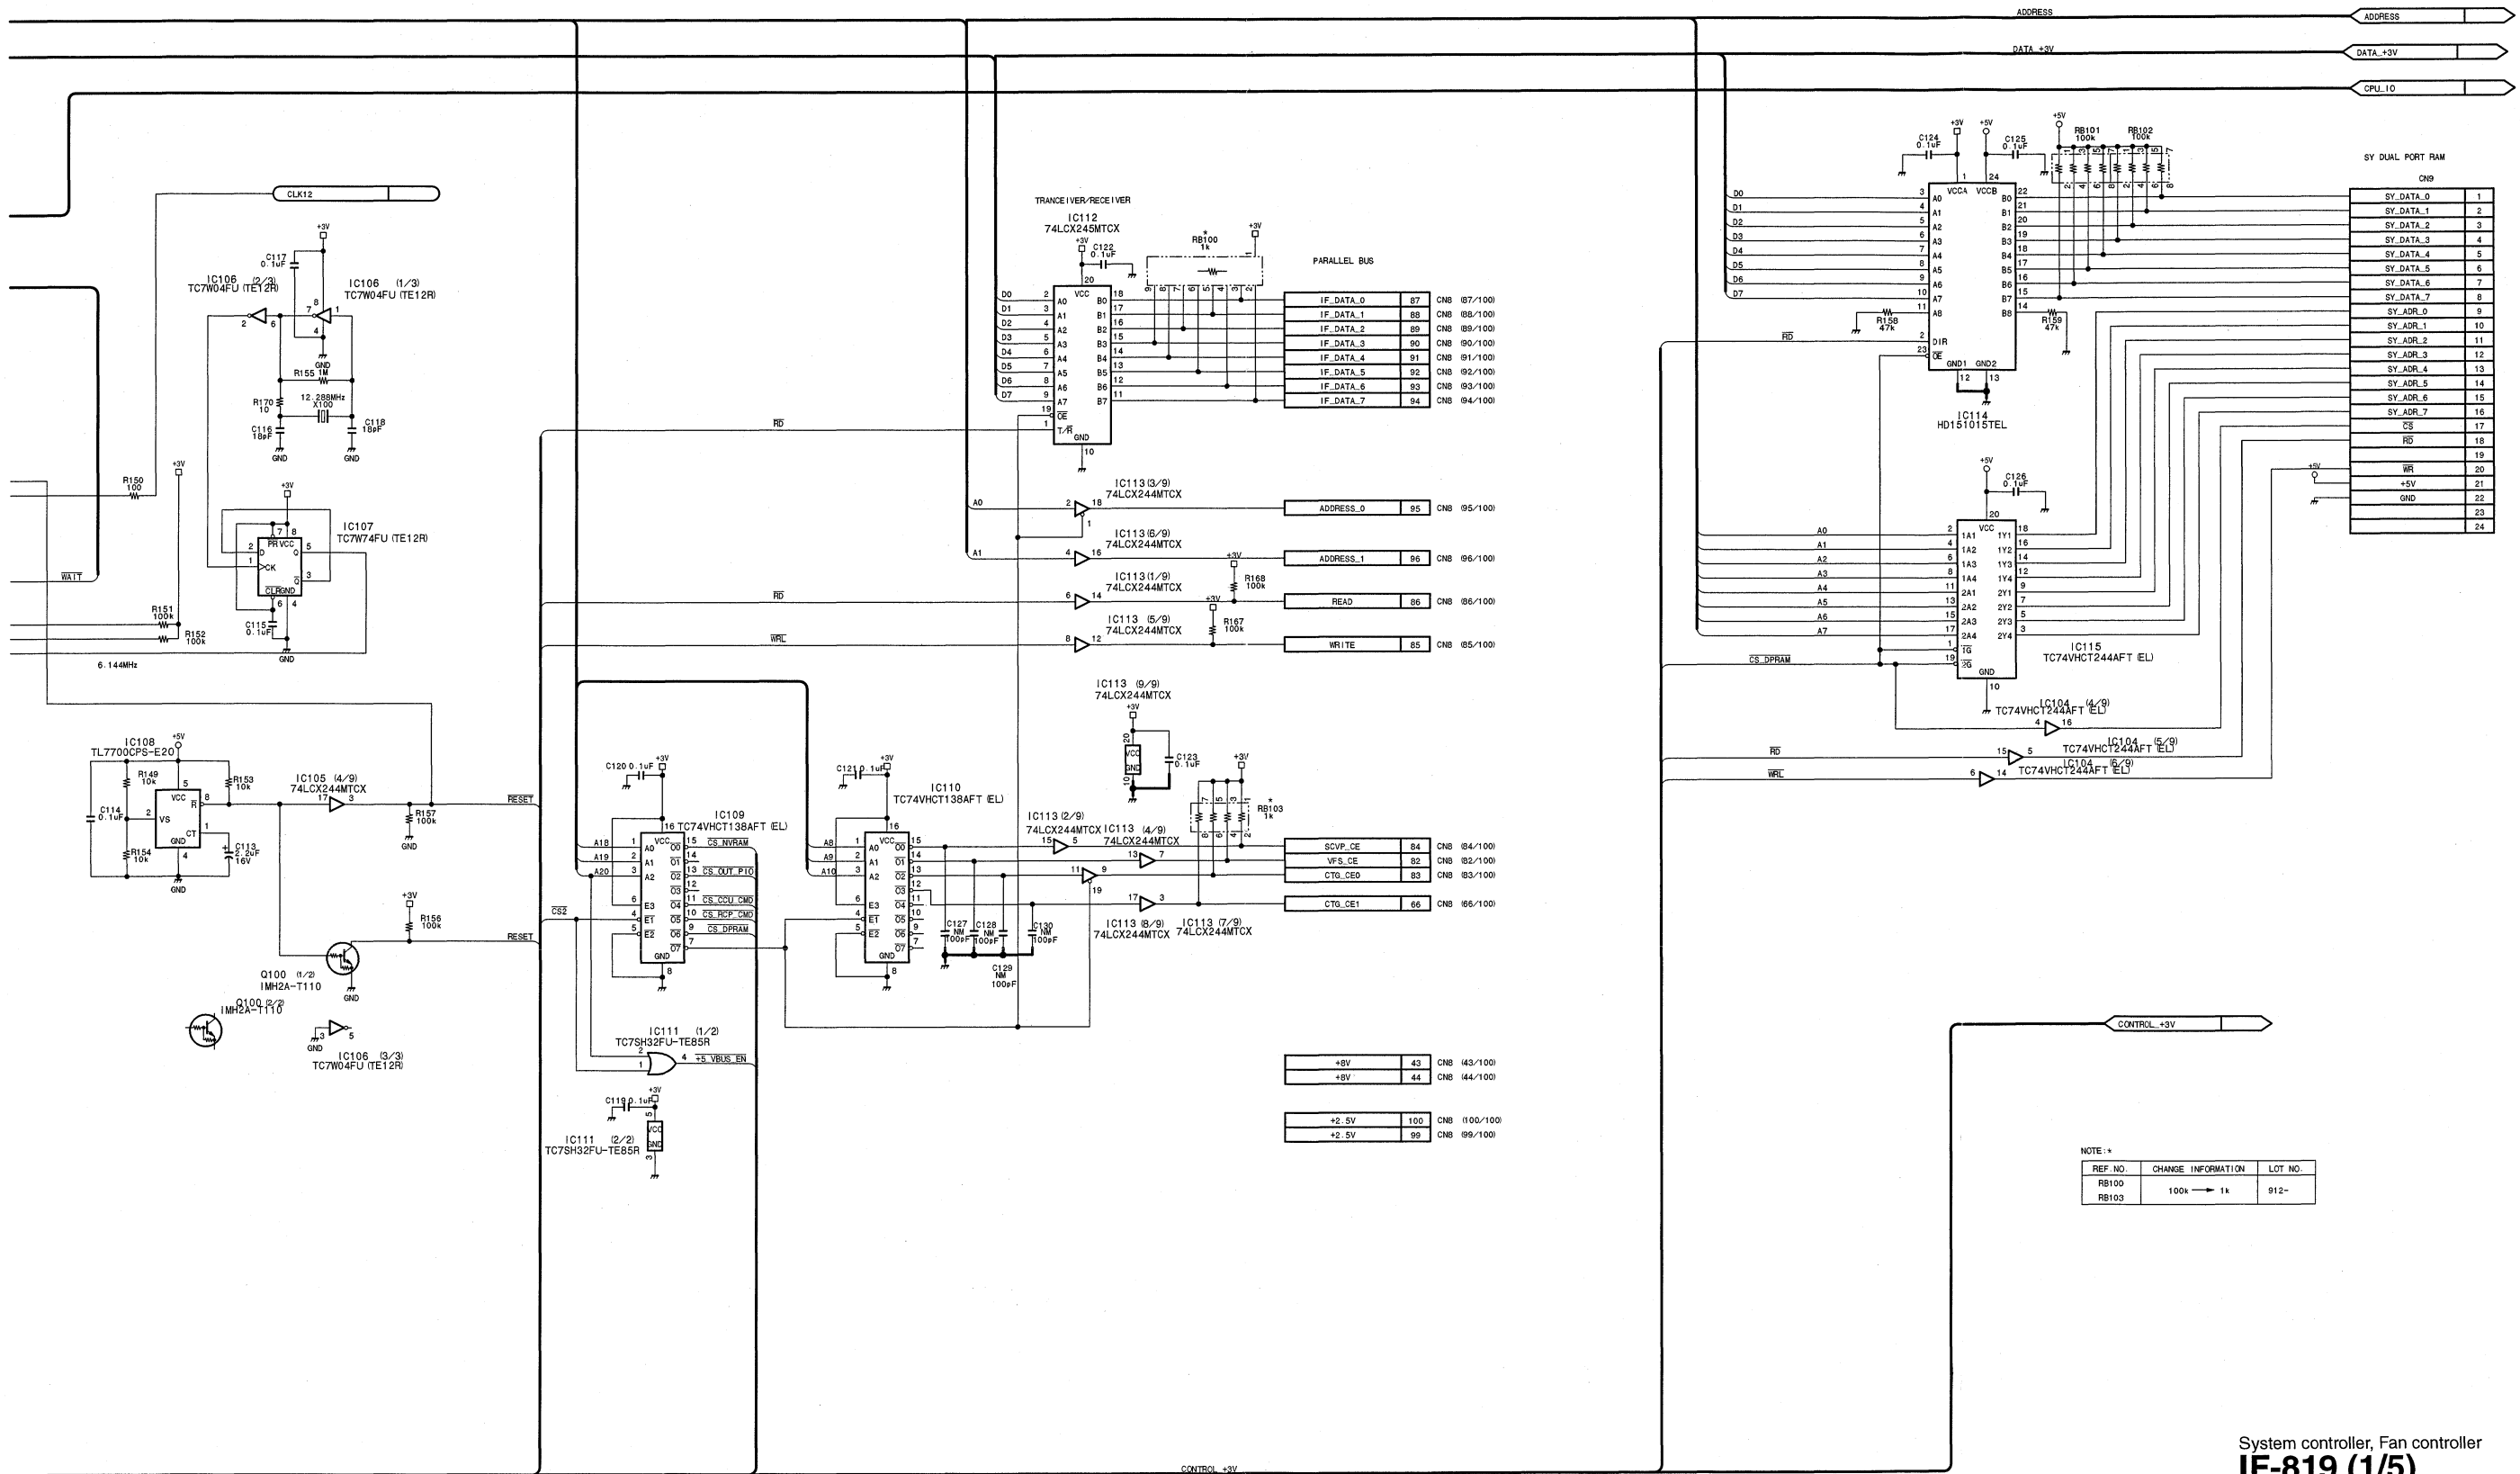



System controller, Fan controller
IF-819 (1/5)
 BOARD NO. 1-678-369-11
 LOT NO. 911-
 HDW-F900C_IF-819_111_1



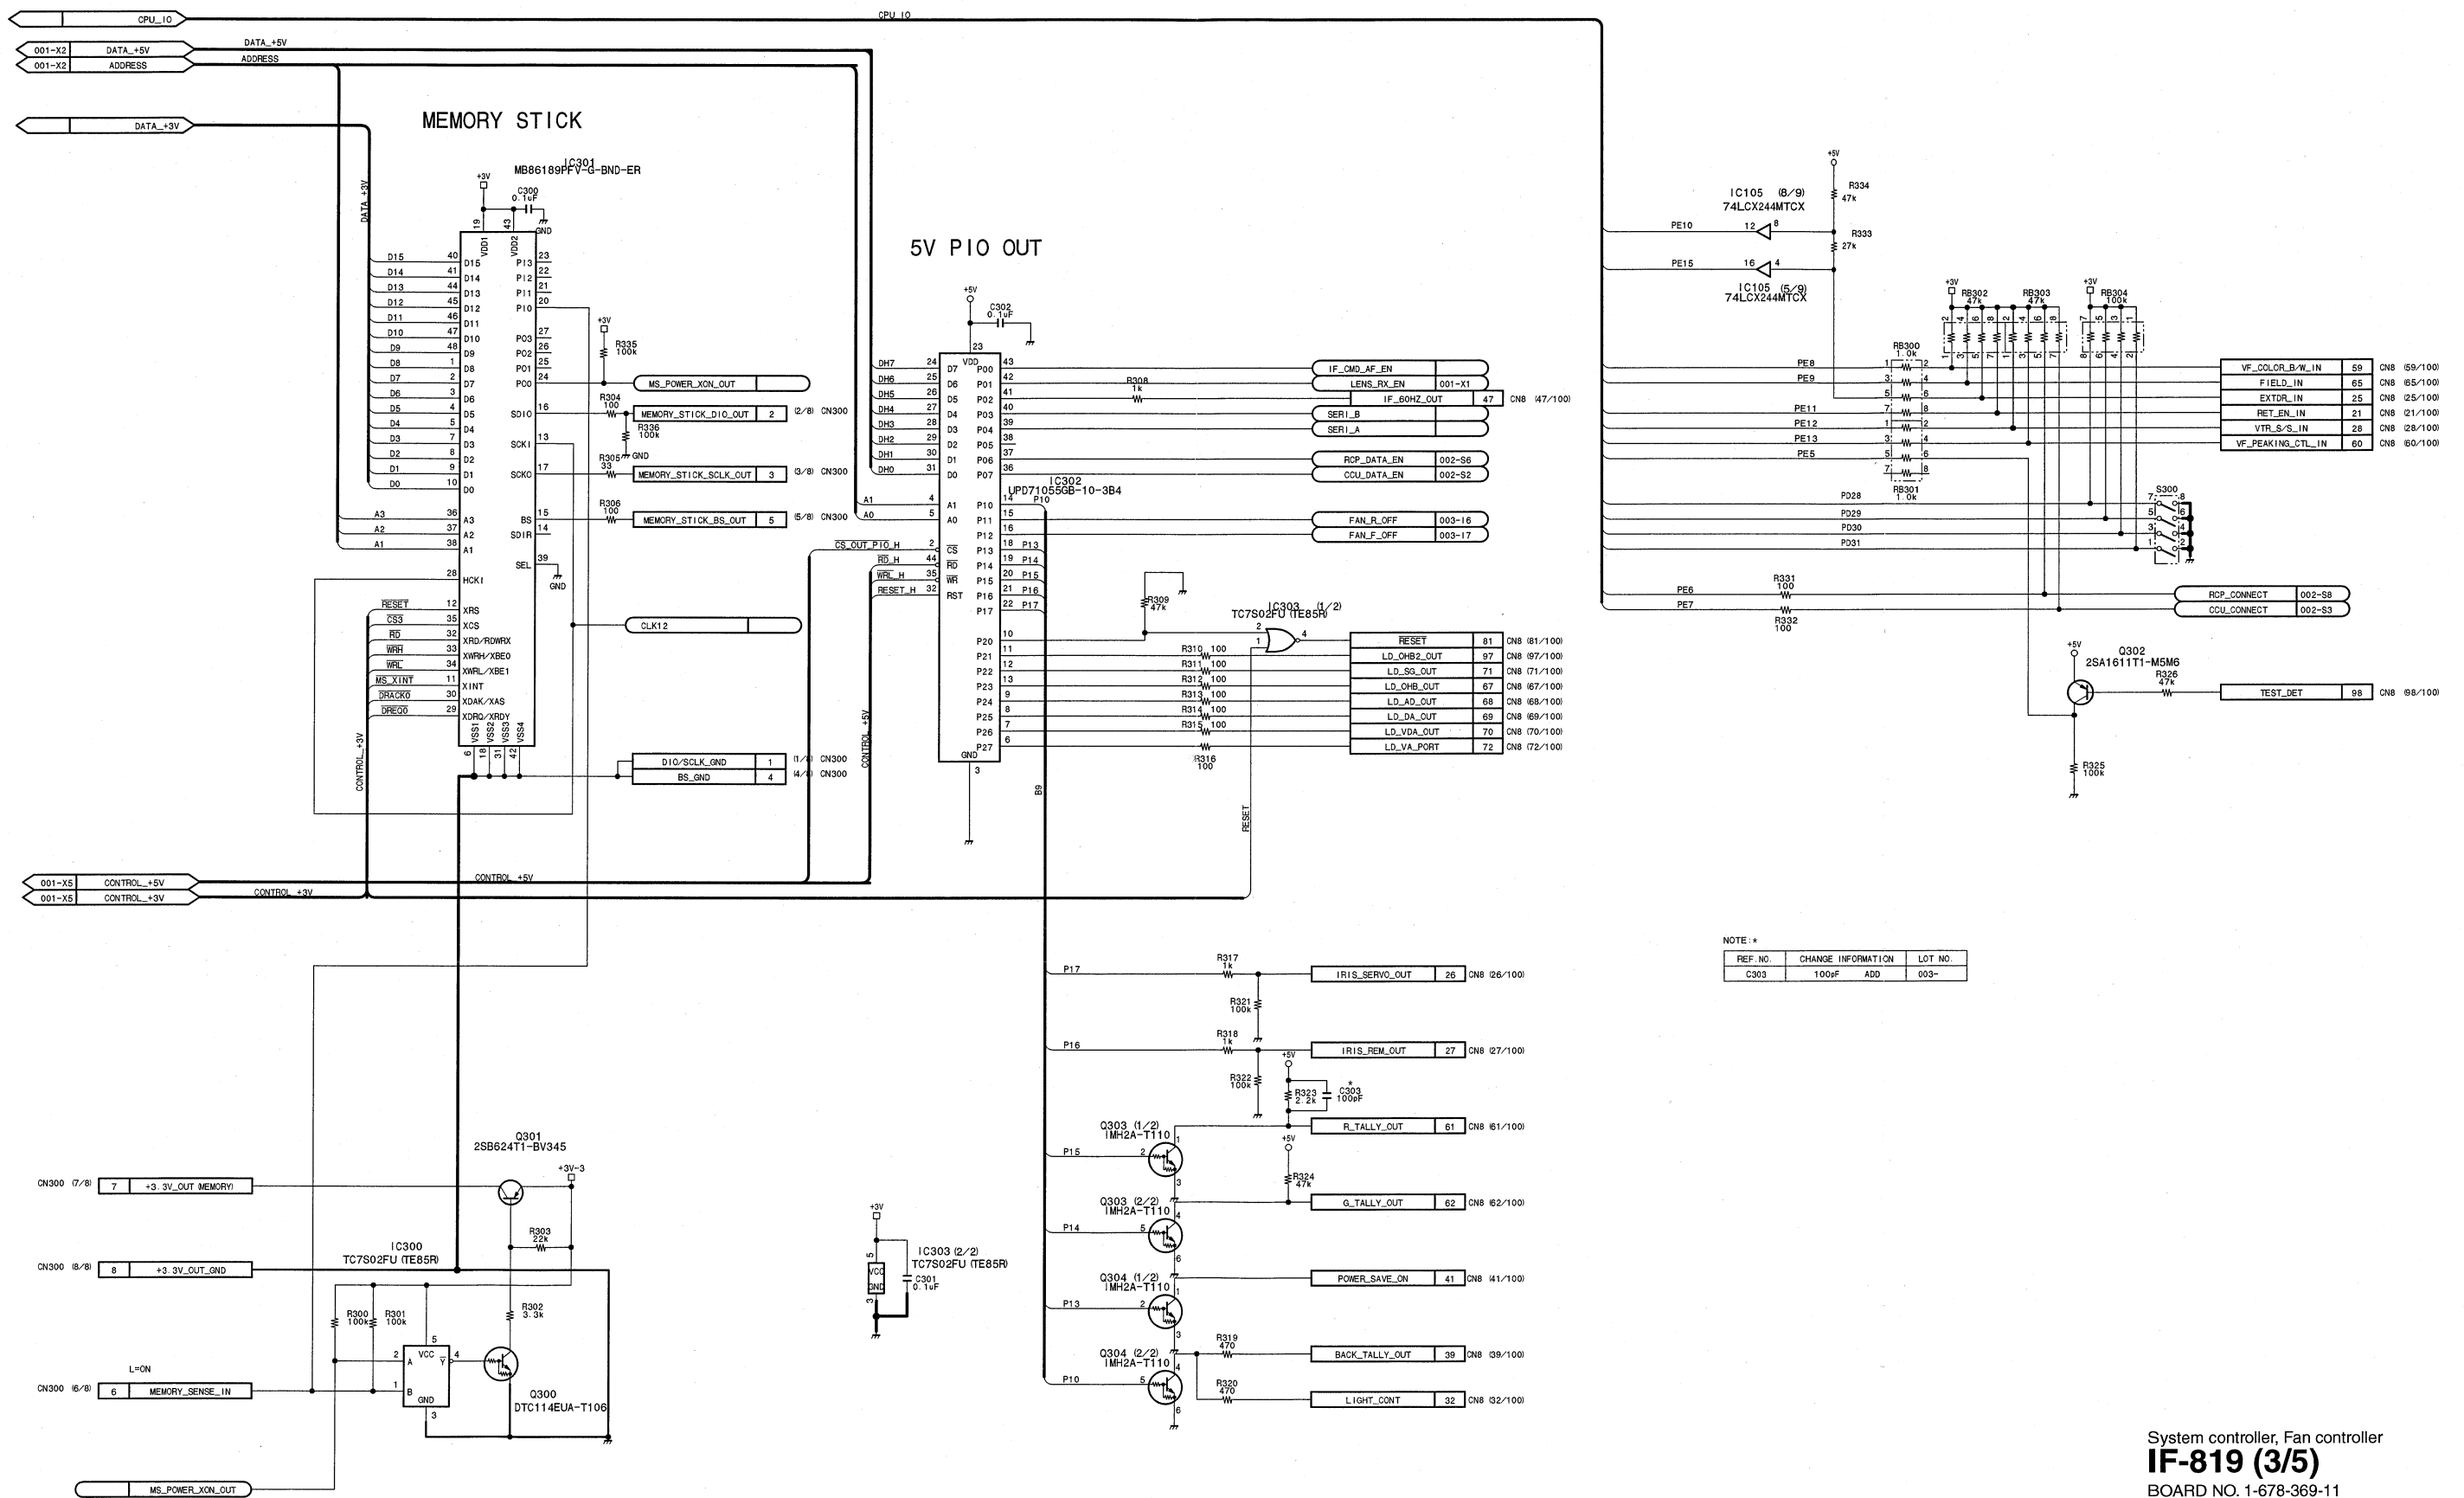


System controller, Fan controller
IF-819 (3/5)
BOARD NO. 1-678-369-11
LOT NO. 911-
HDW-F900C_IF-819_111_3





4

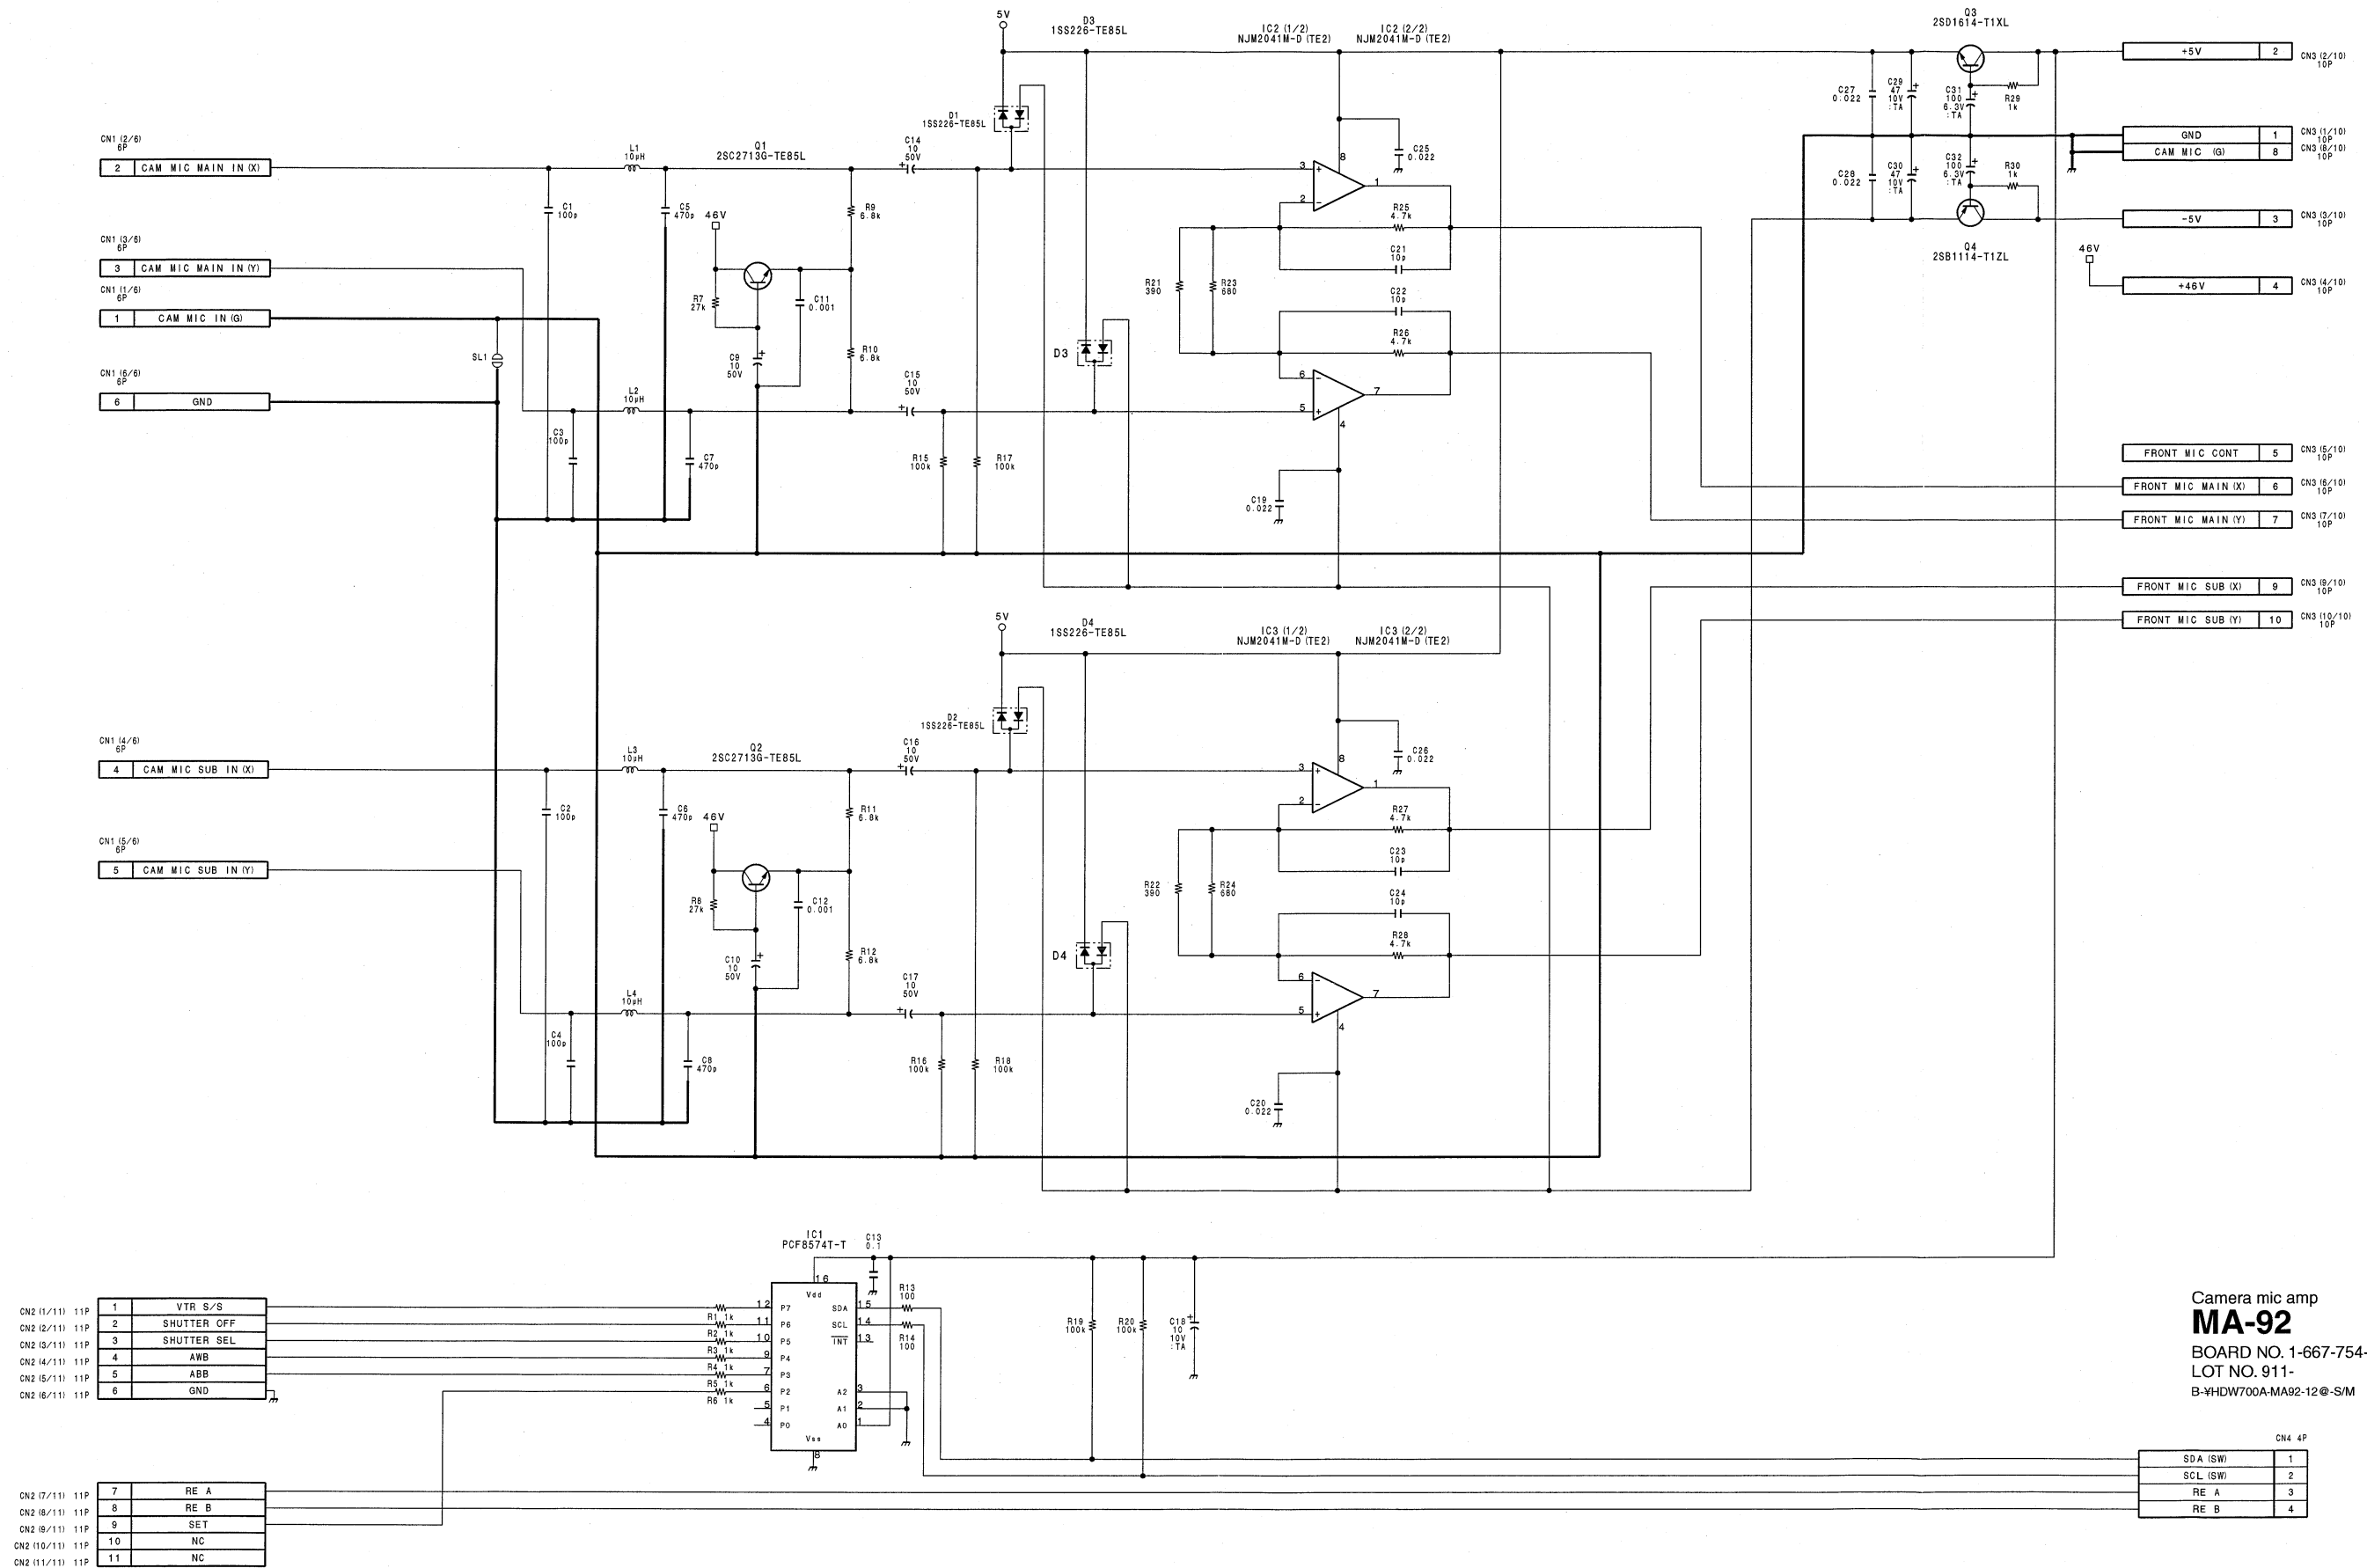

SV-218

SY-285

ENC-59

CN9			
SIGNAL NAME		SIGNAL NAME	
N.C	100	N.C	
N.C	98	N.C	
CAPSTAN_FG_A	96	CAPSTAN_FG_B	
SPARE_ID_2	94	SPARE_ID_1	
REEL_HUB	92	TAPE_THICKNESS	
FUNC_CAM_3	90	FUNC_CAM_2	
FUNC_CAM_1	88	FUNC_CAM_0	
S_REEL_FG	86	T_REEL_FG	
DRUM_FG	84	DRUM_PG	
TAPE_TOP/END_DET	82	TAPE_TOP/END_SEL	
CASSETTE_LOCK	80	CASSETTE_IN	
SV_ADJ_LED_3	78	SV_ADJ_LED_2	
SV_ADJ_LED_1	76	SV_ADJ_LED_0	
DIP_SW_2	74	DIP_SW_1	
PUSH_SW_2	72	PUSH_SW_1	
NV_SO	70	NV_S1	
NV_SCK	68	NV_CS	
N.C	66	N.C	
SV_ADJ_RV_00	64	SV_ADJ_RV_01	
SV_ADJ_NO	62	N.C	
REC_CTL	60	PB_CTL	
CTL_REC	58	CUE/TC_REC	
+12V (UNREG)	56	+12V (UNREG)	
GND	54	GND	
GND	52	GND	
GND	50	GND	
-5V	48	-5V	
+5V	46	+5V	
SYSTEM_RESET	44	N.C	
N.C	42	N.C	
N.C	40	N.C	
N.C	38	N.C	
REC_A/E_SEL	36	RF_ENV_A	
PB_C/G_SEL	34	PB_D/H_SEL	
PB_A/E_SEL	32	PB_B/F_SEL	
SYS_FRAME	30	SV_CF	
GND	28	GND	
CAPSTAN_ST-BY	26	SERVO_REF_CF	
DRUM_F/R_CNT	24	CAPSTAN_R/F_CNT	
LOADING_DRIVE_2	22	LOADING_DRIVE_1	
CAPSTAN_DRIVE_00	20	CAPSTAN_DRIVE_01	
DRUM_CURRENT_00	18	DRUM_CURRENT_01	
DRUM_DRIVE	16	DRUM_DRIVE	
DRUM_DRIVE	14	GND MOTOR	
GND MOTOR	12	GND MOTOR	
N.C	10	N.C	
N.C	8	N.C	
N.C	6	N.C	
N.C	4	N.C	
N.C	2	N.C	


CN10			
SIGNAL NAME		SIGNAL NAME	
N.C	100	N.C	
N.C	98	SYS_R/W	
TG_RESET	96	ECC_RESET	
HENC/HDEC/DE_RESET	94	CNC_RESET	
REC_MODE	92	PB_MODE	
SYS_DATA_7	90	SYS_DATA_6	
SYS_DATA_5	88	SYS_DATA_4	
SYS_DATA_3	86	SYS_DATA_2	
SYS_DATA_1	84	SYS_DATA_0	
PROC_STB	82	PROC_W/R	
SYS_ADDR_5	80	SYS_ADDR_4	
SYS_ADDR_3	78	SYS_ADDR_2	
SYS_ADDR_1	76	SYS_ADDR_0	
SYS_CLK	74	TC_CS	
OPT_CS	72	VN_CS	
DEC_B_CS	70	DEC_A_CS	
ENC_CS	68	ENC_CS	
PROC_EE/PB	66	PROC_PB_REV	
FF_LED	64	PLAY_LED	
REW_LED	62	STOP_KEY	
FF_KEY	60	PLAY_KEY	
REW_KEY	58	EJECT_KEY	
N.C	56	N.C	
GND	54	GND	
GND	52	GND	
GND	50	GND	
-5V	48	-5V	
+5V	46	+5V	
SYSTEM_RESET	44	CAM_RESET	
CAM_FRAME	42	BATT_EXT	
SYS_FRAME	40	SYS_CF	
RF_ALARM_B/F	38	RF_ALARM_A/E	
RF_ALARM_D/H	36	RF_ALARM_C/G	
SIO_B_RX	34	SIO_B_TX	
ADAPTER_RX	32	ADAPTER_TX	
EO_ENABLE	30	EO_STB3	
EO_STB2	28	EO_STB1	
EO_SIO	26	EO_SCK	
TELE_DATA	24	TELE_READ	
TELE_CLK	22	TELE_POWER_ON	
TELE_RESET	20	TELE_D-READY	
N.C	18	N.C	
SPI_TC_TO_SY	16	SPI_SY_TO_TC	
N.C	14	SPI_CLK	
HUMID_DET	12	CASS_REC_INH	
DRUM_TEST	10	DRUM_REC_EN	
EXT_TC_IN	8	EXT_TC_OUT	
REC_TC	6	PB_TC	
N.C	4	N.C	
+3V	2	+3V	

CN16			
SIGNAL NAME		SIGNAL NAME	
+2V	100	+2V	
+2V	98	+2V	
PROC_JP2	96	SYS_ADDR_3	
TG_RESET	94	GND	
HENC/HDEC/DE_RESET	92	ECC_RESET	
REC_MODE	90	PB_MODE	
SYS_DATA_7	88	SYS_DATA_6	
SYS_DATA_5	86	SYS_DATA_4	
SYS_DATA_3	84	SYS_DATA_2	
SYS_DATA_1	82	SYS_DATA_0	
PROC_STB	80	PROC_W/R	
SYS_ADDR_1	78	SYS_ADDR_0	
SYS_ADDR_2	76	ENC_CS	
REC_INHIBIT_ECC	74	REC_A/E_SEL	
PB_A/E_SEL	72	PB_B/F_SEL	
PB_C/G_SEL	70	PB_D/H_SEL	
DRUM_TEST	68	GND	
N.C	66	N.C	
N.C	64	N.C	
GND	62	GND	
FS256_A7_ECC	60	FS_A7_ECC	
REF_F_ECC	58	CK37_ENC	
N.C	56	+12V UNREG	
GND	54	GND	
GND	52	GND	
GND	50	GND	
-5V	48	N.C	
+5V	46	N.C	
MCK_Y	44	MCK_X	
MPX_Y	42	MPX_X	
REC_D/H_Y	40	REC_D/H_X	
REC_C/G_Y	38	REC_C/G_X	
REC_B/F_Y	36	REC_B/F_X	
REC_A/E_Y	34	REC_A/E_X	
GND	32	GND	
AUD_ENC_3/4	30	AUD_ENC_1/2	
N.C	28	N.C	
GND	26	GND	
HENC_B_VD_ECC_7	24	HENC_B_VD_ECC_6	
HENC_B_VD_ECC_5	22	HENC_B_VD_ECC_4	
HENC_B_VD_ECC_3	20	HENC_B_VD_ECC_2	
HENC_B_VD_ECC_1	18	HENC_B_VD_ECC_0	
HENC_B_SYNC_ECC	16	GND	
CAM_VD_HENC_A_7	14	CAM_VD_HENC_A_6	
CAM_VD_HENC_A_5	12	CAM_VD_HENC_A_4	
CAM_VD_HENC_A_3	10	CAM_VD_HENC_A_2	
CAM_VD_HENC_A_1	8	CAM_VD_HENC_A_0	
CAM_H_HENC_ENC/EN	6	IF_60HZ	
+3V	4	+3V	
+3V	2	+3V	


JP2

3P CASS_REC_INH
2P PROC_JP2

VN-12

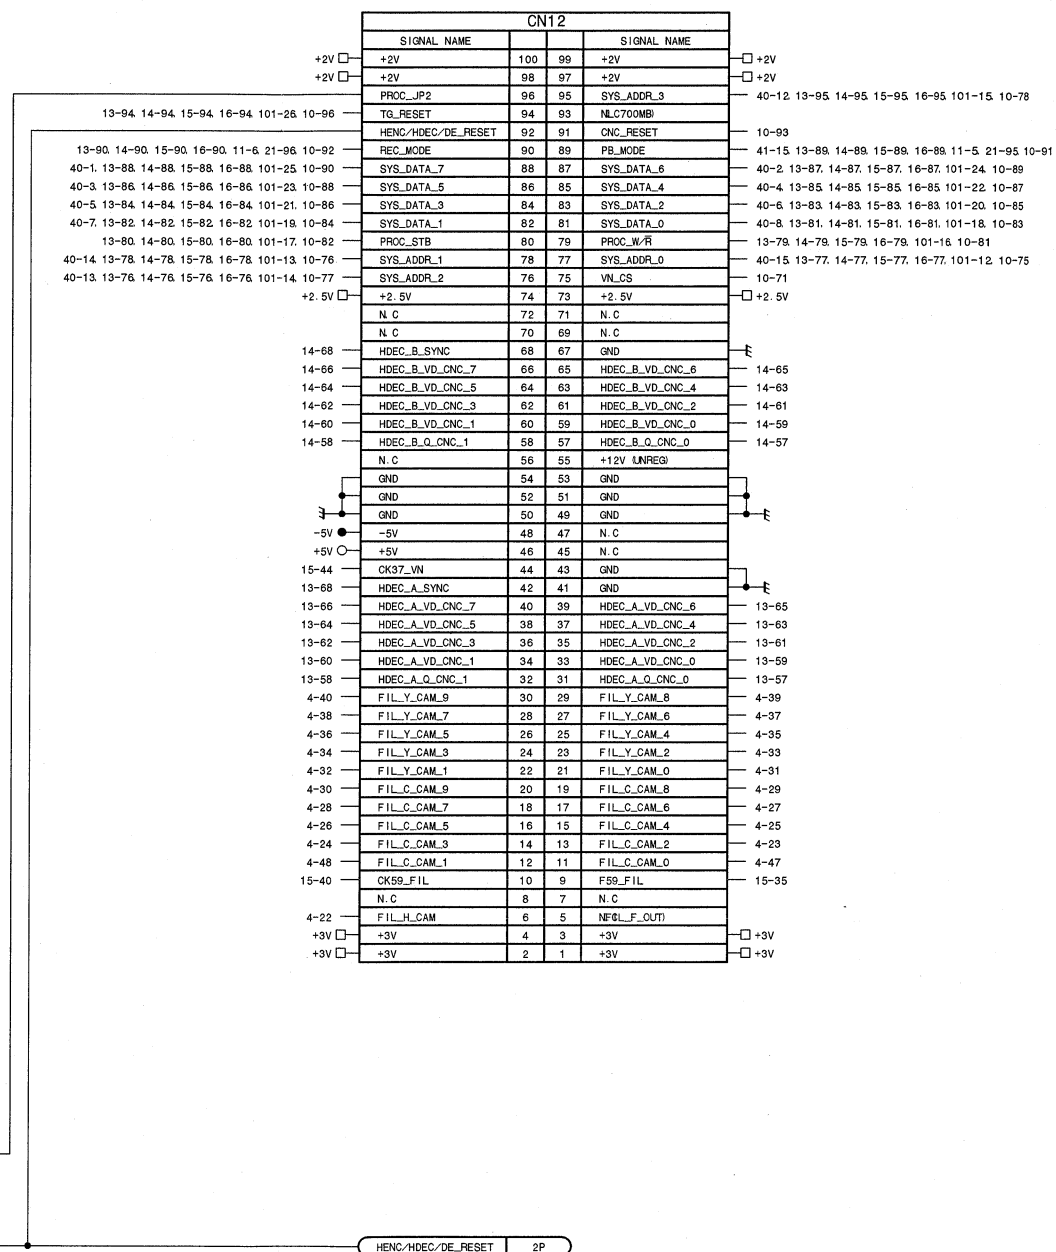


DEC-95 (B)

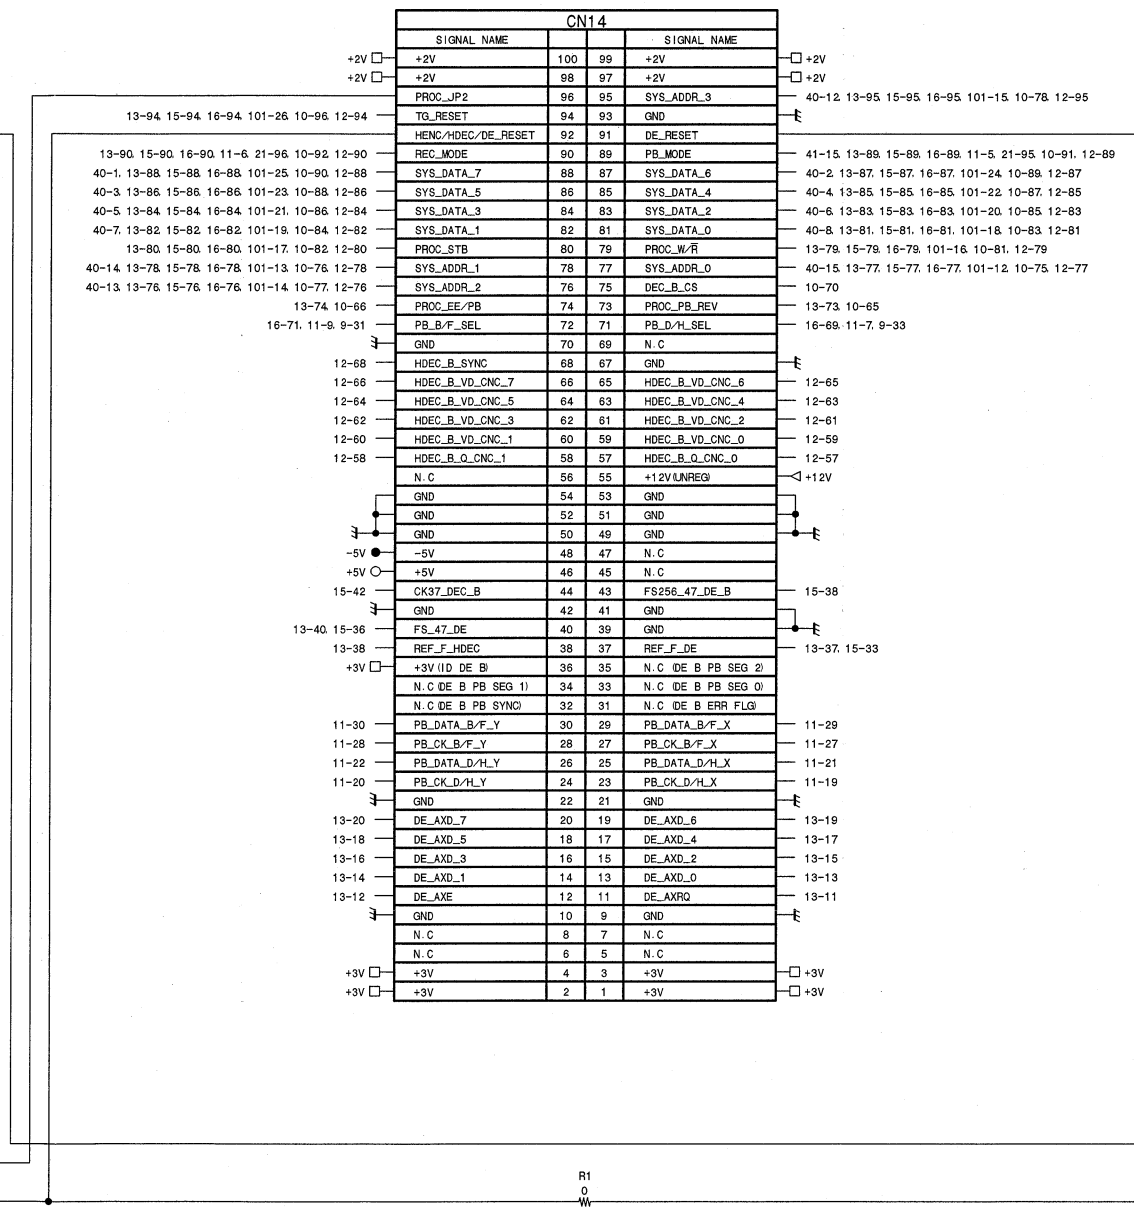


DE_RESET


EQ-89

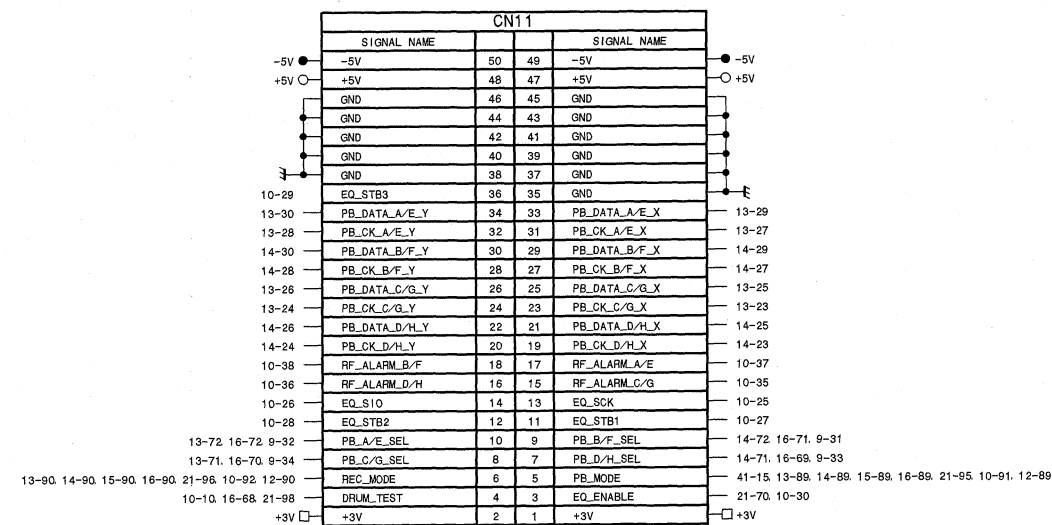


HN_EQ




OPTION

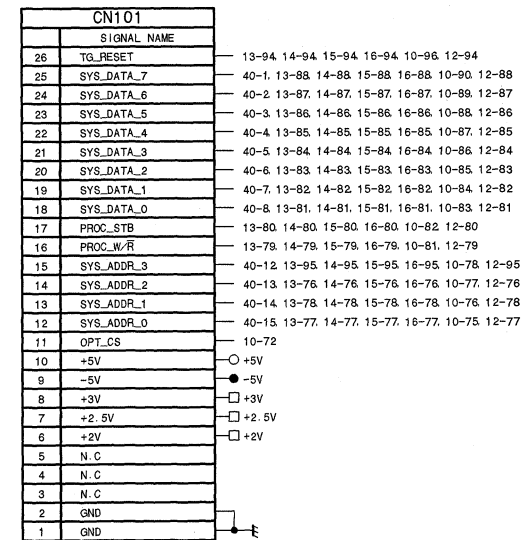

SIO_B (OPTION)



RE-140F

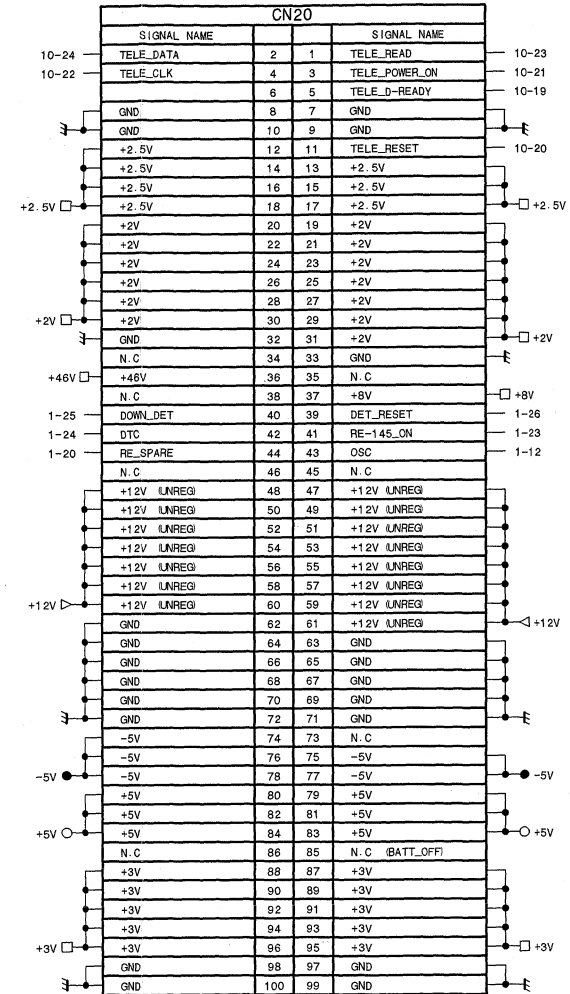

HN-243


CN21			
SIGNAL NAME		SIGNAL NAME	
+2V	+2V	1	2
9-95	CAPSTAN_FG_B	3	4
9-93	SPARE_ID_1	5	6
9-91	TAPE_THICKNESS	7	8
9-88	FUNC_CAM_1	9	10
9-90	FUNC_CAM_3	11	12
9-85	T_REEL_FG	13	14
9-83	DRUM_PG	15	16
9-81	TAPE_TOP/END_SEL	17	18
9-79	CASSETTE_IN	19	20
9-76	SV_ADJ_LED_1	21	22
9-78	SV_ADJ_LED_3	23	24
9-74	DIP_SW_2	25	26
9-72	PUSH_SW_2	27	28
9-69	NV_S1	29	30
9-67	NV_CS	31	32
9-64	SV_ADJ_RV_00	33	34
9-58	CTL_REC	35	36
9-59	PB_CTL	37	38
34-10	PB_A/E_X	39	40
34-7	PB_B/F_X	41	42
34-4	PB_C/G_X	43	44
34-1	PB_D/H_X	45	46
-5V	-5V	47	48
+5V	+5V	49	50
16-43	MCK_X	51	52
16-41	MPX_X	53	54
16-39	REC_D/H_X	55	56
16-37	REC_C/G_X	57	58
16-35	REC_B/F_X	59	60
16-33	REC_A/E_X	61	62
9-62	SV_ADJ_NO	63	64
9-25	SERVO_REF_CF	65	66
9-23	CAPSTAN_R/F_CONT	67	68
9-22	LOADING_DRIVE_2	69	70
9-19	CAPSTAN_DRIVE_0	71	72
9-17	DRUM_CURRENT_0	73	74
9-14 9-15 9-16	DRUM_DRIVE	75	76
9-11 9-12 9-13	GND MOTOR	77	78
42-1	REC_CUE_X	79	80
10-5	PB_TC	81	82
10-6	REC_TC	83	84
41-15 13-89 14-89 15-89 16-89 11-5 10-91 12-89	PB_MODE	85	86
10-9	DRUM_REC_EN	87	88
	N.C	89	90
		91	92
		93	94
		95	96
		97	98
		99	100

APR-55

CN40	
SIGNAL NAME	
1	SYS_DATA_7
2	SYS_DATA_6
3	SYS_DATA_5
4	SYS_DATA_4
5	SYS_DATA_3
6	SYS_DATA_2
7	SYS_DATA_1
8	SYS_DATA_0
9	GND
10	SYS_ADDR_5
11	SYS_ADDR_4
12	SYS_ADDR_3
13	SYS_ADDR_2
14	SYS_ADDR_1
15	SYS_ADDR_0
16	GND
17	TC_CS
18	GND
19	SPI_CLK
20	SPI_TC_TO_SY
21	SPI_SY_TO_TC
22	SYSTEM_RESET
23	SYS_FRAME
24	SYS_R/W
25	GND
26	BATT_ID_A
27	N.C
28	N.C

APR-55

CN41	
SIGNAL NAME	
1	SCL_SW
2	SDA_SW
3	N.C
4	N.C
5	N.C
6	N.C
7	F74_TC
8	FS256_RC_TC
9	FS64_RC_TC
10	FS_RC_TC
11	GND
12	FS256_47_TC
13	FS64_47_TC
14	FS_47_TC
15	PB_MODE
16	GND
17	GND
18	AUD_ENC_3/4
19	AUD_ENC_1/2
20	GND
21	AUD_DEC_3/4
22	AUD_DEC_1/2
23	SDI_XEN
24	DIGITAL_AU_3/4_IN
25	N.C DIGITAL AU 1/2 IN
26	DIGITAL_AU_3/4_OUT
27	DIGITAL_AU_1/2_OUT
28	GND



APR-55

CN42	
SIGNAL NAME	
1	REC_CUE_X 21-89
2	PB_CUE_X 21-92
3	REC_CUE_G 21-90
4	INCOM 54-3
5	FRONT_MIC_G 37-8
6	FRONT_MIC_SUB_Y 37-10
7	FRONT_MIC_SUB_X 37-9
8	FRONT_MIC_MAIN_X 37-6
9	FRONT_MIC_MAIN_Y 37-7
10	FRONT_MIC_CONT 37-5
11	GND
12	SPEAKER_X 56-3
13	AUDIO_HP_X 56-1
14	AUDIO_HP_G 56-2
15	AU_PB_X 44-38
16	AU_PB_Y 44-37
17	GND
18	AUDIO_MUTE 44-40
19	AU_PB_SUB_X 44-32
20	AU_PB_SUB_Y 44-33
21	GND
22	POWER_ON_MUTE 44-46
23	GND
24	CH1_MIC/LINE_X 44-42
25	CH1_MIC/LINE_Y 44-43
26	GND
27	CH2_MIC/LINE_X 44-49
28	CH2_MIC/LINE_Y 44-50

APR-55

CN108	
SIGNAL NAME	
1	+5V
2	+5V
3	+5V
4	+5V
5	+5V
6	+3V
7	+3V
8	+12V (UNREG)
9	-5V
10	-5V

POWER-SW

CN32	
SIGNAL NAME	
1	POWER_SW 46-9
2	GND

HP-90

CN56	
SIGNAL NAME	
1	AUDIO_HP_X 42-13
2	AUDIO_HP_G 42-14
3	SPEAKER_X 42-12
4	+5V

PS-569

CN46	
SIGNAL NAME	
1	+12V (UNREG) 42-13
2	+12V (UNREG) 42-14
3	BATT_EXT 10-41
4	N.C.
5	GND (UNREG)
6	GND (UNREG)
7	+12V (UNREG) 42-13
8	+12V (UNREG) 42-14
9	POWER_SW 32-1
10	N.C.
11	GND (UNREG)
12	GND (UNREG)

KY-293


CN50	
SIGNAL NAME	
1	+5V
2	GND
3	PLAY_KEY 10-59
4	REW_KEY 10-58
5	EJECT_KEY 10-57
6	FF_KEY 10-60
7	STOP_KEY 10-61
8	FF_LED 10-64
9	REW_LED 10-62
10	PLAY_LED 10-63

BATT-INFO


CN52	
SIGNAL NAME	
1	BATT_REM
2	BATT_ID
3	LIGHT_CONT

CN-2025


CN44	
SIGNAL NAME	
1	EXT_TC_OUT 10-7
2	GND
3	EXT_TC_IN 10-8
4	GND
5	GND
6	GENLOCK_G 7-23 6-56
7	GENLOCK_X 7-25 6-54
8	GND
9	N.C. DIGITAL_COM_OUT_A
10	N.C. DIGITAL_COM_OUT_B
11	N.C. DIGITAL_COM_IN_A
12	N.C. DIGITAL_COM_IN_B
13	GND
14	-5V
15	GND
16	+5V
17	TEST_OUT_PB_G 6-9
18	TEST_OUT_PB_X 6-11
19	GND
20	TEST_OUT_PRL_G 6-21
21	TEST_OUT_PRL_X 6-23
22	GND
23	TEST_OUT_Y_G 6-15
24	TEST_OUT_Y_X 6-17
25	TEST_DET 8-98
26	N.C.
27	-5V
28	GND
29	+5V
30	+46V
31	GND
32	AU_PB_SUB_X 42-19
33	AU_PB_SUB_Y 42-20
34	GND
35	GND
36	AU_PB_X 42-15
37	AU_PB_Y 42-16
38	GND
39	GND
40	AUDIO_MUTE 42-18
41	GND
42	CH1_MIC/LINE_X 42-24
43	CH1_MIC/LINE_Y 42-25
44	GND
45	GND
46	POWER_ON_MUTE 42-22
47	GND
48	GND
49	CH2_MIC/LINE_X 42-27
50	CH2_MIC/LINE_Y 42-28

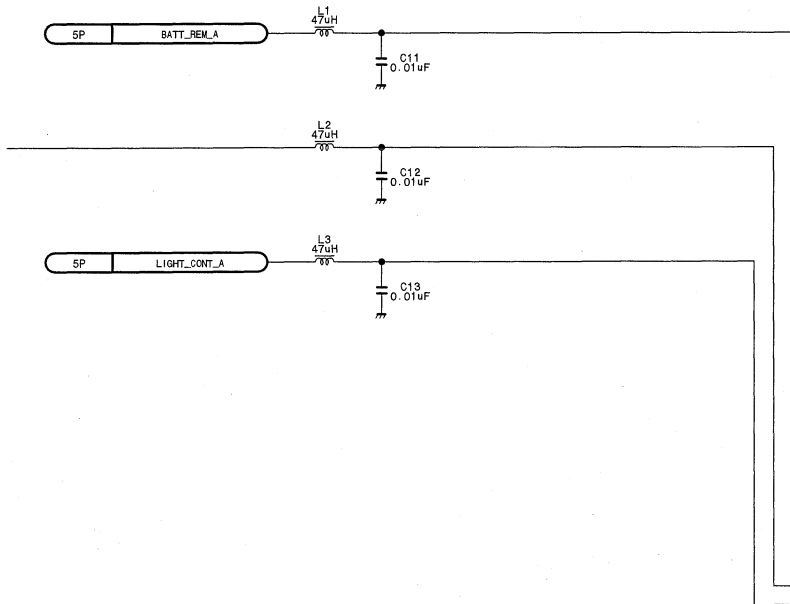

VA-195

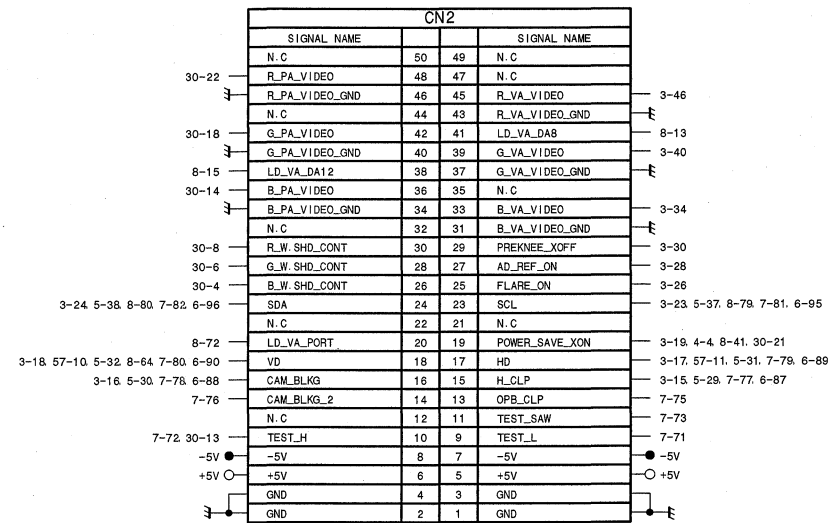

AD-167/171

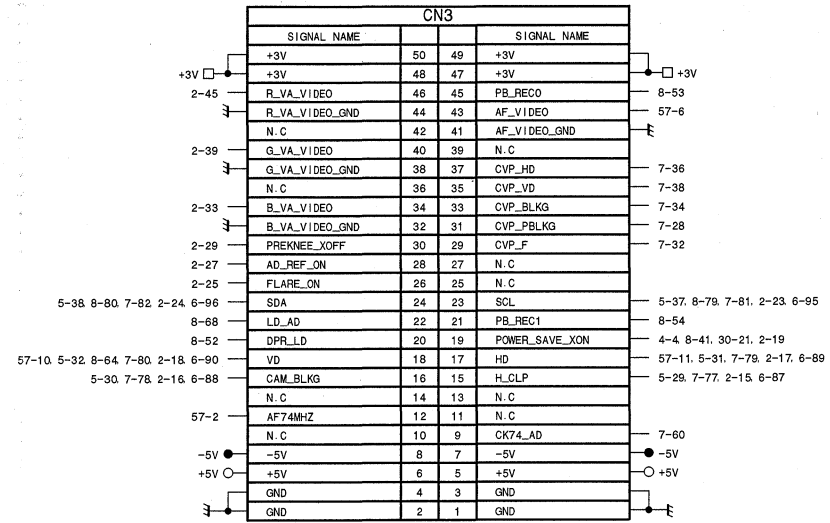

LOT NO. 911-2A2

N.C	96	95	N.C
N.C	94	93	N.C
N.C	92	91	N.C
N.C	90	89	N.C
N.C	88	87	N.C
N.C	86	85	N.C
N.C	84	83	N.C
N.C	82	81	N.C
N.C	80	79	N.C
N.C	78	77	N.C
N.C	76	75	N.C
N.C	74	73	N.C

DPR-152/227

LOT NO. 2A3-

SIGNAL NAME	CN4	SIGNAL NAME	CN4
+2.5V	100	+2.5V	99
SDI_H_ISG	98	SDI_F_ISG	97
Y_SDI_DATA_9	96	Y_SDI_DATA_8	95
Y_SDI_DATA_7	94	Y_SDI_DATA_6	93
Y_SDI_DATA_5	92	Y_SDI_DATA_4	91
Y_SDI_DATA_3	90	Y_SDI_DATA_2	89
Y_SDI_DATA_1	88	Y_SDI_DATA_0	87
C_SDI_DATA_9	86	C_SDI_DATA_8	85
C_SDI_DATA_7	84	C_SDI_DATA_6	83
C_SDI_DATA_5	82	C_SDI_DATA_4	81
C_SDI_DATA_3	80	C_SDI_DATA_2	79
C_SDI_DATA_1	78	C_SDI_DATA_0	77
SKIN_GATE_SD1	76	CK74_SD1	75
SDI_H	74	SDI_F	73
+2V	72	+2V	71
ADDRESS_1	70	ADDRESS_0	69
IF_DATA_7	68	IF_DATA_6	67
IF_DATA_5	66	IF_DATA_4	65
IF_DATA_3	64	IF_DATA_2	63
IF_DATA_1	62	IF_DATA_0	61
READ	60	WRITE	59
CVP_CE	58	VFS_CE	57
SKIN_GATE_VDA	56	CAM_RESET	55
CK74_DPR	54	CK46/59_CAM	53
CK37_CAM	52	CK46_CAM	51
GND	50	GND	49
FIL_C_CAM_1	48	FIL_C_CAM_0	47
+5V	46	+2V	45
VF_DTL	44	F46_CAM	43
F37/74_CAM	42	VFS_74F	41
FIL_Y_CAM_9	40	FIL_Y_CAM_8	39
FIL_Y_CAM_7	38	FIL_Y_CAM_6	37
FIL_Y_CAM_5	36	FIL_Y_CAM_4	35
FIL_Y_CAM_3	34	FIL_Y_CAM_2	33
FIL_Y_CAM_1	32	FIL_Y_CAM_0	31
FIL_C_CAM_9	30	FIL_C_CAM_8	29
FIL_C_CAM_7	28	FIL_C_CAM_6	27
FIL_C_CAM_5	26	FIL_C_CAM_4	25
FIL_C_CAM_3	24	FIL_C_CAM_2	23
FIL_H_CAM	22	CAM_VD_HENC_B_7	21
CAM_VD_HENC_B_6	20	CAM_VD_HENC_B_5	19
CAM_VD_HENC_B_4	18	CAM_VD_HENC_B_3	17
CAM_VD_HENC_B_2	16	CAM_VD_HENC_B_1	15
CAM_VD_HENC_B_0	14	CAM_VD_HENC_A_7	13
CAM_VD_HENC_A_6	12	CAM_VD_HENC_A_5	11
CAM_VD_HENC_A_4	10	CAM_VD_HENC_A_3	9
CAM_VD_HENC_A_2	8	CAM_VD_HENC_A_1	7
CAM_VD_HENC_A_0	6	CAM_H_HENC	5
POWER_SAVE_XON	4	TEMP_DPR	3
+3V	2	+3V	1

LOT NO. 911-002

REMOTE

SIGNAL NAME	CN45
1	CAM_CMD_RCP_X
2	CAM_CMD_RCP_Y
3	RCP_CMD_CAM_X
4	RCP_CMD_CAM_Y
5	GND RCP
6	+12V LUNREG
7	GND LUNREG
8	N.C SHIELD

DA-148

SIGNAL NAME	CN5	SIGNAL NAME	CN5
GND	50	GND	49
-5V	48	-5V	47
+5V	46	+5V	45
+8V	44	+8V	43
N.C	42	CK74_DA	41
GND	40	GND	39
SDA	38	SCL	37
LD_DA	36	ZEBRA_100_LEV	35
SDI_XEN	34	ZEBRA_70_LEV	33
VD	32	HD	31
CAM_BLK	30	H_CLP	29
SYS_BLK	28	MAIN_VID_XON	27
N.C	26	4-3_MOD_LEV	25
N.C	24	VF_Y_DC_LEV	23
N.C	22	C_VID_XON	21
N.C	20	PR/RL_DA_VID	19
N.C	18	PR/RL_DA_VID_GND	17
N.C	16	N.C	15
N.C	14	Y/G_DA_VID	13
N.C	12	Y/G_DA_VID_GND	11
N.C	10	N.C	9
N.C	8	PB/B_DA_VID	7
N.C	6	PB/B_DA_VID_GND	5
+3V	4	+3V	3
+3V	2	+3V	1

VDA-51

SIGNAL NAME	CN6	SIGNAL NAME	CN6
+2.5V	100	+2.5V	99
+2.5V	98	+2.5V	97
SDA	96	SCL	95
LD_VDA	94	N.C	93
N.C	92	N.C	91
VD	90	HD	89
CAM_BLK	88	H_CLP	87
SYS_BLK	86	N.C	85
ZEBRA_2	84	ZEBRA_1	83
SKIN_GATE_VDA	82	4-3_MOD	81
N.C	80	CAM_CHARA	79
N.C	78	VF_FRAME	77
AF_WIN	76	CAM_CHARA_BLK	75
N.C	74	N.C	73
VF_DTL	72	N.C	71
N.C	70	CCU_RET_PB	69
N.C	68	CCU_RET_PB_GND	67
N.C	66	CCU_RET_PR	65
N.C	64	CCU_RET_PR_GND	63
N.C	62	CCU_RET_Y	61
N.C	60	CCU_RET_Y_GND	59
SYNC_2	58	SYNC_1	57
GENLOCK_G	56	N.C	55
GENLOCK_X	54	GND	53
GND	52	GND	51
-5V	48	-5V	47
+5V	46	+5V	45
+8V	44	+8V	43
N.C	42	VF_VIDEO_PR	41
N.C	40	VF_VIDEO_PR_GND	39
VF_DTL	38	N.C	37
N.C	36	VF_VIDEO_Y	35
ZEBRA_100_LEV	34	VF_VIDEO_Y_GND	33
ZEBRA_70_LEV	32	N.C	31
SDI_XEN	30	VF_VIDEO_PB	29
MAIN_VID_XON	28	VF_VIDEO_PB_GND	27
4-3_MOD_LEV	26	N.C	25
VF_Y_DC_LEV	24	TEST_OUT_PR_X	23
C_VID_XON	22	TEST_OUT_PR_G	21
PR/RL_DA_VID	20	N.C	19
PR/RL_DA_VID_GND	18	TEST_OUT_Y_X	17
N.C	16	TEST_OUT_Y_G	15
Y/G_DA_VID	14	N.C	13
Y/G_DA_VID_GND	12	TEST_OUT_PB_X	11
N.C	10	TEST_OUT_PB_G	9
PB/B_DA_VID	8	N.C	7
PB/B_DA_VID_GND	6	Y_REM_OUT	5
+3V	4	+3V	3
+3V	2	+3V	1

LOT NO. 003-

REMOTE

SIGNAL NAME	CN45
1	CAM_CMD_RCP_X
2	CAM_CMD_RCP_Y
3	RCP_CMD_CAM_X
4	RCP_CMD_CAM_Y
5	GND RCP
6	+12V LUNREG
7	GND LUNREG
8	Y_REM_OUT

SG-267

IF-819

RE-145F

CN7			
SIGNAL NAME		SIGNAL NAME	
+2.5V	100	+2.5V	8-66
LD_B0	98	CTG_CE_1	8-66
ADDRESS_1	96	ADDRESS_0	4-69, 8-95
IF_DATA_7	94	IF_DATA_6	4-67, 8-93
IF_DATA_5	92	IF_DATA_4	4-65, 8-91
IF_DATA_3	90	IF_DATA_2	4-63, 8-89
IF_DATA_1	88	IF_DATA_0	4-61, 8-87
READ	86	WRITE	4-59, 8-85
CTG_CE_0	84	CAM_RESET	109-5, 4-55, 8-81, 10-43
SDA	82	SCL	3-23, 5-37, 8-79, 2-23, 6-95
VD	80	HD	3-17, 57-11, 5-31, 2-17, 6-89
CAM_BLK0_2	78	H_CLP	3-15, 5-29, 2-15, 6-87
CAM_BLK0_2	76	OPB_CLP	2-13
HD_SAW	74	TEST_SAW	2-11
TEST_H	72	TEST_L	2-9
SYS_BLK0	70	FIELD	57-9, 8-85
ZEBRA_2	68	ZEBRA_1	6-83
VF_FRAME	66	4-3_MOD	6-81
CAM_CHARA_BLK	64	CAM_CHARA	6-79
CHB_RESET	62	CAM_CK74_TG	15-70
CK74_AD	60	CAM_CK74_TG_Y	15-68
CK74_DPR	58	CK74_DA	5-41
N.C	56	N.C	
GND	54	GND	
GND	52	GND	
GND	50	GND	
-5V	48	-5V	
+5V	46	+5V	
+8V	44	+8V	
SYNC_2	42	SYNC_1	6-57
GND	40	GND	
CVP_VD	38	CAM_H_TG	15-71
CVP_HD	36	CAM_F_TG	15-72
CVP_BLK0	34	CAM_FRAME	10-42
CVP_F	32	SDI_H_ISG	4-98
VFS_74F	30	N.C	
CVP_PBLK0	28	N.C	
COL_F	26	GENLOCK_X	44-7, 6-54
COL_H	24	GENLOCK_G	44-8, 6-56
GND	22	SDI_F_ISG	4-97
CHB_VDH	20	CHB_BLK0GH	30-5
H_PHASEH	18	FRM_RSTH	31-5
N.C	16	N.C	
GND	14	GND	
PLL-	12	PLL+	31-8
GND	10	GND	
CK74+	8	CK74+	31-10
GND	6	GND	
+3V	4	+3V	
+3V	2	+3V	

3P	BATT_REM_A
3P	LIGHT_CONT_A

CN8			
SIGNAL NAME		SIGNAL NAME	
+2.5V	100	+2.5V	31-3
TEST_DET	98	LD_OHB2	4-69, 7-95
ADDRESS_1	96	ADDRESS_0	4-67, 7-93
IF_DATA_7	94	IF_DATA_6	4-65, 7-91
IF_DATA_5	92	IF_DATA_4	4-63, 7-89
IF_DATA_3	90	IF_DATA_2	4-61, 7-87
IF_DATA_1	88	IF_DATA_0	4-59, 7-85
READ	86	WRITE	7-84
CVP_CE	84	CTG_CE_0	109-5, 4-55, 7-83, 10-43
VFS_CE	82	CAM_RESET	3-23, 5-37, 7-81, 2-23, 6-95
SDA	80	SCL	41-1, 36-2
SDA_SW	78	SCL_SW	33-2
SDA_VF	76	SCL_VF	31-6
SDA_OHB	74	SCL_OHB	7-98
LD_VA_PORT	72	LD_S0	5-36
LD_VDA	70	LD_DA	31-2
LD_AD	68	LD_OHB	57-9, 7-69
CTG_CE_1	66	FIELD	
VD	64	N.C	
G_TALLY	62	R_TALLY	33-6
VF_PEAKING_CTL	60	COLOR/BW	33-4
FAN_R_GND	58	FAN_R_+	48-1
UNREG +12V	56	UNREG +12V	3-12V
PB_REC1	54	PB_REC0	3-45
DPR_LD	52	GND	
GND	50	GND	
-5V	48	IF_60HZ	15-5, 16-5
+5V	46	+5V	
+8V	44	+8V	
FAN_F_+	42	POWER_SAVE_XON	3-19, 4-4, 30-21, 2-19
FAN_F_GND	40	BACK_TALLY	51-2
ADAPTER_RX	38	N.C	
ADAPTER_TX	36	N.C	
BATT_REM_A	34	IF_CMD_AF	57-15
LIGHT_CONT_A	32	AF_CMD_IF	57-14
LENS_TX	30	LENS_RX/FOCUS_POSI	38-11, 57-13
VTR_S/S	28	IRIS_REM	38-10
IRIS_SERVO	26	EXTDR_ON	38-9
ZOOM_POSI	24	IRIS_CONT	38-6
IRIS_POSI	22	RET_EN	38-4
RE_B	20	RE_A	36-4
TEMP_DPR	18	N.C	4-3
BLECONSH_BUSY	16	LD_VA_DA12	2-38
BLECONSH_RX	14	LD_VA_DAB	2-41
BLECONSH_TX	12	RCP_CMD_CAM_Y	45-4
BLECONSH_CLK	10	RCP_CMD_CAM_X	45-3
GND	8	CAM_CMD_RCP_Y	45-2
GND	6	CAM_CMD_RCP_X	45-1
+3V	4	+3V	
+3V	2	+3V	

CN1			
SIGNAL NAME		SIGNAL NAME	
UNREG +12V	50	UNREG +12V	
UNREG +12V	48	UNREG +12V	
UNREG +12V	46	UNREG +12V	
UNREG +12V	44	UNREG +12V	
GND	42	GND	
GND	40	GND	
GND	38	+9.5V	
+9.5V	36	+15.5V	
+15.5V	34	N.C	
GND	32	GND	
GND	30	GND	
GND	28	N.C	
DET_RESET	26	DOWN_DET	20-40
DTC	24	RE-145_ON	20-41
N.C	22	OSC	20-43
RE_SPARE	20	N.C	
GND	18	GND	
GND	16	+35V	
N.C	14	GND	
-10.5V	12	-10.5V	
GND	10	N.C	
+5V-2	8	+5V-2	
+5V-2	6	-5V-2	
-5V-2	4	N.C	
GND	2	GND	

SH-74

CN30			
SIGNAL NAME		SIGNAL NAME	
GND	23	24	GND
POWER_SAVE_XON	21	22	R_PA_VIDEO
GND	19	20	R_PA_VIDEO_GND
N.C	17	18	G_PA_VIDEO
GND	15	16	G_PA_VIDEO_GND
TEST_H	13	14	B_PA_VIDEO
GND	11	12	B_PA_VIDEO_GND
OHB_RESET	9	10	GND
HD_ISAW	7	8	R_W_SHD_CONT
OHB_BLKGH	5	6	G_W_SHD_CONT
OHB_VDH	3	4	B_W_SHD_CONT
GND	1	2	GND

VF

CN33			
SIGNAL NAME		SIGNAL NAME	
+12V_VF_UNREG	1	11	GND_VF_UNREG
SCL_VF	2	12	N.C POWER OFF CTL
SDA_VF	3	13	VF_PEAKING_CTL
COLOR/BW	4	14	N.C
N.C	5	15	VF_VIDEO_PR_GND
R_TALLY	6	16	VF_VIDEO_PR
G_TALLY	7	17	VF_VIDEO_PB_GND
N.C	8	18	VF_VIDEO_PB
N.C (CHARACTER)	9	19	VF_VIDEO_Y_GND
N.C	10	20	VF_VIDEO_Y

AF

CN57			
SIGNAL NAME		SIGNAL NAME	
GND	1	2	AF74MHZ
GND	3	4	-5V
+5V	5	6	AF_VIDEO
AF_VIDEO_GND	7	8	AF_WIN
AF_WIN	9	10	FIELD
VD	11	12	LENS_TX
LENS_TX	13	14	AF_CMD_IF
AF_CMD_IF	15	16	IF_CMD_AF

DR-411

CN31			
SIGNAL NAME		SIGNAL NAME	
GND	28	29	GND
GND	27	28	GND
GND	26	27	GND
+12V_UNREG	25	26	+12V
+35V	24	25	+35V
+15.5V	23	24	+15.5V
+15.5V	22	23	+15.5V
GND	21	22	GND
+9.5V	20	21	+9.5V
+9.5V	19	20	+9.5V
-10.5V	18	19	-10.5V
-10.5V	17	18	-10.5V
+5V-2	16	17	+5V-2
+5V-2	15	16	+5V-2
-5V-2	14	15	-5V-2
-5V-2	13	14	-5V-2
GND	12	13	GND
CK74+	11	12	7-8
CK74+	10	11	7-7
PLL+	9	10	7-12
PLL+	8	9	7-11
SDA_OHB	7	8	8-74
SCL_OHB	6	7	8-73
FRM_RSTH	5	6	7-17
H_PHASEH	4	5	7-18
LD_OHB2	3	4	8-97
LD_OHB	2	3	8-87
GND	1	2	GND

LENS

CN38			
SIGNAL NAME		SIGNAL NAME	
+12V_LENS_UNREG	1	2	+12V
GND_LENS_UNREG	2	3	GND
RET_EN	3	4	8-21
IRIS_POSI	4	5	8-22
IRIS_CONT	5	6	8-23
ZOOM_POSI	6	7	8-24
EXTDR_ON	7	8	8-25
IRIS_SERVO	8	9	8-26
IRIS_REM	9	10	8-27
VTR_S/S	10	11	8-28
LENS_RX_FOCUS_POSI	11	12	57-13 8-29
LENS_TX	12	13	57-12 8-30

FAN (R)

CN48			
SIGNAL NAME		SIGNAL NAME	
FAN_R+	1	2	8-57
FAN_R_GND	2	3	GND

FAN (F)

CN55			
SIGNAL NAME		SIGNAL NAME	
FAN_F+	1	2	8-42
FAN_F_GND	2	3	GND

BLECONSH

CN109			
SIGNAL NAME		SIGNAL NAME	
BLECONSH_BUSY	1	2	8-16
BLECONSH_RX	2	3	8-14
BLECONSH_TX	3	4	8-12
BLECONSH_CLK	4	5	8-10
CAM_RESET	5	6	4-55 8-81 7-83 10-43

LOT NO. 911-092, 232-2A2

CN53			
SIGNAL NAME		SIGNAL NAME	
N.C	1	2	N.C
N.C	2	3	N.C
N.C	3	4	N.C
N.C	4	5	N.C
N.C	5	6	N.C
N.C	6	7	N.C
N.C	7	8	N.C
N.C	8	9	N.C
N.C	9	10	N.C
N.C	10	11	N.C
N.C	11	12	N.C
N.C	12	13	N.C
N.C	13	14	N.C
N.C	14	15	N.C
N.C	15	16	N.C
N.C	16	17	N.C
N.C	17	18	N.C
N.C	18	19	N.C
N.C	19	20	N.C
N.C	20	21	N.C
N.C	21	22	N.C
N.C	22	23	N.C
N.C	23	24	N.C
N.C	24	25	N.C
N.C	25	26	N.C

MA-92

CN36			
SIGNAL NAME		SIGNAL NAME	
SDA_SW	1	2	41-2 8-78
SCL_SW	2	3	41-1 8-77
RE_A	3	4	8-19
RE_B	4	5	8-20

MA-92

CN37			
SIGNAL NAME		SIGNAL NAME	
GND	1	2	+5V
+5V	2	3	-5V
-5V	3	4	+46V
+46V	4	5	42-10
FRONT_MIC_CONT	5	6	42-8
FRONT_MIC_MAIN_X	6	7	42-9
FRONT_MIC_MAIN_Y	7	8	42-5
FRONT_MIC_G	8	9	42-7
FRONT_MIC_SUB_X	9	10	42-6
FRONT_MIC_SUB_Y	10	11	GND

SW-1032
(BACK TALLY)

CN51			
SIGNAL NAME		SIGNAL NAME	
+5V	1	2	8-39
BACK_TALLY	2	3	8-62 33-7
G_TALLY	3	4	GND

CN-2024 (V)

LOT NO. 2A3- (EXT I/O)

CN53			
SIGNAL NAME		SIGNAL NAME	
SDI_H	1	2	4-74
SDI_F	2	3	4-73
SDI_XEN	3	4	41-23 5-34 15-67 6-30
N.C	4	5	N.C
CK74_SDI	5	6	4-75
SKIN_GATE_SDI	6	7	4-76
C_SDI_DATA_0	7	8	4-77
C_SDI_DATA_1	8	9	4-78
C_SDI_DATA_2	9	10	4-79
C_SDI_DATA_3	10	11	4-80
C_SDI_DATA_4	11	12	4-81
C_SDI_DATA_5	12	13	4-82
C_SDI_DATA_6	13	14	4-83
C_SDI_DATA_7	14	15	4-84
C_SDI_DATA_8	15	16	4-85
C_SDI_DATA_9	16	17	4-86
Y_SDI_DATA_0	17	18	4-87
Y_SDI_DATA_1	18	19	4-88
Y_SDI_DATA_2	19	20	4-89
Y_SDI_DATA_3	20	21	4-90
Y_SDI_DATA_4	21	22	4-91
Y_SDI_DATA_5	22	23	4-92
Y_SDI_DATA_6	23	24	4-93
Y_SDI_DATA_7	24	25	4-94
Y_SDI_DATA_8	25	26	4-95
Y_SDI_DATA_9	26	27	4-96

CN-2024 (A)

CN54			
SIGNAL NAME		SIGNAL NAME	
GND	1	2	+12V
+12V_UNREG	2	3	42-4
INCOM	3	4	GND
GND	4	5	CCU_RET_Y_GND
CCU_RET_Y_GND	5	6	CCU_RET_Y
CCU_RET_Y	6	7	CCU_RET_PR_GND
CCU_RET_PR_GND	7	8	CCU_RET_PR
CCU_RET_PR	8	9	CCU_RET_PB_GND
CCU_RET_PB_GND	9	10	CCU_RET_PB
CCU_RET_PB	10	11	GND
GND	11	12	CCU_F
CCU_F	12	13	CCU_H
CCU_H	13	14	ADAPTER_TX
ADAPTER_TX	14	15	ADAPTER_RX
ADAPTER_RX	15	16	N.C
N.C	16	17	FS_RC_SDI
FS_RC_SDI	17	18	FS64_RC_SDI
FS64_RC_SDI	18	19	FS256_RC_SDI
FS256_RC_SDI	19	20	DIGITAL_AU_1/2_OUT
DIGITAL_AU_1/2_OUT	20	21	DIGITAL_AU_3/4_OUT
DIGITAL_AU_3/4_OUT	21	22	DIGITAL_AU_3/4_IN
DIGITAL_AU_3/4_IN	22	23	FS_48_SDI
FS_48_SDI	23	24	FS64_48_SDI
FS64_48_SDI	24	25	FS256_48_SDI
FS256_48_SDI	25	26	+3V

NOTE *

REF. NO.	CHANGE INFORMATION	LOT NO.
C8	33uF/10V → 47uF/10V	243-
C12-C14	1uF/25V → 1uF/20V	243-
C19	10uF/4V → 10uF/10V	001-
C20-C24	33uF A20	001-
C41	33uF A20	001-
C50-C54	2.2uF/10V → 2.2uF/10V	243-
C74-C79	33uF/10V → 47uF/10V	243-
C87-C88	33uF/10V → 47uF/10V	243-
C89-C93	33uF/10V → 47uF/10V	243-
C95-C97	33uF/10V → 47uF/10V	243-
C102-C103	33uF/10V → 47uF/10V	243-
R55-R59	51k A20	001-
R18	2.2 → 0	001-
R19	330 → 0	001-
R51-R53	270k → 330k	243-
R124	2.2 → 0	001-
R133	2.2 → 0	001-
R134	2.2 → 0	001-
R193-R205	180k → 150k	243-

CHN2	CHN7	CHN1	CHN2	CHN7	CHN1
B MPX-1N	5	5	B MPX-1N	5	5
B MPX-4P	4	4	B MPX-4P	4	4
B MPX-3N	3	3	B MPX-3N	3	3
B MPX-2P	2	2	B MPX-2P	2	2
GND	1	1	GND	1	1

CHN23	CHN8	CHN23	CHN8
G MPX-1N	5	G MPX-1N	5
G MPX-4P	4	G MPX-4P	4
G MPX-3N	3	G MPX-3N	3
G MPX-2P	2	G MPX-2P	2
GND	1	GND	1

CHN24	CHN9	CHN24	CHN9
R MPX-1N	5	R MPX-1N	5
R MPX-4P	4	R MPX-4P	4
R MPX-3N	3	R MPX-3N	3
R MPX-2P	2	R MPX-2P	2
GND	1	GND	1


CHN24	CHN9	CHN24	CHN9
R MPX-1N	5	R MPX-1N	5
R MPX-4P	4	R MPX-4P	4
R MPX-3N	3	R MPX-3N	3
R MPX-2P	2	R MPX-2P	2
GND	1	GND	1

CHN24	CHN9	CHN24	CHN9
R MPX-1N	5	R MPX-1N	5
R MPX-4P	4	R MPX-4P	4
R MPX-3N	3	R MPX-3N	3
R MPX-2P	2	R MPX-2P	2
GND	1	GND	1

CHN24	CHN9	CHN24	CHN9
R MPX-1N	5	R MPX-1N	5
R MPX-4P	4	R MPX-4P	4
R MPX-3N	3	R MPX-3N	3
R MPX-2P	2	R MPX-2P	2
GND	1	GND	1

CHN24	CHN9	CHN24	CHN9
R MPX-1N	5	R MPX-1N	5
R MPX-4P	4	R MPX-4P	4
R MPX-3N	3	R MPX-3N	3
R MPX-2P	2	R MPX-2P	2
GND	1	GND	1


CHN24	CHN9	CHN24	CHN9
R MPX-1N	5	R MPX-1N	5
R MPX-4P	4	R MPX-4P	4
R MPX-3N	3	R MPX-3N	3
R MPX-2P	2	R MPX-2P	2
GND	1	GND	1




4-80

4-80

Pre-amp
PA-238
 BOARD NO. 1-677-568-11, 12
 LOT NO. 911-
 HDW-F900C_PA-238_211_1
 HDW-F900 P2V2






1


2

3


4


5

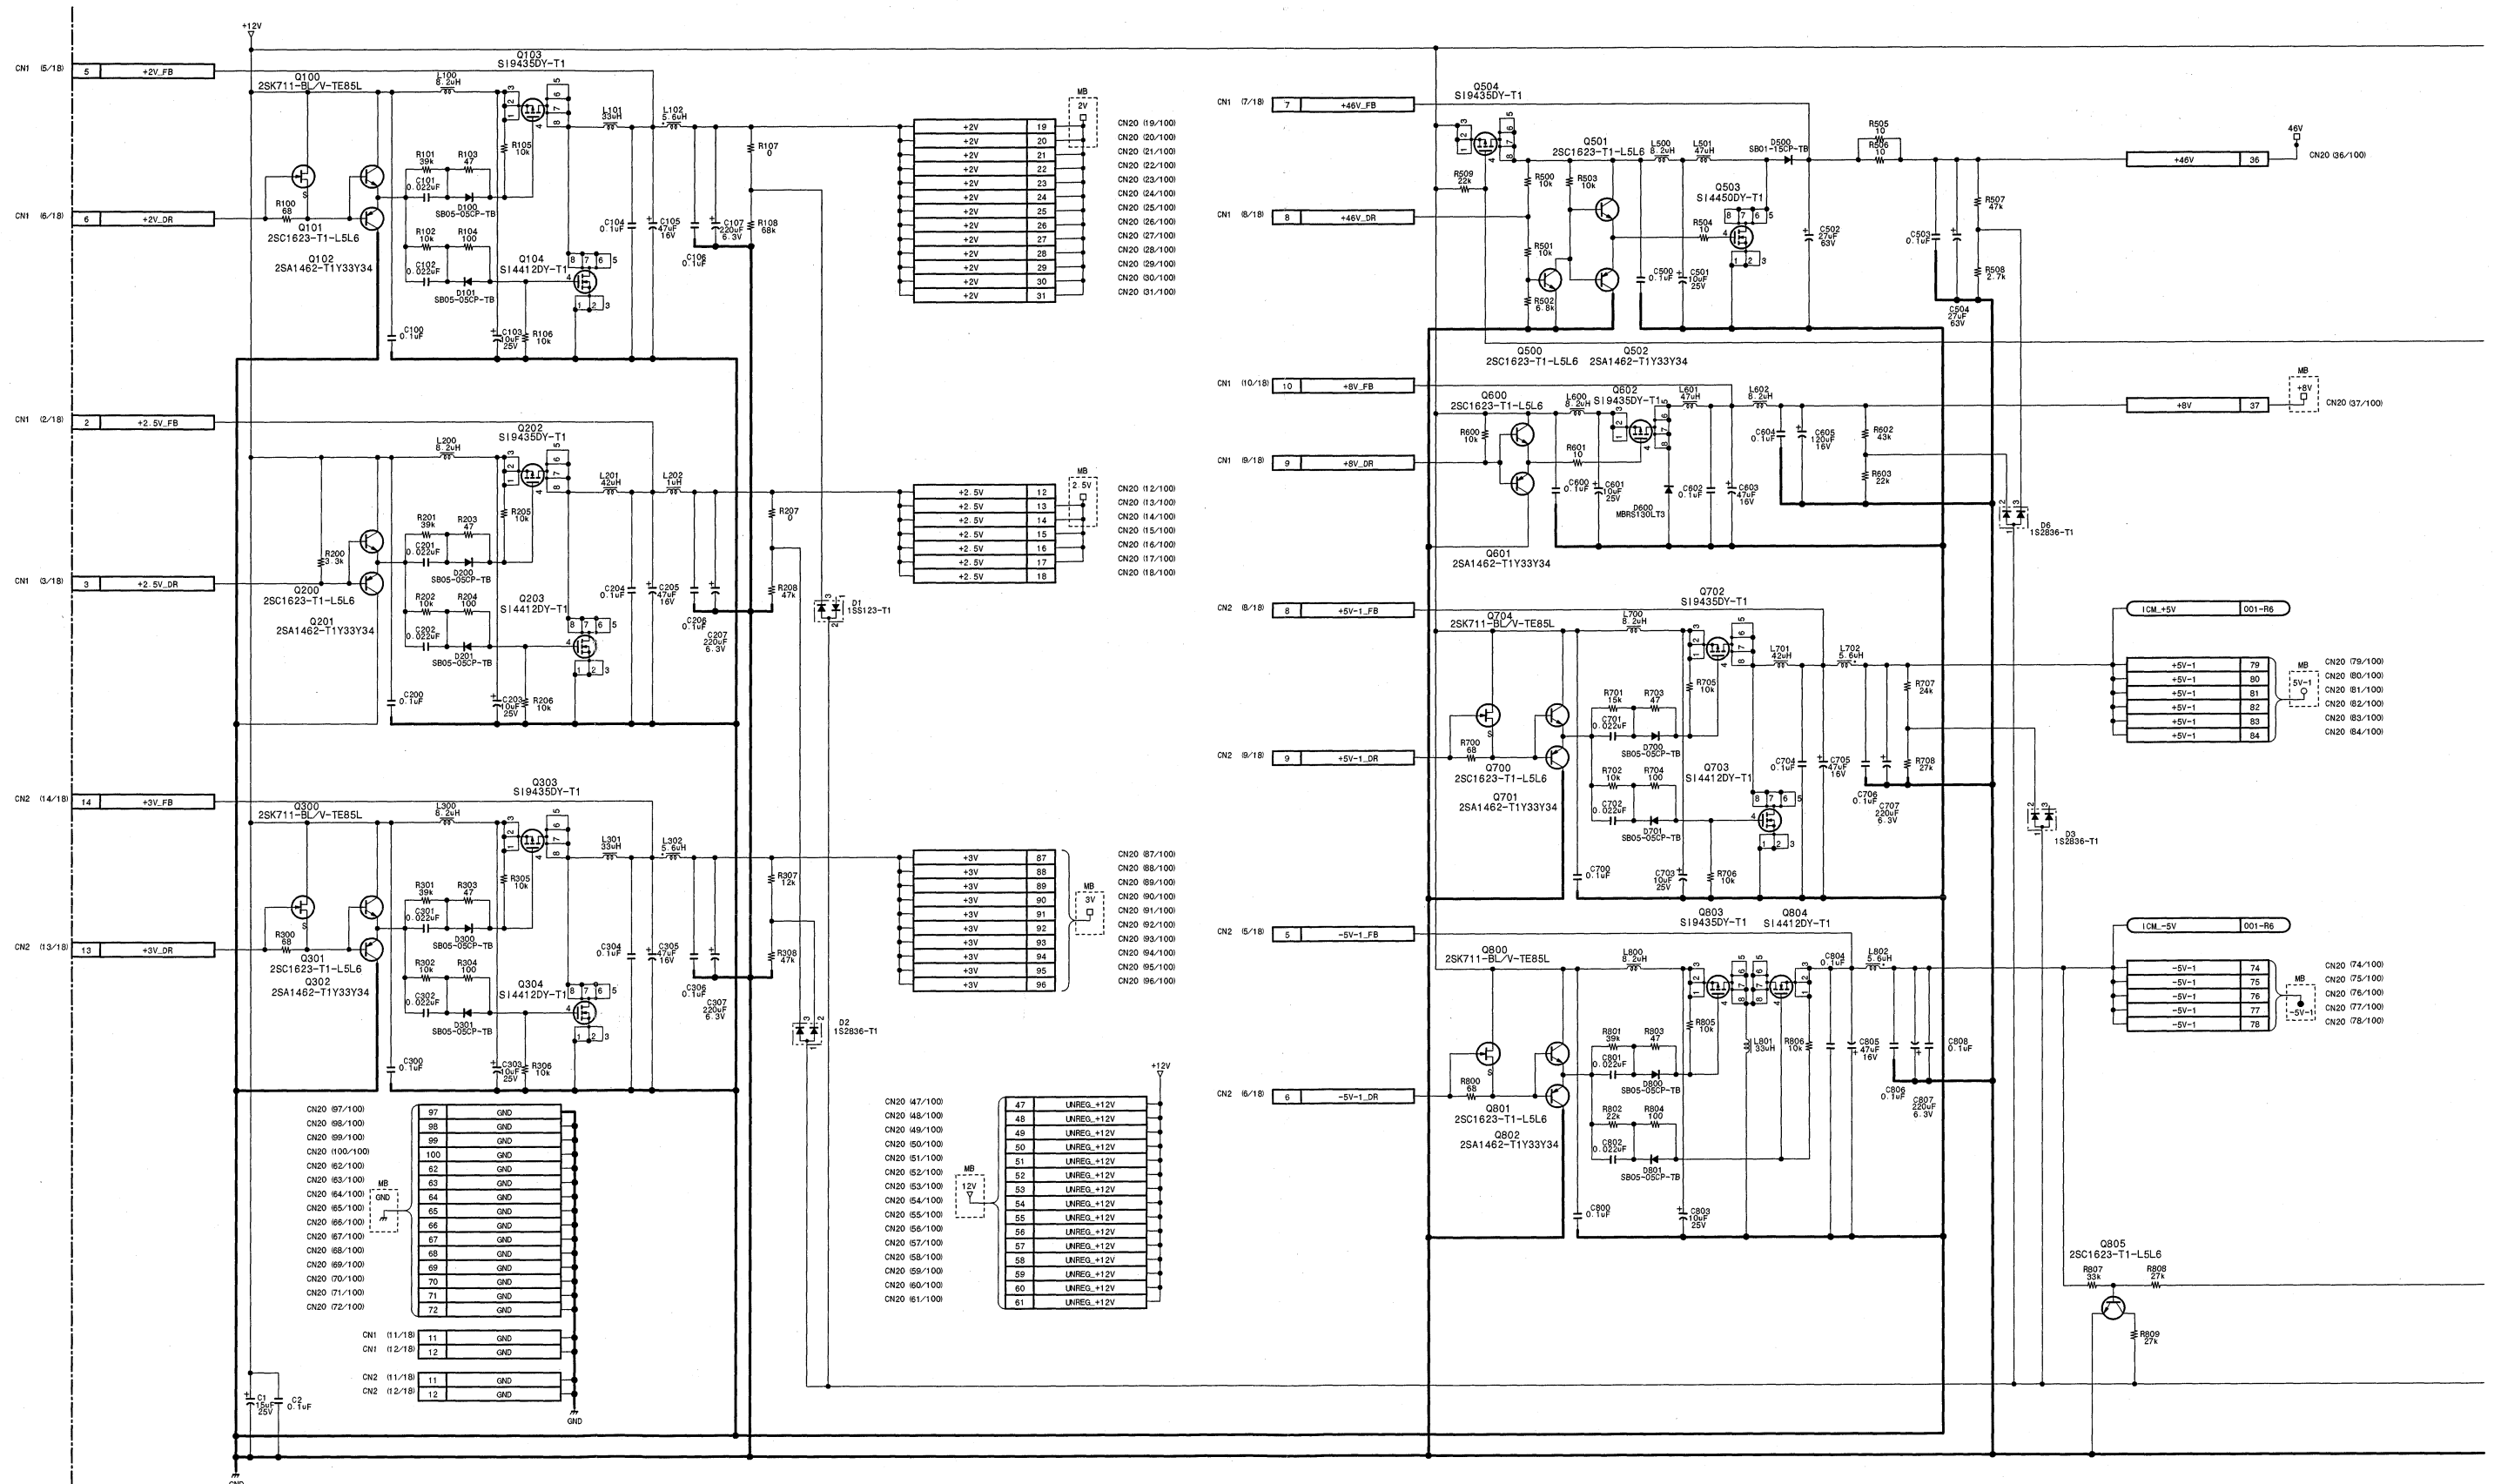












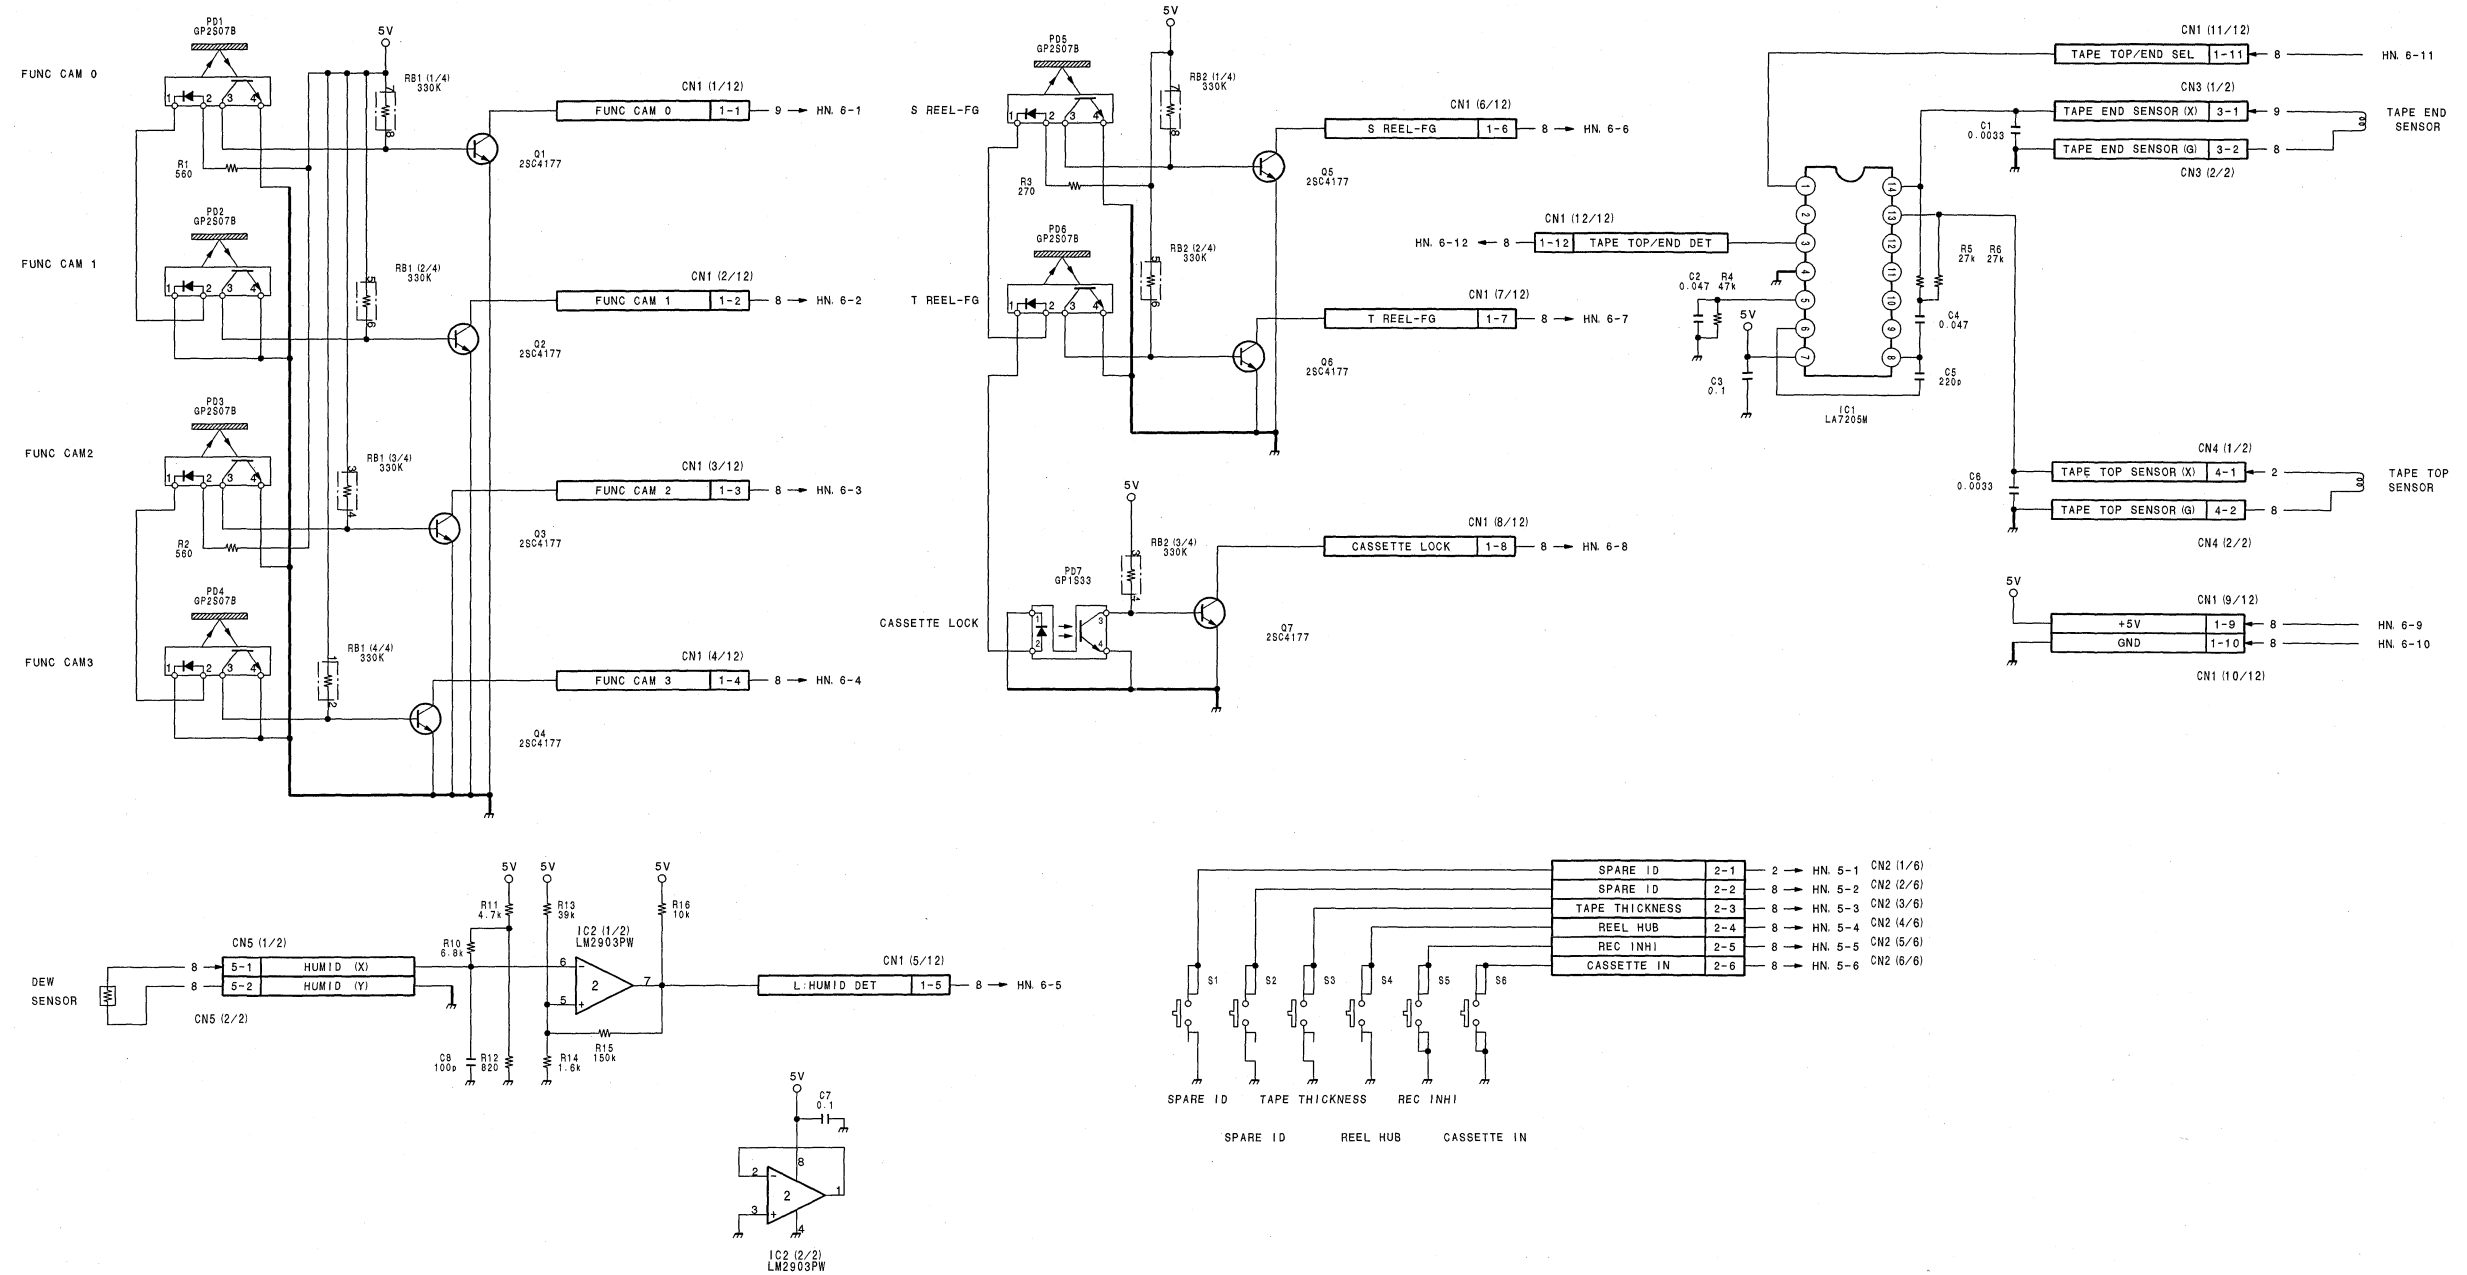


Tape sensor, DEW sensor
SE-275
 BOARD NO. 1-656-316-11
 LOT NO. 911-
 B-VHDW700-SE275-11-S/M




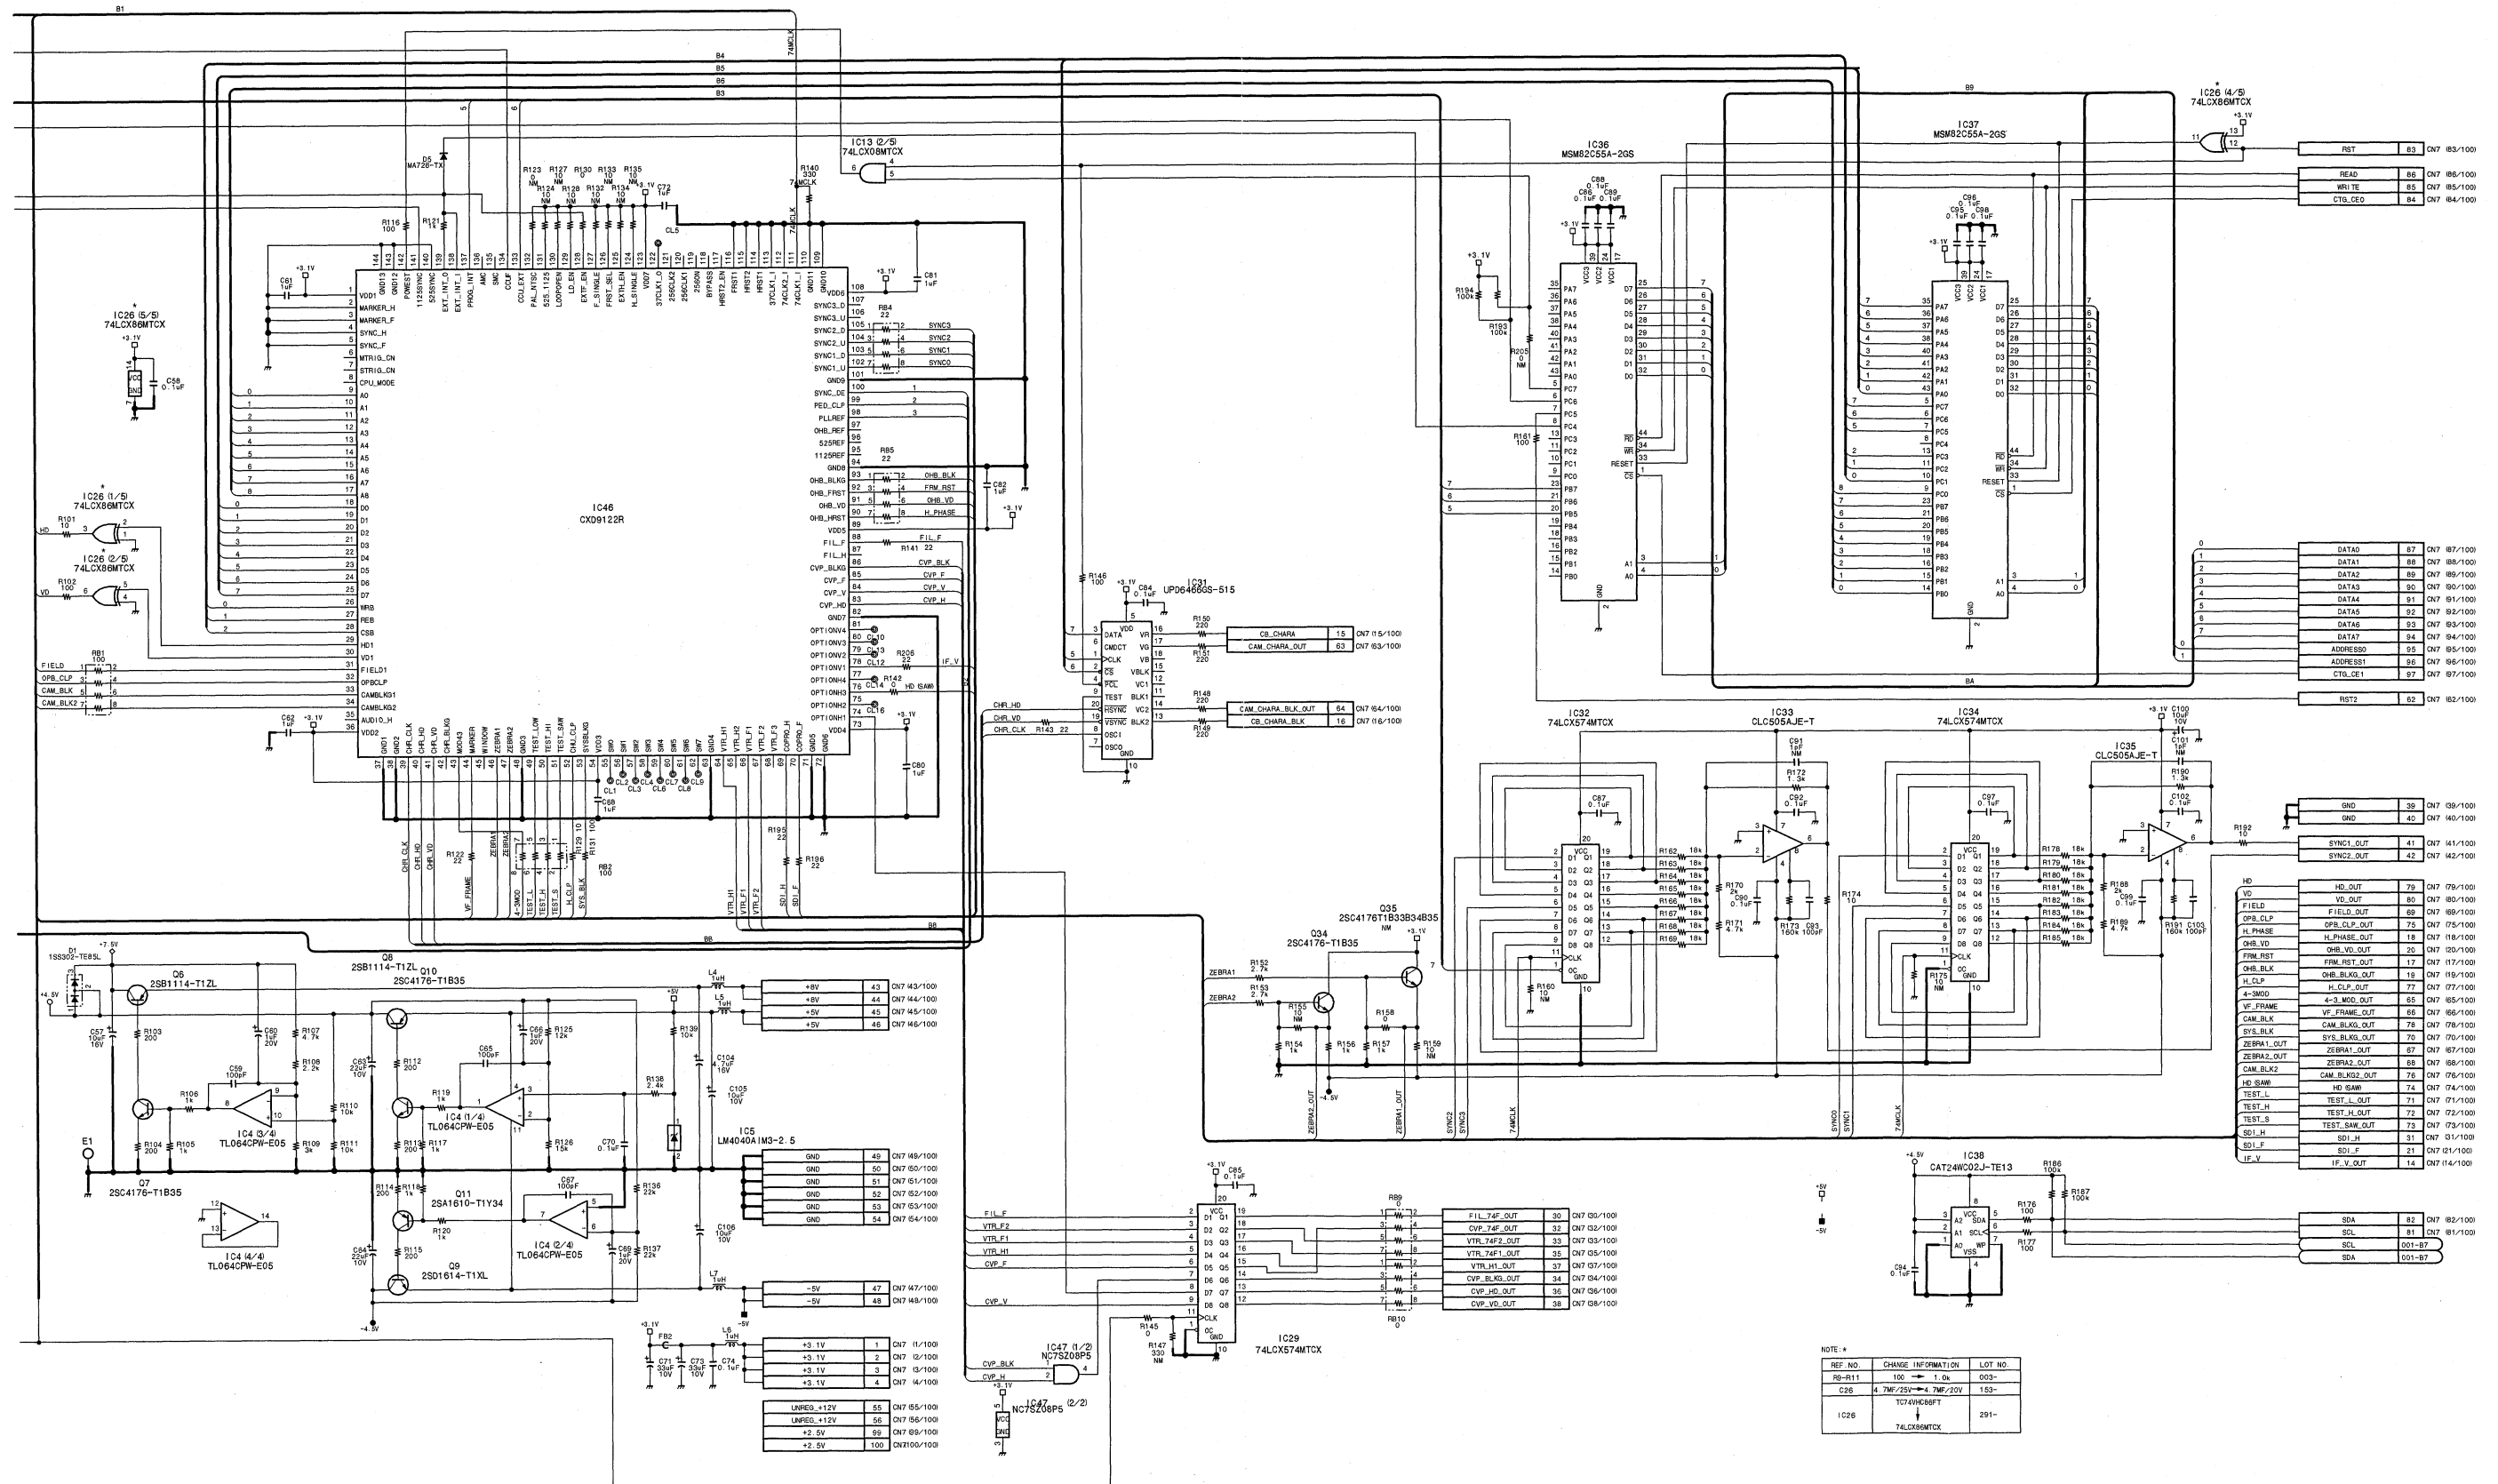


REF. NO.	CHANGE INFORMATION	LOT NO.
RD-R11	100 → 1.0k	003-
C26	4.7M/25V → 4.7M/20V	153-
IC26	74LX86MTCX	291-


GEN lock, Timing pulse generator (CTG), Character generator
SG-267
 BOARD NO. 1-677-591-11, 12
 LOT NO. 911-
 HDW-F900C_SG-267_112_1




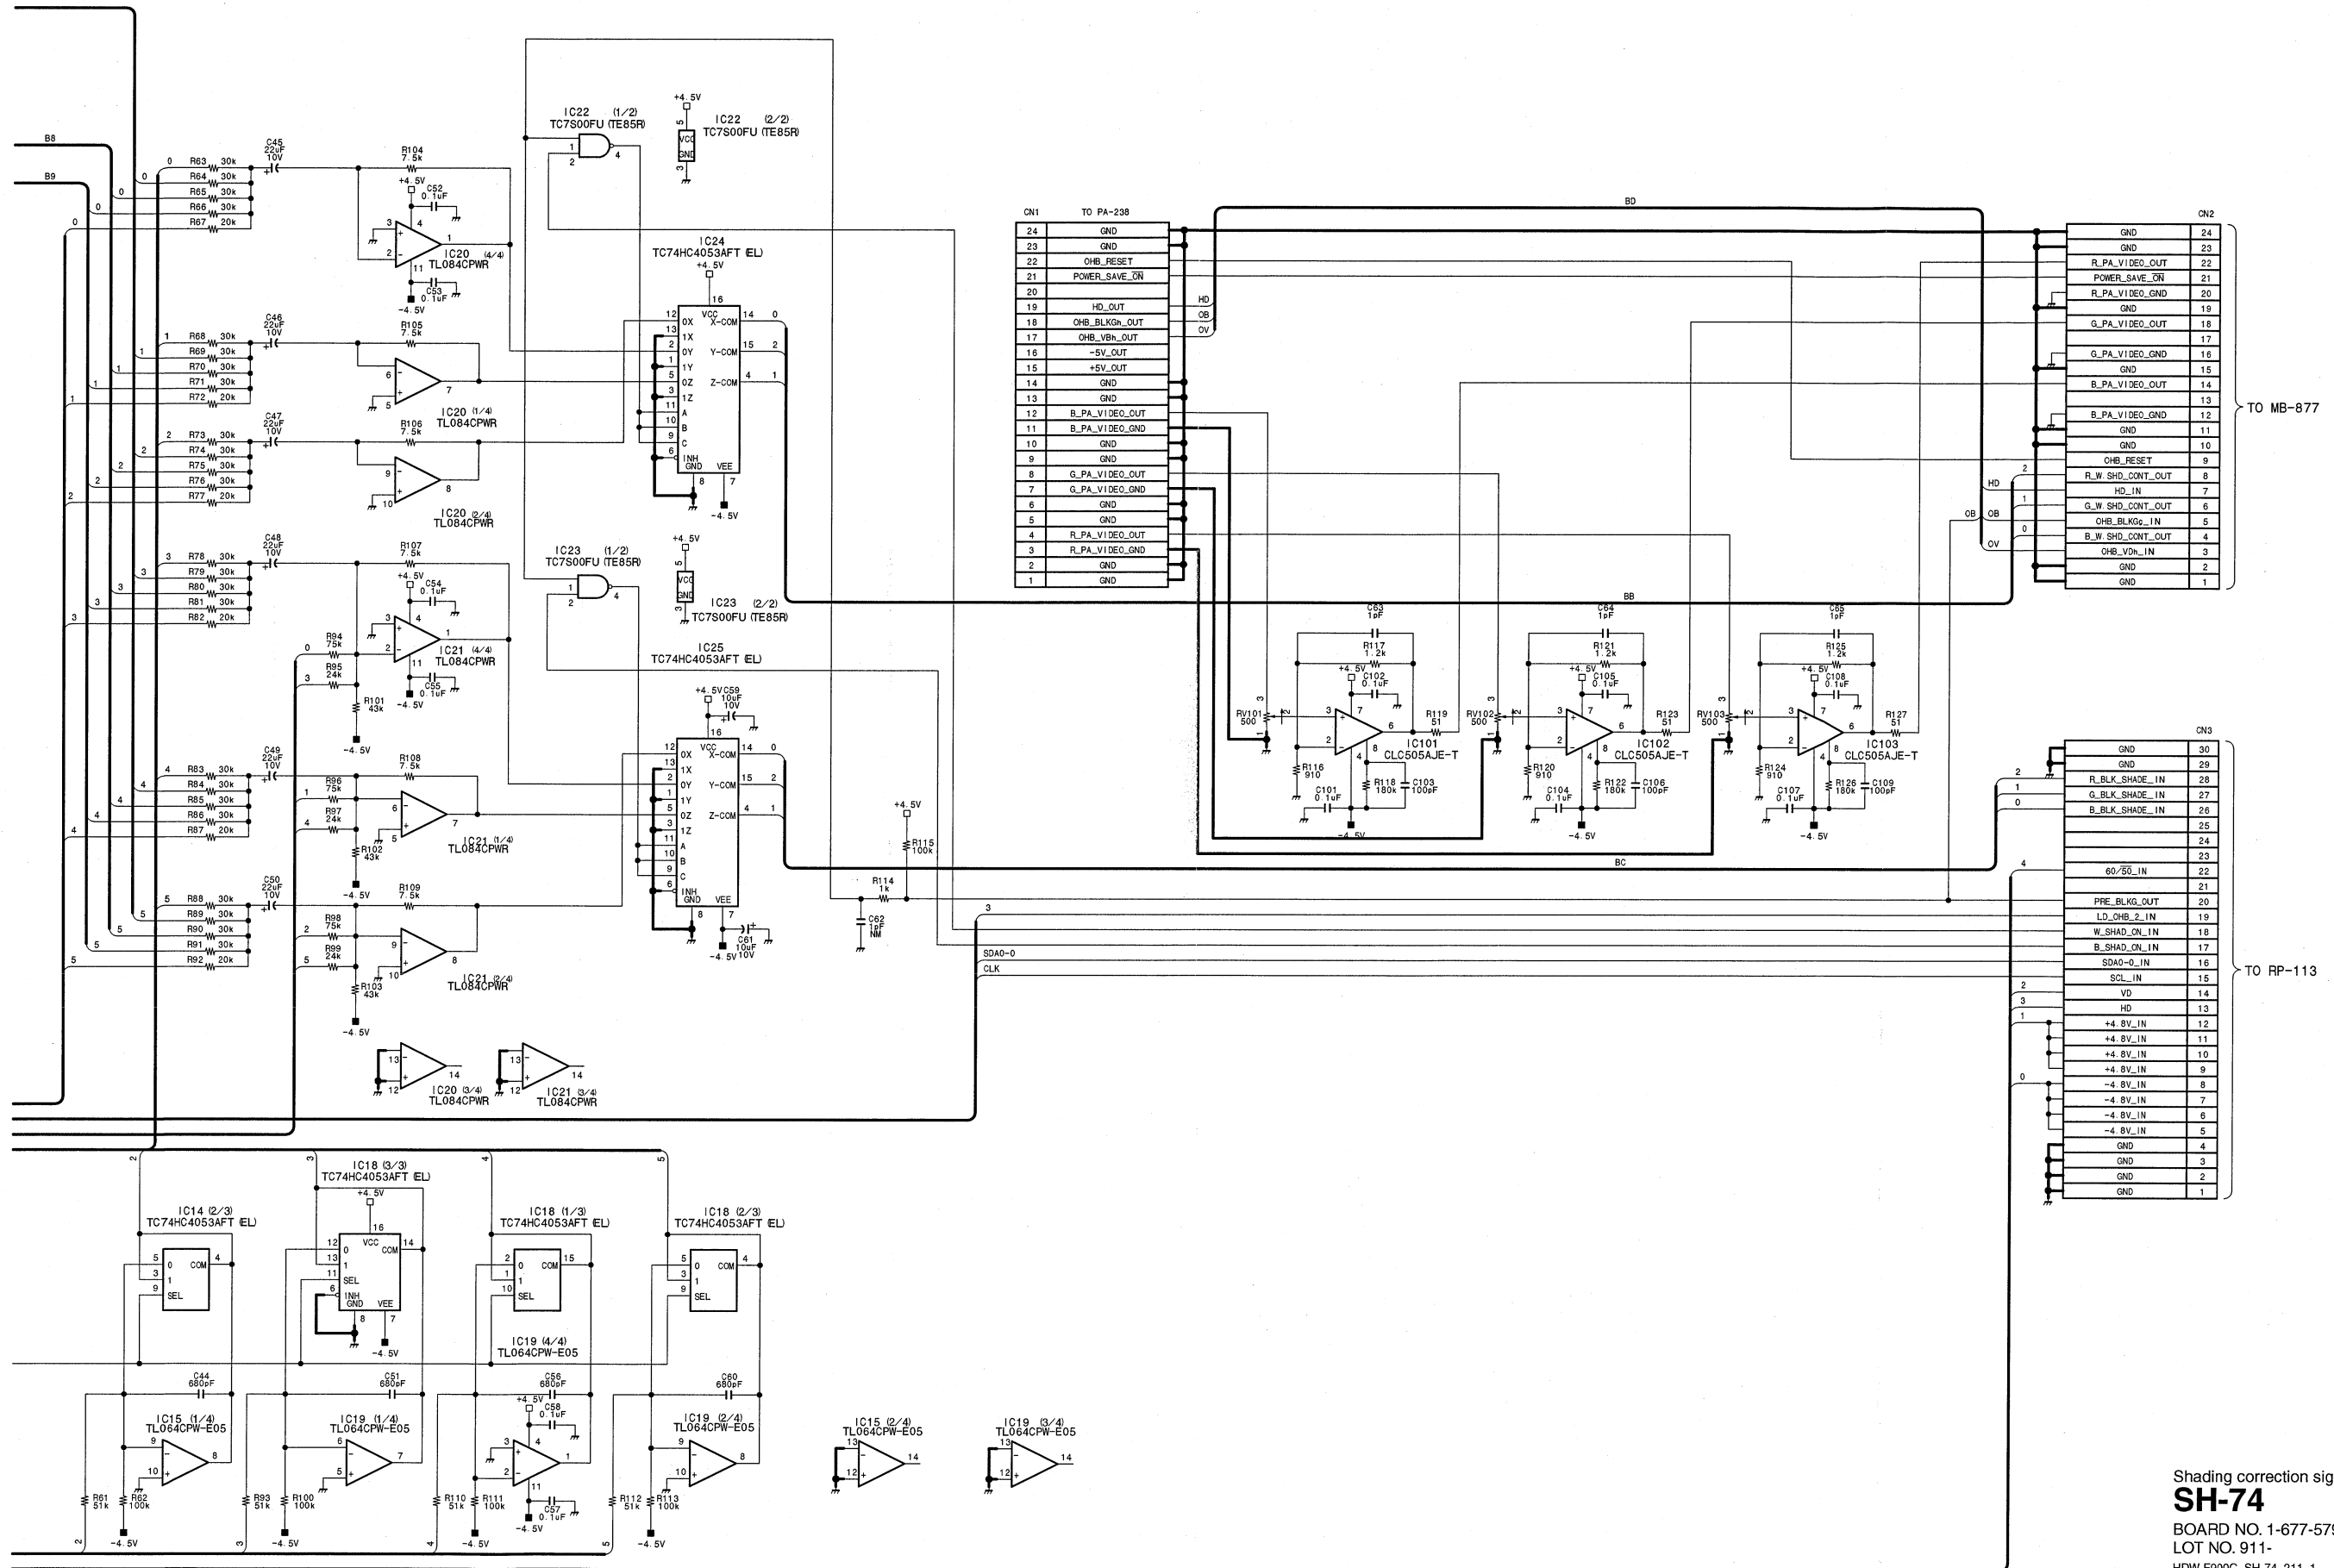

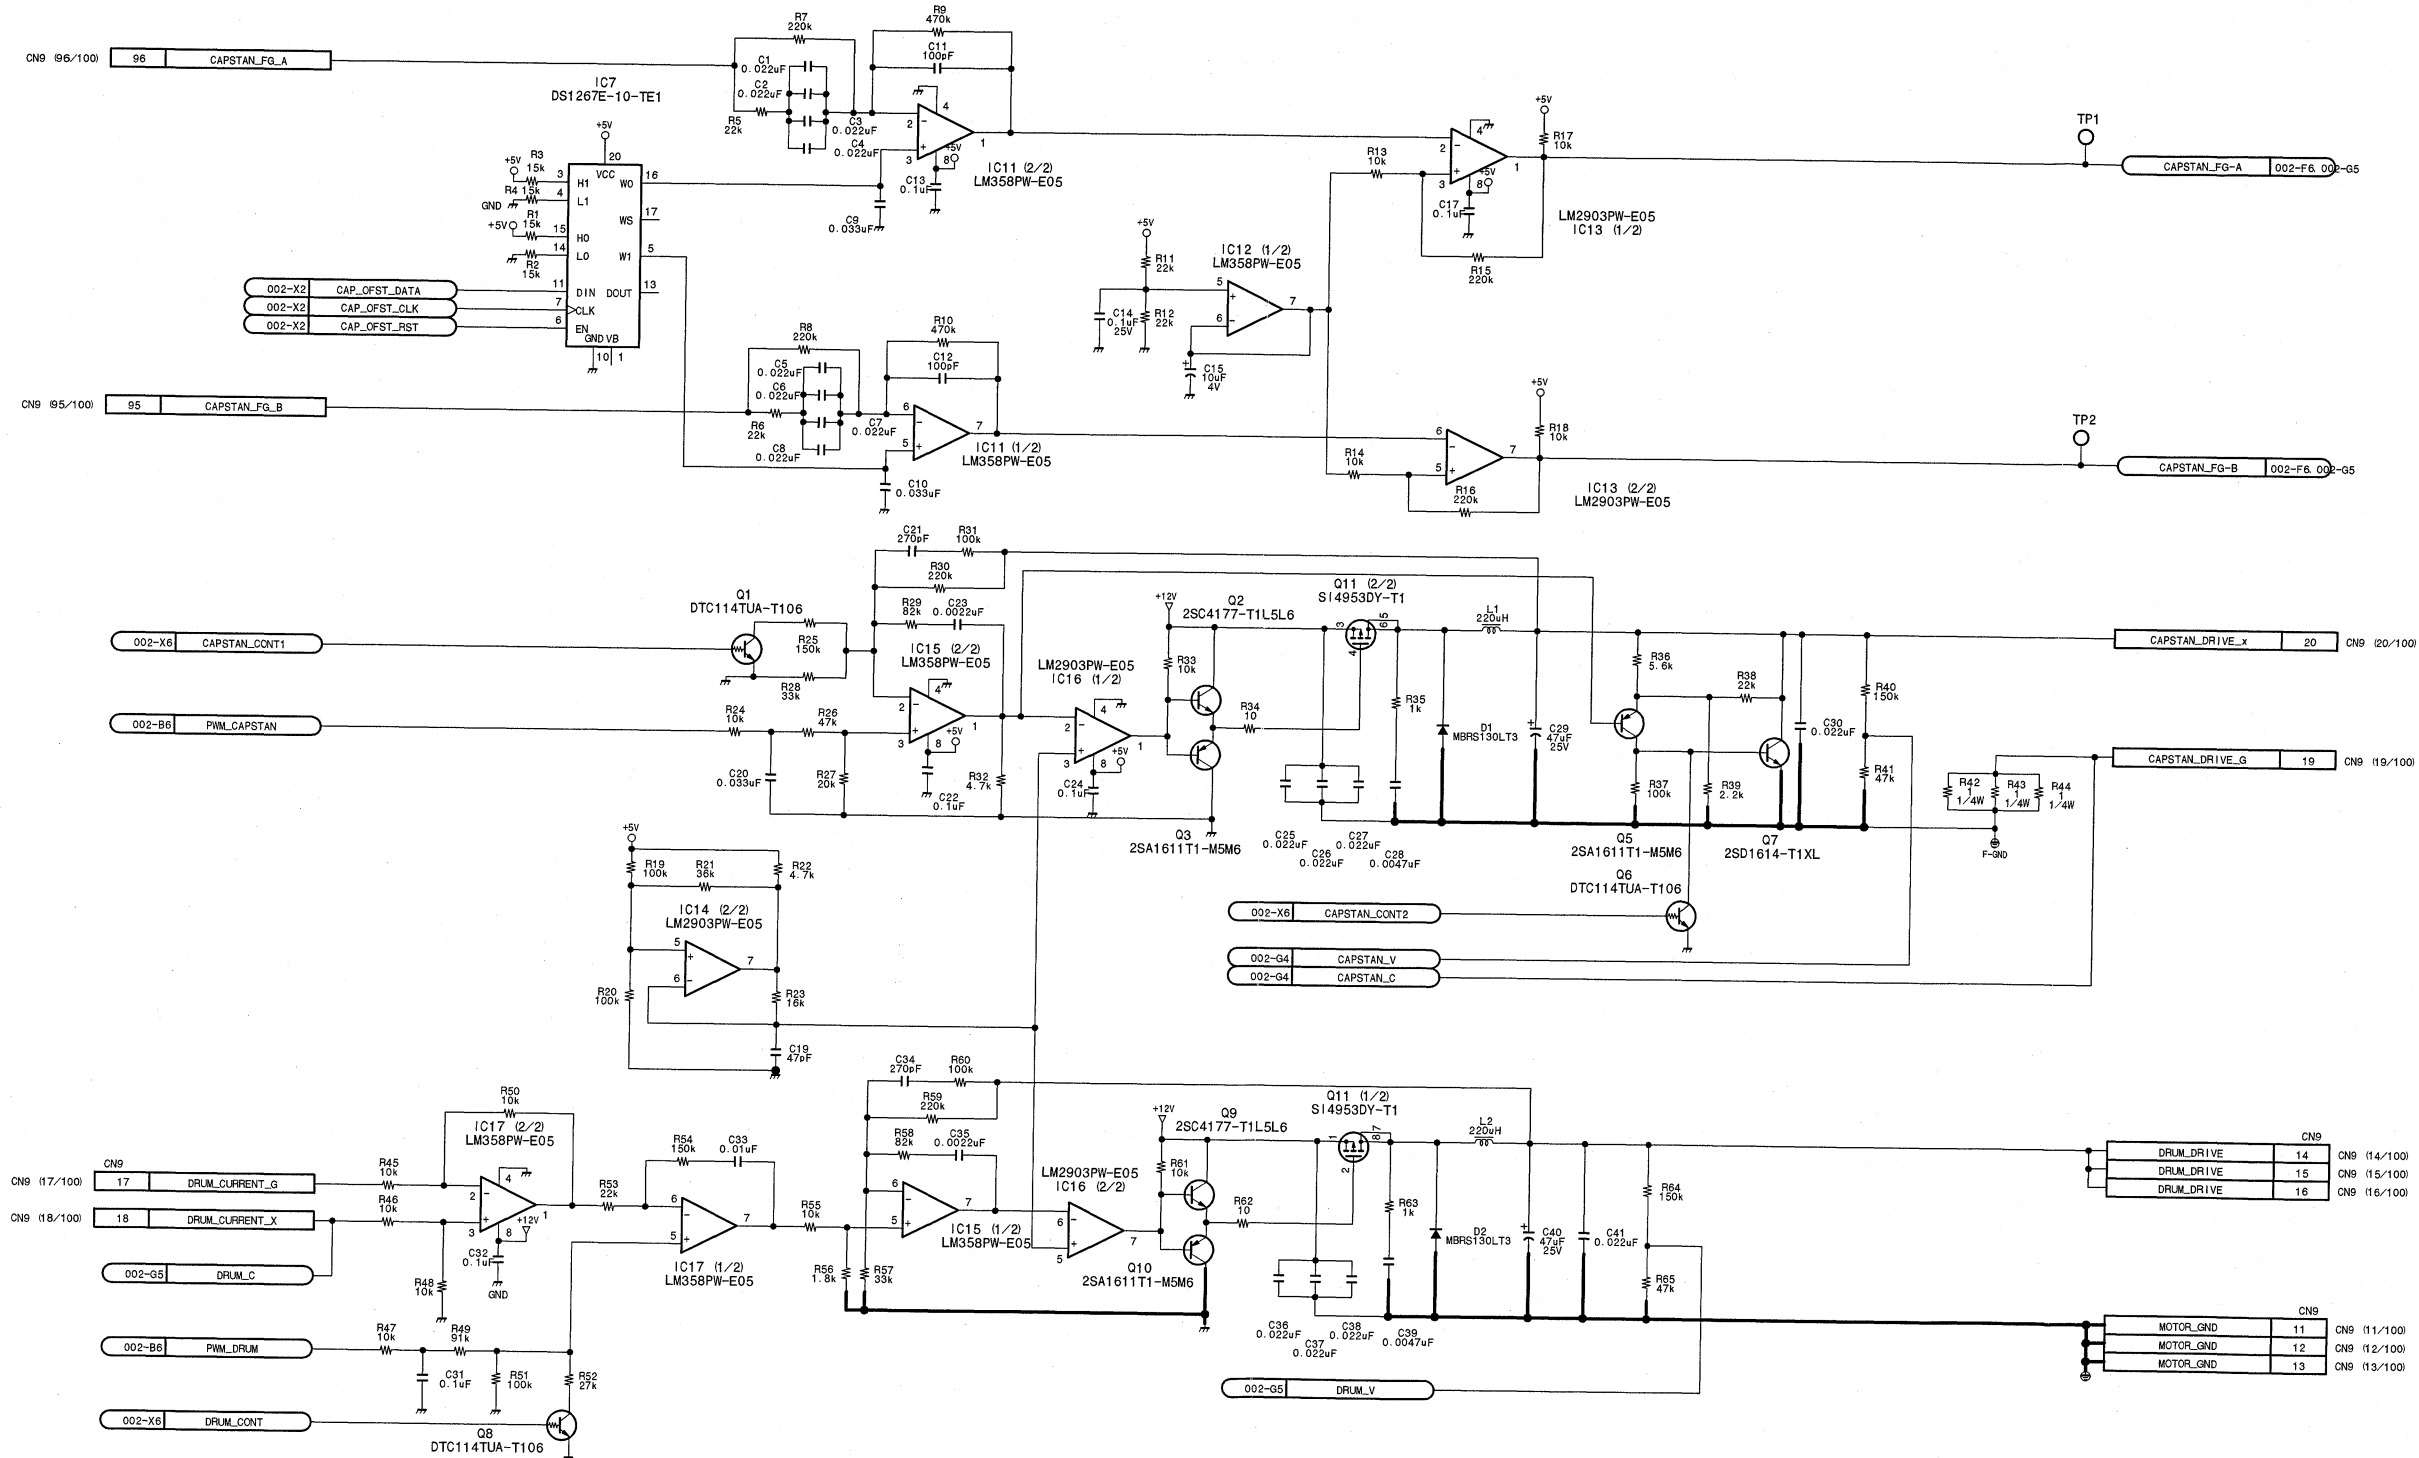




Servo controller
SV-218 (1/2)
 BOARD NO. 1-677-538-11
 LOT NO. 911-
 HDW-F900V_SV-218_012_1

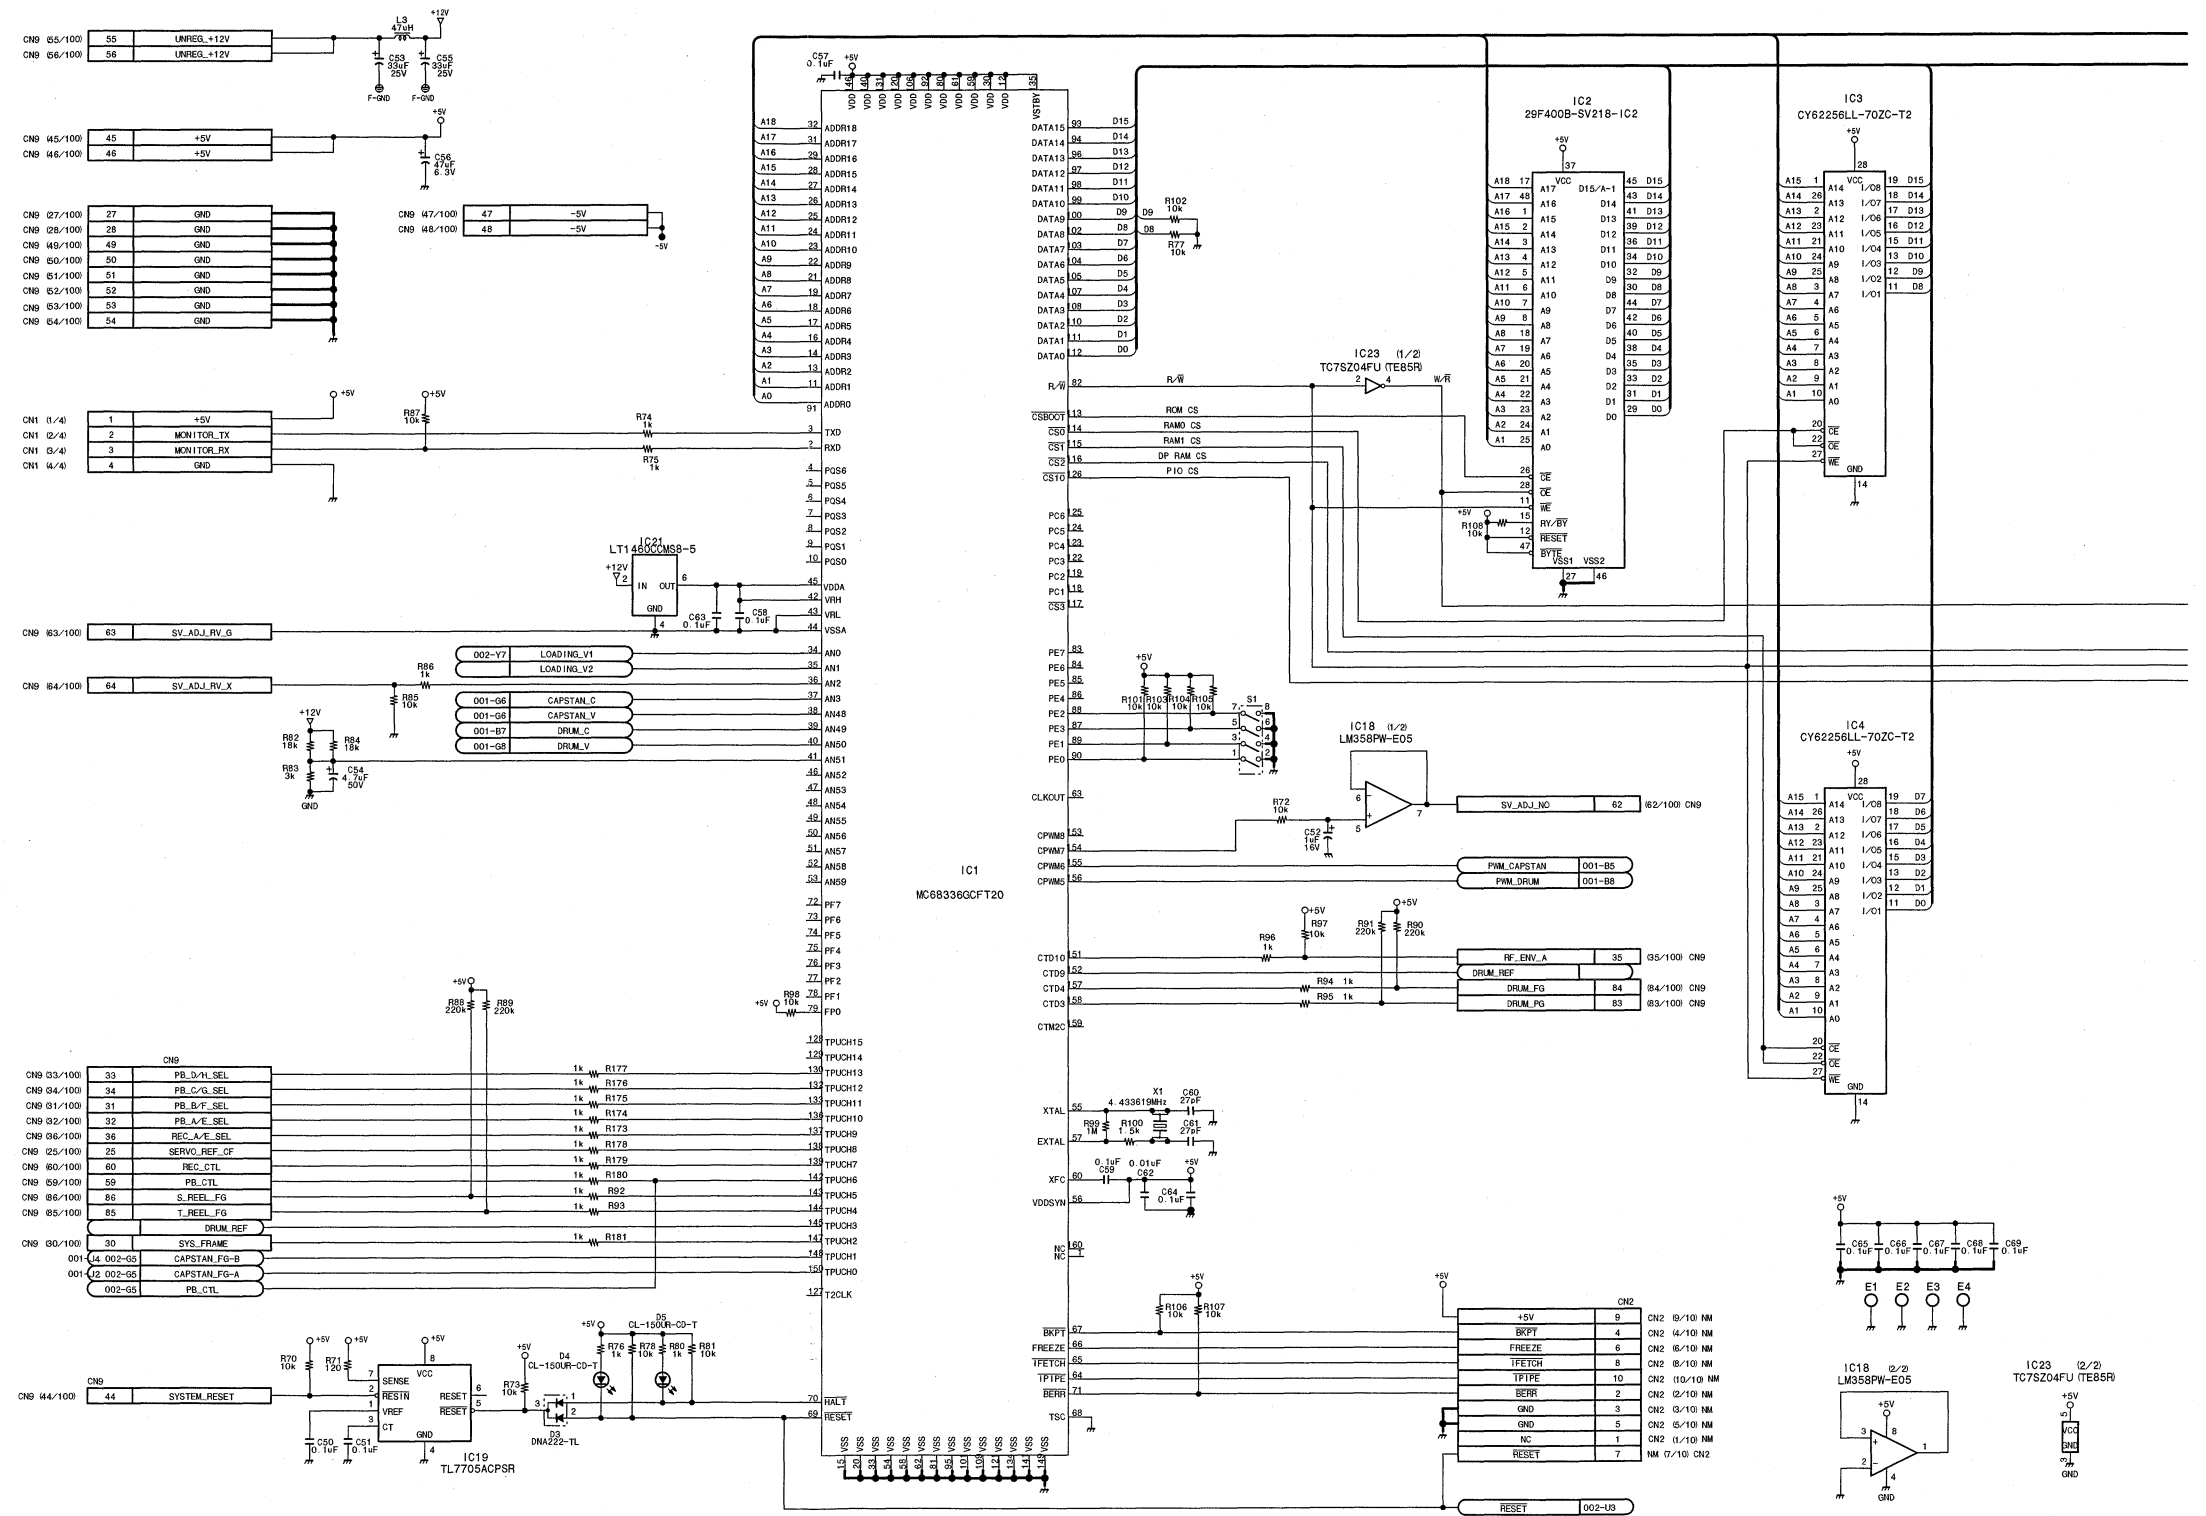

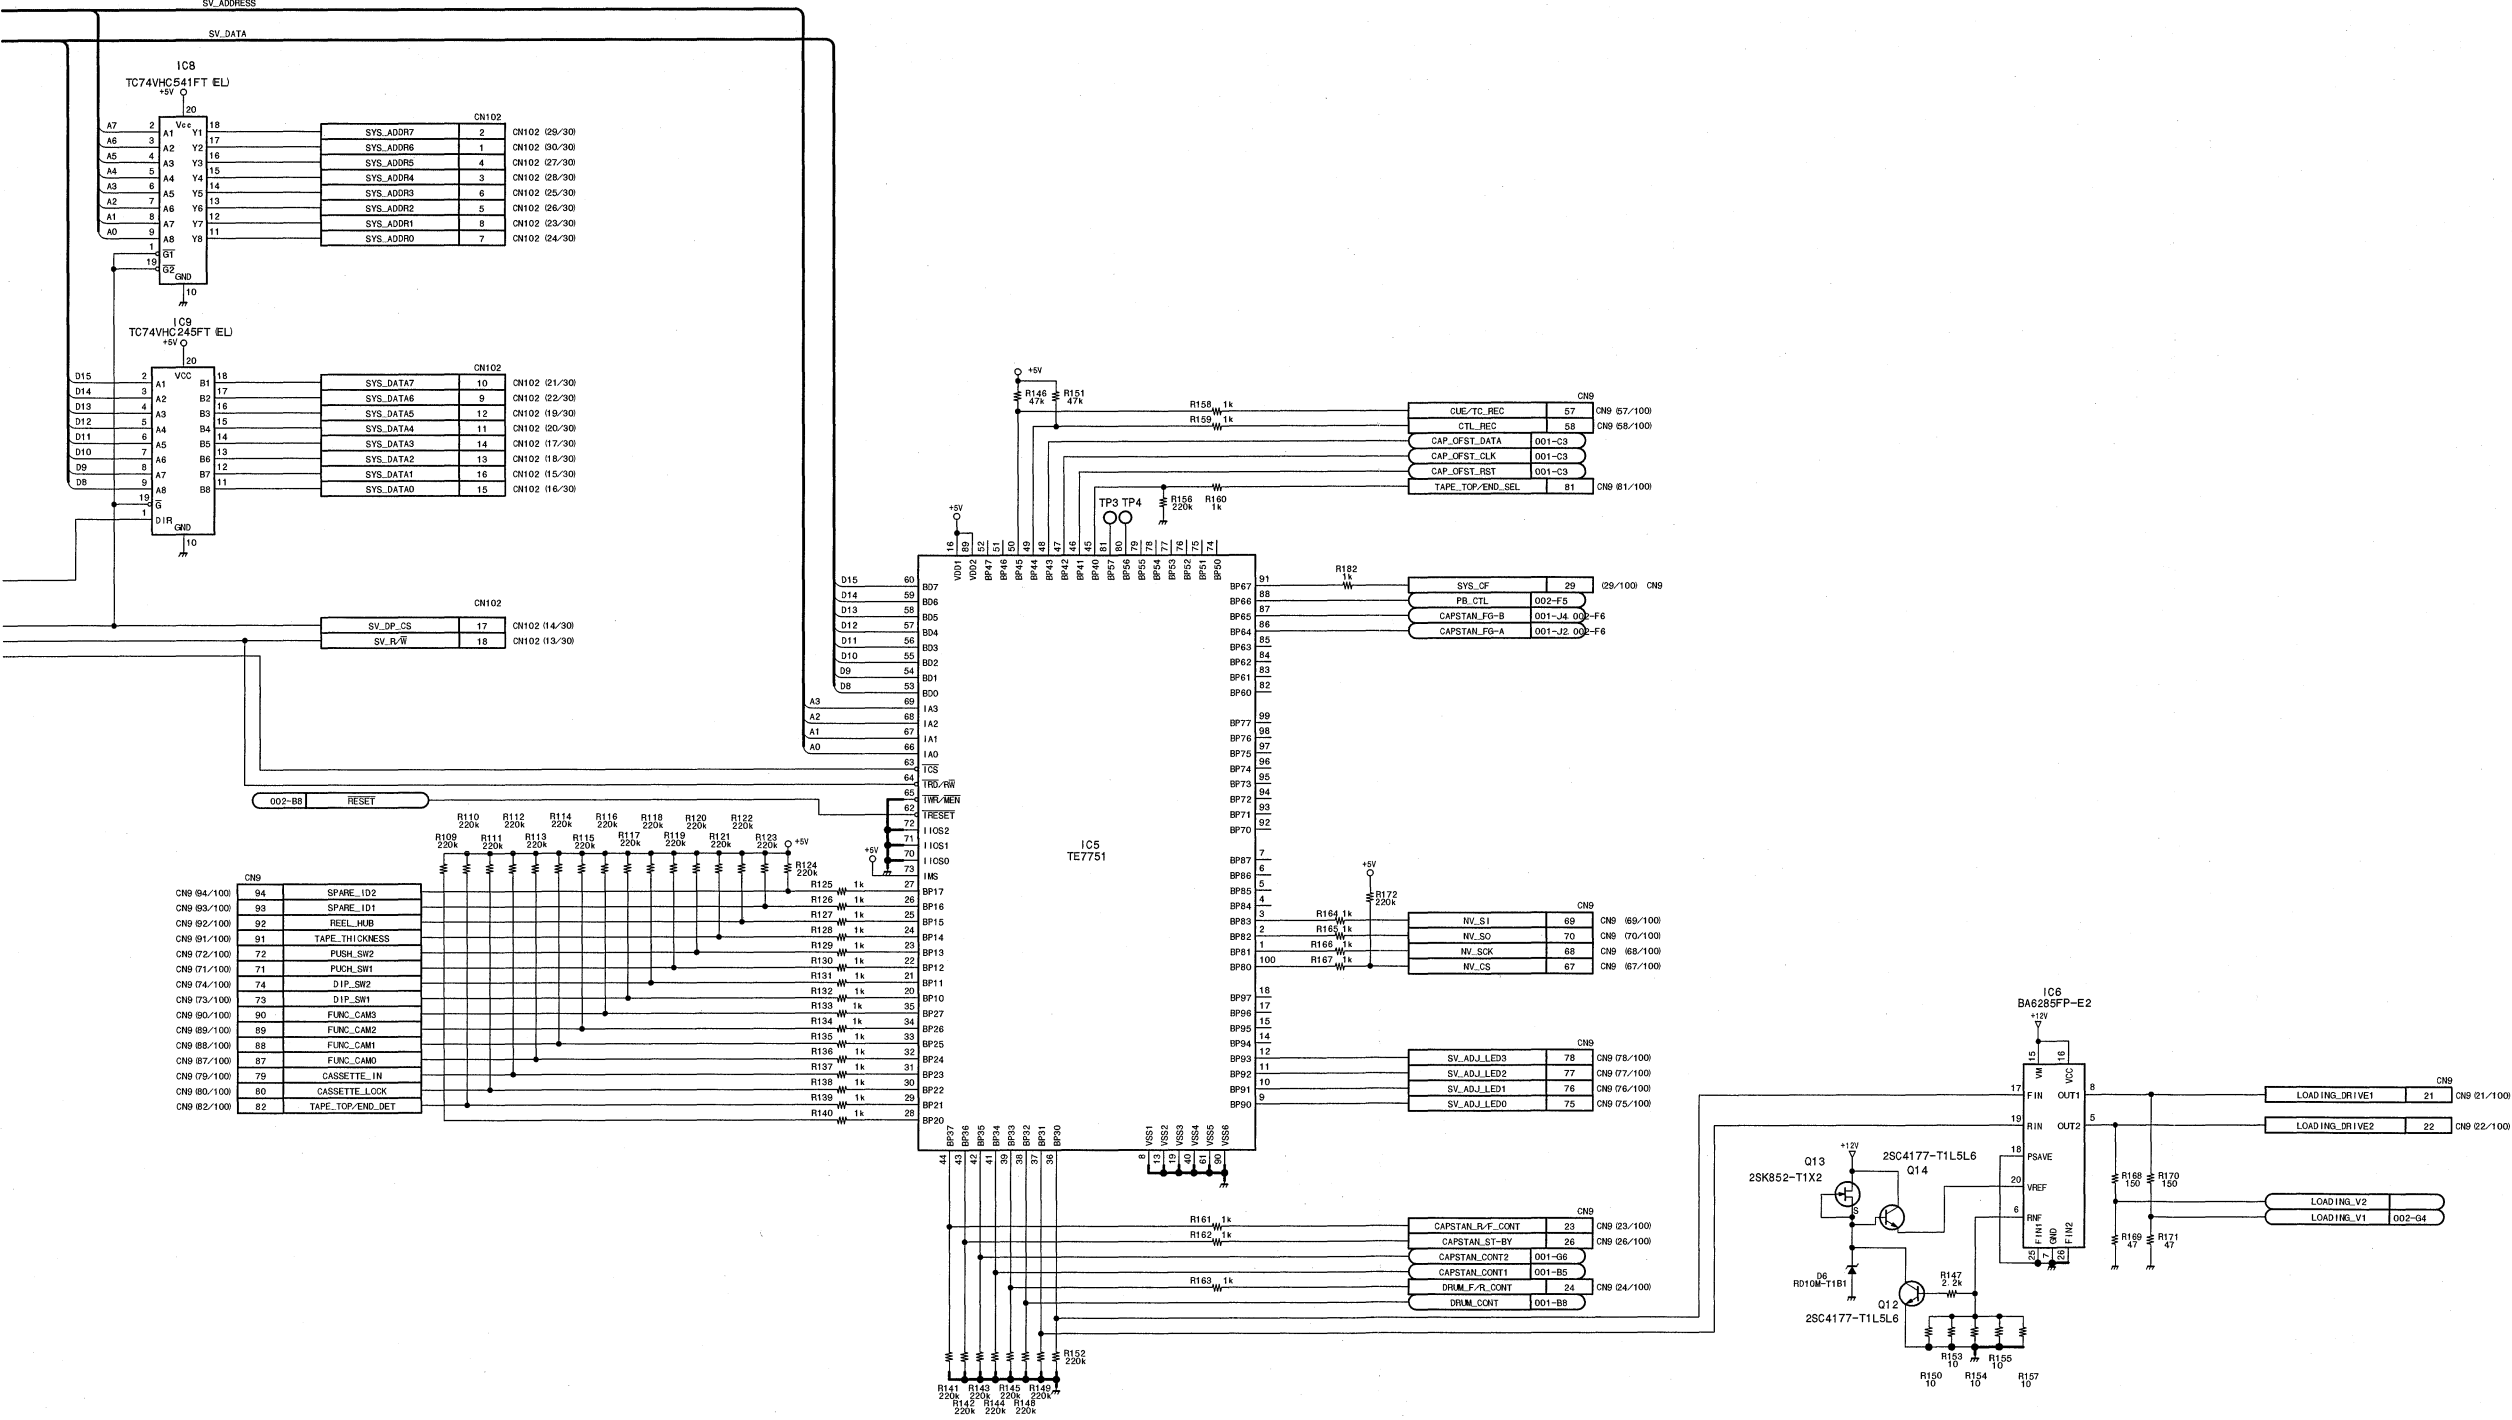


Servo controller
SV-218 (2/2)
BOARD NO. 1-677-538-11
LOT NO. 911-
HDW-F900V_SV-218_012_2

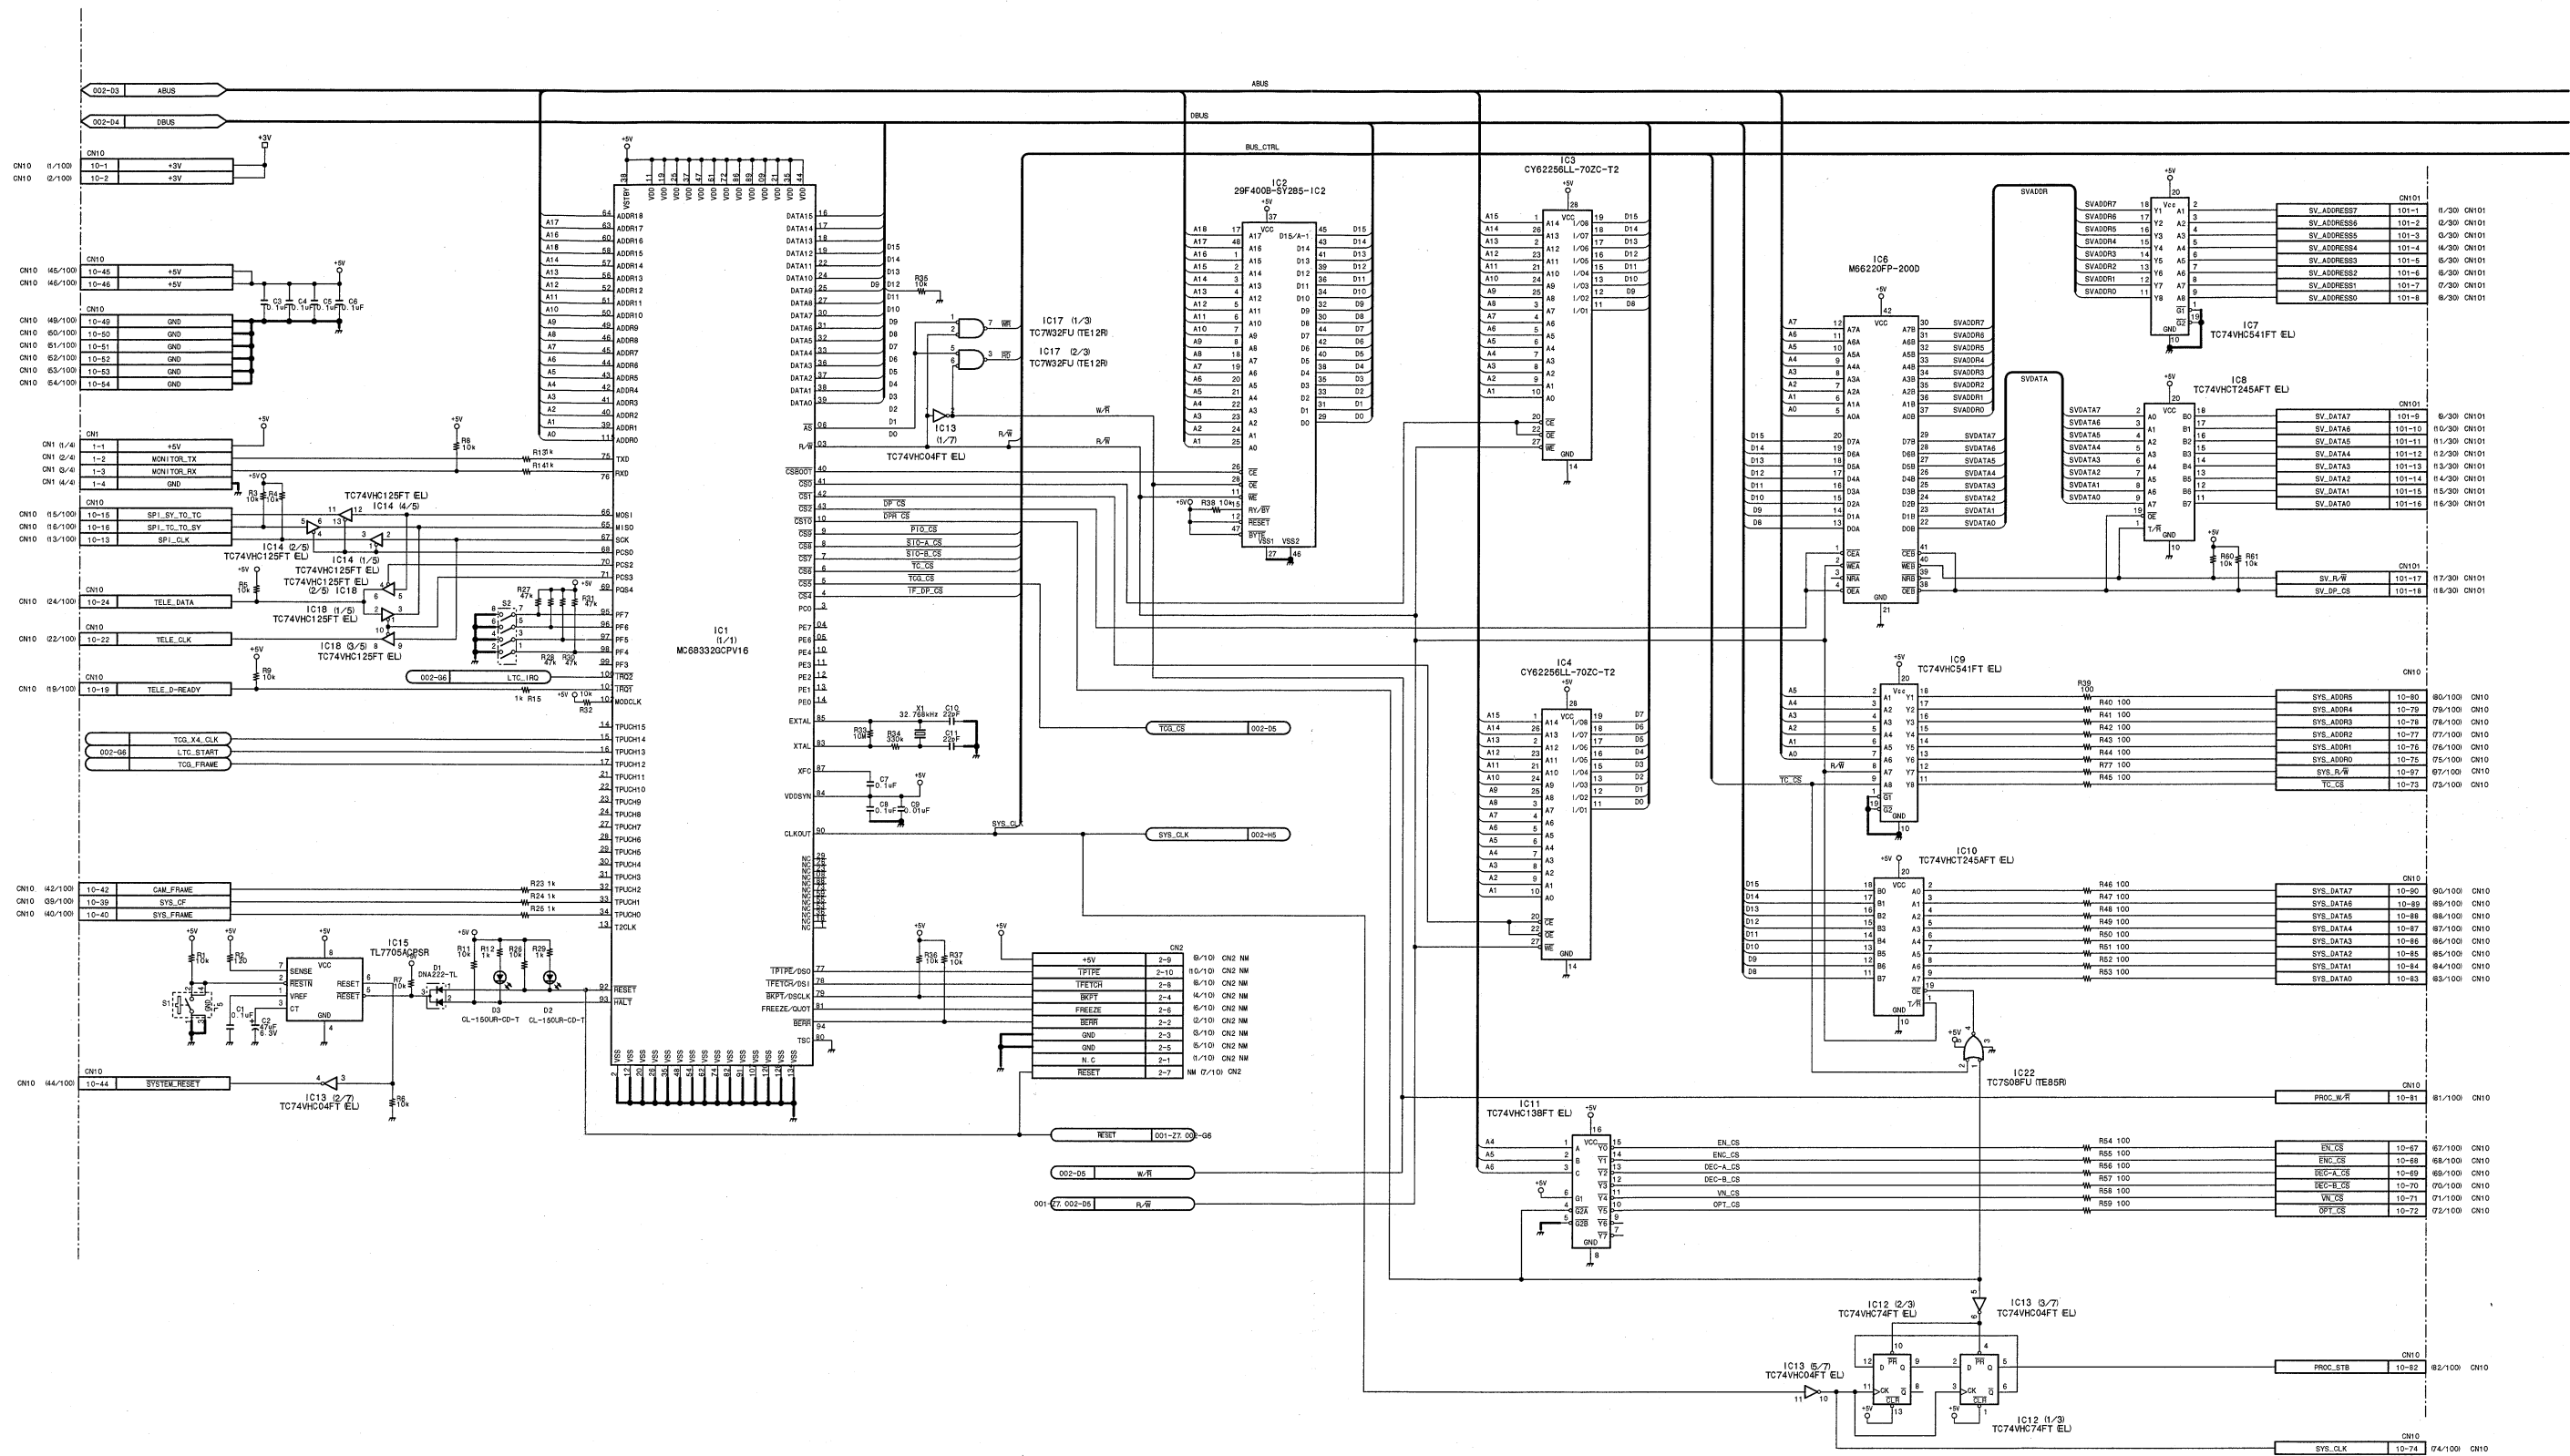


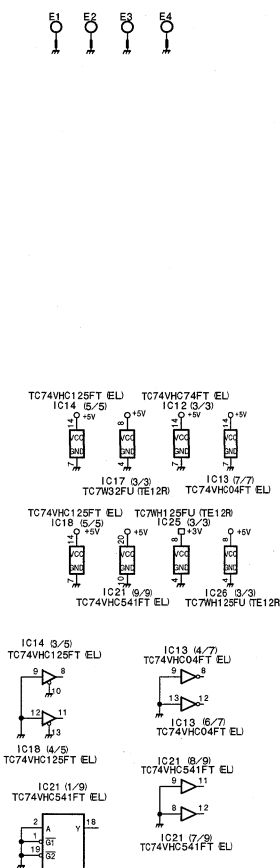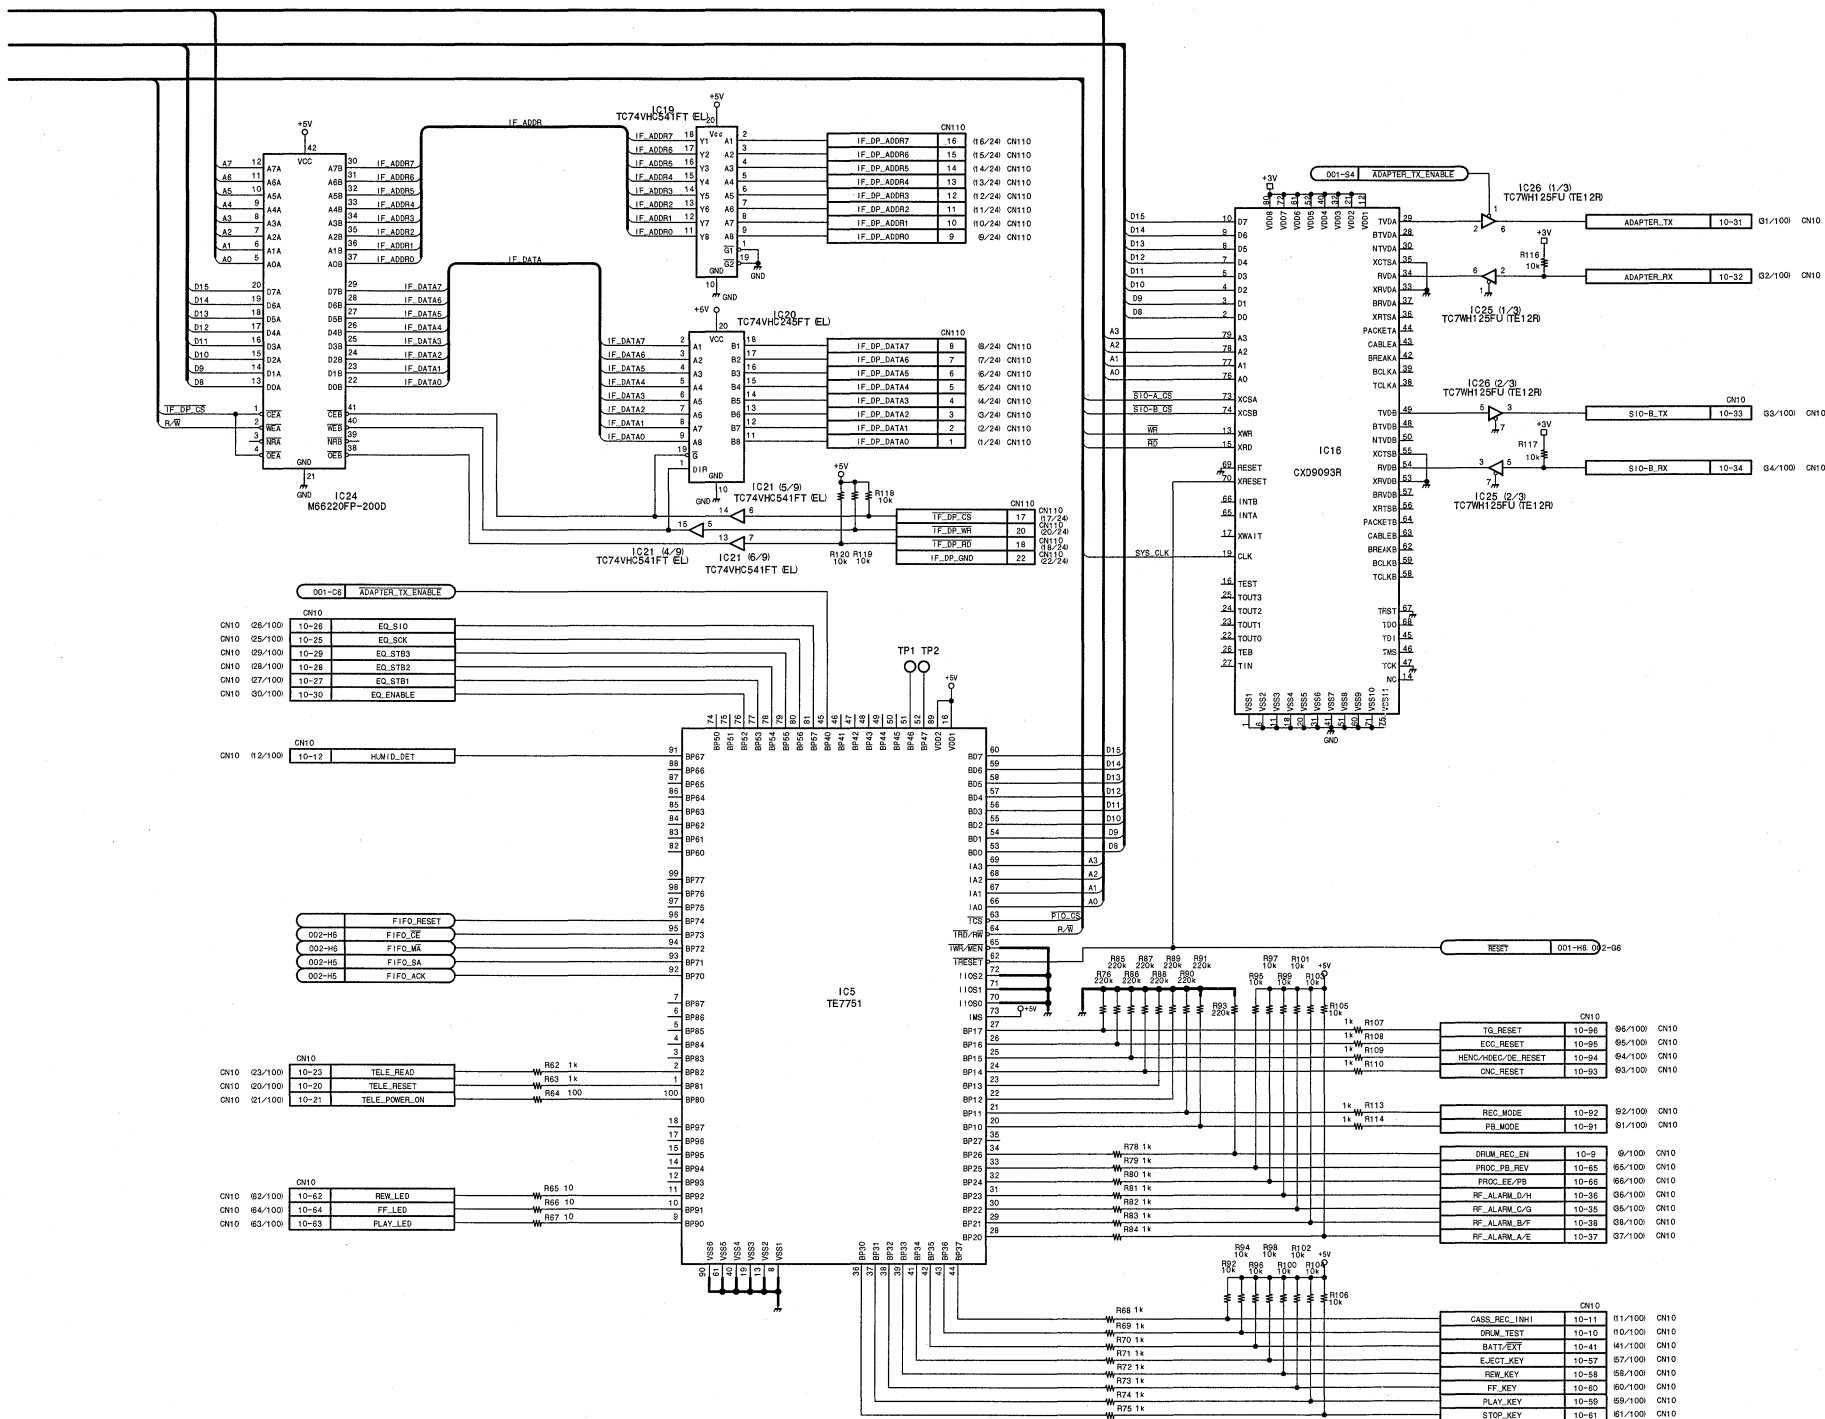

System controller for VTR block, Timecode controller
SY-285 (1/2)
BOARD NO. 1-677-539-11
LOT NO. 911-
HDW-F900V_SY-285_005_1

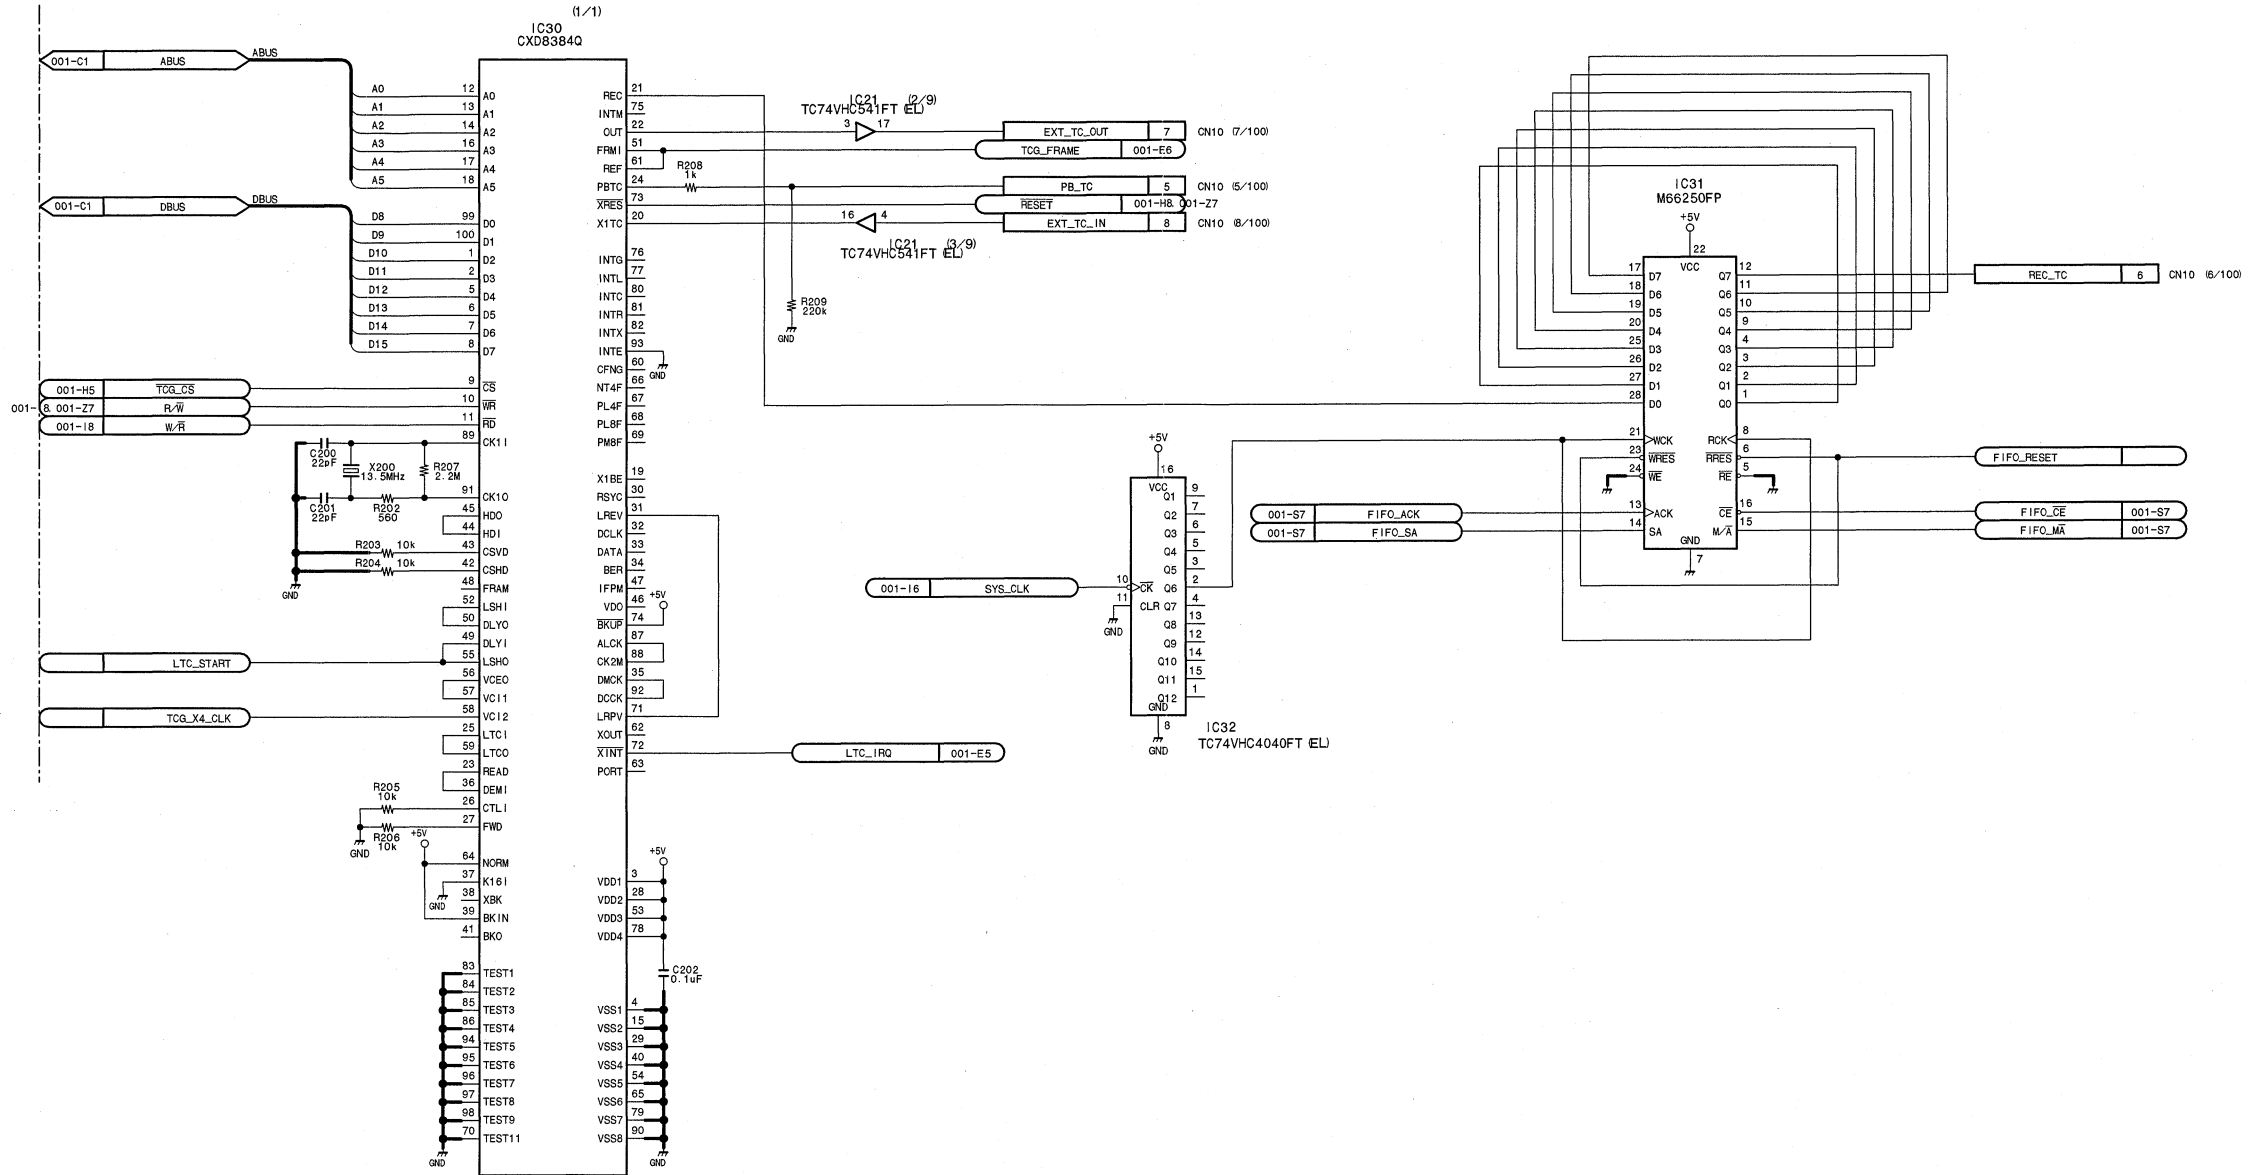

System controller for VTR block, Timecode controller
SY-285 (2/2)
BOARD NO. 1-677-539-11
LOT NO. 911-
HDW-F900V_SY-285_005_2

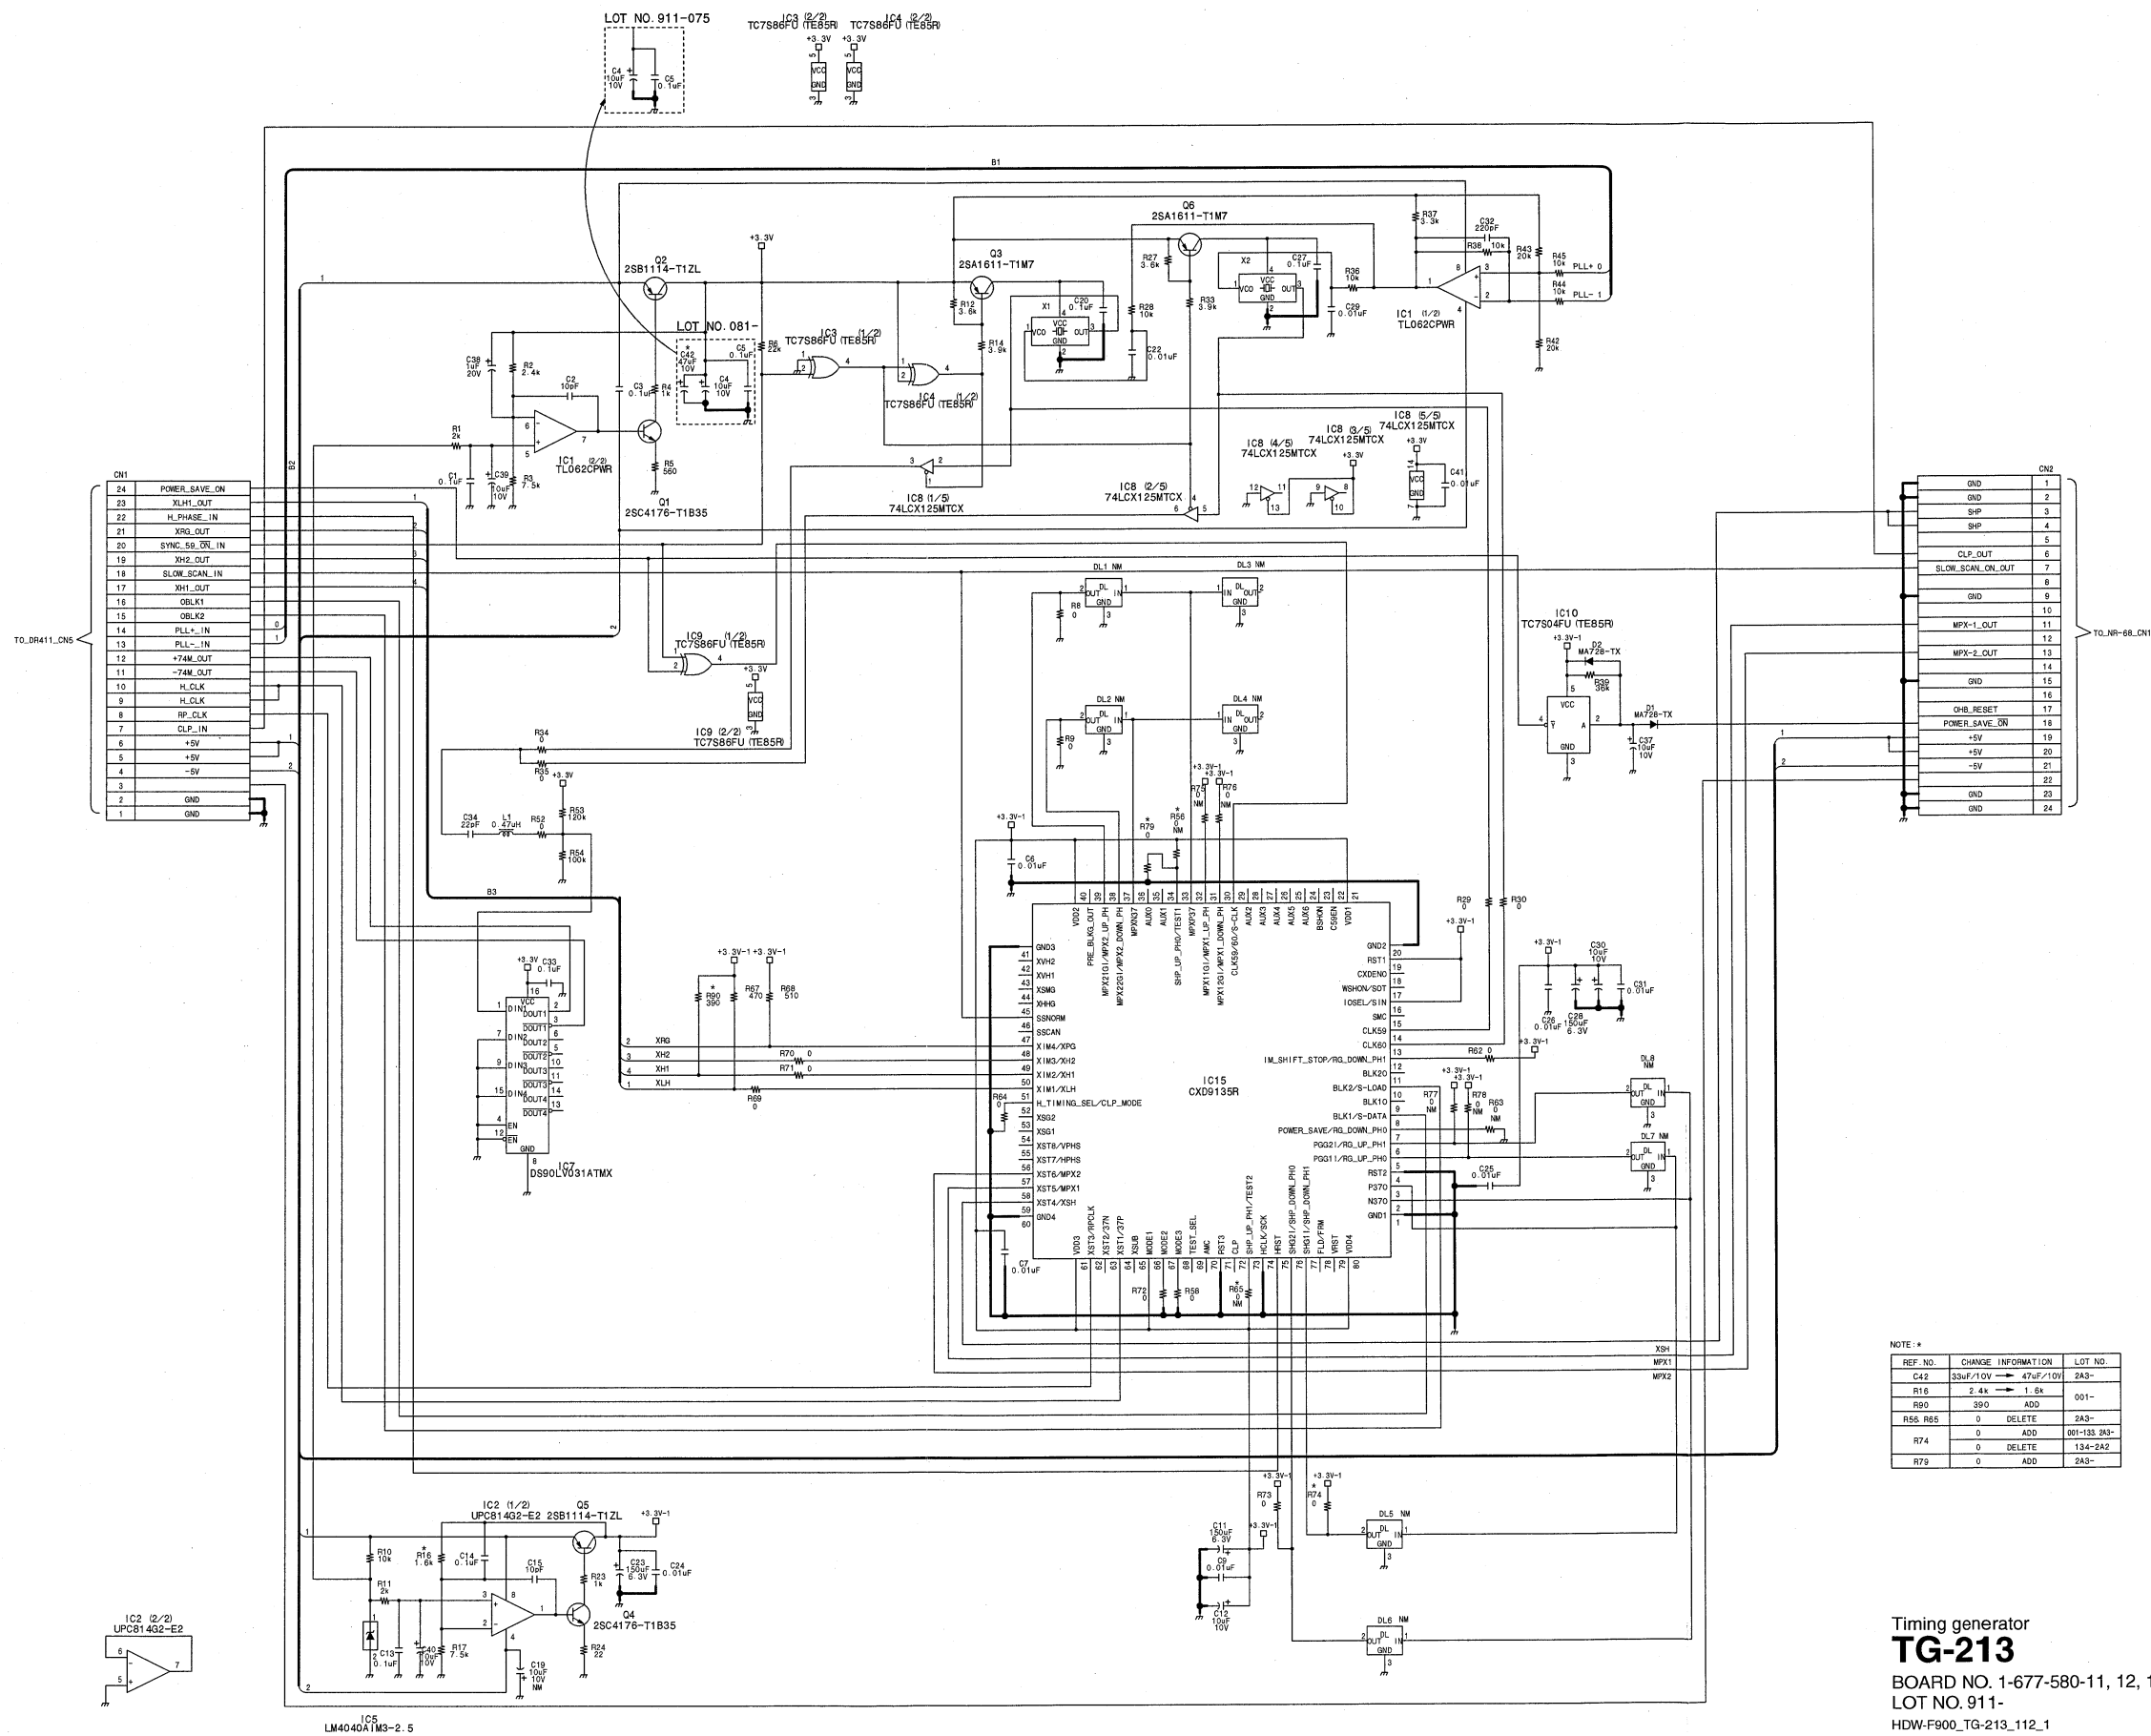


1


2

3

4

5

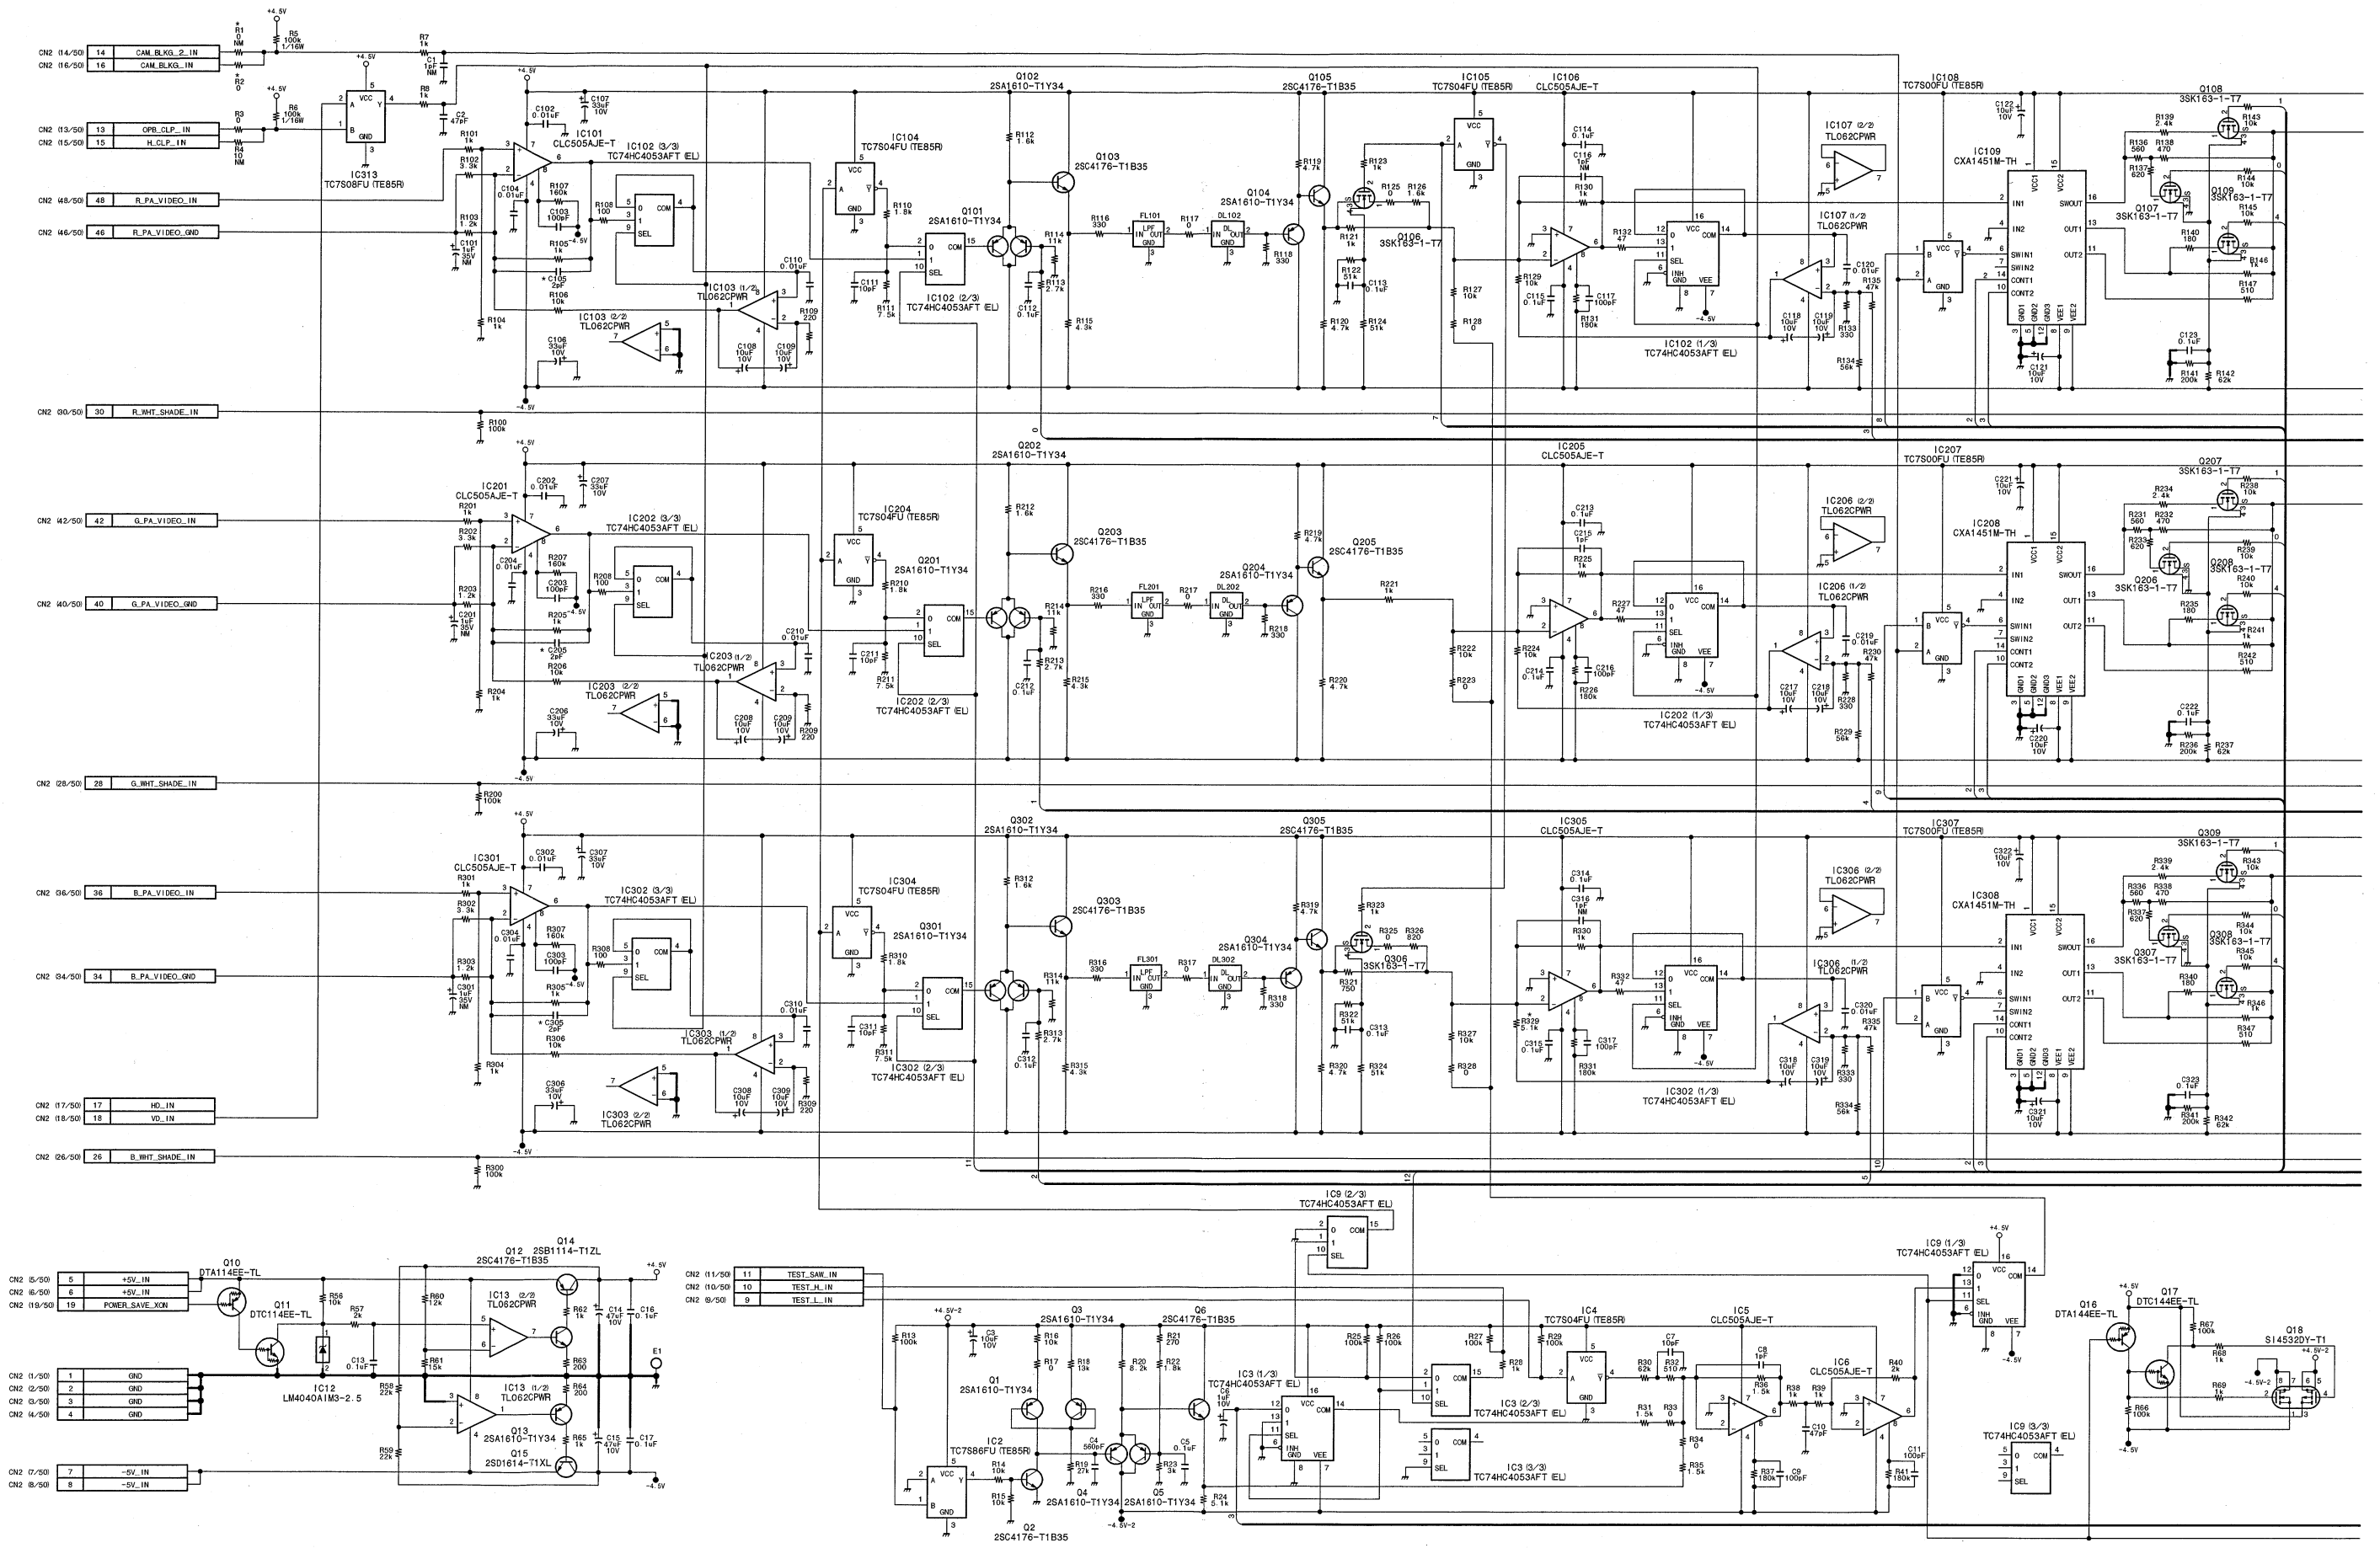

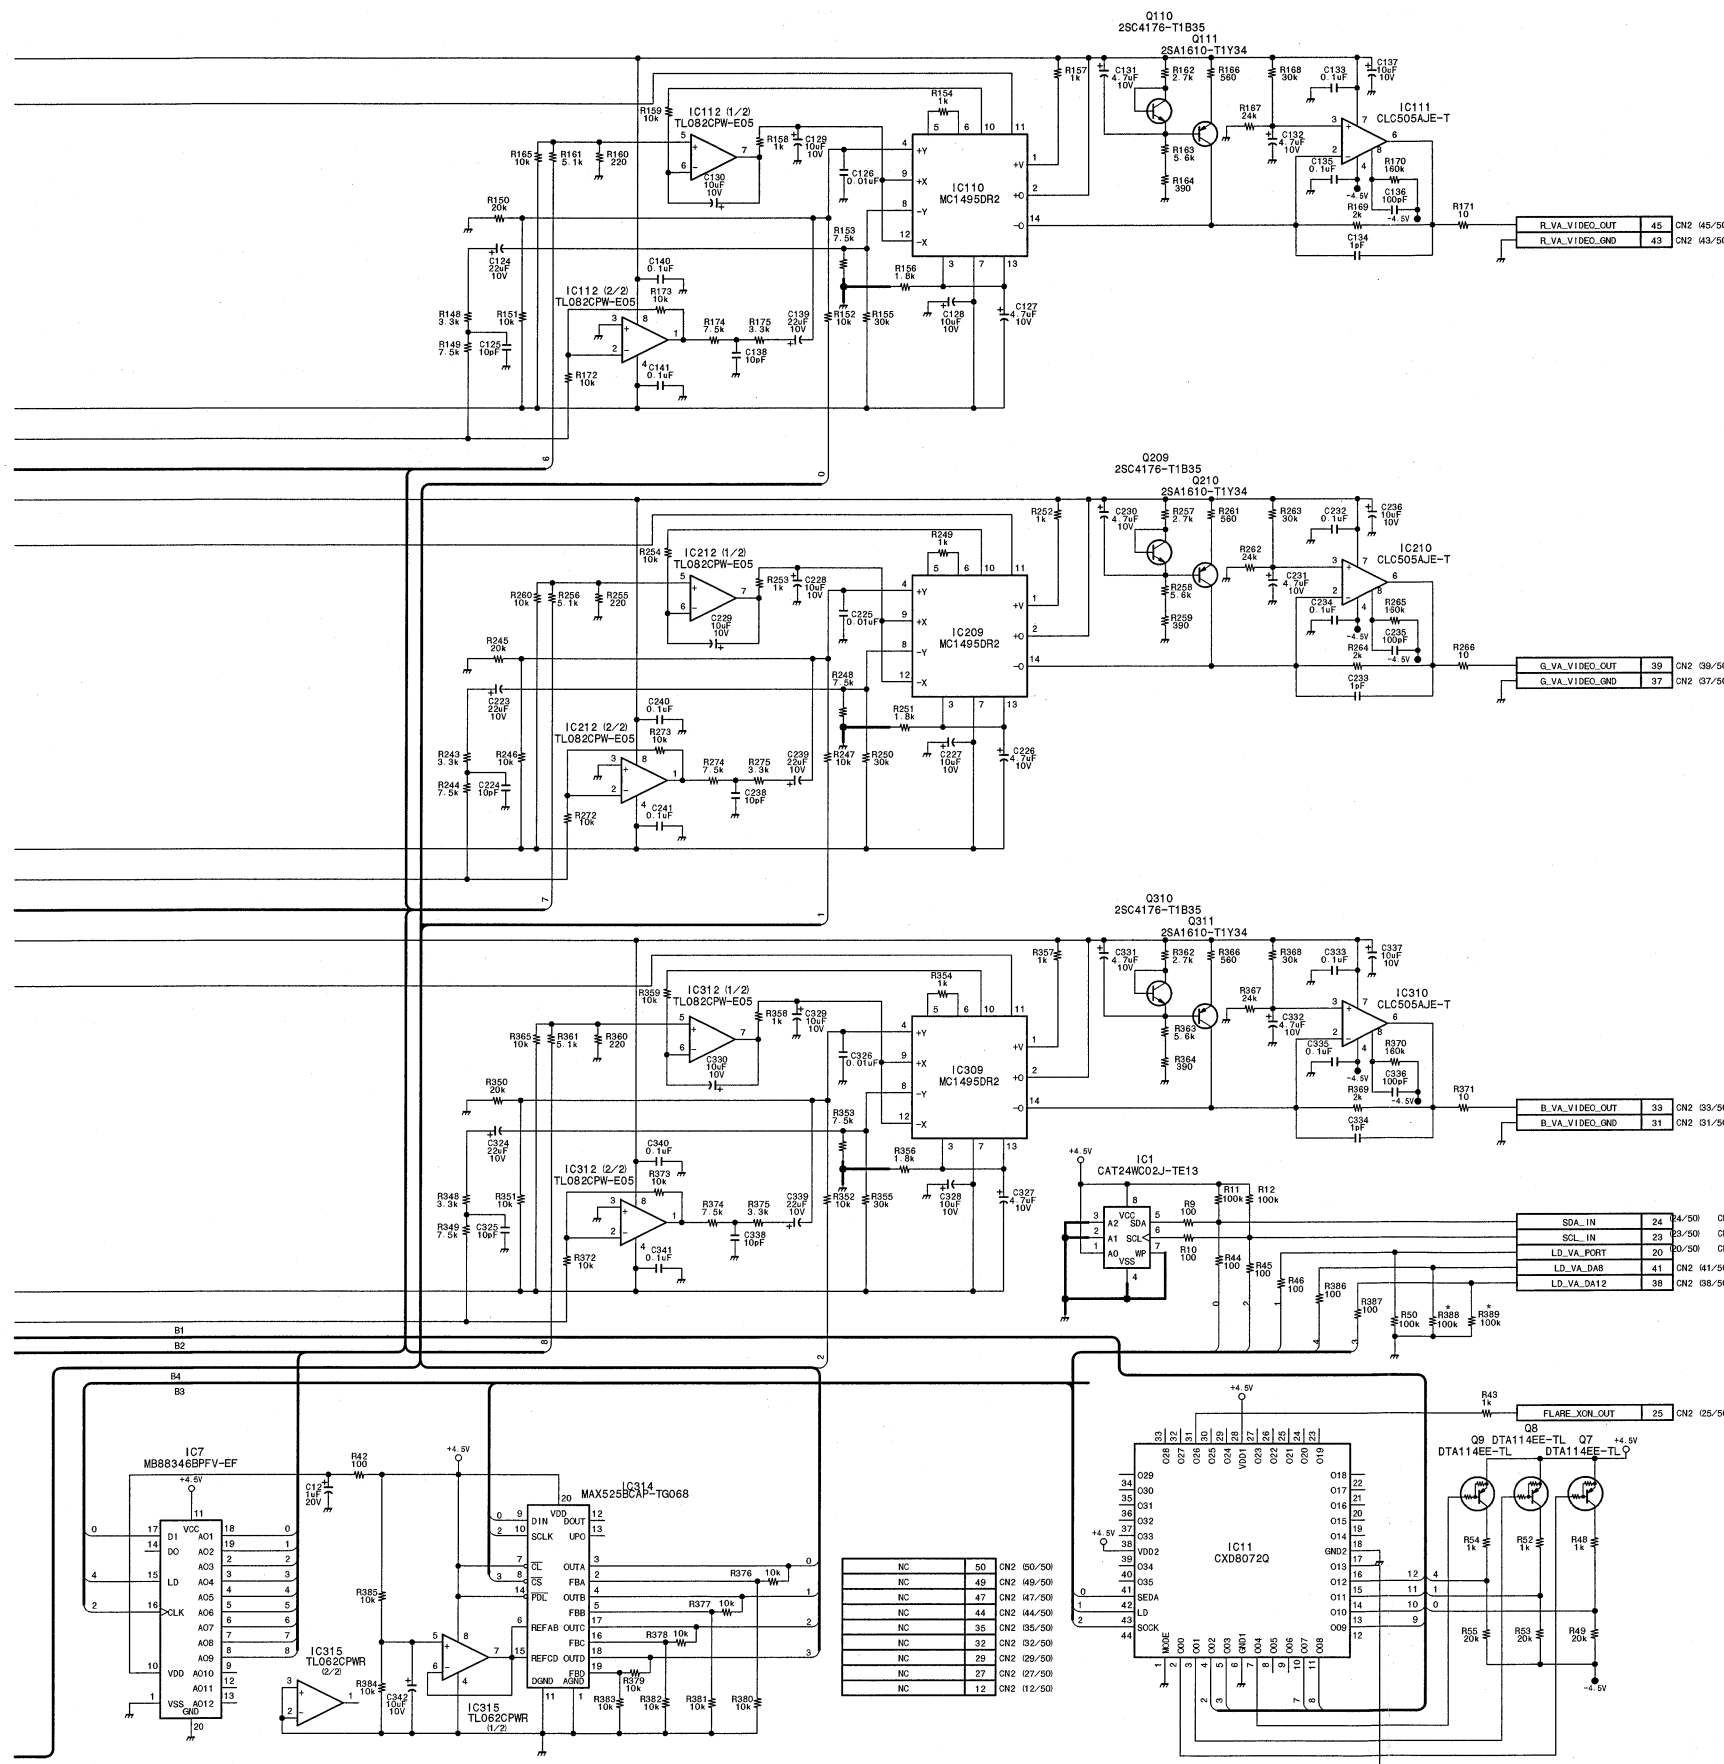


NOTE *

REF. NO.	CHANGE INFORMATION	LOT NO.
C105	36F DELETE 912-075	
	26F ADD 081-	
C205	36F DELETE 912-075	
	26F ADD 081-	
C305	36F DELETE 912-075	
	26F ADD 081-	
R1	0 DELETE 2A3-	
R2	0 DELETE 001-294	
R329	10k ADD 2A3-	
R388	10k ADD 003-	
R389	100k ADD 2A3-	

Video amp, White gain, White shading compensator
VA-195
 BOARD NO. 1-677-593-11, 12
 LOT NO. 911-
 HDW-F900C_VA-195_211_1

4-104



3


5

VDA-51

BOARD NO. 1-677-594-11, 12

LOT NO. 911-


HDW-F900C_VDA-51_211_1

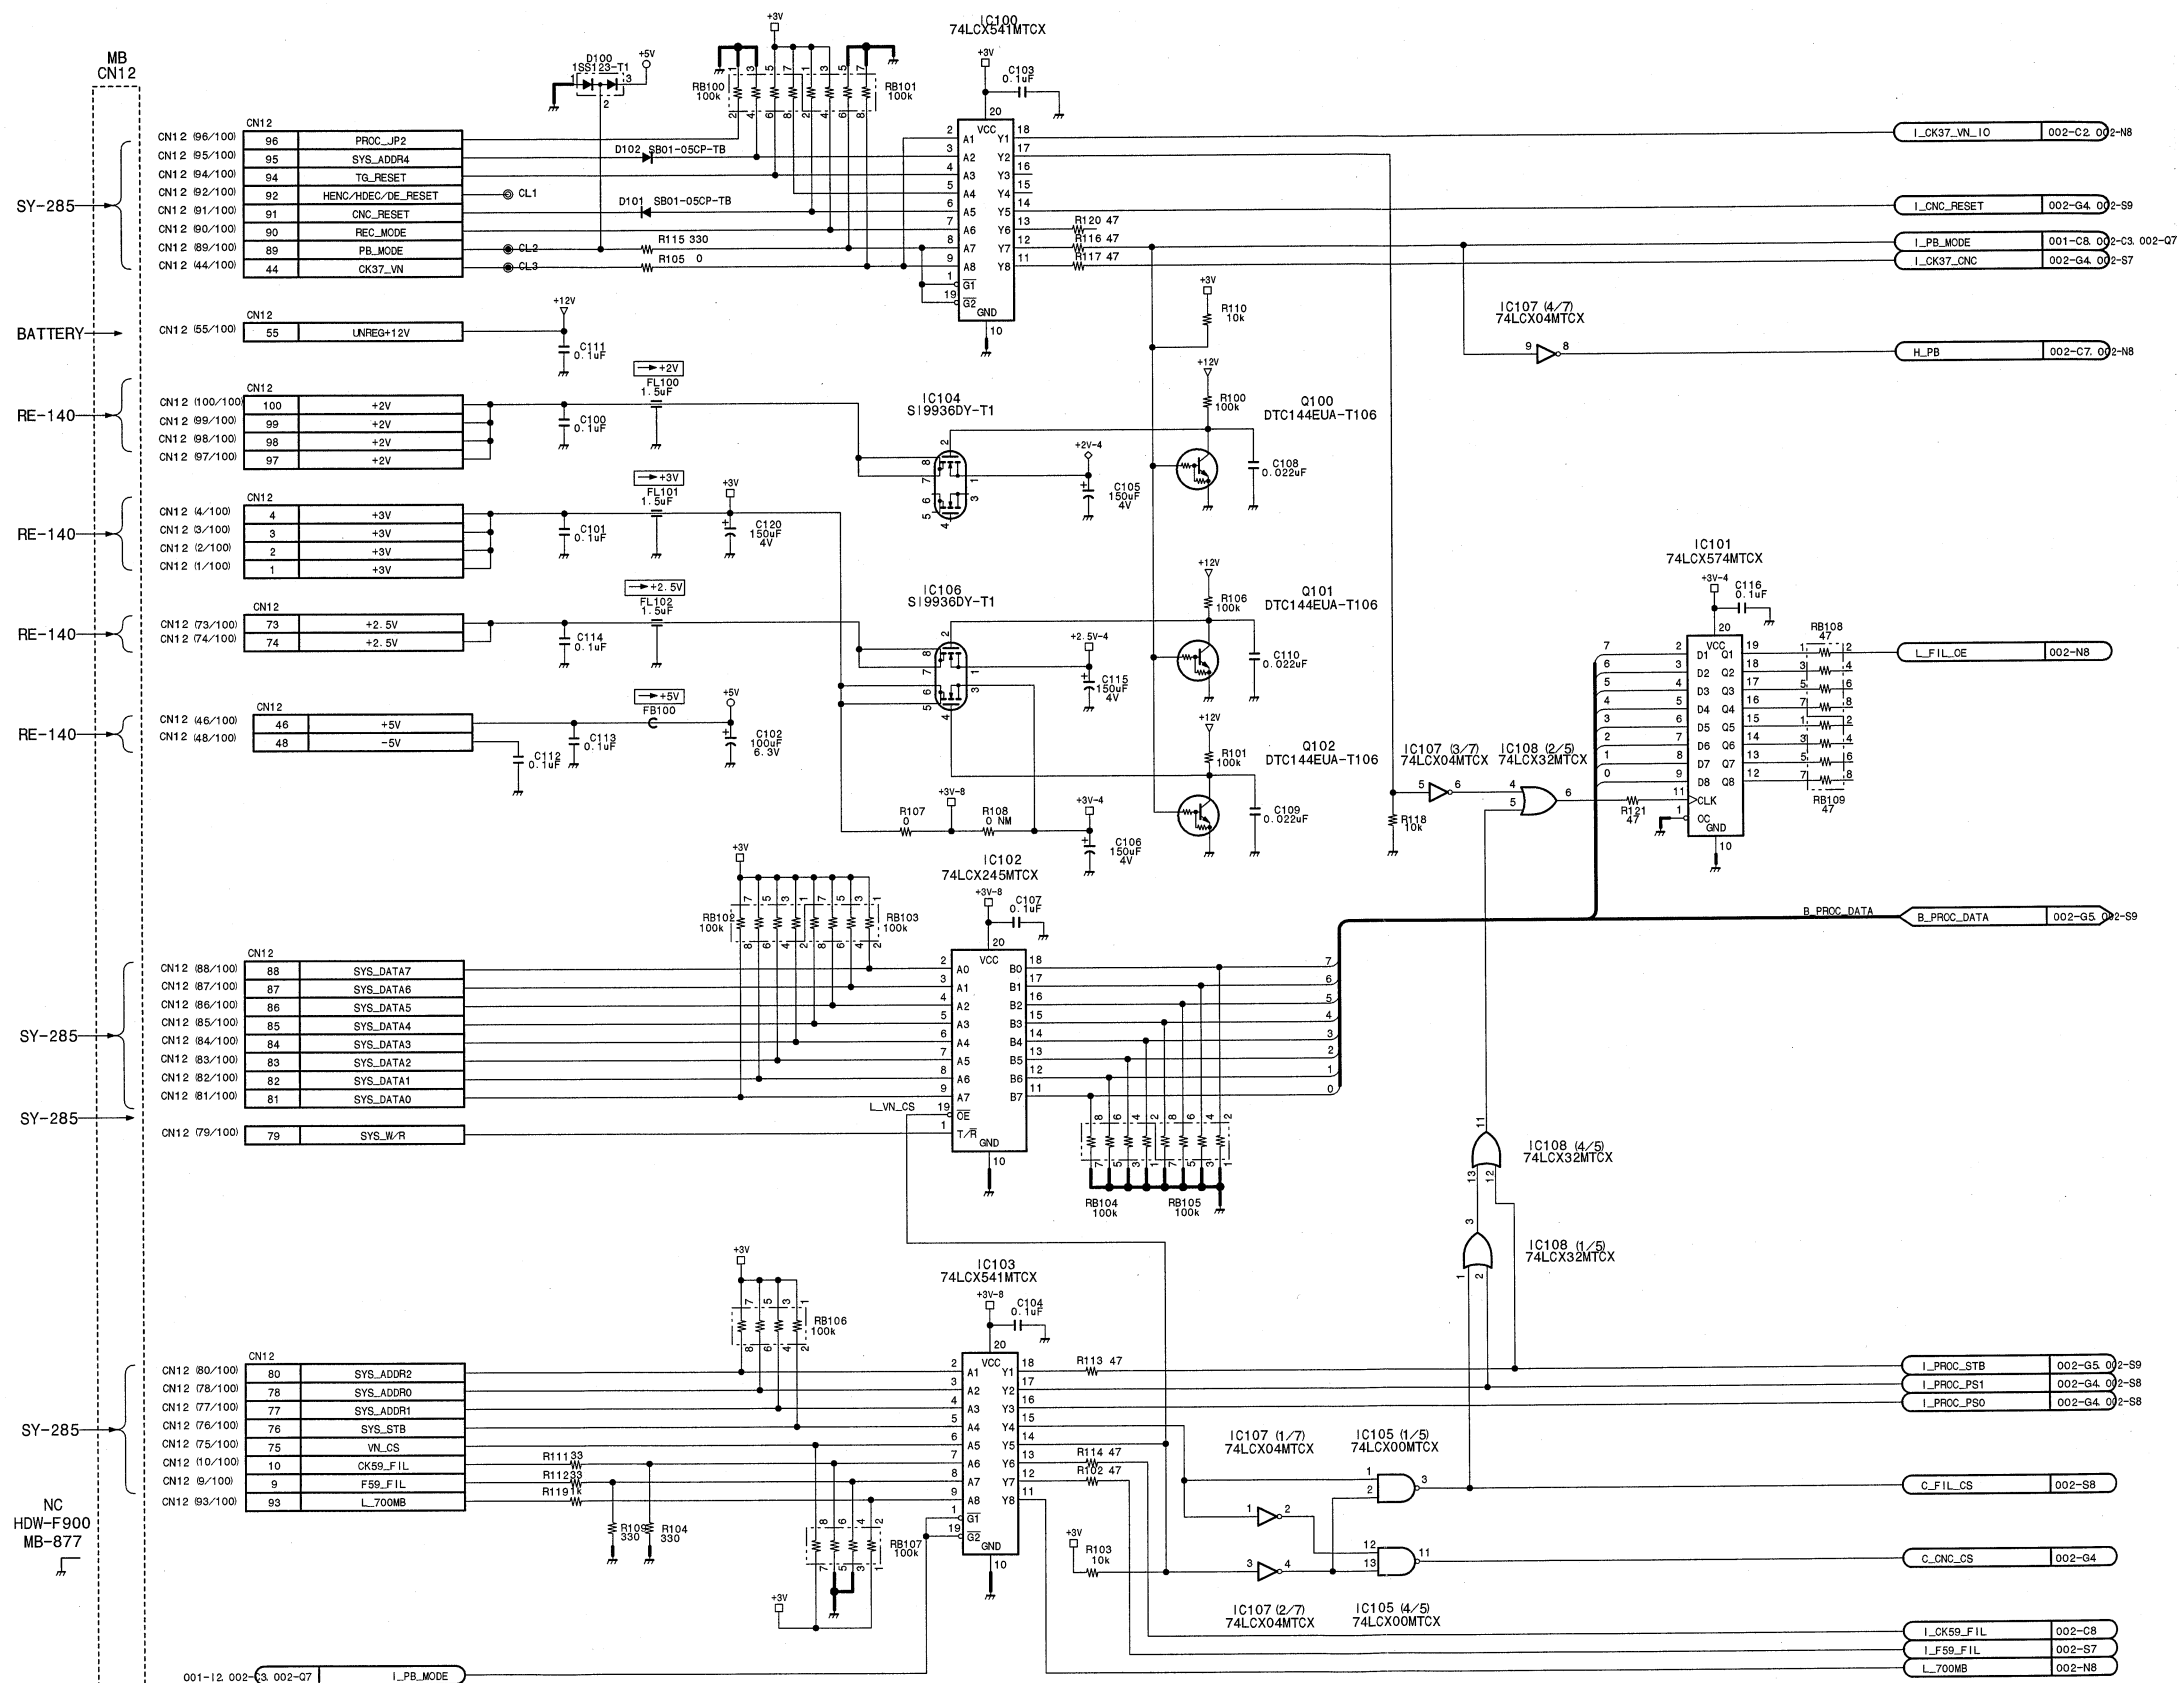


F_MODE	2	1	0	FRAME
0	0	0	0	29.97Hz
1	0	0	1	30.0Hz
2	0	1	0	25.0Hz
3	0	1	1	25.0Hz
4	1	0	0	23.98Hz
5	1	0	1	24.0Hz
6	1	1	0	---
7	1	1	1	---


CN12		
41	GND	CN12 41/100
43	GND	CN12 43/100
49	GND	CN12 49/100
50	GND	CN12 50/100
51	GND	CN12 51/100
52	GND	CN12 52/100
53	GND	CN12 53/100
54	GND	CN12 54/100
67	GND	CN12 67/100

CN12		
56	NC UNREG.+12V	CN12 56/100
45	NC	CN12 45/100
8	NC	CN12 8/100
69	NC	CN12 69/100

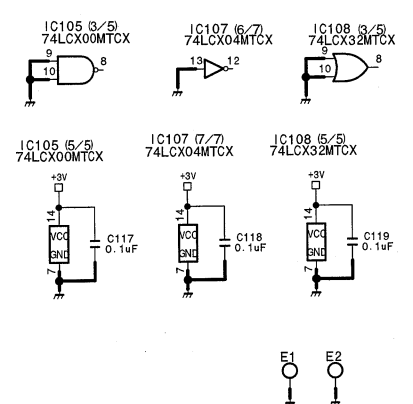

Concealment, FIL (Rate convert)
VN-12 (1/2)
 BOARD NO. 1-677-541-11
 LOT NO. 911-
 HDW-F900V_VN-12_004_1

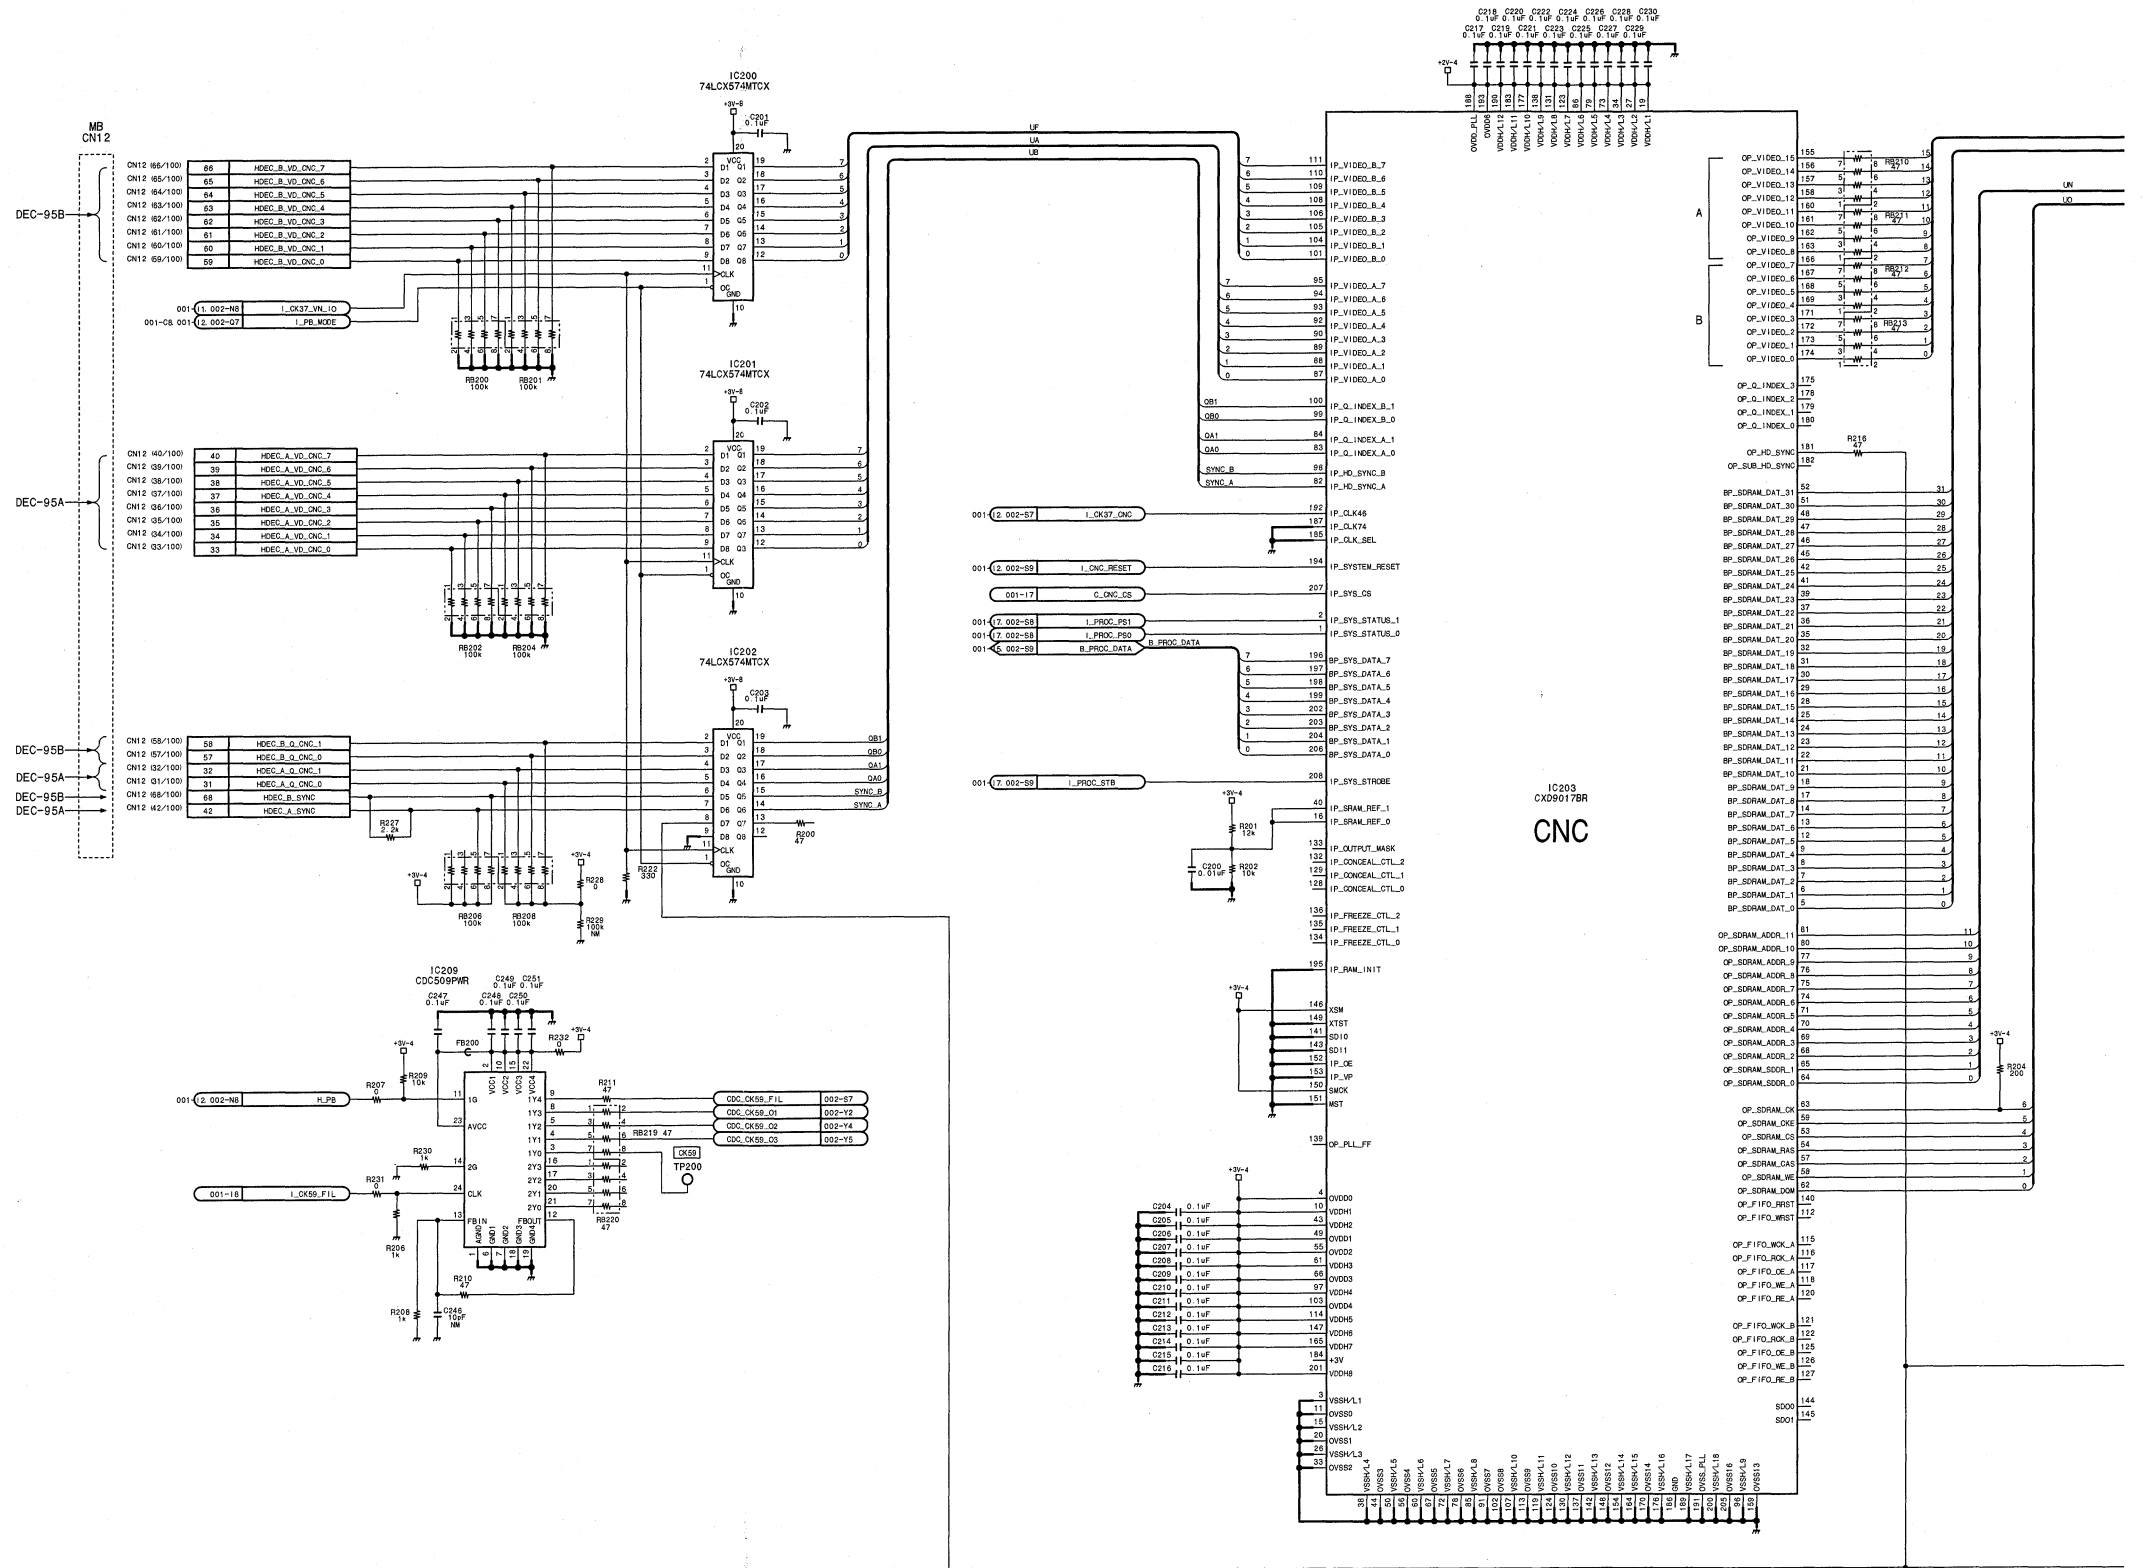



Concealment, FIL (Rate convert)
VN-12 (2/2)
 BOARD NO. 1-677-541-11
 LOT NO. 911-
 HDW-F900V_VN-12_004_2


1


2

3


4

5

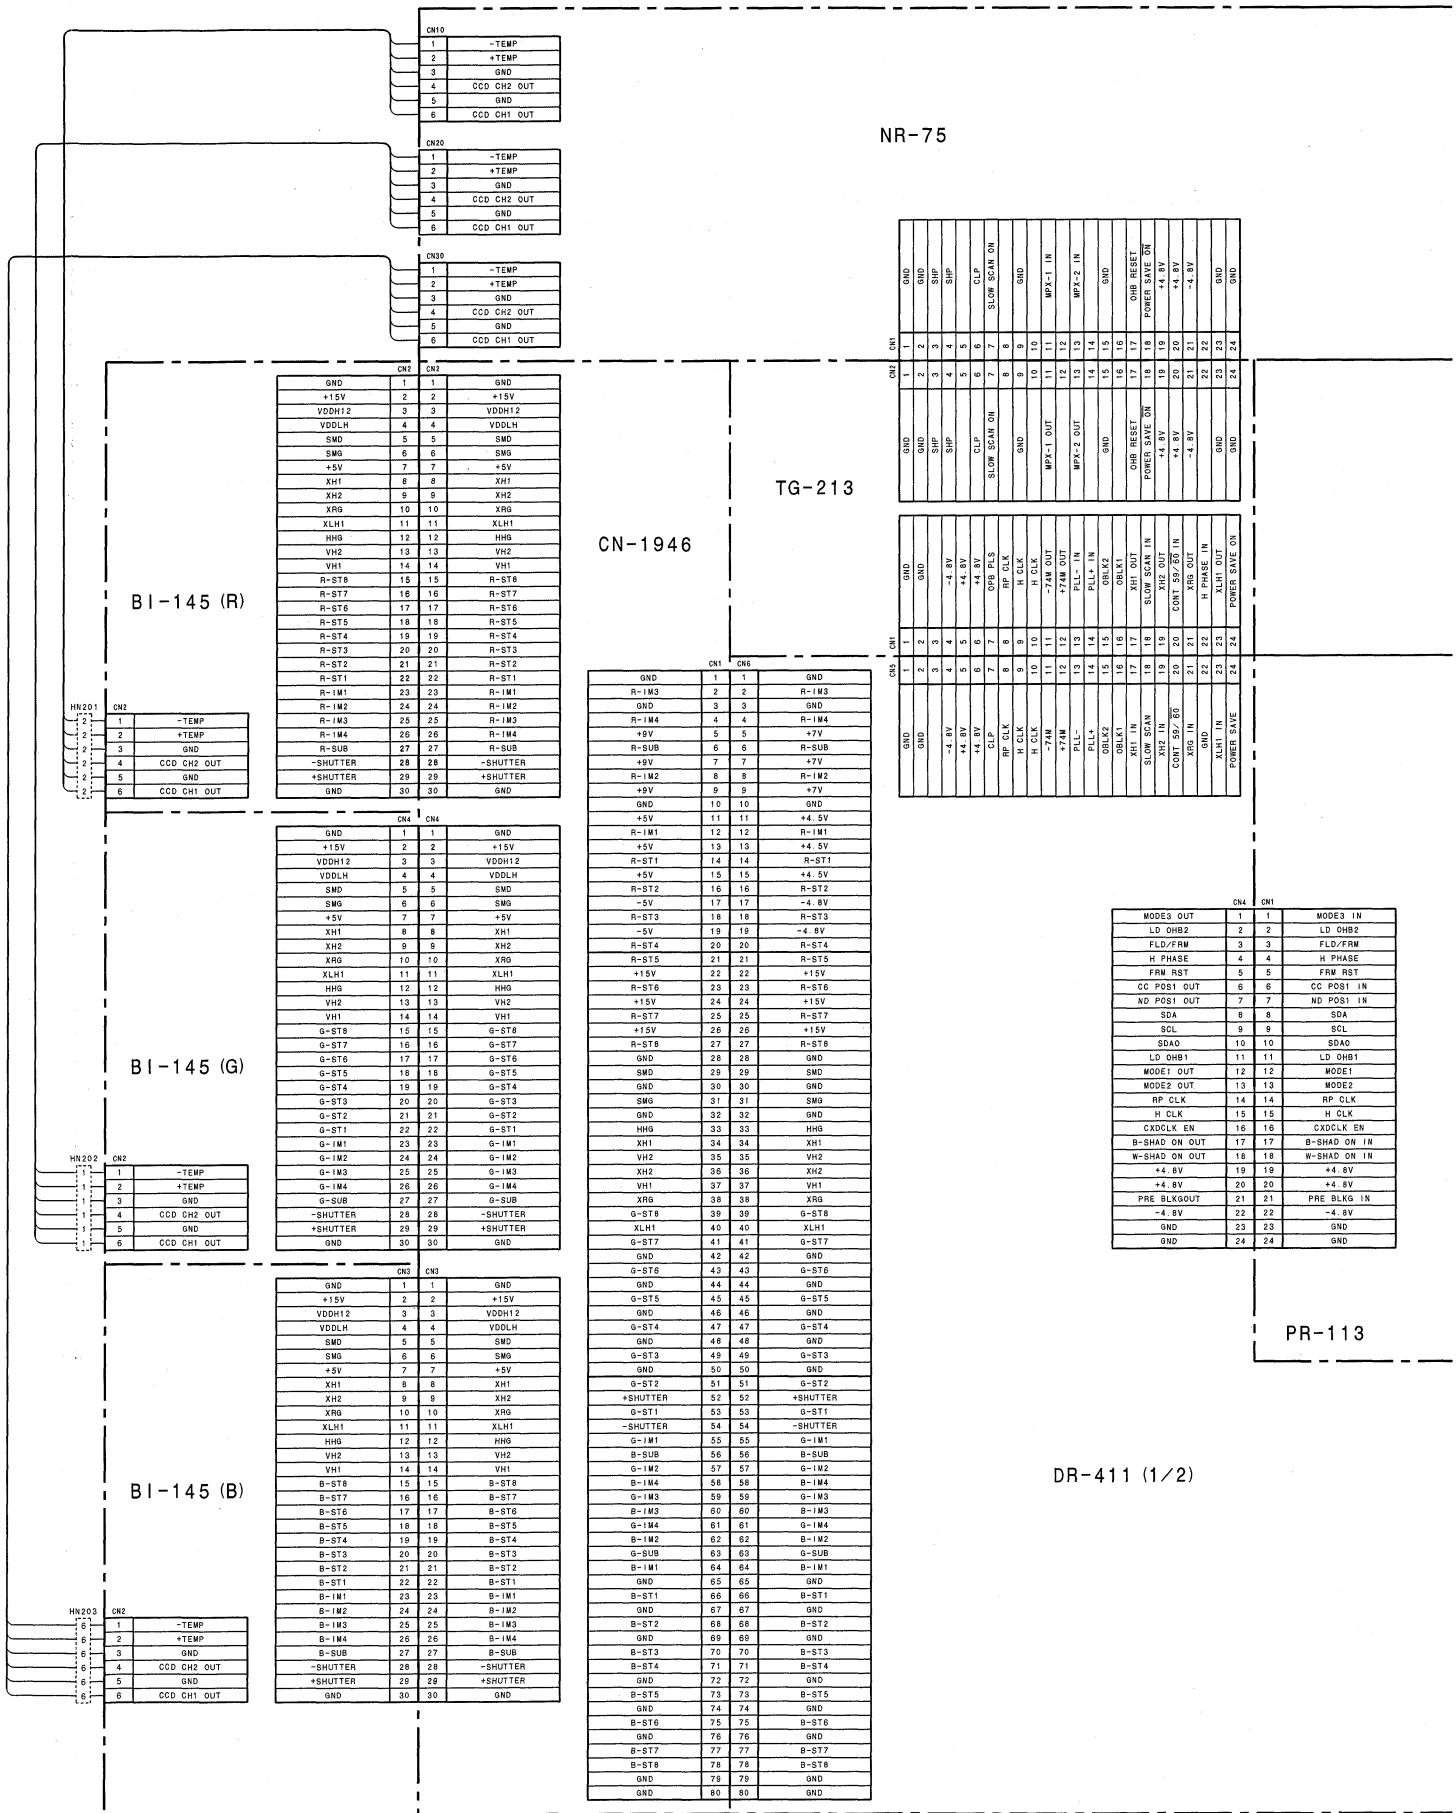





Frame Wiring (1/3)







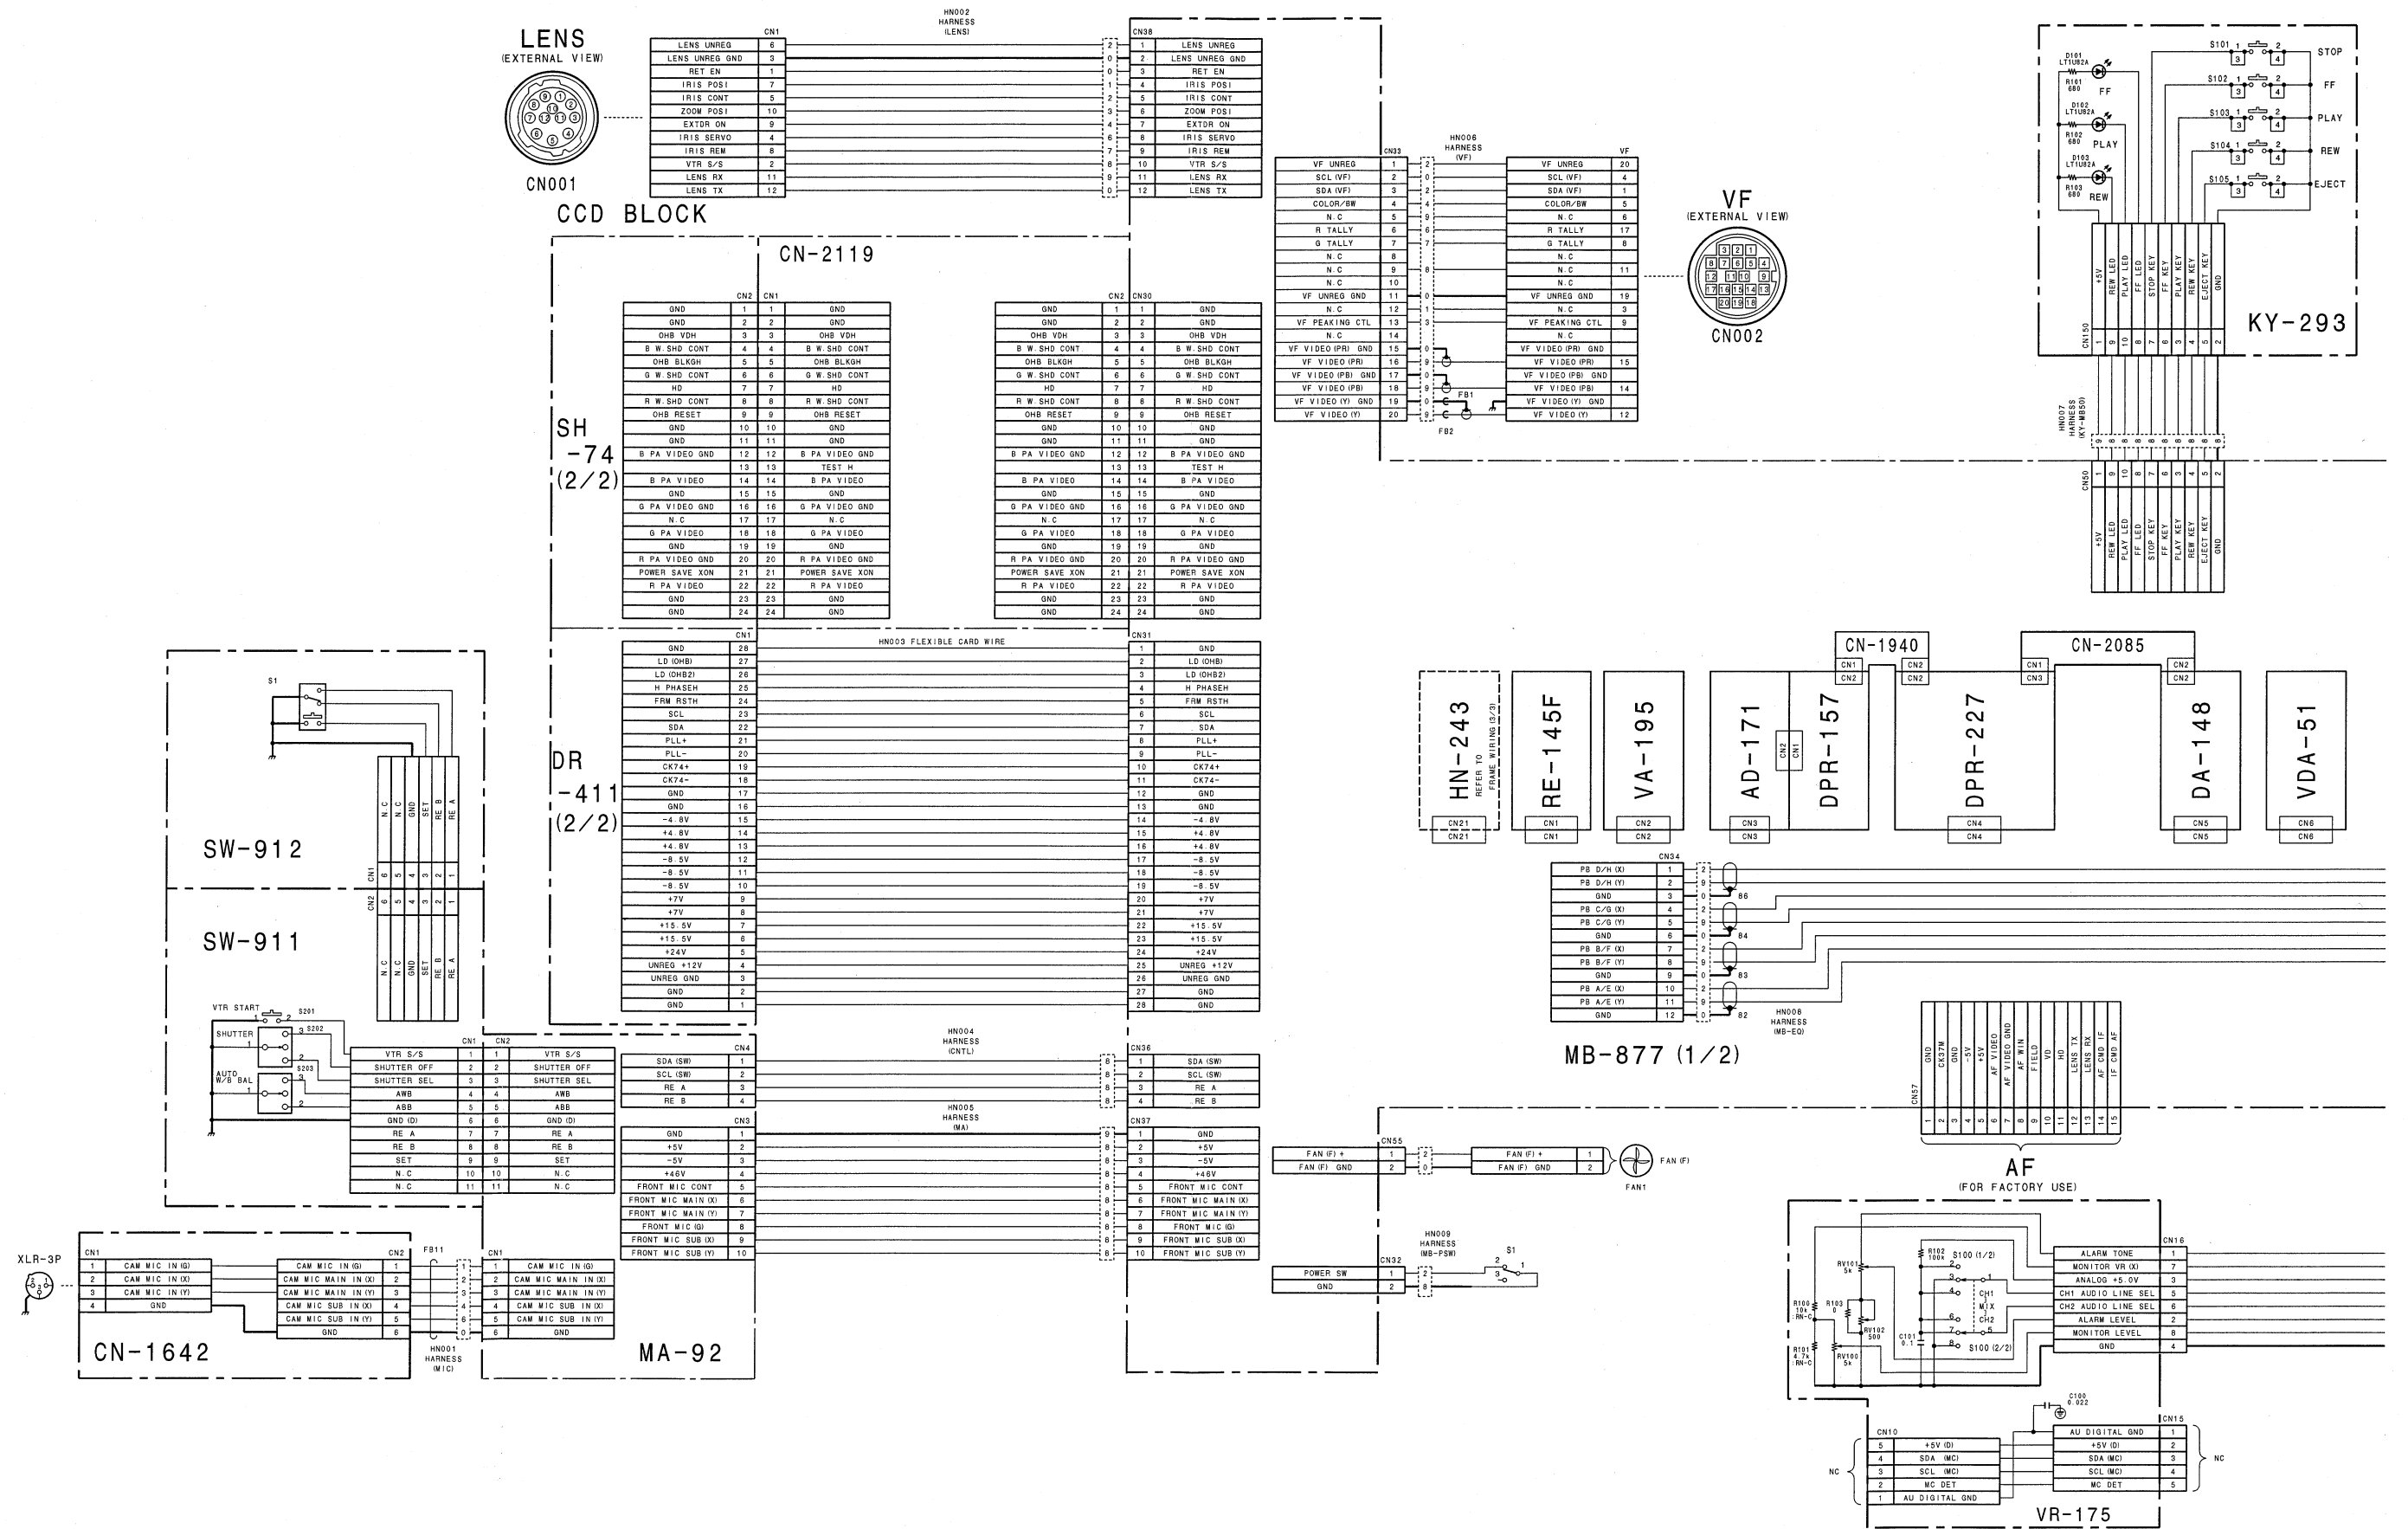


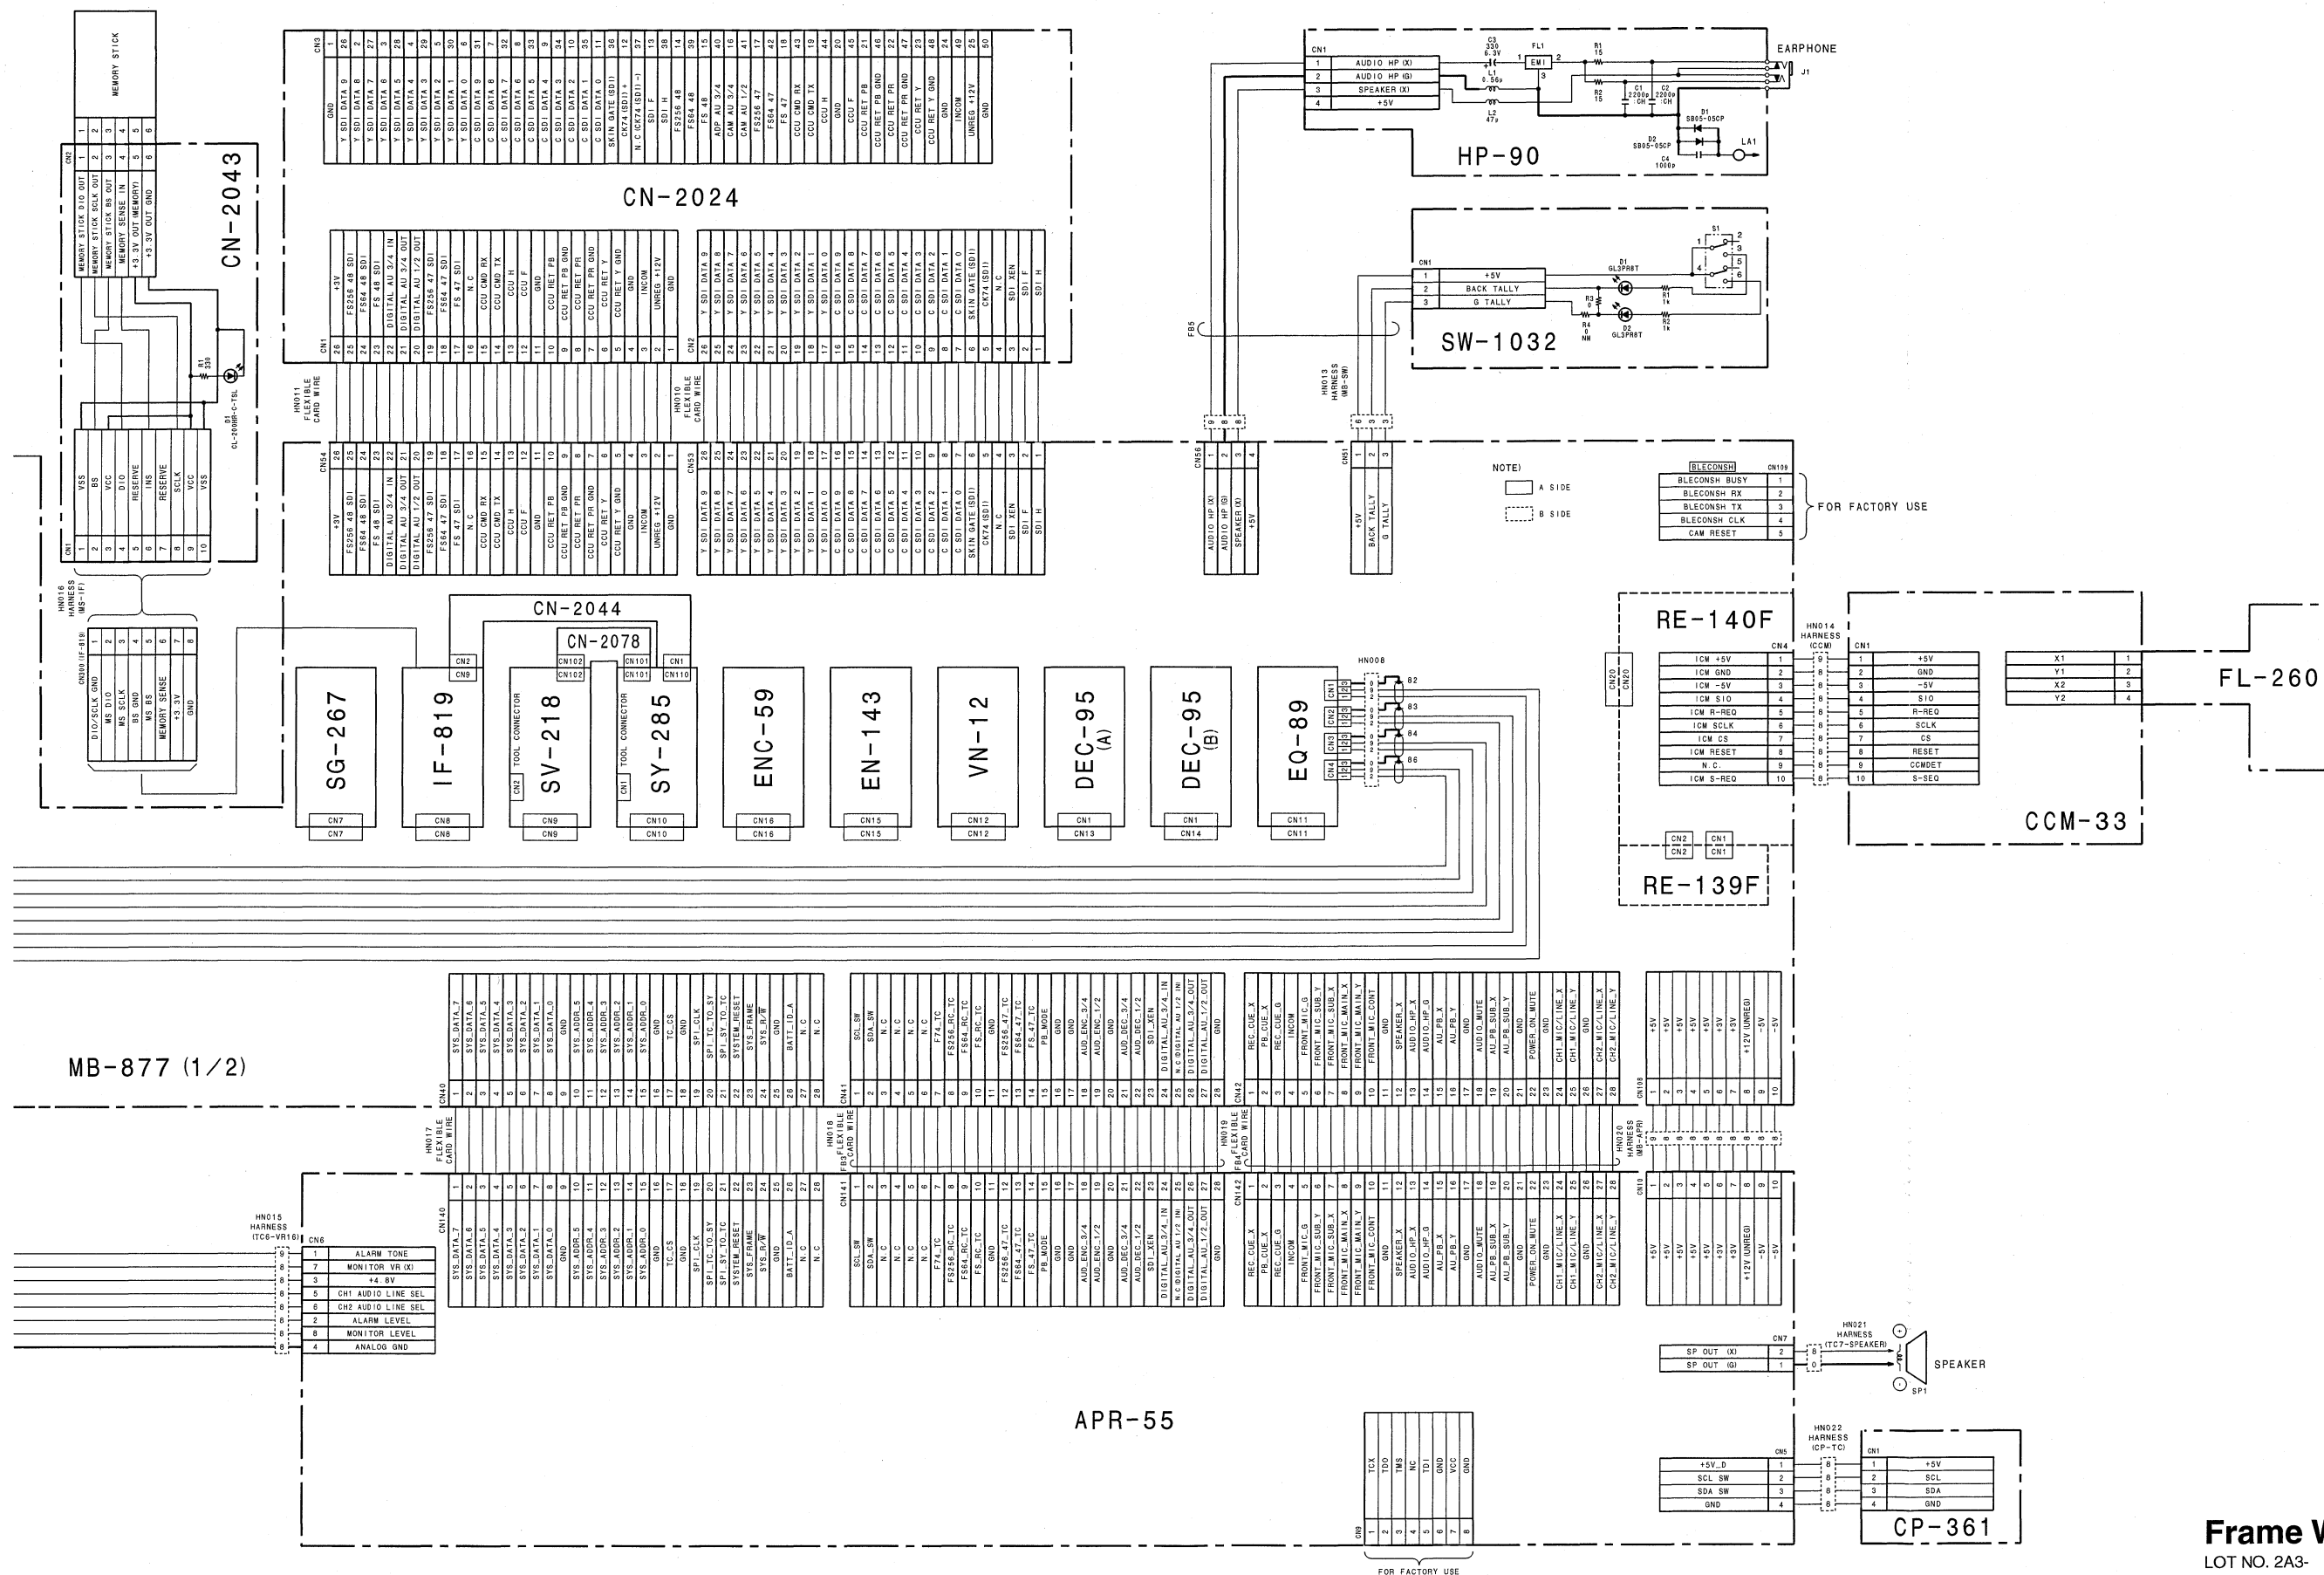



Frame Wiring (3/3)



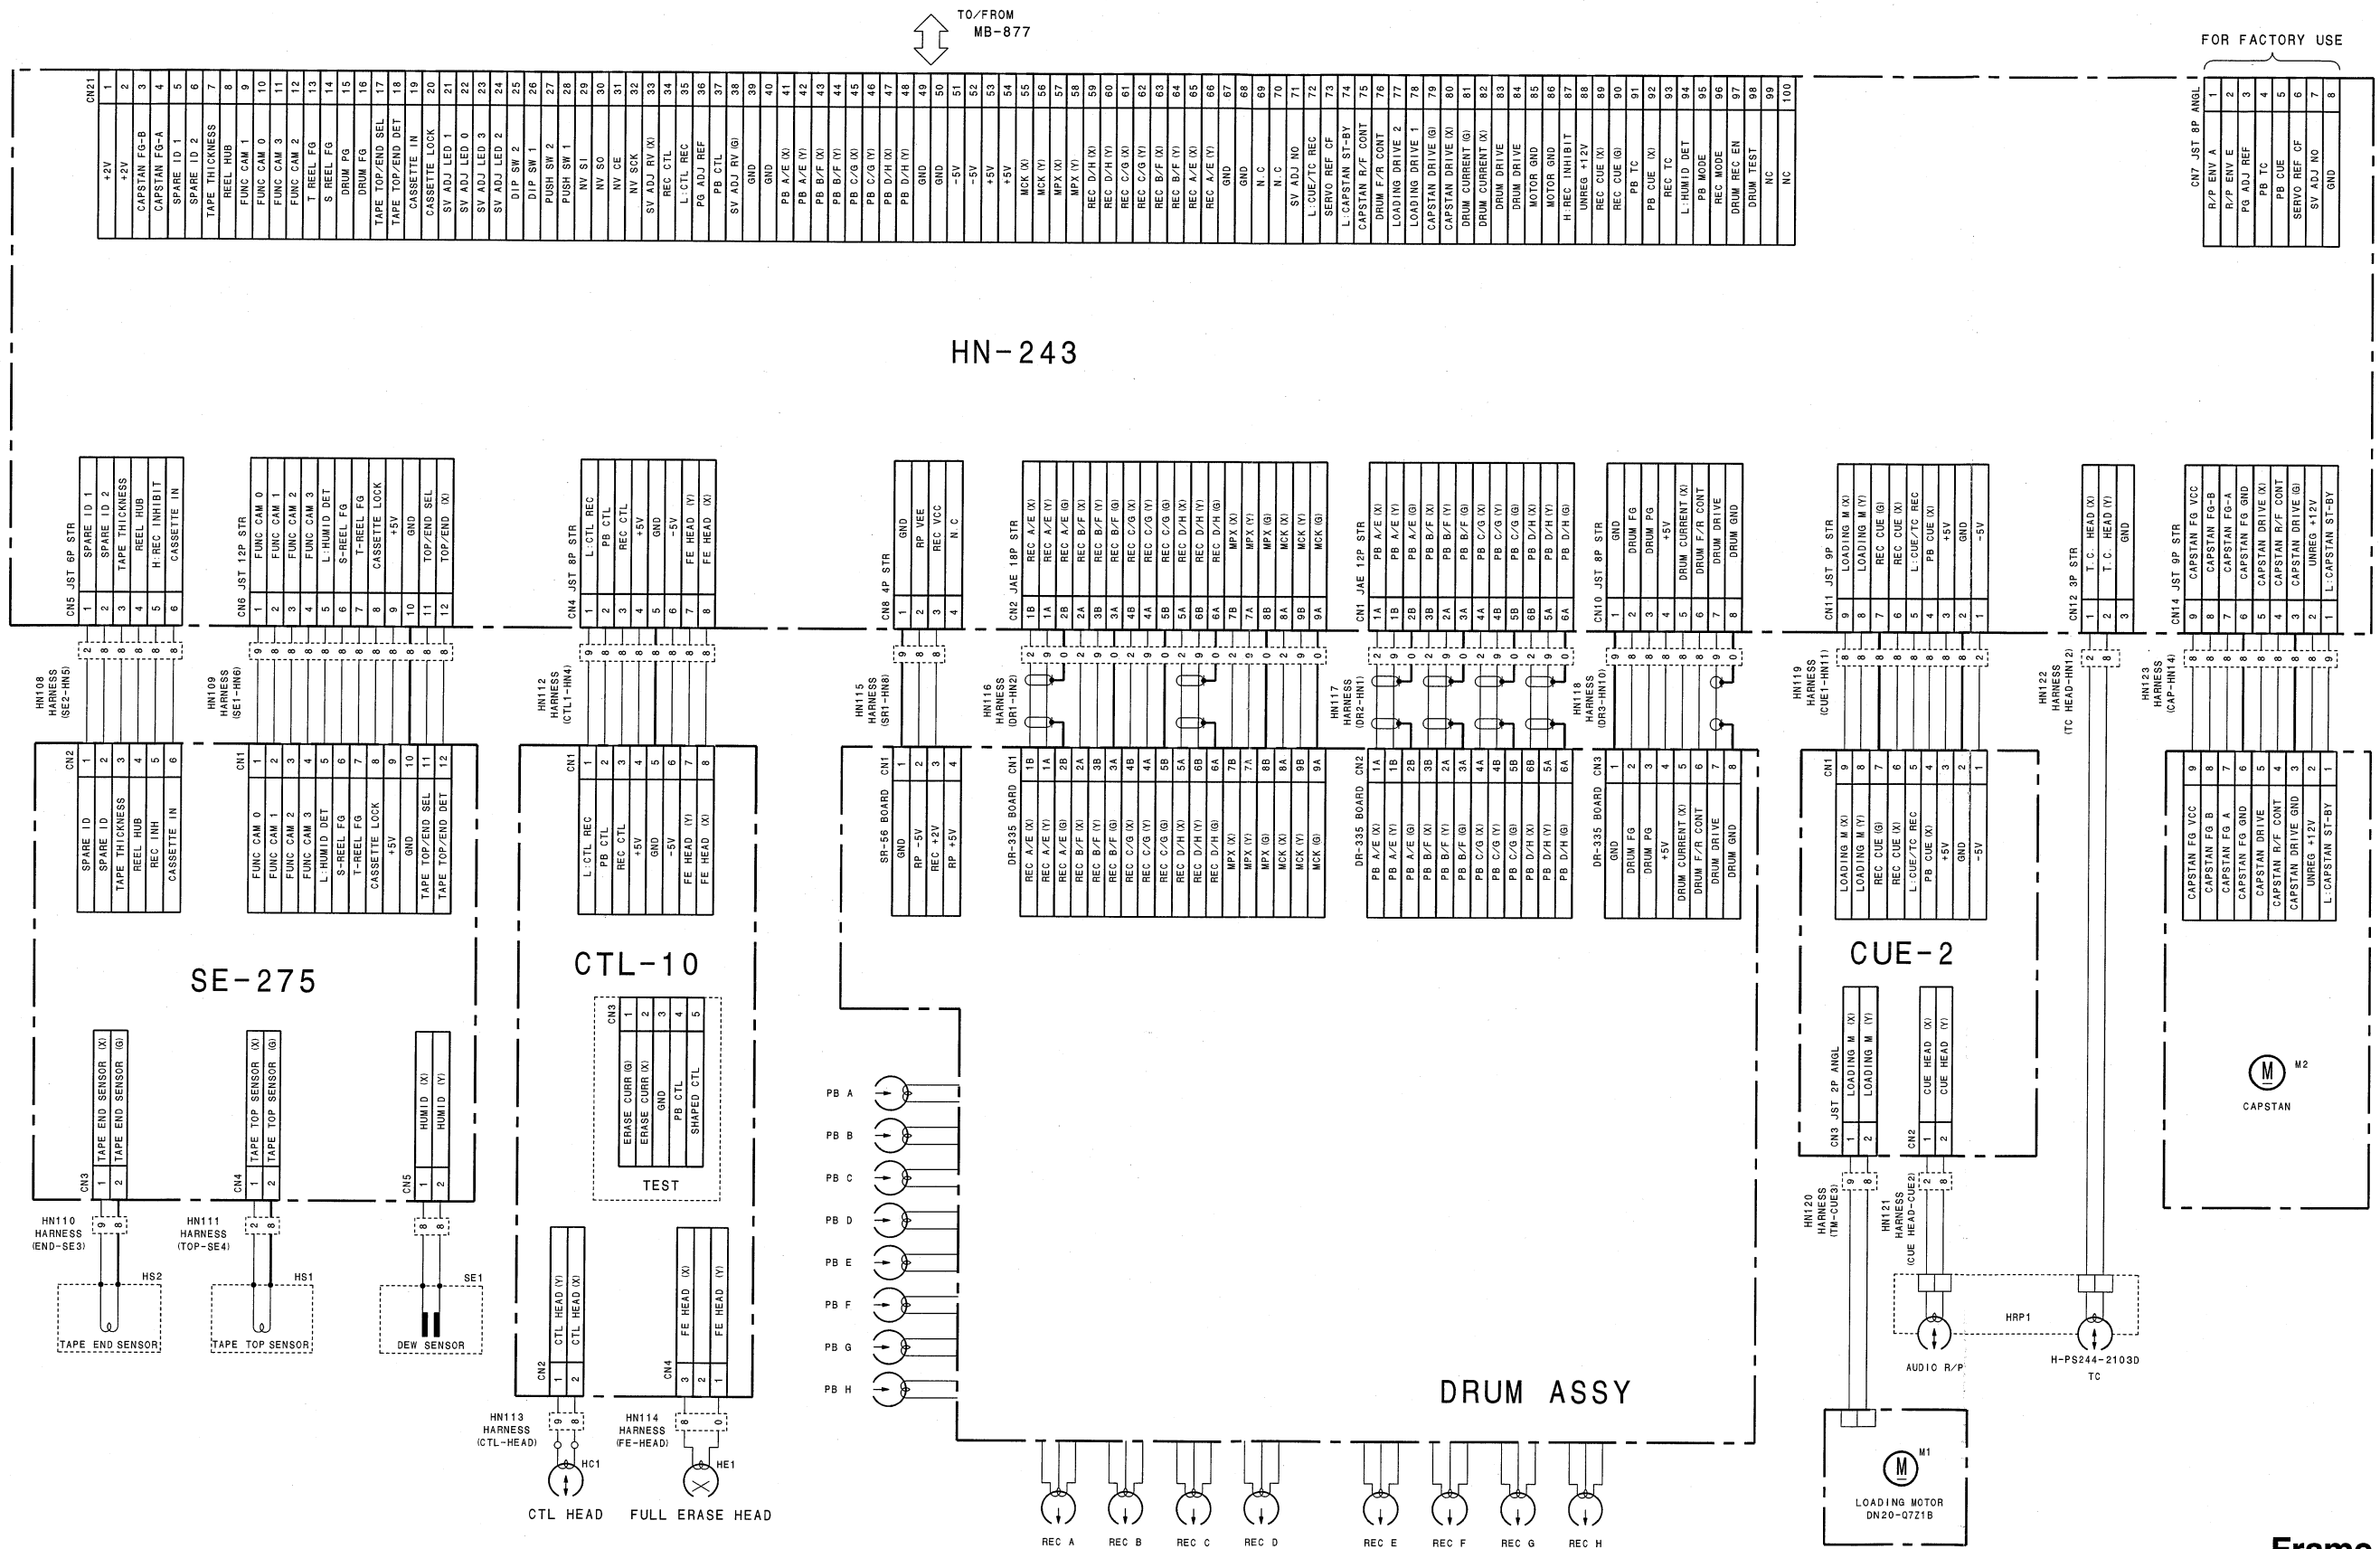



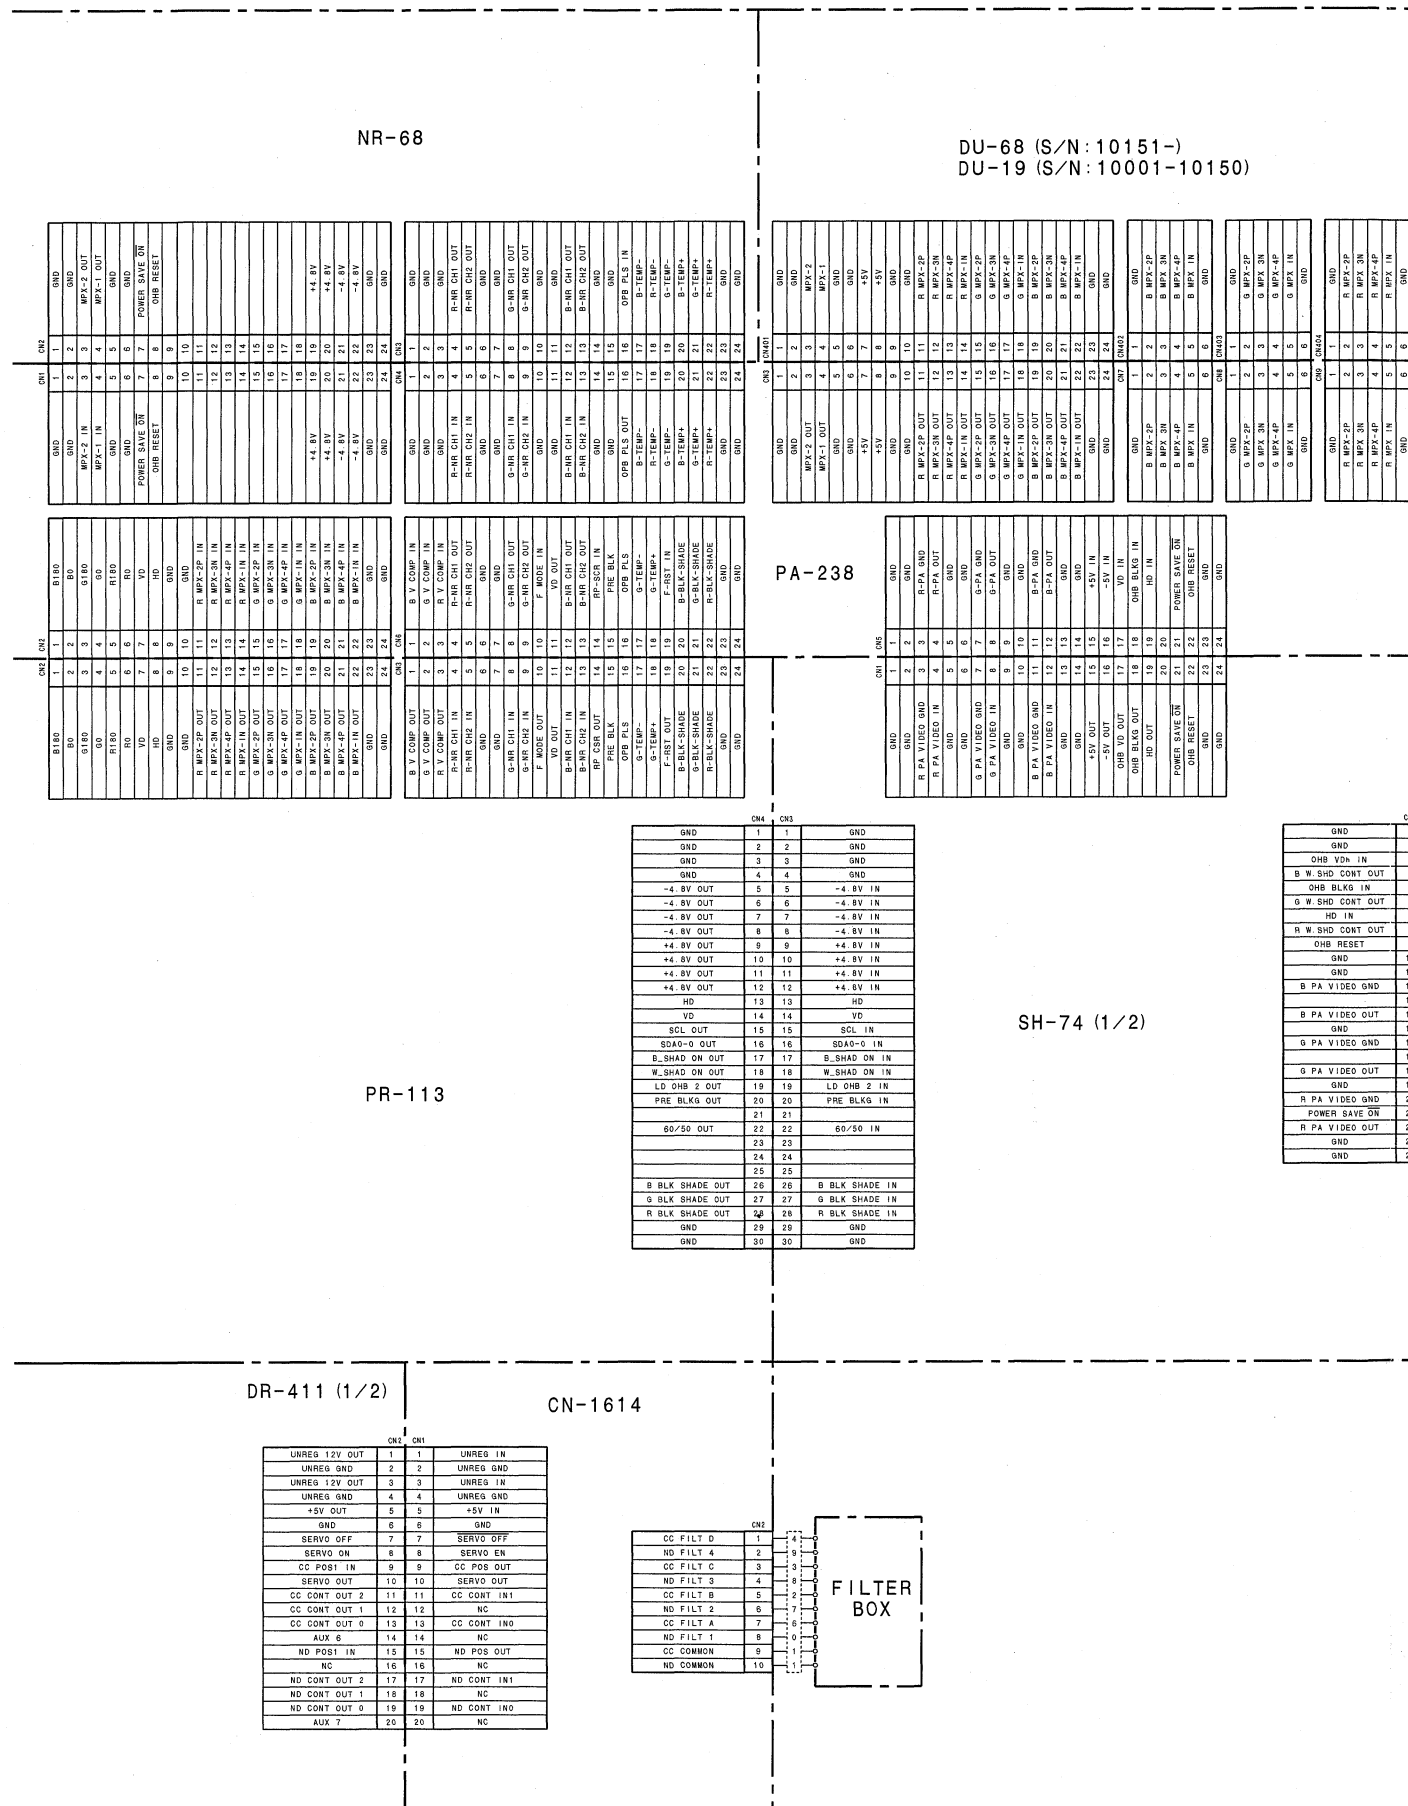

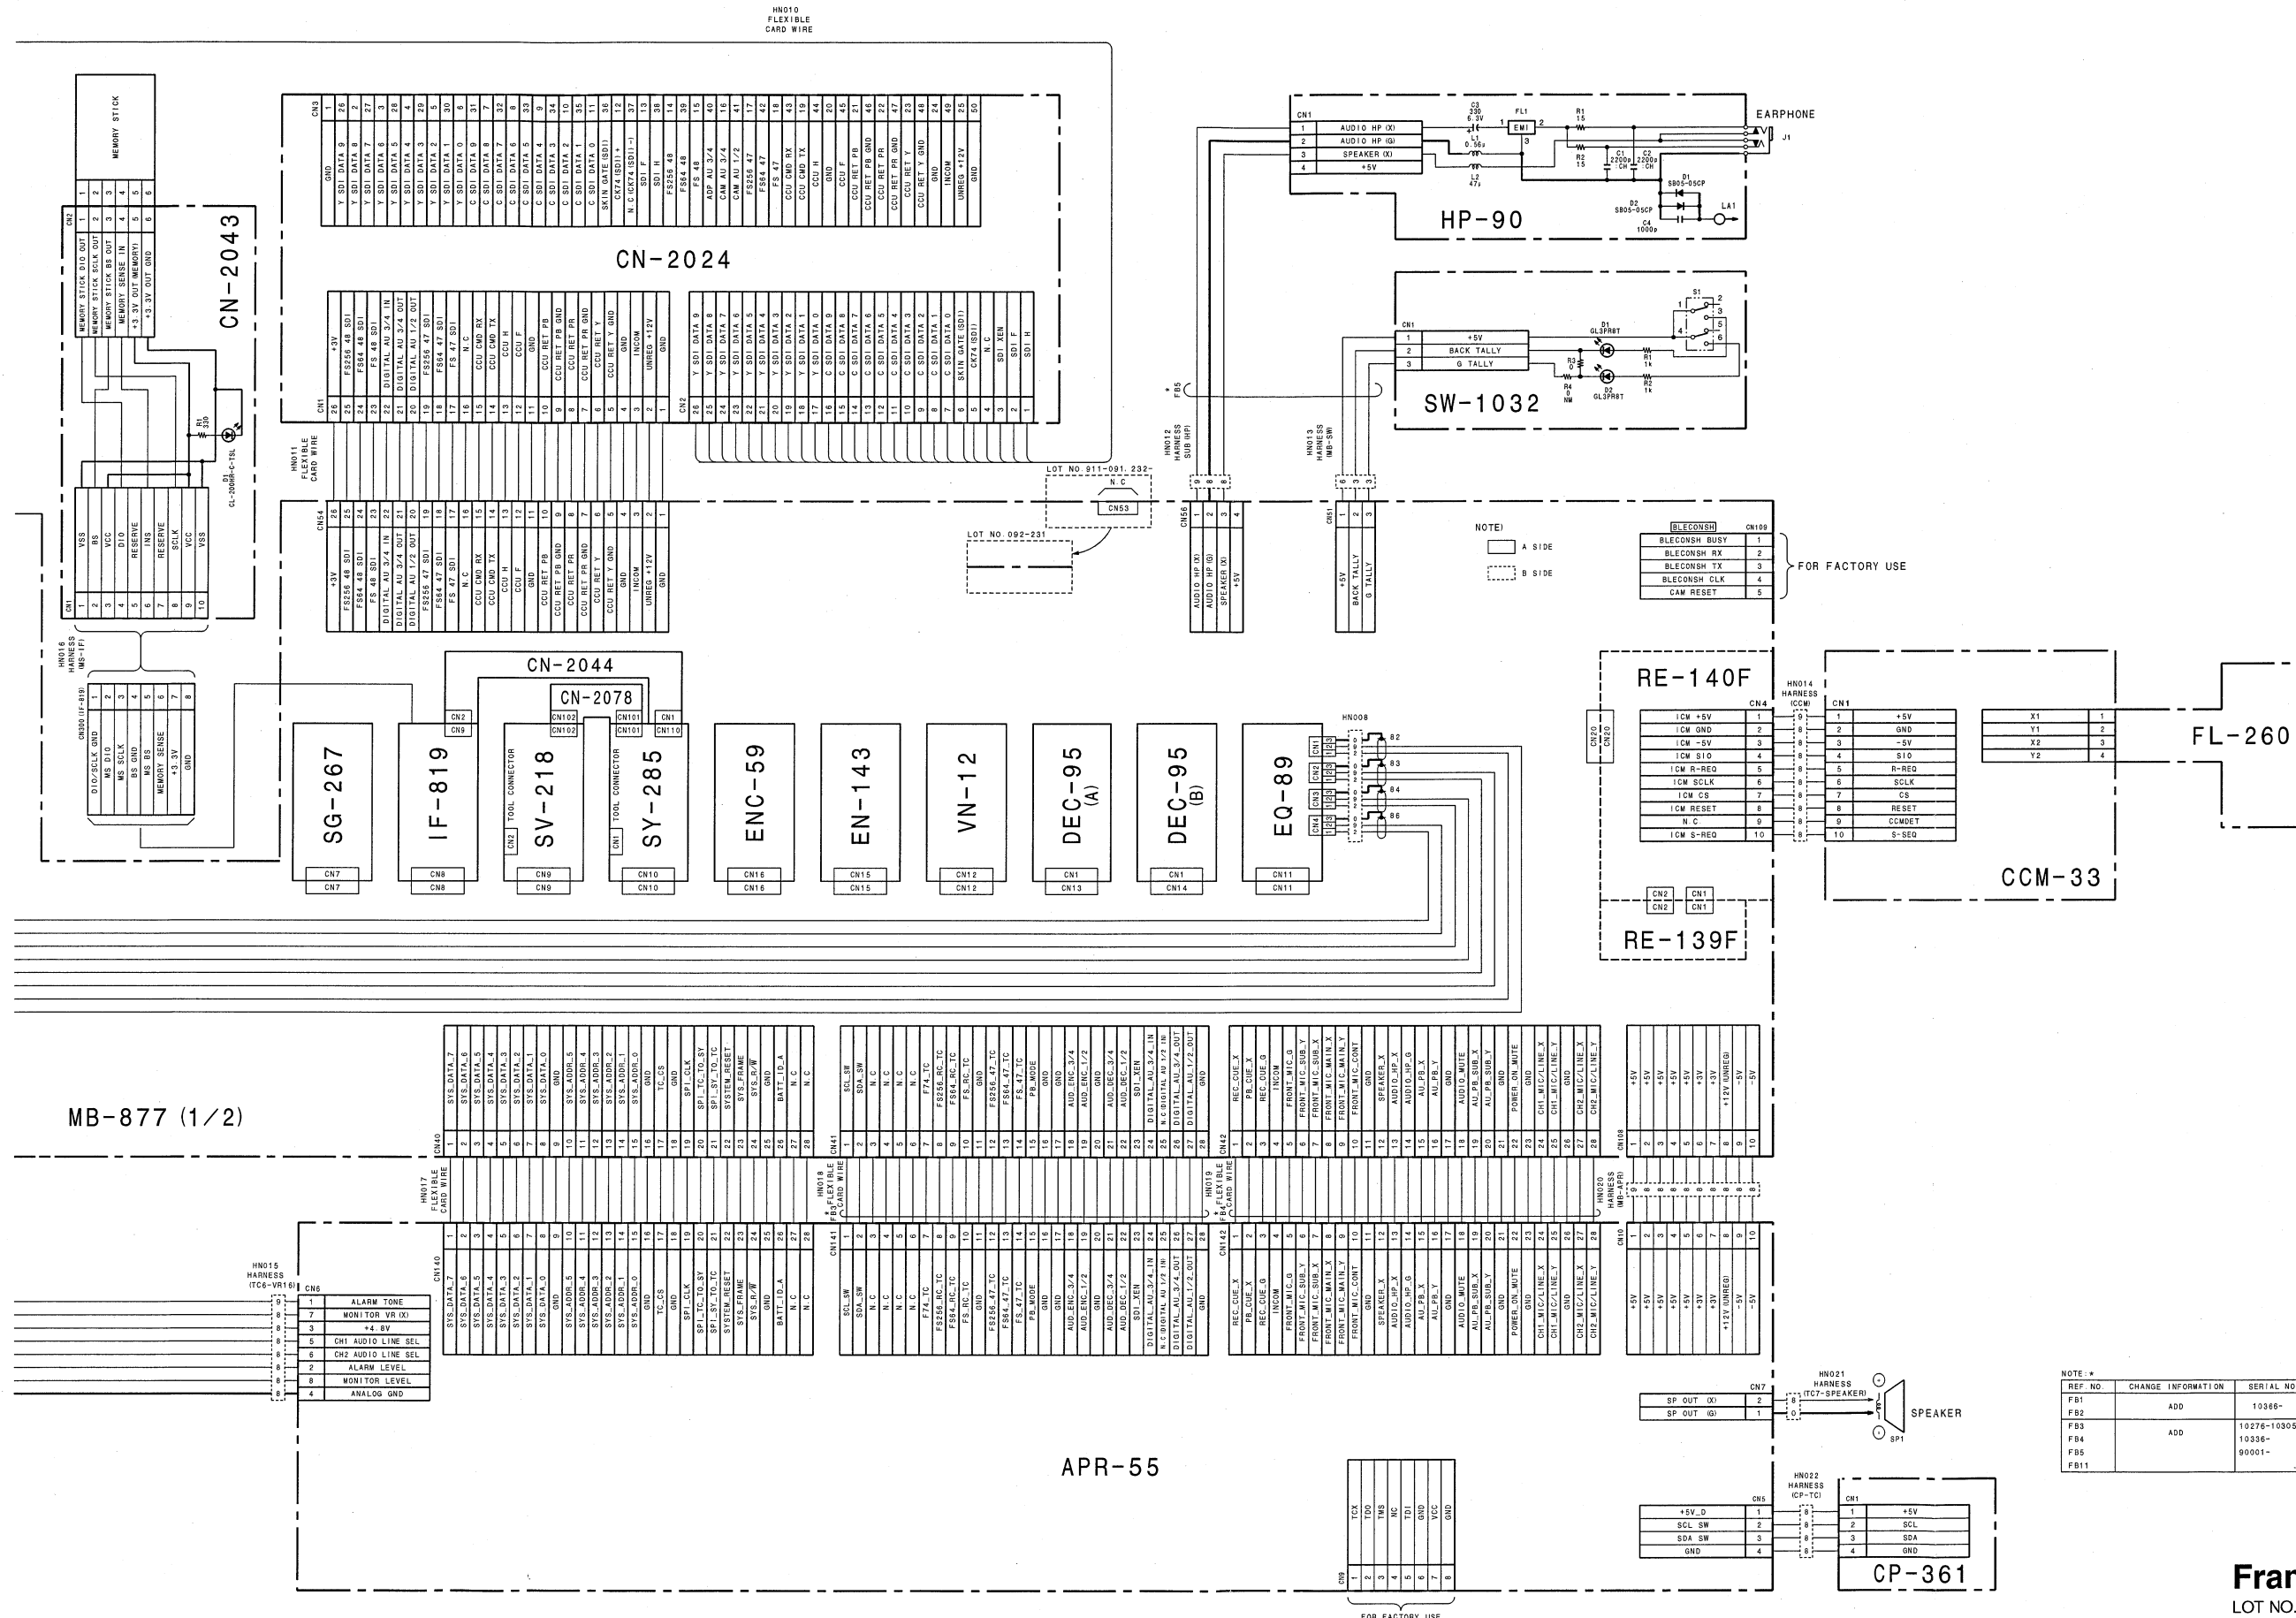


Frame Wiring (3/3)



TO/FROM
MB-877

HN-243

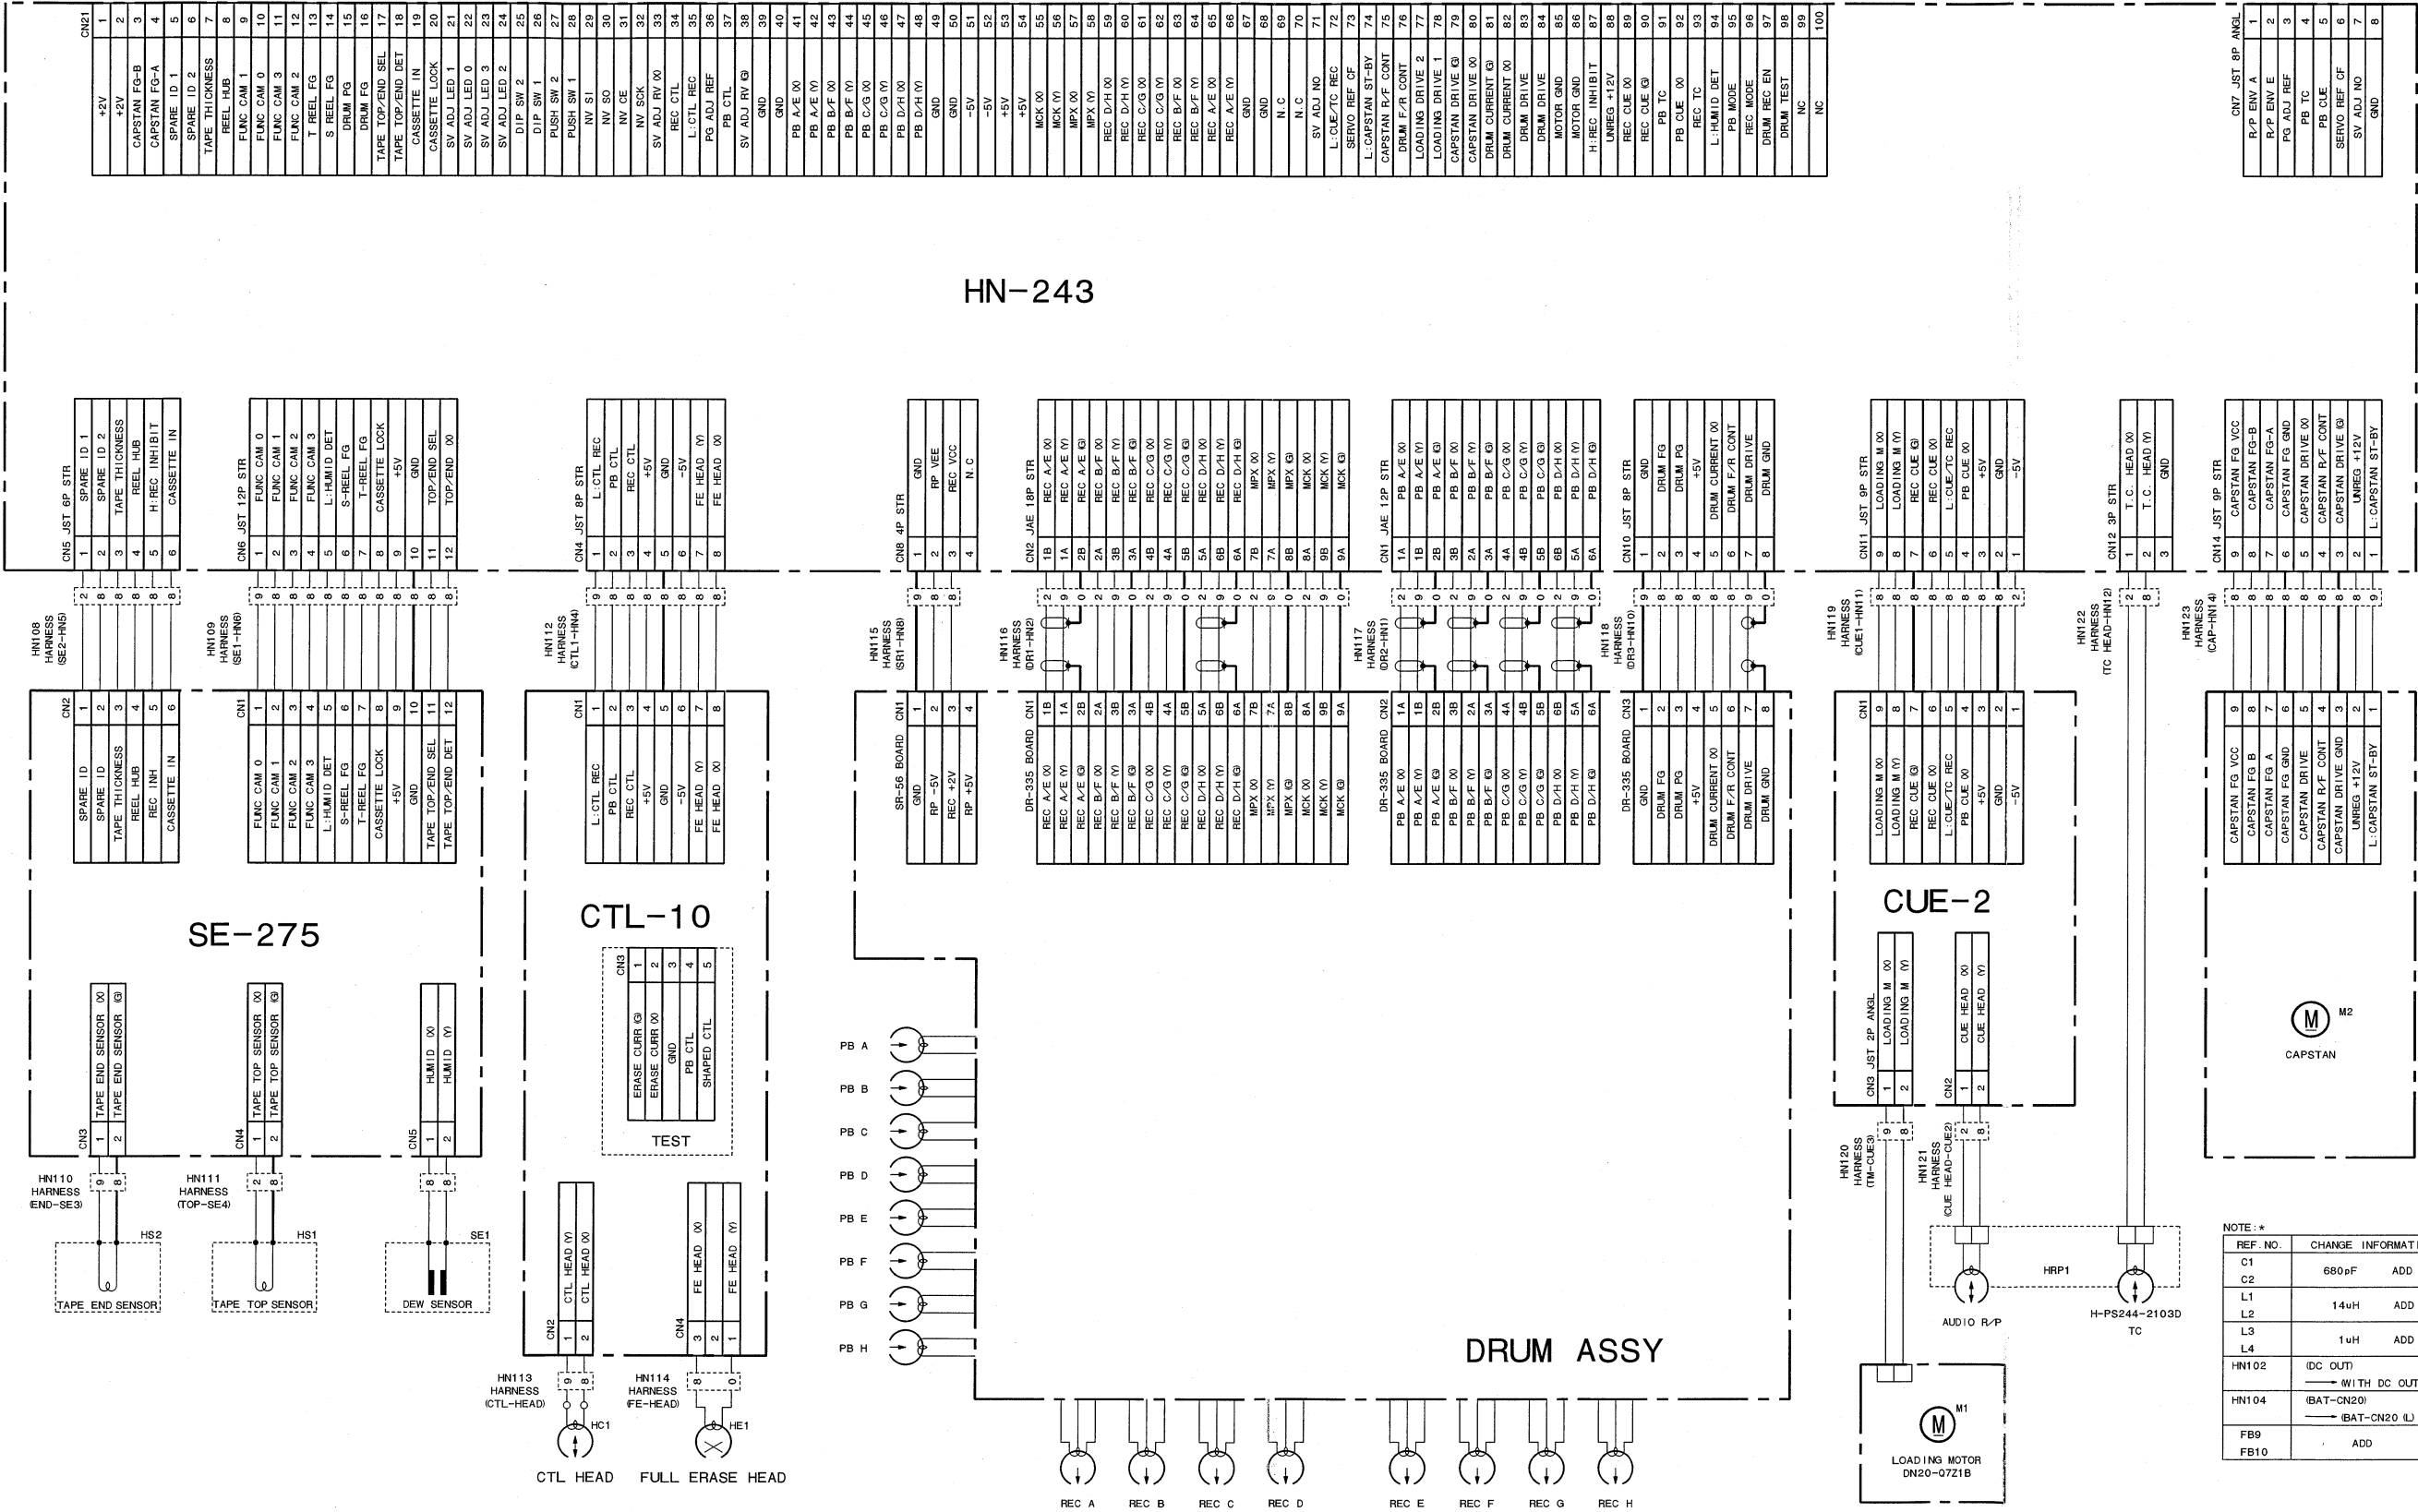

FOR FACTORY USE

CN7 JST 8P ANL	1
R-P ENV A	2
R-P ENV E	3
PG ADJ REF	4
PB TC	5
PB CUE	6
SERVO REF OF	7
SV ADJ NO	8
GND	

CN11 JST 9P STR	1
LOADING M 00	2
LOADING M 00	3
REC CUE 00	4
REC CUE 00	5
DRUM CURRENT 00	6
DRUM DRIVE	7
DRUM DRIVE	8
DRUM DRIVE	9

CN12 3P STR	1
T.C. HEAD 00	2
T.C. HEAD 00	3
GND	

CN14 JST 9P STR	1
CAPSTAN FG VCC	2
CAPSTAN FG B	3
CAPSTAN FG A	4
CAPSTAN FG GND	5
CAPSTAN DRIVE	6
CAPSTAN R/F CONT	7
CAPSTAN DRIVE GND	8
UNREG +12V	9
L-CAPSTAN ST-BY	

REF. NO.	CHANGE INFORMATION	SERIAL NO.
C1	680pF ADD	
C2		
L1	14uH ADD	
L2		
L3	1uH ADD	10276-10305
L4		10336-90001-
HN102	(DC OUT) WITH DC OUT L	
HN104	(BAT-CN20) (BAT-CN20 L)	
PB9		
FB10	ADD	

Section 5
Board Layouts


Index

No.	Board Name	Circuit Function	Page
1	AD-171	Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter	5-3
2	AD-167	Flare, PRE knee, White clip, Black clip, PRE filter, A/D converter	5-4
3	APR-55	Audio processor	5-5
4	CN-1432	CCD block	5-11
5	CN-1614	Filter	5-11
6	CN-1642	Connector board for Camera mic	5-11
7	CN-1940	Relay board for AD-167 board and DPR-152 board	5-11
8	CN-1946	CCD block	5-12
9	CN-2024	Adaptor	5-12
10	CN-2025	Connector board for Audio IN/OUT & EXT DC IN/OUT	5-9
11	CN-2043	Connector board for Memory Stick	5-12
12	CN-2044	Relay board for IF-819 board and SY-285 board	5-12
13	CN-2046	Connector board for Monitor OUT, EXT TC IN/OUT	5-13
14	CN-2078	Relay board for SV-218 board and SY-285 board	5-13
15	CN-2085	Relay board for DPR-152 board and DA-148 board	5-13
16	CN-2119	CCD block	5-11
17	CN-2140	Connector board on the DPR-152 board	5-13
18	CO-38	Connector (Genlock IN, Remote)	5-13
19	CP-361	Control panel	5-14
20	CTL-10	CTL head amp	5-14
21	CUE-2	CUE head amp	5-14
22	DA-148	Post filter, D/A converter	5-17
23	DEC-95	ECC/BRR decoder	5-19
24	DPR-227	SCVP (Digital processing), VFS (Frame rate converter)	5-21
25	DPR-152	SCVP (Digital processing), VFS (Frame rate converter)	5-23
26	DPR-157	Digital processing	5-25
27	DR-411	CCD driver, Timing generator	5-15
28	DU-19	Connector board	5-13
29	DU-68	Connector board	5-13
30	EN-143	BRR encoder (B), Timing generator	5-27
31	ENC-59	BRR encoder (A), ECC encoder	5-29
32	EQ-89	RF equalizer	5-30
33	HN-243	Harness, Erase head amp, TC head amp	5-31
34	HP-90	Headphone	5-31
35	IF-819	System controller, Fan controller	5-32
36	KY-293	Function key	5-31
37	MA-92	Camera mic amp	5-33
38	MB-877	Motherboard	5-34
39	PA-238	Pre-amp	5-37
40	PS-569	Power supply, Circuit breaker	5-39


No.	Board Name	Circuit Function	Page
41	RE-139	Power supply, Regulator (VTR)	5-39
42	RE-140	Power supply, Regulator (VTR)	5-40
43	RE-145F	Power supply, Regulator (CCD block)	5-41
44	RPR-13	Assistant board for VFS	5-41
45	SE-275	Tape sensor, DEW sensor	5-42
46	SG-267	GEN lock, Timing pulse generator (CTG), Character generator	5-43
47	SH-74	Shading correction signal generator	5-45
48	SV-218	Servo controller	5-46
49	SW-911	VTR S/S switch, Shutter switch, ABB/AWB switch	5-47
50	SW-912	Rotary encoder switch	5-47
51	SW-1032	Back tally, Back tally switch	5-47
52	SY-285	System controller for VTR block, Timecode controller	5-48
53	TG-213	Timing generator	5-49
54	VA-195	Video amp, White gain, White shading compensator	5-51
55	VDA-51	Monitor out, VF out, Character mix, Marker mix, Zebra mix, Skin marker mix	5-53
56	VN-12	Concealment, FIL (Rate convert)	5-55
57	VR-175	Memory card, Audio select switch, Alarm level, Monitor level	5-47

AD-171 (1-685-659-12)

C1	*C1	C210	*B3	C407	B3	L206	*D2	R103	A2	R226	*B2	R349	*E2
C2	*B1	C211	*C3	C408	*B4	L301	*D3	R104	*A2	R227	*C2	R350	*E2
C3	A1	C212	C3	C409	*D4	L302	*E3	R105	A2	R228	*C2	R351	*E2
C4	A1	C213	C3	C410	*E4	L303	*E2	R106	A2	R229	*B2	R352	E2
C5	*B1	C214	*C2	C411	*E4	L305	E2	R107	*A3	R230	*B2	R353	E2
C6	*C1	C215	*C3	C412	*A4	L306	*E2	R108	*A2	R231	*C2	R354	E2
C7	*C1	C216	*B2			L401	E4	R109	*B2	R232	*B2	R355	*E2
C8	D1	C217	*D2	CN2	A4			R110	A3	R233	*B2	R356	E2
C9	*C1	C218	*B2	CN3	B1	Q1	*B1	R111	A2	R234	*B2	R357	*E3
C10	*B1	C219	C2			Q2	*B1	R112	*A3	R235	*C2	R358	*E3
C11	*B1	C220	*C2	D101	A3	Q3	*D1	R113	A3	R236	*C2	R359	*E3
C12	D1	C221	*C2	D201	B3	Q4	*D1	R114	*A3	R237	*C2	R360	*E3
C13	*C1	C222	*C2	D301	D3	Q5	*D1	R115	A3	R238	*C2	R361	*D2
C14	*C1	C223	*B2			Q6	*D1	R116	*A3	R239	*C2	R363	*D2
C15	*C1	C224	*C2	E1	E1	Q8	*E1	R117	*A2	R240	*B2	R364	*D2
C16	D1	C225	*C2			Q9	*D1	R118	*A3	R241	B2	R365	*D2
C17	*B1	C226	*D2	FB1	A1	Q101	*A2	R119	A3	R242	*B2	R369	*E3
C18	*B1	C227	D2	FB2	A1	Q102	*A2	R120	A2	R243	*C2	R371	*E2
C19	*D1	C229	C2	FB3	*E1	Q103	*A2	R121	A2	R244	*C2	R372	*E2
C20	*D1	C230	*D2	FB4	*A4	Q105	*A2	R122	A3	R245	*C3	R373	*E2
C21	*D1	C231	C3	FB5	*A4	Q106	B2	R123	A3	R246	*C2	R374	*E2
C22	E1	C232	*C2	FB6	B4	Q201	*C2	R124	A2	R247	*C2	R401	*B4
C23	*E1	C233	*C2	FB103	A4	Q202	*B2	R125	*A2	R248	*C2	R405	*D4
C24	*E1	C234	C2	FB104	*B3	Q203	*B2	R126	*A2	R249	*C2	R406	*D4
C25	*A1	C235	*C2	FB105	*A3	Q205	*B2	R127	*A2	R250	*C2	R407	*D4
C26	*A1	C236	C2	FB106	A2	Q206	C2	R128	*A2	R251	*D2	R408	*D4
C27	*A1	C237	D3	FB203	A4	Q301	*E2	R129	*A2	R252	D2	R409	*D4
C28	E1	C238	*C2	FB204	*C3	Q302	*D2	R130	*A2	R253	C2	R410	C4
C29	E1	C239	D3	FB205	*C3	Q303	*D2	R131	*A2	R254	C2	R411	C4
C30	*E1	C240	D3	FB206	C2	Q305	*D2	R132	*A2	R255	*C2	R412	*C4
C31	*A1	C241	B2	FB303	A4	Q306	E2	R133	*A2	R257	*C3	RB1	E1
C32	*E1	C242	*D3	FB304	*E3	Q307	*E2	R134	*A2	R258	*C3	RB2	E1
C33	*E1	C243	*C3	FB305	*E3	Q308	*D2	R135	*A2	R259	*C3	RB401	B4
C34	*E1	C244	B2	FB306	E2	Q309	*B2	R136	*A2	R260	*D3	RB402	B4
C35	*E1	C245	C2			Q400	*D4	R137	*A2	R261	D2	RB403	*B4
C36	*E1	C246	A4	FL101	B2	Q401	*D4	R138	*A2	R262	C2	RB404	*B4
C101	A3	C247	*C3	FL201	D2			R139	*A2	R263	*D3	RB405	D4
C102	A3	C248	*C3	FL301	E2	R1	*B1	R140	*A2	R264	*D2	RB406	D4
C103	*A3	C301	D3			R2	*B1	R141	A2	R265	*D2	RB407	E4
C104	A2	C302	*D3	IC1	*C1	R3	*B1	R142	A2	R269	*C3	RB408	E4
C105	A3	C303	*D3	IC2	*B1	R4	*B1	R143	*A2	R271	*D2	RB409	*E4
C106	A3	C304	*D2	IC3	*B1	R5	*B1	R144	*A2	R272	*D2	RB410	B4
C107	*A3	C305	D3	IC4	*B1	R6	*B1	R145	*A3	R273	*D2	RB411	B4
C108	*A3	C306	D3	IC5	C1	R7	*C1	R146	*A2	R274	*C2	RB412	*B4
C109	*A3	C307	*D3	IC6	D2	R8	D1	R147	*A2	R301	D2	RB413	*C4
C110	*A3	C308	*D3	IC7	E1	R9	D1	R148	*B2	R302	D2	RB414	D4
C111	*A3	C309	*D3	IC8	*A1	R10	D1	R149	*B2	R303	D2	RB415	D4
C112	A3	C310	*D3	IC9	*E1	R11	*C1	R150	*B2	R304	*E2	RB416	E4
C113	A3	C311	E3	IC10	*E1	R12	D1	R151	*B2	R305	D2	RB417	E4
C114	*A2	C312	E3	IC101	A2	R13	D1	R152	B2	R306	D2	RB418	*E4
C115	*A3	C313	E3	IC102	A3	R14	*C1	R153	B2	R307	*D3		
C116	*A2	C314	*E2	IC103	A3	R15	*C1	R154	A2	R308	*D2		
C117	*B2	C315	*E3	IC104	A2	R16	D1	R155	*B2	R309	*D2		
C118	*A2	C316	*D2	IC105	A2	R17	D1	R157	*B3	R310	D3		
C119	A2	C317	*E2	IC106	B2	R18	D1	R158	*A3	R311	D2		
C120	*A2	C318	*D2	IC107	B3	R19	*C1	R159	*A3	R312	*D3		
C121	*A2	C319	E2	IC201	B2	R20	*C1	R160	*B3	R313	D3		
C122	*A2	C320	*E2	IC202	B3	R21	*C1	R161	*D3	R314	*D3		
C123	*A2	C321	*E2	IC203	B3	R22	*B1	R162	B2	R315	D3		
C124	*A2	C322	*E2	IC204	C2	R23	*C1	R163	*D3	R316	*E3		
C125	*A2	C323	*D2	IC205	C2	R24	*C1	R164	*D3	R317	*E2		
C126	*B2	C324	*E2	IC206	C2	R25	*B1	R165	*D3	R318	*E3		
C127	B2	C325	*E2	IC207	C3	R26	*C1	R169	*A3	R319	D3		
C129	*B2	C326	*E2	IC301	D2	R27	*C1	R171	*B2	R320	E2		
C130	*D3	C327	E2	IC302	D3	R28	*D1	R172	*B2	R321	E2		
C131	A3	C329	E2	IC303	D3	R29	*D1	R173	*B2	R322	E3		
C132	*B2	C330	*D2	IC304	E2	R30	*D1	R174	*A2	R323	E3		
C133	*B2	C332	*E2	IC305	E2	R31	*D1	R201	B2	R324	E2		
C134	A2	C333	*E2	IC306	E2	R33	D1	R202	B2	R325	*E2		
C135	*B2	C334	E2	IC307	E3	R34	E1	R203	B2	R326	*D2		
C136	A2	C335	*E2	IC401	B4	R35	E1	R204	*C2	R327	*E2		
C137	B3	C336	E2	IC402	*B4	R36	E1	R205	B2	R328	*E2		
C138	*A2	C337	E3	IC403	D4	R37	E1	R206	B2	R329	*D2		
C139	B3	C338	*E2	IC404	E4	R38	*A2	R207	*B3	R330	*D2		
C140	B3	C339	E3	IC405	*E4	R39	*B1	R208	*B2	R331	*E2		
C141	A2	C340	E3	IC406	D3	R40	*B1	R209	*B2	R332	*D2		
C142	*B3	C341	D2	IC407	D3	R41	*E1	R210	B3	R333	*D2		
C143	*B3	C342	*B3	IC408	*C4	R42	*B1	R211	B2	R334	*D2		
C144	A2	C343	*B3			R43	*B1	R212	*B3	R335	*E2		
C145	A2	C344	D2	L1	*C1	R44	*B1	R213	B3	R336	*E2		
C146	A4	C345	E2	L2	*B1	R45	*E1	R214	*B3	R337	*E2		
C147	*A3	C346	A4	L3	D1	R46	*A1	R215	B3	R338	*E2		
C148	*A3	C347	*E3	L4	*E1	R47	*A1	R216	*C3	R339	*E2		
C201	B3	C366	E3	L101	*A3	R48	*A1	R217	*C2	R340	*D2		
C202	*B3	C367	*E3	L102	*A3	R49	*E1	R218	*C3	R341	D2		
C203	*B3	C400	*C4	L103	*A2	R50	*E1	R219	B3	R342	*D2		
C204	*B2	C401	B3	L105	A2	R51	*E1	R220	C2	R343	*E2		
C205	B3	C402	*B4	L106	*B2	R52	*E1	R221	C2	R344	*E2		
C206	B3	C403	*D4	L201	*B3	R53	*D1	R222	C3	R345	*E3		
C207	*B3	C404	*B4	L202	*C3	R54	*D1	R223	C3	R346	*E2		
C208	*B3	C405	*E4	L203	*C2	R101	A2	R224	C2	R347	*E2		
C209	*B3	C406	E4	L205	C2	R102	A2	R225	*C2	R348	*E2		

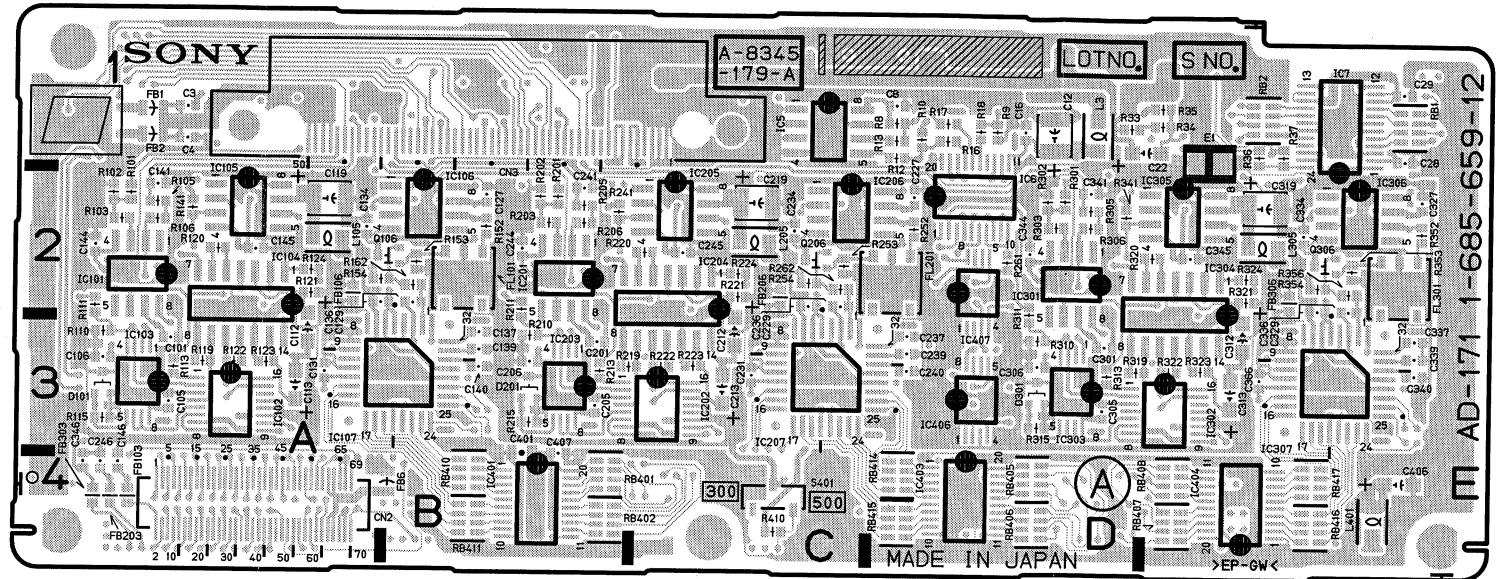
S401 C4
*:B SIDE

*:B SIDE




APR-55 (1-677-540-12)

C600	G6	C1073	*H4	C2034	F4	C4031	D4	E501	*G2	IC503	J6	Q503	*G6	R1083	*H5	R1175	J5	R1274	*E6	R2111	*F4	R4008	*C3	R4112	*E3	S103	*H3
C601	H6	C1074	*J4	C2035	F4	C4032	*D3			IC505	K3	Q504	*G6	R1084	F5	R1176	*K5	R1275	*E6	R2112	*F4	R4009	*C3	R4113	*F4	S104	H4
C602	*H6	C1075	H4	C2036	F4	C4033	*D4	IC100	*J3	IC506	*H1	Q600	H6	R1085	F5	R1177	*E3	R1280	*H5	R2113	*F5	R4010	C3	R4114	*E4	S151	J4
C603	*H6	C1076	J4	C2037	F4	C4034	*B2	IC101	H5	IC511	C6	Q601	H6	R1086	*J4	R1178	*J4	R1281	*H4	R2115	*F5	R4011	*C4	R4115	*F4	S152	*J3
C604	*H6	C1077	H4	C2038	F4	C4035	*E3	IC102	J5	IC512	K6			R1087	*J5	R1179	*J4	R1282	*J5	R2116	*F4	R4013	*D4	R4116	*E3	S153	J4
C605	*G5	C1078	J4	C2039	*F4	C4036	*E4	IC103	F6	IC514	K2	R500	*K6	R1088	*H5	R1180	*K5	R1283	*J4	R2117	*F5	R4014	*D3	R4117	*F3	S400	*E4
C606	G6	C1079	*J4	C2040	F4	C4037	E3	IC104	J5	IC517	*G1	R600	D6	R1089	*J5	R1181	H5	R1286	F2	R2120	*C6	R4015	*D4	R4118	F4	S401	H5
C607	*G5	C1080	*F1	C2042	*F4	C4038	E4	IC105	H5	IC518	K2	R601	*H6	R1090	*J4	R1182	J5	R1287	F2	R2121	*C6	R4016	*D4	R4119	*F3	S402	*E4
C608	G6	C1081	*F2	C2044	*F4	C4039	*E3	IC107	F5	IC600	*H6	R602	H6	R1091	*F5	R1183	*J4	R1288	*J4	R2122	*F5	R4017	*D3	R4120	*F4	S501	K1
C609	*H6	C1082	*F2	C2045	*F4	C4040	E3	IC108	E5	IC601	H6	R603	J6	R1092	*F5	R1184	*J4	R2000	*G5	R2123	*F5	R4018	*D3	R4121	*E3	S502	G4
C610	*H6	C1083	*F2	C2047	*F5	C4041	E3	IC109	H4			R604	J6	R1093	*F5	R1185	*F3	R2001	*H5	R2124	*G5	R4019	*D4	R4122	*E4	S503	G5
C611	*H6	C1084	*F2	C2049	*F4	C4042	E4	IC110	J4	L100	E3	R606	H6	R1094	*F5	R1186	*J4	R2002	*G5	R2125	*G5	R4022	*D3	R4123	*C3	S504	F2
C612	*H6	C1085	*F2	C2051	F4	C4043	E3	IC111	*J5	L300	D5	R607	H6	R1095	*J5	R1187	*J4	R2003	*G5	R3000	D6	R4023	*D4	R4124	*D3	S505	F2
C613	G6	C1086	*F1	C2052	*F5	C4044	E4	IC112	F2	L301	D5	R1000	*H5	R1096	*F5	R1188	*H4	R2010	*G4	R3001	D6	R4024	*D3	R4125	D3	S506	G3
C614	H6	C1087	*F1	C2057	*G4	C4045	E3	IC113	*J3	L302	D5	R1001	*H5	R1097	*H5	R1189	*J4	R2011	*H4	R3002	C6	R4025	*D4	R4126	*D3	S507	G3
C615	H6	C1088	*F1	C2058	*G4	C4046	E4	IC114	K5	L303	C5	R1002	*J5	R1098	*J5	R1190	*F3	R2012	*G4	R3003	D6	R4026	D3	R4127	D3	S509	G4
C616	H6	C1089	*F2	C2059	*G4	C4047	*C3	IC115	H4	L600	*H6	R1003	*J5	R1099	*J5	R1191	H4	R2013	*H4	R3004	D6	R4027	D4	R4128	D3	S510	G5
C618	H6	C1090	*F2	C2060	*H4	C4048	*C3	IC116	J4	L601	*H6	R1004	*H5	R1100	*H4	R1192	J4	R2014	*G4	R3005	D6	R4028	*D3	R4129	D4	S512	G4
C619	H6	C1091	F2	C2061	F3	C4049	E3	IC117	*J5	L602	*H6	R1005	*J5	R1101	*H4	R1193	*H4	R2015	*G4	R3006	D6	R4029	*D4	R4130	*D4	S519	*J2
CI000	*H5	C1092	F2	C2062	F3	C4050	E4	IC118	E5	L603	*H6	R1006	*F5	R1102	*J5	R1194	*J4	R2016	*G4	R3007	*C5	R4030	*D4	R4131	*D4	S520	*J1
CI001	*J5	C1093	F2	C2063	F3	C4051	*C2	IC119	*F1	L604	*G5	R1007	*F5	R1103	*H4	R1195	*F3	R2017	*G4	R3008	D6	R4031	*D3	R4132	*D3	S522	K2
CI002	F6	C1094	F2	C2064	F3	C4053	*C2	IC120	J5	L605	G6	R1008	G6	R1104	*H4	R1196	*H4	R2018	*G4	R3009	D6	R4032	*D4	R4138	*D4	S540	*G2
CI003	F5	C1095	F2	C2065	*F4	C4054	*C2	IC121	H5			R1009	G6	R1105	*J5	R1197	*J4	R2019	*H4	R3010	D6	R4033	*D3	R4141	*D4		
CI004	E6	C1096	F1	C2066	F4	C4056	*C2	IC125	*H4	LCD501	H2	R1010	*E5	R1106	*J4	R1198	H4	R2020	*G4	R3011	D5	R4034	D4	R4143	*D3	SL101	*H5
CI005	E5	C1097	*E2	C2067	*F4	C4058	F4	IC126	*J4			R1011	*E5	R1107	*H4	R1199	J4	R2021	*H4	R3012	*C5	R4037	D3	R4144	C3	SL102	*H5
CI006	*H5	C1098	*E2	C2068	F4	C4059	F3	IC127	*E2	PH100	G4	R1012	F6	R1108	*H4	R1200	*H4	R2022	*G4	R3013	C6	R4038	*B3	R4145	D3	SL103	*H5
CI007	*J5	C1099	E2	C2069	F4	C4060	F3	IC128	E3			R1013	F6	R1109	*H4	R1201	*F2	R2023	*H4	R3014	C6	R4039	D3	R4146	*D3	SL104	*K5
CI008	H5	C1100	E2	C2070	*F4	C4061	*D3	IC129	*E2	Q104	H4	R1014	*H5	R1110	*J4	R1202	*F2	R2024	*G4	R3015	D5	R4040	*B3	R4147	*D3	SL105	*K5
CI009	J5	C1102	E2	C2071	F4	C4062	*D3	IC131	E3	Q105	J4	R1015	*J5	R1111	H3	R1203	*F2	R2025	*G4	R3016	D5	R4041	*D3	R4148	*D4	SL106	*K5
CI010	G5	C1103	E2	C2072	*F4	C4063	*D4	IC132	F5	Q106	*F2	R1016	*F5	R1112	J3	R1204	*F2	R2026	*H4	R3017	*D5	R4042	*D4	R4149	*D4	SL107	*H3
CI011	J5	C1104	E2	C3000	D6	C4064	*D4	IC133	E6	Q111	*F2	R1017	*E5	R1113	*J4	R1205	*F2	R2027	*H4	R3018	*D5	R4045	*D4	R4150	*C2	SL108	*H3
CI012	F5	C1108	E2	C3001	C6	C4065	*F4	IC134	G5	Q112	*H4	R1018	*F5	R1114	*J4	R1206	*F2	R2028	*F3	R3020	*C5	R4046	*D3	R4151	*C2	SL109	*J3
CI013	*F5	C1109	*E2	C3002	D6	C4066	*D3	IC135	G5	Q113	*J4	R1019	*E5	R1115	*H4	R1207	*F2	R2029	F3	R3021	*C4	R4047	*B2	R4152	*C2	SL110	*J3
CI014	E5	C1110	E2	C3003	D6	C4067	*D4	IC136	*F2	Q114	*J4	R1020	*H5	R1116	*H4	R1208	*F2	R2030	*F3	R3022	*D5	R4048	*B2	R5000	*K2	SL401	*D3
CI015	*E5	C1111	E2	C3004	D6	C4070	*B2	IC138	*J3	Q115	*J4	R1021	*H5	R1117	*H4	R1209	*F2	R2031	*F3	R3023	*D5	R4049	*B2	R5002	*J6	SL402	*D3
CI016	G5	C1112	*E2	C3005	D6	C4071	*C2	IC139	*E2	Q116	*H4	R1022	J6	R1118	H3	R1210	*F1	R2032	F3	R3024	*D5	R4050	*B2	R5003	*J6	SL403	*D4
CI017	F5	C1113	*D3	C3006	D5	C4072	*C2	IC141	*H5	Q117	*J4	R1023	J6	R1119	*H4	R1211	*F2	R2033	F3	R3025	*D5	R4051	*D4	R5004	*K6	SL404	*D4
CI018	*G5	C1114	*D3	C3007	D5	C4073	D3	IC142	*J5	Q118	*H4	R1024	G6	R1120	H3	R1212	*F2	R2034	F3	R3026	*D5	R4052	*E3	R5005	*C6	SL405	*E3
CI019	*E5	C1128	H5	C3008	*C5	C4074	D3	IC143	*E2	Q119	*J4	R1025	F6	R1121	J3	R1213	*F2	R2035	*F3	R3027	*C5	R4053	*E4	R5009	*H2	SL406	*E4
CI020	*E5	C1129	J5	C3009	D5	C4075	D3	IC144	*E2	Q120	*H4	R1026	*F5	R1122	J3	R1214	*F1	R2036	F3	R3028	*C5	R4054	*E3	R5010	*H2	SL407	*F3
CI021	*F5	C1130	H3	C3010	D5	C4076	D4	IC200	G5	Q121	*J4	R1027	*E5	R1123	*J4	R1215	*F1	R2037	*F3	R3029	*C5	R4055	*E4	R5011	*H2	SL408	*E3
CI022	*G5	C1131	*J3	C3011	*D5	C4077	*E3	IC201	G5	Q122	*H4	R1028	*E5	R1124	*H4	R1216	*F2	R2038	*F3	R3030	D5	R4056	*E3	R5012	*H2	SL409	*F4
CI023	E5	C1132	*H4	C3012	D5	C4078	E3	IC202	F4	Q123	*J4	R1029	G6	R1125	*J4	R1217	*F1	R2039	*F3	R3031	*D5	R4057	*E4	R5013	*H2	SL410	*E4
CI024	F5	C1133	*H4	C3013	C6	C4079	E3	IC203	*G5	Q124	*F2	R1030	*F5	R1126	*J4	R1218	*F2	R2040	*F3	R3032	D5	R4058	*E3	R5014	*H2	SL411	*E3
CI025	E5	C1134	J3	C3014	C6	C4080	E3	IC204	*F5	Q125	*F2	R1031	F6	R1127	*J4	R1219	*F1	R2041	*F3	R3033	*D5	R4059	*E4	R5015	*H2	SL412	*E4
CI026	H5	C1135	*K3	C3015	*D5	C4081	*E4	IC205	*F5	Q126	*F1	R1033	*H3	R1128	*H4	R1220	*F2	R2042	*F3	R3034	D4	R4060	*E3	R5016	*H2		
CI027	J5	C1136	*J4	C3018	C5	C4082	E4	IC206	*H5	Q127	F2	R1034	*G5	R1129	H4	R1221	*F2	R2043	*F3	R3035	*D4	R4061	*E4	R5017	*H2	TP100	*K5
CI028	J5	C1137	*J4	C3019	C5	C4083	E4	IC207	G4	Q128	F3	R1035	*E5	R1130	J4	R1222	*F2	R2044	*F3	R3036	E4	R4062	*E3	R5018	*H2	TP150	*K5
CI029	H5	C1138	H4	C3020	*C4	C4084	E4	IC208	F4	Q129	F3	R1036	*E5	R1131	H4	R1223	*F2	R2045	*F3	R3037	E4	R4063	*E4	R5019	*H2	TP300	*E2
CI030	F6	C1139	*J4	C3021	*D5	C4085	*B3	IC209	F4	Q130	F3	R1037	*E5	R1132	H4	R1224	*F2	R2046	*F3	R3038	E4	R4064	*B2	R5020	*H2	TP301	*C5
CI031	F6	C1140	*H3	C3022	*D4	C5000	*J6	IC210	G4	Q140	F6	R1038	*F5	R1133	J4	R1225	*F1	R2047	*F3	R3039	E4	R4065	*B2	R5021	*H2	TP302	*D5
CI032	E6	C1141	*J3	C3023	D5	C5001	*K6	IC211	F3	Q141	F6	R1039	*F5	R1134	J4	R1226	*F1	R2048	*F3	R3040	E5	R4066	*B2	R5022	*H2	TP303	*C5
CI033	E6	C1142	J4	C3024	*D4	C5002	*J6	IC212	F3	Q142	F6	R1040	*G5	R1135	*H3	R1227	*F1	R2049	*F3	R3041	E5	R4067	*B2	R5023	*H2	TP304	*D4
CI034	*H5	C1143	*J4	C3025	F4	C5006	*K2	IC213	F4	Q143	H5	R1042	*F5	R1136	*J3	R1228	*F2	R2050	*F3	R3042	E5	R4068	*B2	R5024	*F1	TP400	*E3
CI035	G5	C1144	K5	C3026	E5	C5007	*K2	IC214	F4	Q144	H5	R1043	*H5	R1137	*F2	R1229	*F2	R2051	*F3	R3043	E5	R4069	*B2	R5025	*F1	TP402	*B2
CI036	F6	C1145	K5	C3027	E4	C5008	*K3	IC217	*G1	Q145	H5</																



APR-55 -A SIDE-SUFFIX: -12

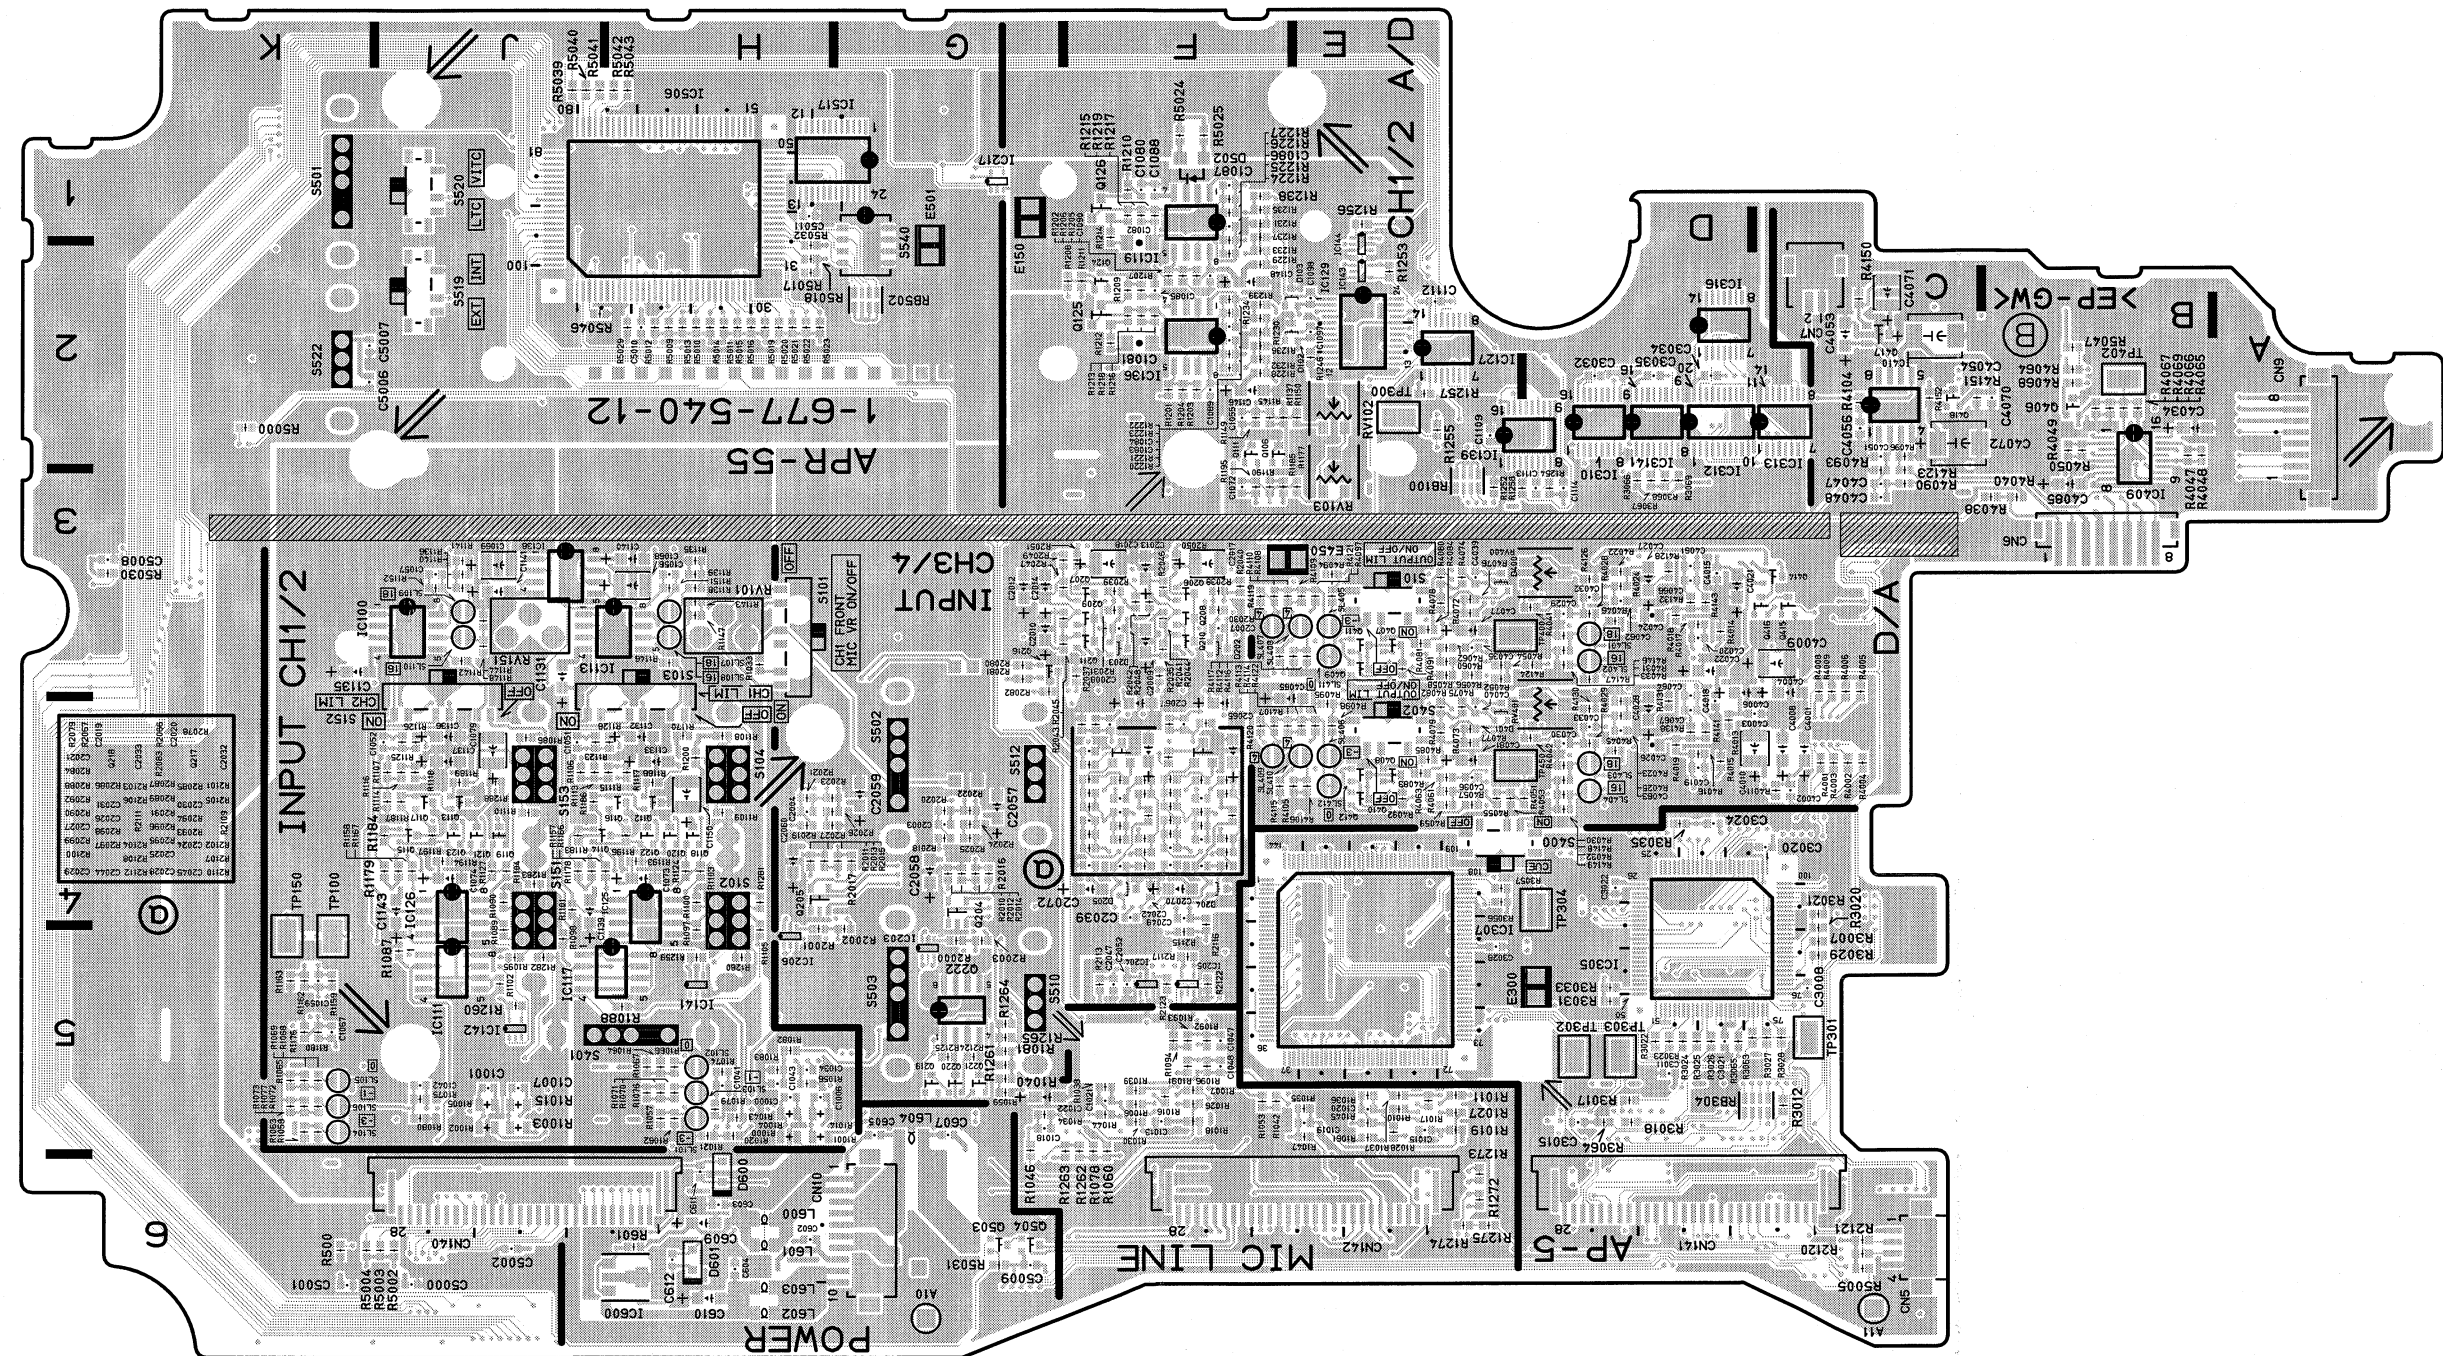


APR-55 (1-677-540-11)

C600	G6	C1073	H4	C2053	G5	C4060	*F3	IC140	*D2	Q126	*F1	R1054	E6	R1146	*H3	R1238	*F1	R2078	*F4	R3045	E5	R4073	*E4	R5025	*F1	TP302	*D5
C601	H6	C1074	H4	C2054	G5	C4061	*D3	IC200	G5	Q204	*G4	R1055	*E6	R1147	*H3	R1239	*F2	R2079	*F4	R3046	F4	R4074	*E3	R5029	*H2	TP303	*D5
C602	*G5	C1075	H4	C2055	*G5	C4062	*D3	IC201	G5	Q205	*H4	R1056	G3	R1148	*J3	R1240	H5	R2080	*G3	R3047	E5	R4075	*E4	R5030	*K3	TP304	*D4
C603	*H6	C1076	H4	C2056	*G5	C4063	*D4	IC202	F4	Q206	*F3	R1057	*H5	R1149	*F2	R1241	*H3	R2081	*G3	R3048	E5	R4076	*E3	R5031	*G6	TP400	*E3
C604	*H6	C1077	H4	C3000	D6	C4064	*D4	IC204	*F5	Q207	*F3	R1058	*J5	R1150	*E2	R1242	*H3	R2082	*F4	R3049	E5	R4077	*E4	R5032	*H2	TP402	*B2
C605	*G5	C1078	H4	C3001	C6	C4065	*E3	IC205	*F5	Q208	*F3	R1059	*G5	R1151	H3	R1243	H5	R2083	*F4	R3050	E5	R4078	*E3	R5034	C6	TP450	*E4
C606	*G5	C1079	K4	C3002	D6	C4066	D4	IC206	*H5	Q209	*F3	R1060	F5	R1152	J3	R1244	*E2	R2084	*F4	R3051	E5	R4079	*E4	R5035	C6		
C607	*G5	C1080	*F1	C3003	D6	C4067	*D4	IC207	G4	Q210	*F3	R1061	E6	R1153	J5	R1245	J5	R2085	*F4	R3052	E5	R4080	*E3	R5036	C6		
C608	G6	C1081	*F2	C3004	D6	C4068	D3	IC208	F4	Q211	*F3	R1062	*H5	R1154	J5	R1246	*E2	R2086	*F4	R3053	E4	R4081	*E3	R5039	*J1		
C609	*H6	C1082	*F2	C3005	D6	C4069	*D3	IC209	F4	Q216	*G3	R1063	*J5	R1155	J5	R1247	*J3	R2087	*F4	R3054	E5	R4082	*E4	R5040	*J1		
C610	*H6	C1083	*F2	C3006	D5	C5000	*J6	IC210	G4	Q217	F4	R1064	*H5	R1156	J5	R1248	J5	R2088	*F4	R3055	E5	R4083	*E4	R5041	*J1		
C611	*H6	C1084	*F2	C3007	D5	C5001	*K6	IC211	F3	Q218	F4	R1065	*J5	R1157	*J4	R1249	*J3	R2089	*F4	R3056	*E4	R4084	*E3	R5042	*H1		
C612	*H6	C1085	*F2	C3008	*C5	C5002	*J6	IC212	F3	Q219	G5	R1066	*H5	R1158	*J4	R1250	E2	R2090	*F4	R3057	*E4	R4085	*E4	R5043	*H1		
C613	G6	C1086	*F1	C3009	D5	C5006	*K2	IC213	F4	Q220	G5	R1067	*H5	R1159	*J5	R1251	E2	R2091	*F4	R3058	E5	R4086	E3	R5044	K2		
C614	H6	C1087	*F1	C3010	D5	C5007	*K2	IC214	F4	Q221	G5	R1068	*J5	R1160	H3	R1252	*E3	R2092	*F4	R3059	E4	R4087	E4	R5045	K2		
C615	H6	C1088	*F1	C3011	*D5	C5008	*K3	IC300	D5	Q222	*G5	R1069	*J5	R1161	J3	R1253	*D2	R2093	*F4	R3060	E4	R4088	E3				
C616	H6	C1089	*F2	C3012	D5	C5009	*G6	IC301	D5	Q404	E3	R1070	*H5	R1162	*J5	R1254	*D3	R2094	*F4	R3061	E5	R4089	E4	RB100	*E3		
C618	H6	C1090	*F2	C3013	C6	C5010	*H2	IC302	D5	Q405	E4	R1071	*H5	R1163	*J5	R1255	*E2	R2095	*F4	R3062	E5	R4090	*C3	RB300	D6		
C619	H6	C1091	F2	C3014	C6	C5011	*H1	IC303	D5	Q406	*B2	R1072	*J5	R1164	*J3	R1256	*D2	R2096	*F4	R3063	*D5	R4091	*E3	RB301	D6		
C1000	*H5	C1092	F2	C3015	D5	C5012	C6	IC304	C5	Q407	*B3	R1073	*J5	R1165	*J3	R1257	*D2	R2097	*F4	R3064	*D5	R4092	*E4	RB302	D6		
C1001	*J5	C1093	F2	C3018	C5	C5015	K2	IC305	*D5	Q408	*E4	R1074	*H5	R1166	*J4	R1258	*D3	R2098	*F4	R4001	*C4	R4093	*C3	RB303	D6		
C1002	F6	C1094	F2	C3019	C5	C5016	K1	IC306	C5	Q409	*B3	R1075	*J5	R1167	*J4	R1259	*G1	R2099	*F4	R4002	*C4	R4094	*E3	RB304	*C5		
C1003	F6	C1095	F2	C3020	*C4			IC307	*E5	Q410	*E4	R1076	*H5	R1168	*J3	R1260	*G1	R2100	*F4	R4003	*C4	R4095	*E4	RB305	C6		
C1004	E6	C1096	F1	C3021	*D5	CN5	*C6	IC308	E5	Q411	*B3	R1077	*J5	R1169	J5	R1261	*G5	R2101	*F4	R4004	*C4	R4096	*C2	RB501	C6		
C1005	E6	C1097	*E2	C3022	*D4	CN6	*B3	IC400	C3	Q412	*E4	R1078	*F6	R1170	*H4	R1262	*F6	R2102	*F4	R4005	*C3	R4097	*B3	RB502	*G2		
C1006	*G5	C1098	*E2	C3023	D5	CN7	*C2	IC401	C4	Q503	*G6	R1079	*H5	R1171	J5	R1263	*F6	R2103	*F4	R4006	*C3	R4098	*E4				
C1007	*H5	C1099	E2	C3024	*D4	CN9	*A2	IC402	C3	Q504	*G6	R1080	*J5	R1172	*J4	R1264	*G5	R2104	*F4	R4007	C3	R4099	*E3	RV101	H3		
C1008	*H5	C1100	E2	C3025	F4	CN10	*G6	IC403	C3	Q600	H6	R1081	*G5	R1173	*J3	R1265	*G5	R2105	*F4	R4008	*C3	R4100	*E3	RV102	*E2		
C1009	*H5	C1101	*E2	C3026	E5	CN140	*J6	IC404	D3	Q601	H6	R1082	*G3	R1174	H5	R1280	G3	R2106	*F4	R4009	*C3	R4101	*E4	RV103	*E3		
C1010	G5	C1102	*E2	C3027	E4	CN141	*D6	IC405	D4			R1083	G3	R1175	J5	R1281	G3	R2107	*F4	R4010	C3	R4102	*E4	RV151	J3		
C1011	H5	C1103	E2	C3028	*E5	CN142	*E6	IC409	*B2	R500	*K6	R1084	*F5	R1176	*J5	R2000	*G5	R2108	*F4	R4011	*C4	R4103	*E3	RV400	*D3		
C1012	F5	C1104	*E2	C3029	D4			IC410	*C2	R600	D6	R1085	*F5	R1177	*B3	R2001	*H5	R2109	*F4	R4012	*C4	R4104	*C2	RV401	*D4		
C1013	*F5	C1105	*E2	C3030	E4	D100	H4	IC411	B3	R601	*H6	R1086	*J4	R1178	*H4	R2002	H5	R2110	*F4	R4013	*C4	R4105	*E4				
C1014	E5	C1106	*E2	C4001	*C4	D101	J4	IC413	D3	R602	H6	R1087	*J5	R1179	*J4	R2003	G5	R2111	*F4	R4014	*D3	R4106	*E4	S10	*E3		
C1015	*E5	C1107	E2	C4002	*C4	D102	*F2	IC414	D4	R603	H6	R1088	*J5	R1180	*J5	R2004	H5	R2112	*F4	R4015	*D4	R4107	*F4	S101	*H3		
C1016	G5	C1108	E2	C4003	*C4	D103	*F2	IC415	E3	R604	H6	R1089	*J5	R1181	H5	R2005	H5	R2113	*F5	R4016	*D4	R4108	*E3	S102	H4		
C1017	F5	C1109	*E2	C4004	*C3	D202	*F3	IC416	E4	R606	H6	R1090	*J4	R1182	J5	R2010	*G4	R2114	*F5	R4017	*D3	R4109	*E3	S103	*H3		
C1018	*F5	C1110	E2	C4005	C4	D203	*F3	IC418	E3	R607	H6	R1091	*F5	R1183	*H4	R2011	*H4	R2115	*F4	R4018	*D3	R4110	*F3	S104	H4		
C1019	*E5	C1111	E2	C4006	*C4	D204	*F5	IC419	E4	R1000	*H5	R1092	*F5	R1184	*J4	R2012	*G4	R2116	*F5	R4019	*D4	R4111	*C2	S151	J4		
C1020	*E5	C1112	*D2	C4007	C3	D205	*F5	IC420	F3	R1001	*H5	R1093	*F5	R1185	*F3	R2013	*H4	R2117	*F5	R4020	*D4	R4112	*E3	S152	*J3		
C1021	*F5	C1113	*D3	C4008	*C3	D300	D6	IC421	F4	R1002	*J5	R1094	*F5	R1186	*J4	R2014	*G4	R2120	*C6	R4021	*D3	R4113	*E4	S153	J4		
C1022	*F5	C1114	*D3	C4009	C3	D400	*B3	IC422	D3	R1003	*H5	R1095	*J4	R1187	*J4	R2015	*G4	R2121	*C6	R4022	*D3	R4114	*E4	S400	*E4		
C1023	*E5	C2000	*H5	C4010	C4	D401	*E4	IC423	D4	R1004	*H5	R1096	*F5	R1188	*H4	R2016	*G4	R2122	*F5	R4023	*D3	R4115	*F4	S401	H5		
C1024	*F5	C2003	*G4	C4011	C3	D502	F1	IC424	D3	R1005	*H5	R1097	*H5	R1189	*J4	R2017	*G4	R2123	*F5	R4024	*D3	R4116	*E3	S402	*E4		
C1025	*E5	C2004	*H4	C4012	C4	D600	*H6	IC425	D4	R1006	*F5	R1098	J5	R1190	*F3	R2018	*G4	R2124	G5	R4025	*D4	R4117	*F3	S501	K1		
C1026	*H5	C2005	F3	C4013	D3	D601	*H6	IC501	J6	R1007	*F5	R1099	J5	R1191	H4	R2019	*H4	R2125	G5	R4026	D3	R4118	F4	S502	G4		
C1027	*J5	C2006	F3	C4014	D3			IC503	J6	R1008	G6	R1100	*H4	R1192	J4	R2020	*G4	R2126	G5	R4027	D4	R4119	*F3	S503	G5		
C1028	*J5	C2007	*F3	C4015	*D3	E100	*G2	IC505	K3	R1009	G6	R1101	*H5	R1193	*J4	R2021	*H4	R2127	G5	R4028	*D3	R4120	*F4	S504	F2		
C1029	*H5	C2008	*F3	C4016	D4	E101	G6	IC506	*H1	R1010	*E5	R1102	*J5	R1194	*J4	R2022	*H4	R3000	D6	R4029	*D4	R4121	*E3	S505	F2		
C1030	F6	C2009	*F3	C4017	D4	E150	*G1	IC511	C6	R1011	*E5	R1103	*H4	R1195	*F3	R2023	*H4	R3001	D6	R4030	*D4	R4122	*E4	S506	G3		
C1031	F6	C2010	*G3	C4018	*D3	E201	H5	IC512	K6	R1012	F6	R1104	*J4	R1196	*H4	R2024	*G4	R3002	C6	R4031	*D3	R4123	*C3	S507	G3		
C1032	E6	C2011	F3	C4019	*D4	E300	*D5	IC514	K2	R1013	F6	R1105	*H4	R1197	*J4	R2025	*G4	R3003	D6	R4032	*D4	R4124	*D3	S509	G4		
C1033	E6	C2012	*G3	C4020	*D3	E400	*F3	IC517	*G1	R1014	*H5	R1106	*J4	R1198	H4	R2026	*H4	R3004	D6	R4033	*D3	R4125	D3	S510	G5		
C1034	G3	C2013	*F3	C4021	*D3	E450	*F3	IC518	K2	R1015	*H5	R1107	*J4	R1199	J4	R2027	*H4	R3005	D6	R4034	D4	R4126	*D3	S512	G4		
C1035	F5	C2014	*G3	C4022	*D4	E451	C3	IC600	*H6	R1016	*F5	R1108	*H4	R1200	K4	R2028	F3	R3006	D6	R4035	*D3	R4127	D3	S519	*J2		
C1036	F6	C2015	F3	C4023	*D3			IC601	H6	R1017	*E5	R1109	*H4	R1201	*F2	R2029	F3	R3007	*C5	R4036	*D4	R4128	*D3	S520	*J1		
C1037	E6	C2016	G3	C4024	*D3	IC100	*J3			R1018	*F5	R1110	*J4	R1202	*F2	R2030	*F3	R3008	D6	R4037	D3	R4129	D4	S522	K2		
C1038	E6	C2017	*F3	C4025	*D4	IC101	H5	L100	E3	R101																	






APR-55 -A SIDE-
SUFFIX: -11

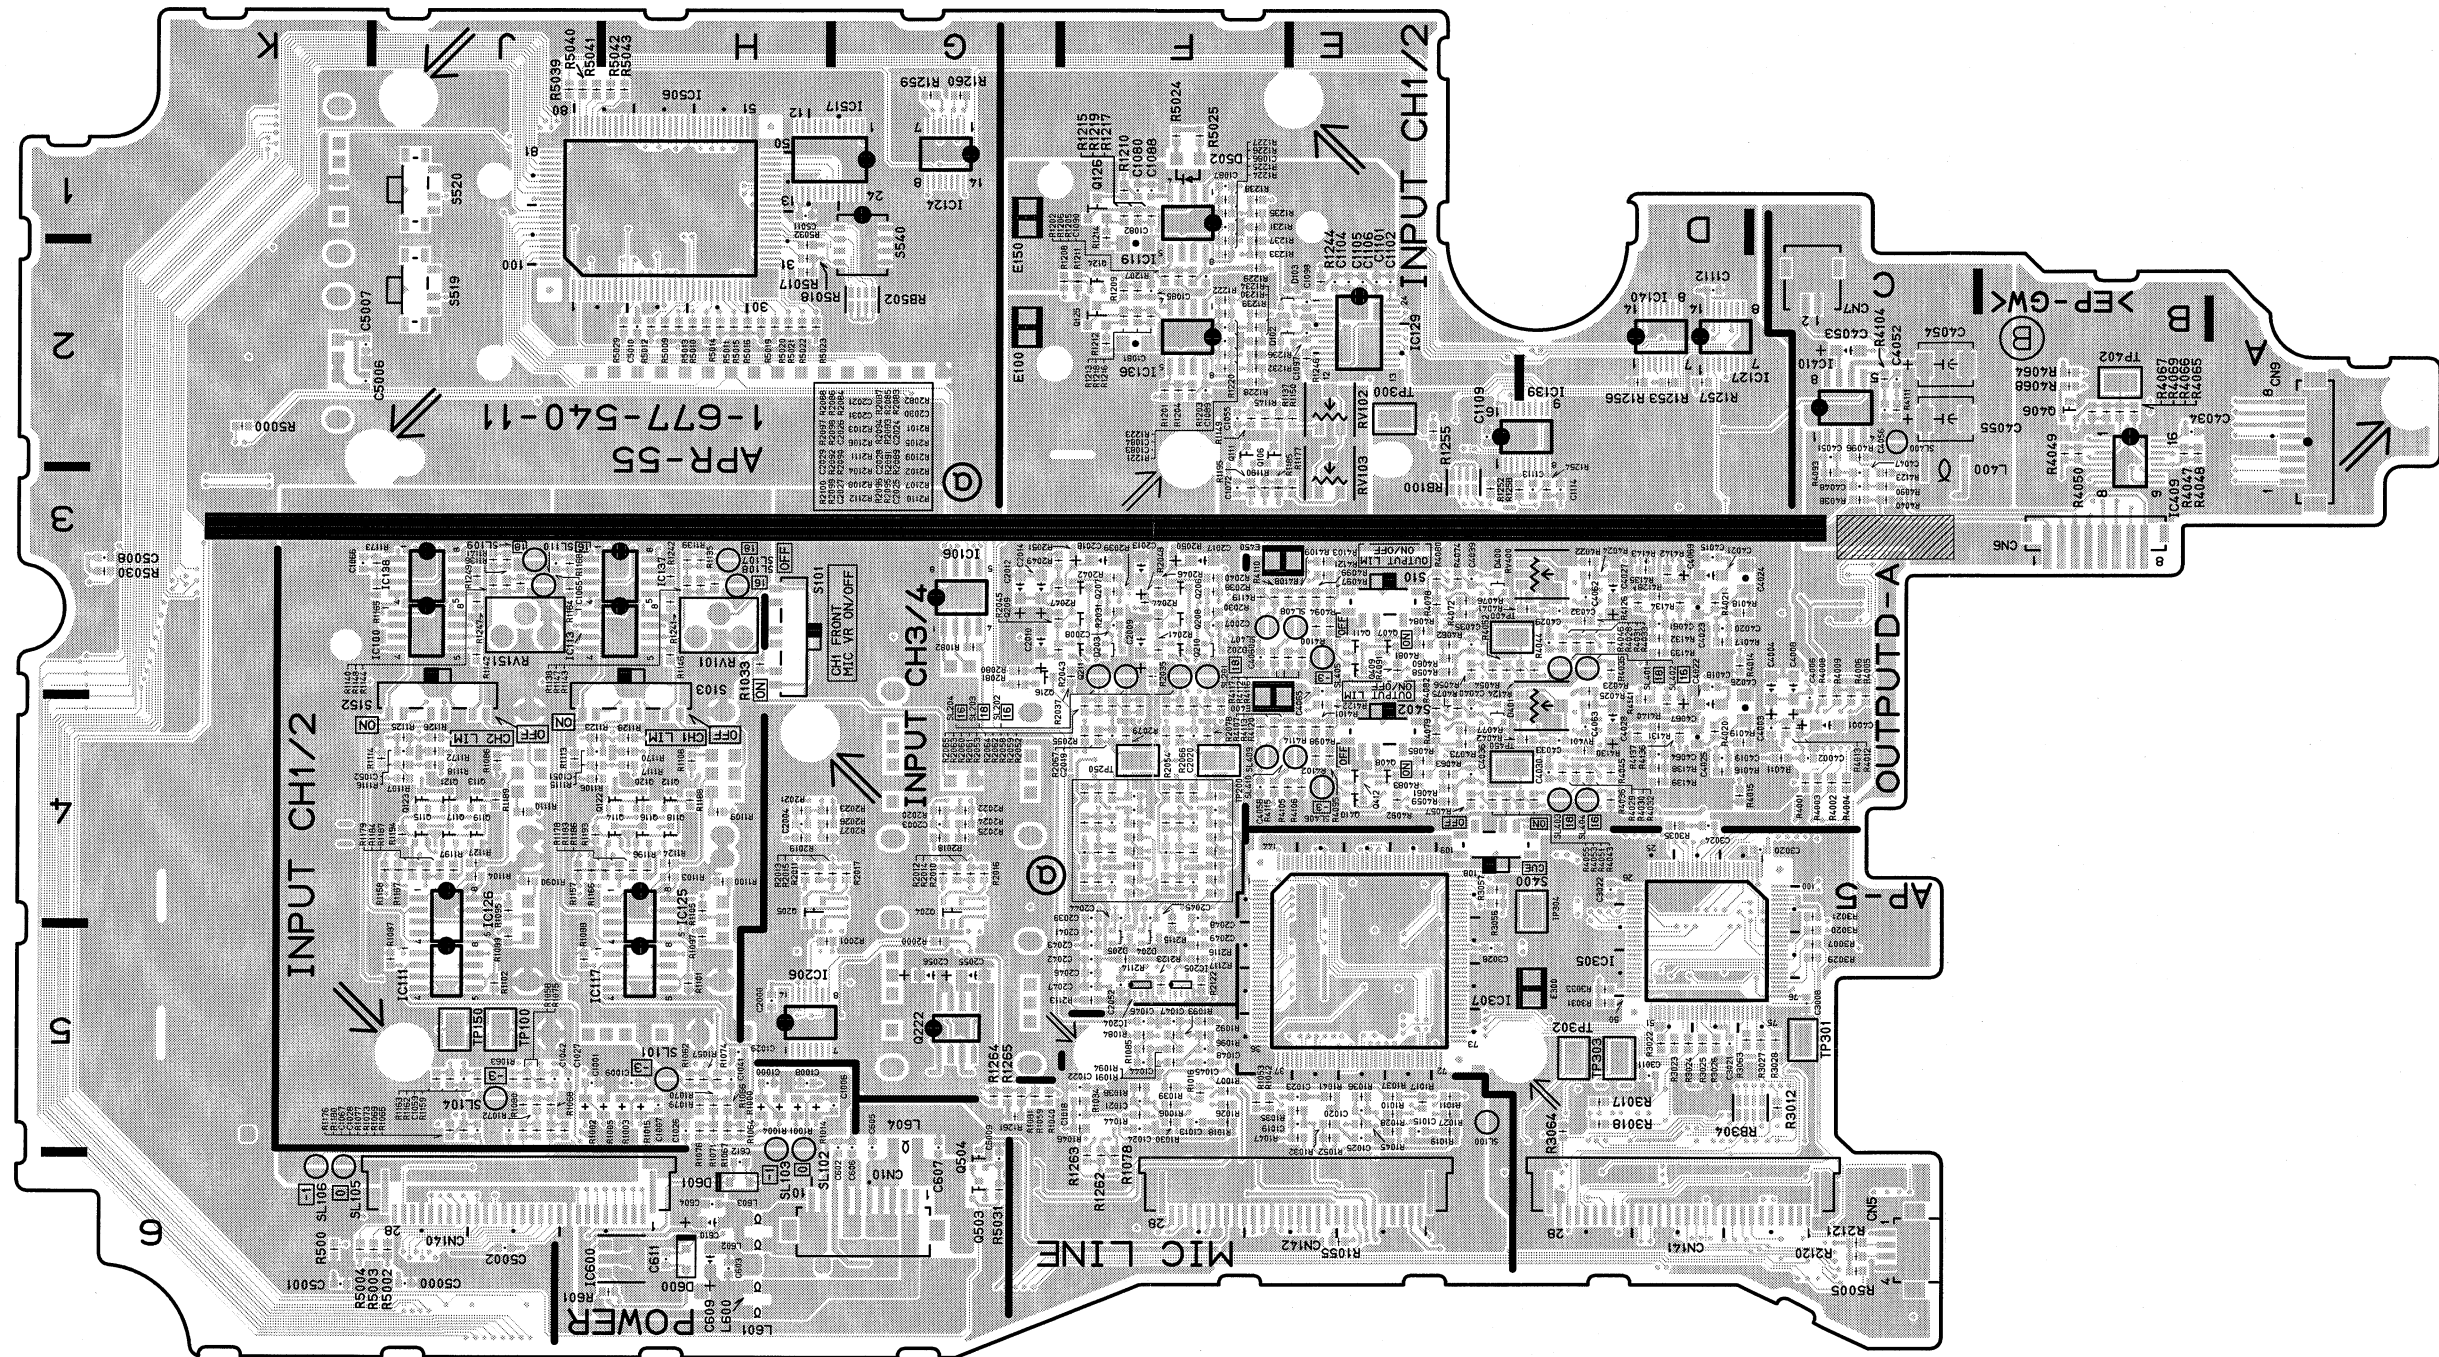


APR-55 -B SIDE-
SUFFIX: -11

C1	A1	CN1	A1	Q305	*A1	R217	*A1
C2	A1	CN2	A1			R218	*A1
C3	*A1	CN10	A1	R1	*A1	R219	*A1
C4	*A1	CN20	A1	R2	*A1	R220	*A1
C5	*A1	CN100	A1	R3	*A1	R221	*A1
C6	*A1	CN200	A1	R4	*A1	R304	*A1
C7	*A1	CN300	A1	R5	*A1	R305	*A1
C8	*A1			R6	*A1	R306	*A1
C9	*A1	D1	*A1	R7	*A1	R307	*A1
C10	*A1	D2	*A1	R8	*A1	R308	*A1
C11	*A1	D3	*A1	R9	*A1	R309	*A1
C12	*A1	D4	*A1	R10	*A1	R310	*A1
C13	*A1	D100	*A1	R11	*A1	R311	*A1
C14	*A1	D101	*A1	R100	*A1	R312	*A1
C100	*A1	D200	*A1	R101	*A1	R313	*A1
C101	*A1	D201	*A1	R102	*A1	R314	*A1
C102	*A1	D300	*A1	R103	*A1	R315	*A1
C103	*A1	D301	*A1	R104	*A1	R316	*A1
C104	*A1	D302	*A1	R105	*A1	R317	*A1
C105	*A1	D303	*A1	R106	*A1	R318	*A1
C106	A1	D304	*A1	R107	*A1	R319	*A1
C107	A1	D305	*A1	R108	*A1	R320	*A1
C108	*A1			R109	*A1	R321	*A1
C109	*A1	FL1	*A1	R110	*A1	R322	*A1
C110	*A1	FL300	*A1	R111	*A1	R323	*A1
C111	*A1	FL301	*A1	R112	*A1	R324	*A1
C200	*A1	FL302	*A1	R113	*A1	R325	*A1
C201	*A1	FL303	*A1	R114	*A1	R326	*A1
C202	*A1			R115	*A1	R327	*A1
C203	*A1	IC1	*A1	R116	*A1	R328	*A1
C204	*A1	IC2	*A1	R117	*A1	R329	*A1
C205	*A1	IC100	*A1	R118	*A1	R330	*A1
C206	A1	IC200	*A1	R119	*A1	R331	*A1
C207	A1	IC300	*A1	R120	*A1	R332	*A1
C208	*A1	IC301	*A1	R121	*A1	R333	*A1
C209	*A1			R200	*A1		
C210	*A1	L1	*A1	R201	*A1	S100	A1
C211	*A1	L2	*A1	R202	*A1	S200	A1
C300	*A1	L100	*A1	R203	*A1		
C301	*A1	L101	*A1	R204	*A1	SL1	*A1
C302	A1	L200	*A1	R205	*A1	SL2	*A1
C303	*A1	L201	*A1	R206	*A1	SL100	*A1
C304	*A1			R207	*A1	SL200	*A1
C305	A1	Q1	*A1	R208	*A1	SL300	*A1
C306	*A1	Q2	*A1	R209	*A1	SL301	*A1
C307	*A1	Q3	*A1	R210	*A1		
C308	*A1	Q4	*A1	R211	*A1	VDR1	A1
C309	*A1	Q300	*A1	R212	*A1		
C310	A1	Q301	*A1	R213	*A1	*:B SIDE	
C311	*A1	Q302	*A1	R214	*A1		
C312	A1	Q303	*A1	R215	*A1		
C313	*A1	Q304	*A1	R216	*A1		




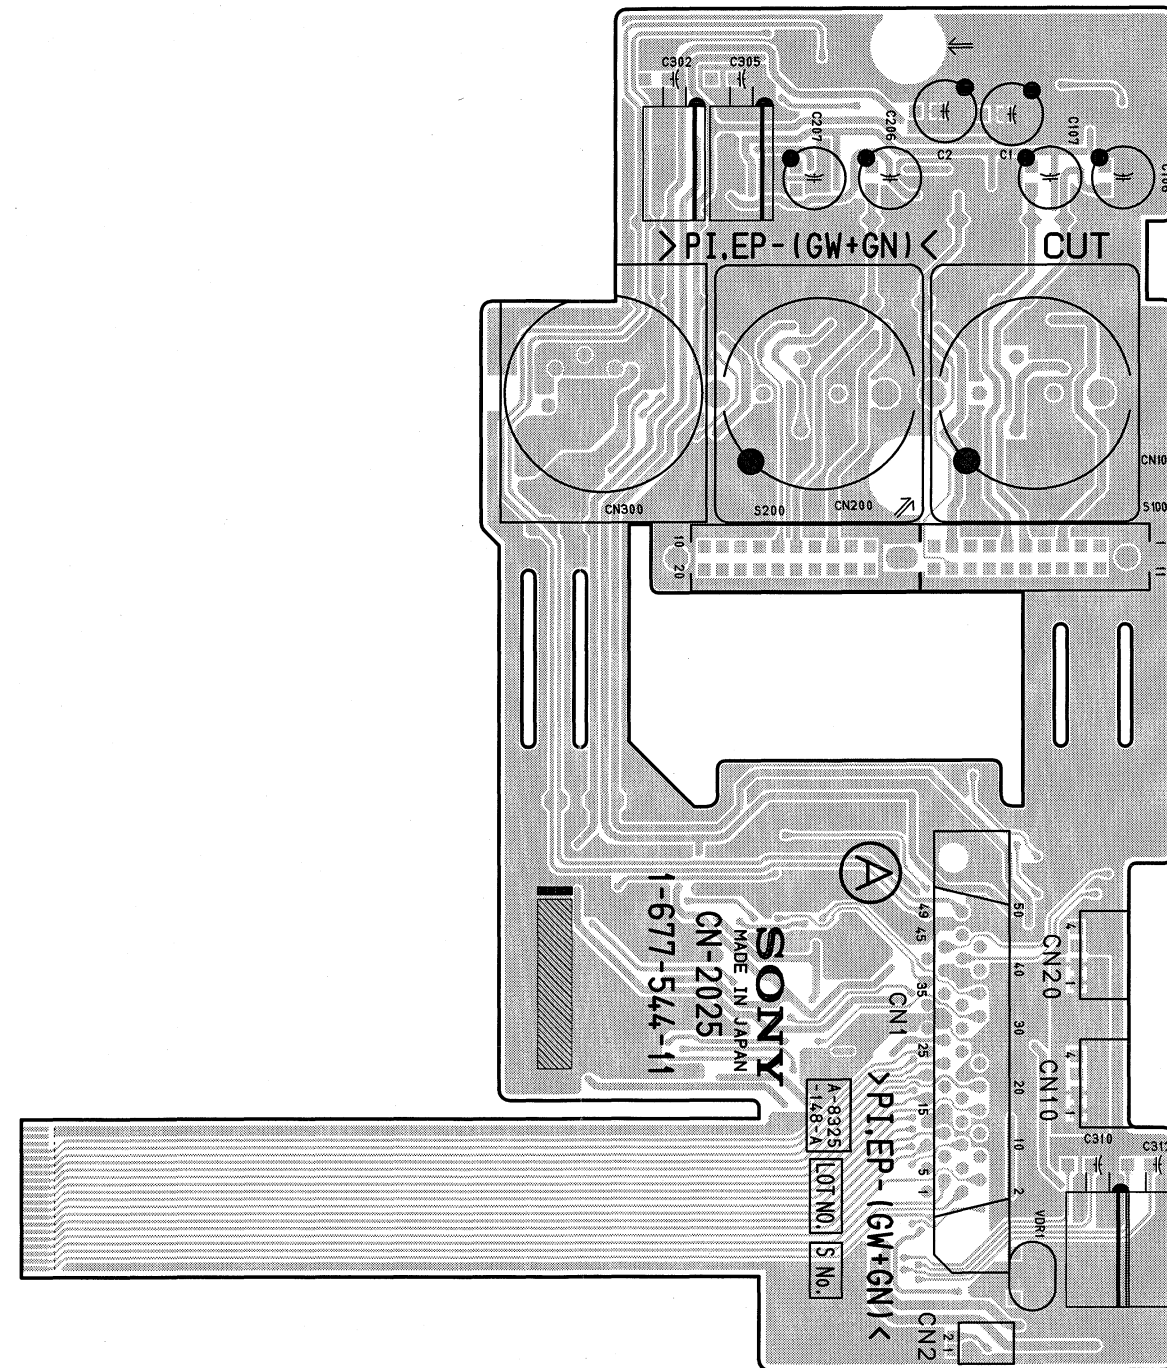


CN-2025 -A SIDE-SUFFIX: -11

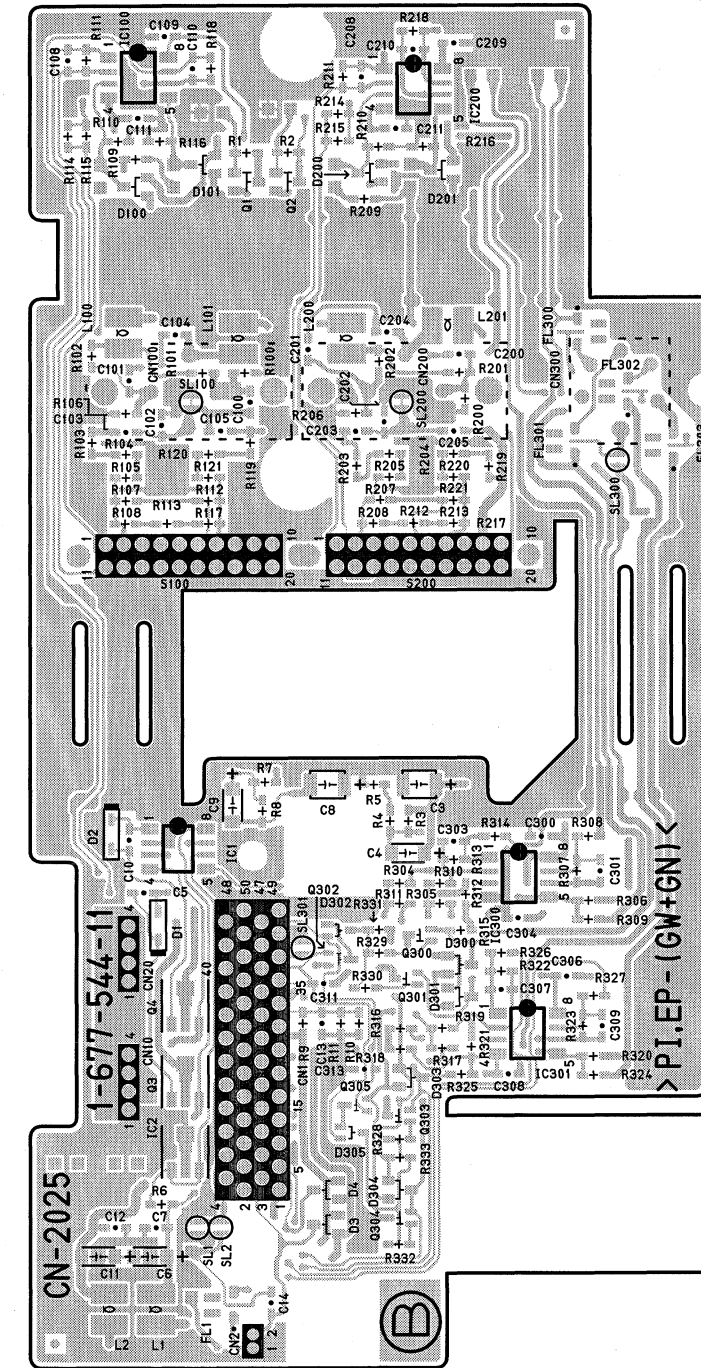


CN-2025 -B SIDE-
SUFFIX: -11




CN-2119 -A SIDE-
SUFFIX: -11




CN-2119 -B SIDE-
SUFFIX: -11




CN-1432 -A SIDE-
SUFFIX: -12




CN-1432 -B SIDE-
SUFFIX: -12

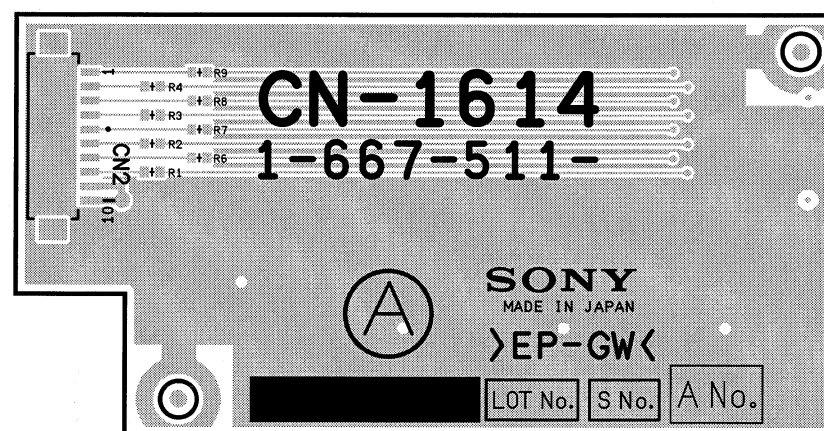


CN-1614 -A SIDE-
SUFFIX: -13

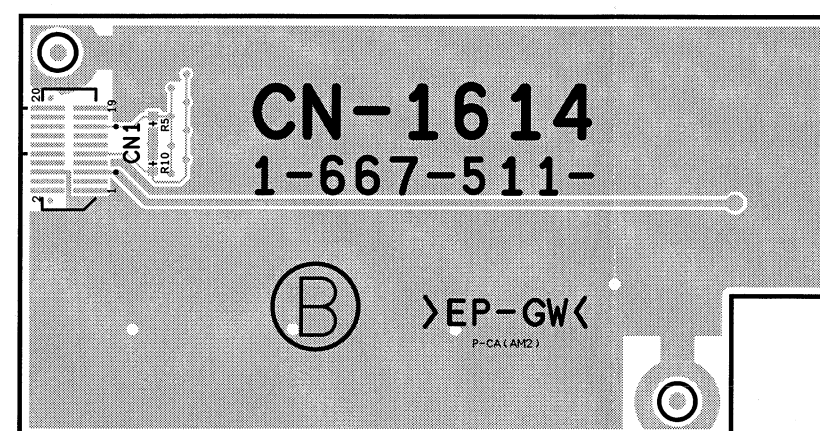


CN-1614 -B SIDE-
SUFFIX: -13

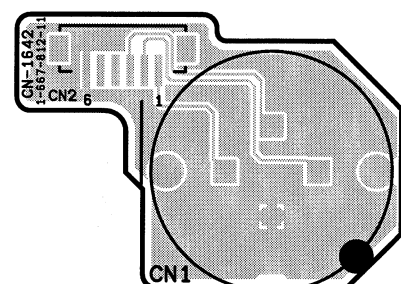


CN-1642 -A SIDE-
SUFFIX: -11

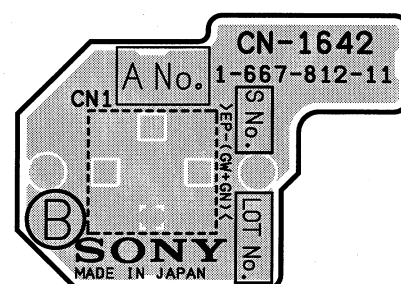


CN-1642 -B SIDE-
SUFFIX: -11

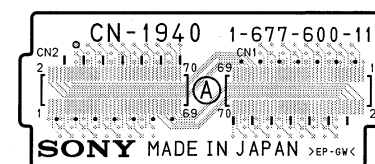


CN-1940 -A SIDE-
SUFFIX: -11

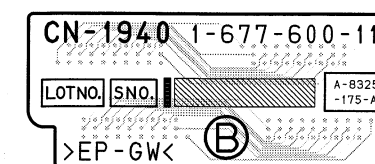

CN-1940 -B SIDE-
SUFFIX: -11

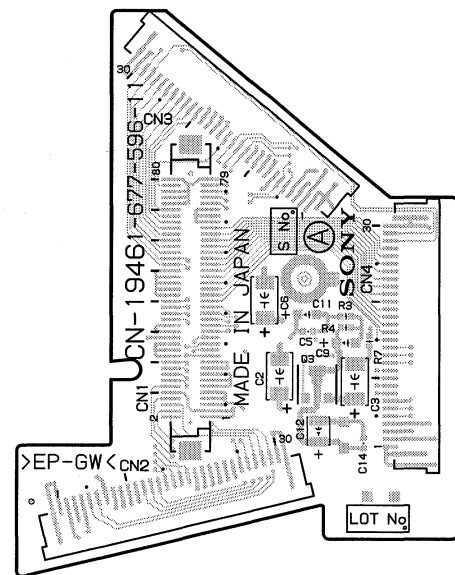


CN-1946 -A SIDE-
SUFFIX: -11

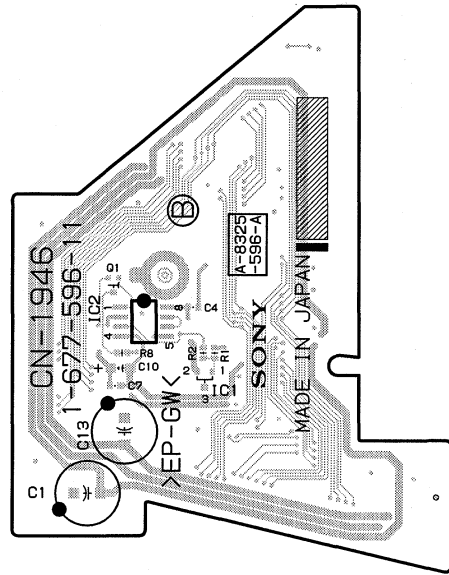


CN-1946 -B SIDE-
SUFFIX: -11




CN-2044 -A SIDE-
SUFFIX: -11



CN-2044 -B SIDE-
SUFFIX: -11

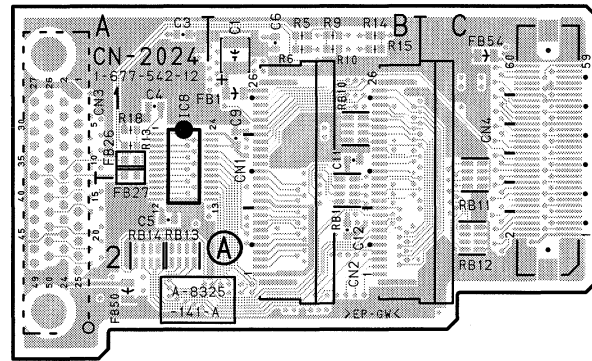


CN-2024 -A SIDE-
SUFFIX: -12

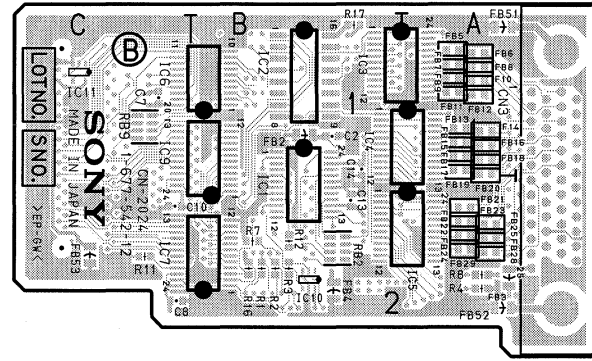


CN-2024 -B SIDE-
SUFFIX: -12


C1	B1	C12	B2	FB1	B1	FB13	*A1	FB25	*A2	IC1	*B1	R1	*B2	R12	*B2	RB10	B1
C2	*B1	C13	*B2	FB2	*B1	FB15	*A1	FB26	A1	IC2	*B1	R2	*B2	R13	A1	RB11	C1
C3	A1	C14	*B1	FB3	*A2	FB16	*A1	FB27	A1	IC3	*B1	R3	*B2	R14	B1	RB12	C2
C4	A1			FB4	*B2	FB17	*A1	FB28	*A2	IC4	*B1	R4	*A2	R15	B1	RB13	A2
C5	A2	CN1	B2	FB5	*A1	FB18	*A1	FB29	*A2	IC5	*B2	R5	B1	R16	*B2	RB14	A2
C6	B1	CN2	B2	FB6	*A1	FB19	*A1	FB50	A2	IC6	*B1	R6	B1	R17	*B1		
C7	*C1	CN3	*A2	FB7	*A1	FB20	*A1	FB51	*A1	IC7	*B2	R7	*B2	R18	A1	*:B SIDE	
C8	*C2	CN4	C1	FB8	*A1	FB21	*A2	FB52	*A2	IC8	A1	R8	*A2				
C9	B1			FB9	*A1	FB22	*A2	FB53	*C2	IC9	*B2	R9	B1	RB1	B2		
C10	*C2	F10	*A1	FB11	*A1	FB23	*A2	FB54	C1	IC10	*B2	R10	B1	RB2	*B2		
C11	B1	F14	*A1	FB12	*A1	FB24	*A2			IC11	*C1	R11	*C2	RB9	*C1		

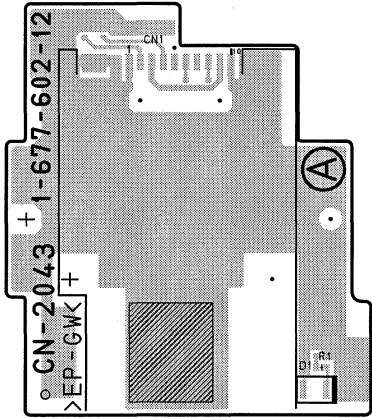


CN-2043 -A SIDE-
SUFFIX: -12

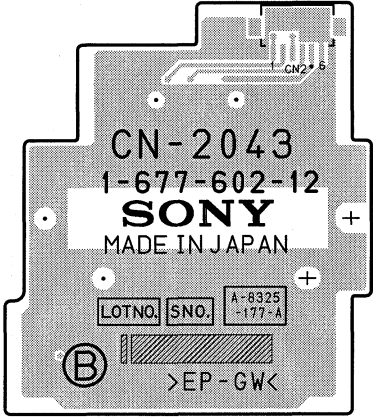


CN-2043 -B SIDE-
SUFFIX: -12

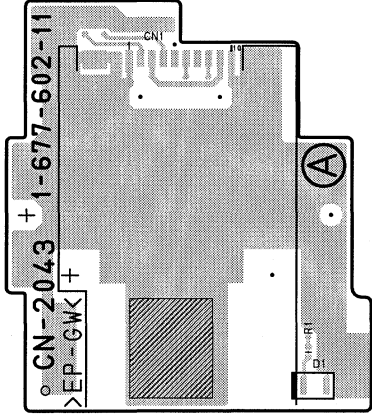


CN-2043 -A SIDE-
SUFFIX: -11

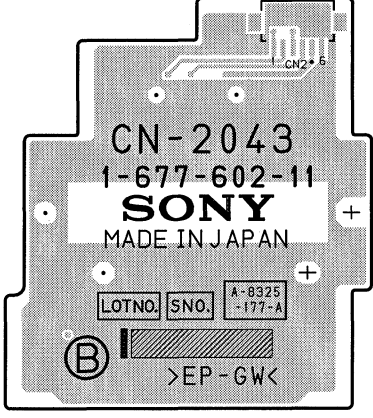

CN-2043 -B SIDE-
SUFFIX: -11

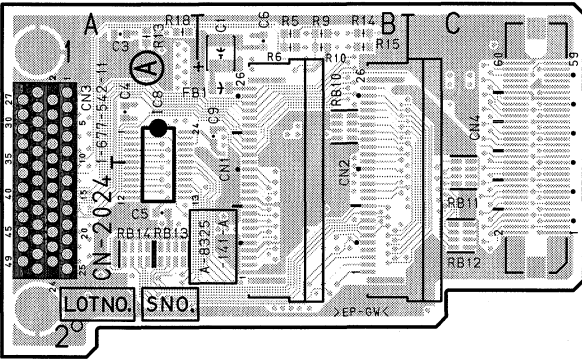


CN-2024 -A SIDE-
SUFFIX: -11

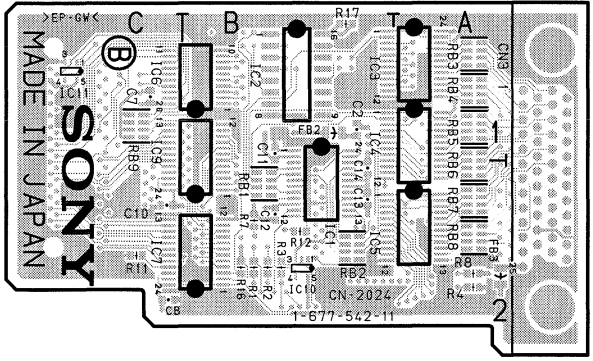


CN-2024 -B SIDE-
SUFFIX: -11


C1	B1	C12	*B2	FB3	*A2	IC10	*B2	R9	B1	RB1	*B2	RB12	C2
C2	*B1	C13	*B2			IC11	*C1	R10	B1	RB2	*B2	RB13	A2
C3	A1	C14	*B2	IC1	*B1			R11	*C2	RB3	*A1	RB14	A2
C4	A1			IC2	*B1	R1	*B2	R12	*B2	RB4	*A1		
C5	A2	CN1	B2	IC3	*B1	R2	*B2	R13	A1	RB5	*A1	*:B SIDE	
C6	B1	CN2	B2	IC4	*B1	R3	*B2	R14	B1	RB6	*A2		
C7	*C1	CN3	*A2	IC5	*B2	R4	*A2	R15	B1	RB7	*A2		
C8	*C2	CN4	C1	IC6	*B1	R5	B1	R16	*B2	RB8	*A2		
C9	B1			IC7	*B2	R6	B1	R17	*B1	RB9	*C1		
C10	*C2	FB1	B1	IC8	A1	R7	*B2	R18	A1	RB10	B1		
C11	*B1	FB2	*B1	IC9	*B2	R8	*A2			RB11	C2		

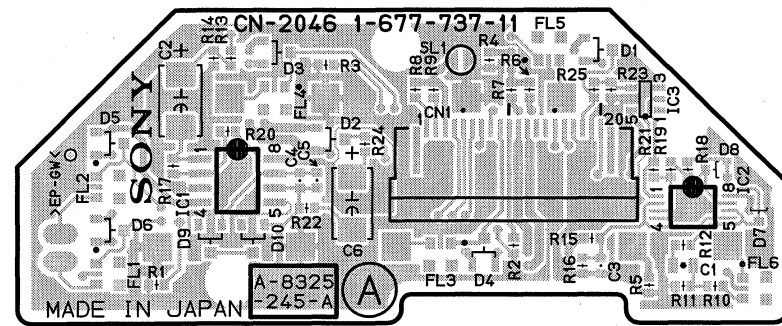


CN-2046 -A SIDE-SUFFIX: -11

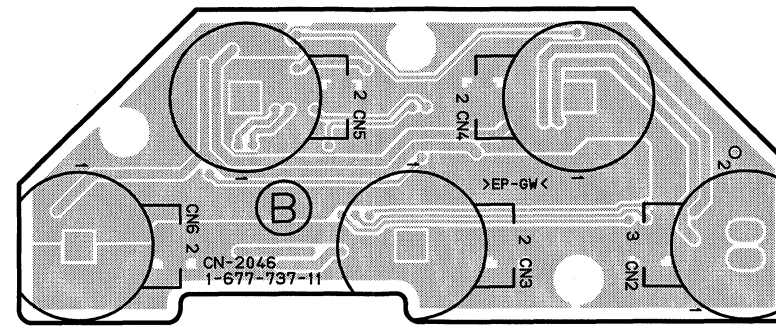


CN-2046 -B SIDE-
SUFFIX: -11




CN-2078 -A SIDE-SUFFIX: -11




CN-2078 -B SIDE-
SUFFIX: -11




CN-2085 -A SIDE-SUFFIX: -11




CN-2085 -B SIDE-
SUFFIX: -11




CN-2140 -A SIDE-SUFFIX: -11




CN-2140 -B SIDE-
SUFFIX: -11

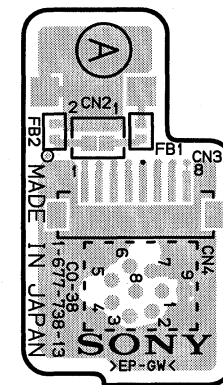


CO-38 -A SIDE-SUFFIX: -13

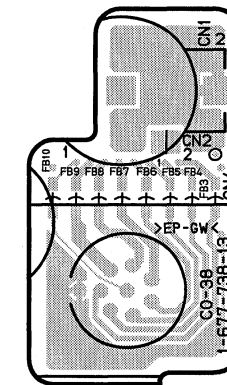


CO-38 -B SIDE-
SUFFIX: -13

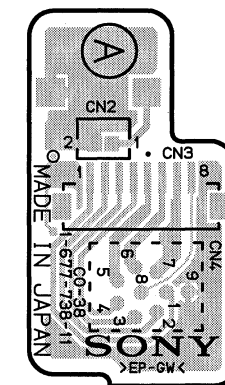


CO-38 -A SIDE-SUFFIX: -11

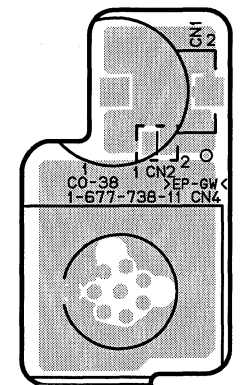


CO-38 -B SIDE-
SUFFIX: -11

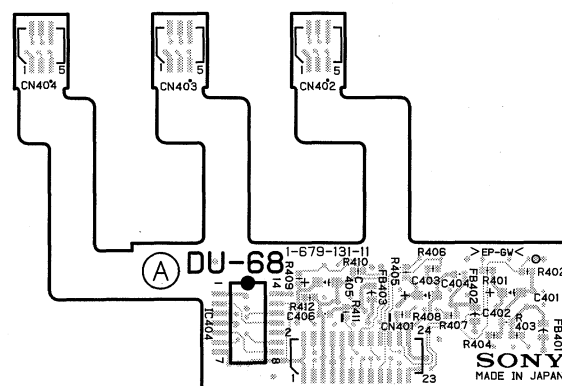


DU-68 -A SIDE-SUFFIX: -11

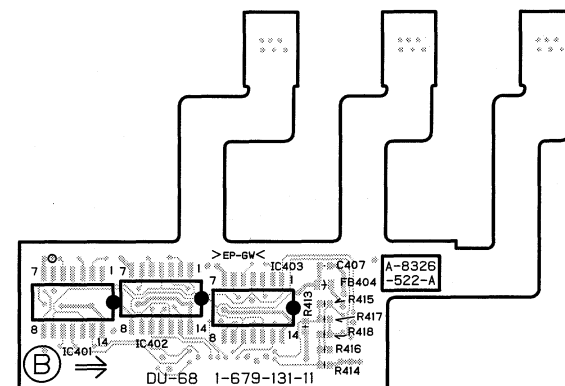


DU-68 -B SIDE-
SUFFIX: -11

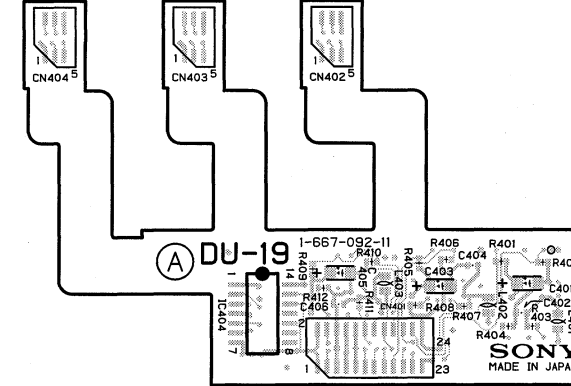


DU-19 -A SIDE-SUFFIX: -11

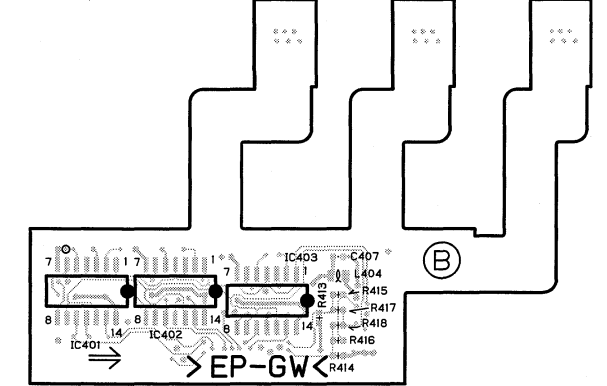

DU-19 -B SIDE-
SUFFIX: -11

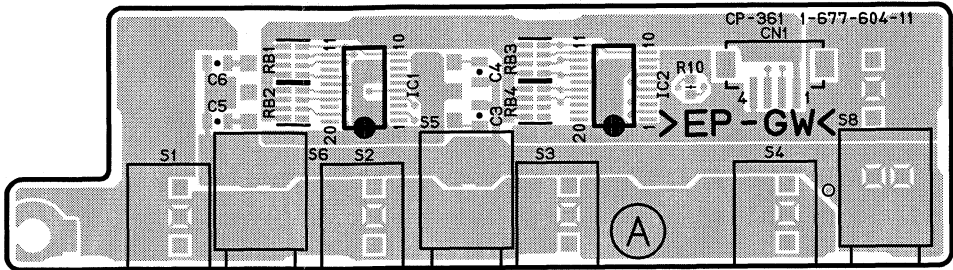


CP-361 -A SIDE-
SUFFIX: -11

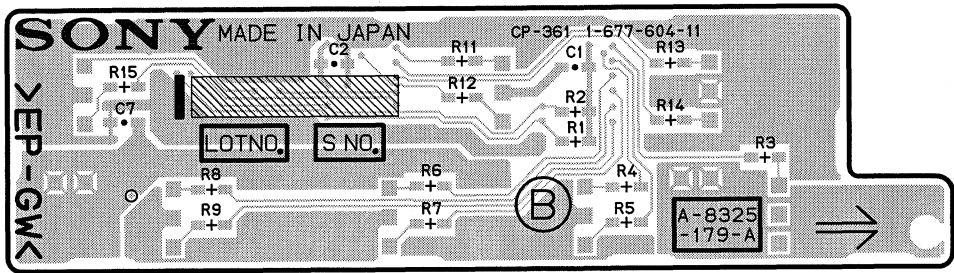


CP-361 -B SIDE-
SUFFIX: -11

CUE-2 (1-652-778-12)

CN1	A2	Q5	B1
CN2	B1	Q6	B1
CN3	D1	Q7	C1
CT1	A1	Q8	D1
CV1	A1	Q9	*B1
		Q10	*C2
		Q11	*B2
		Q12	*A1
D1	*D2	Q13	*A1
D2	*D2		
E1	D1	RV1	*B2
		RV2	*C1
		RV3	*D1
		RV4	*D1
IC1	B2	TP1	B1
IC2	D2	TP2	C1
IC3	C1	TP3	C1
IC4	*C2	TP4	D1
IC5	*D2	TP5	B1
LV1	B1		
Q1	*C1		
Q2	D2		
Q3	B2		
Q4	C2		

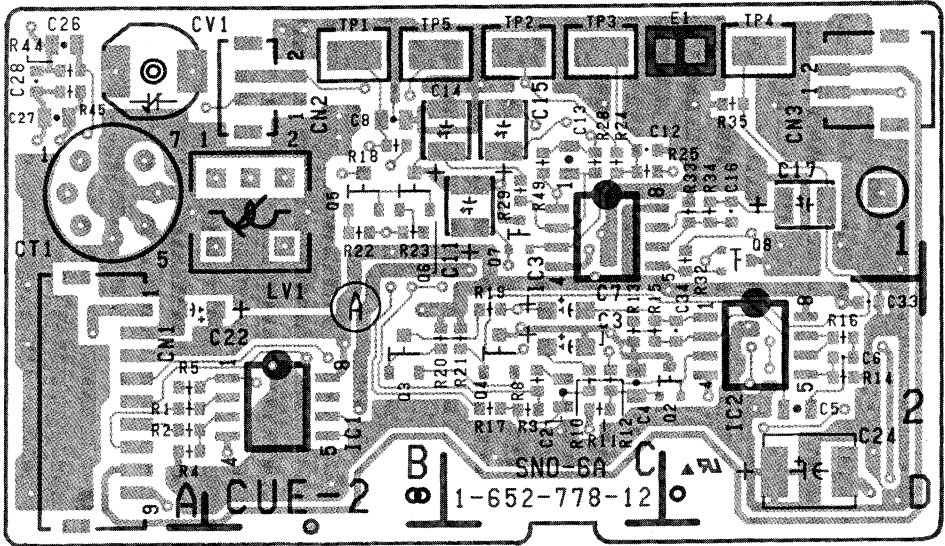

CUE-2 -A SIDE-
SUFFIX: -12

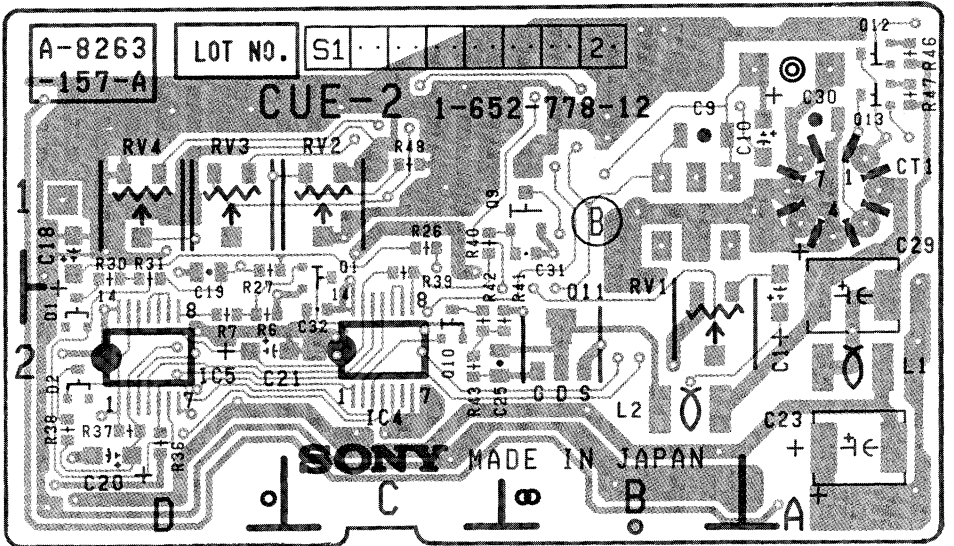


CUE-2 -B SIDE-
SUFFIX: -12


CTL-10 (1-652-765-11)

CN1	D3
CN2	*B2
CN3	D1
CN4	*A3
E1	C1
E2	B2
IC1	*C2
IC2	C3
IC3	D3
Q1	*D2
Q2	*D2
TP1	C1
TP2	C1
TP3	B1

*:B SIDE

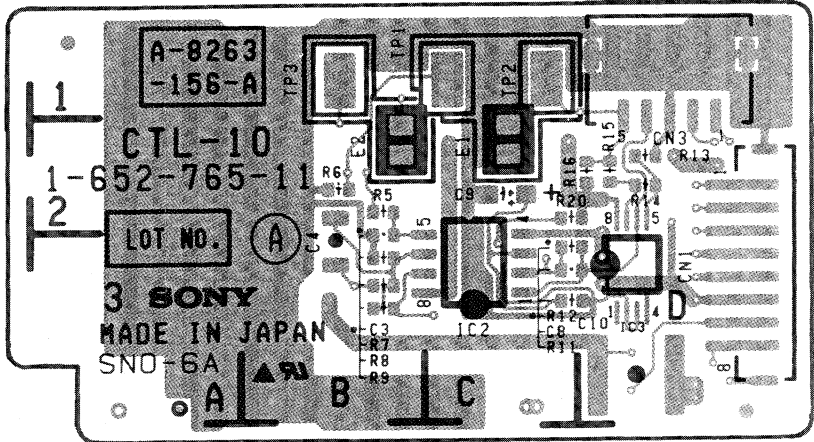

CTL-10 -A SIDE-
SUFFIX: -11

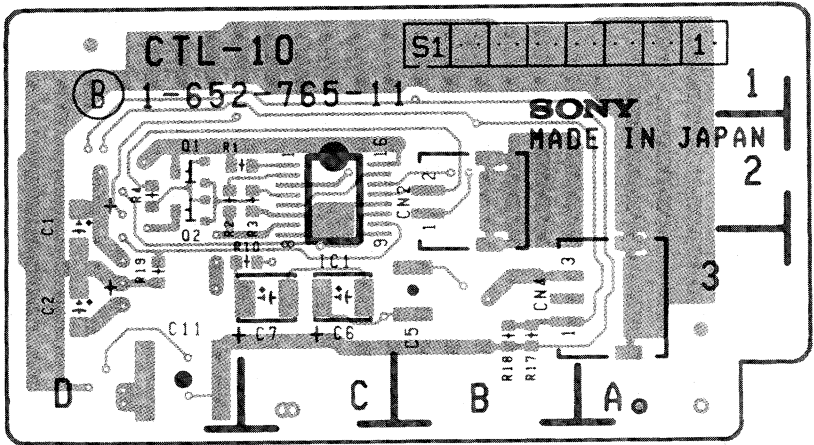


CTL-10 -B SIDE-
SUFFIX: -11


DR-411 (1-677-597-14)

C1	B2	C145	*B2	Q1	*A1	R78	*C4
C3	*A1	C146	*B2	Q2	*B1	R79	B4
C5	B1	C147	B2	Q3	*B1	R80	*B4
C6	*A1	C148	C1	Q4	*B1	R81	*B4
C7	*B1			Q7	B2	R82	*C4
C11	*B1	CN1	*A4	Q8	*B1	R83	C4
C12	B1	CN2	*B4	Q9	*B2	R84	*C4
C13	*B1	CN4	A3	Q10	*B1	R85	*C4
C14	*C1	CN5	A2	Q11	*C4	R86	*C4
C15	*C1	CN6	C3	Q12	*C4	R87	*C2
C17	*A2			Q13	*B4	R93	C1
C18	B1	D1	*A1	Q14	*B4	R94	C1
C19	B2	D3	B4	Q15	*C4	R95	C1
C20	B1	D4	*B4	Q101	B4	R96	C2
C21	*B1	D7	C2	Q102	C4	R100	B4
C23	*B1	D8	C2	Q103	B4	R101	*C2
C27	A4	D101	B3	Q104	B4	R102	*C2
C28	*C4	D102	B3	Q105	B4	R103	C1
C29	*C4	D103	B4	Q106	B4	R104	C1
C30	*C4	D104	B4	Q107	*B4	R105	C2
C33	C4	D105	*B4	Q108	B4	R106	C2
C40	*C4	D106	*B3	Q109	B4	R107	B2
C41	*C4	D107	*B3	Q110	B4	R109	A1
C43	*C4	D108	*B3	Q111	B3	R110	*B1
C44	*C4			Q112	B3	R111	*A2
C45	*C4	E1	A1	Q113	B3	R112	C2
C47	*C4			Q114	B3	R113	A4
C48	*C4	FB1	*C3	Q115	B3	R114	A4
C49	*C4	FB2	C3	Q116	*B4	R115	A4
C50	*B4	FB3	*C3	Q117	*B4	R116	*C4
C52	*C4	FB4	C3	Q118	*B3	R117	A4
C53	B4	FB5	*C3	Q119	*B3	R118	A4
C54	B4	FB6	C3	Q120	*B3	R119	A4
C55	*B4	FB7	*C3	Q121	*B3	R201	C4
C56	*B4	FB8	C3	Q122	*B3	R202	C4
C57	C4	FB9	C4	Q124	*B4	R203	C4
C65	C2	FB10	C3	Q125	B4	R204	B4
C66	B3	FB11	*C3	Q126	C2	R205	B4
C67	*C3	FB12	*C3			R206	B4
C70	C2	FB13	*C3	R1	*C2	R211	*B4
C71	C2	FB14	*C3	R2	*C2	R212	B4
C72	C2	FB15	C3	R3	*C2	R213	B4
C73	C2	FB16	C4	R4	C2	R214	*B2
C74	C2	FB17	C3	R5	*C2	R215	*B2
C75	B2	FB18	*C3	R6	C2	R216	C2
C76	A3	FB19	C3	R7	C2	R217	C4
C77	A4	FB20	*C3	R8	B4	R218	C4
C78	*B1	FB21	C3	R17	C2	R219	*B1
C80	A1	FB22	*C3	R18	B2		
C81	*A2	FB23	C3	R19	C2	RB101	A2
C101	B4	FB24	*C3	R20	C1	RB102	*B2
C102	A3	FB25	*C3	R21	*A1	RB103	*B3
C103	C4	FB26	*C3	R22	*A1	RB104	B2
C104	B3	FB27	*C3	R23	A1	RB105	B3
C105	B3	FB28	C3	R24	A1	RB106	*B2
C106	B4	FB29	*C3	R25	*B1	RB107	*B3
C107	B4	FB30	C3	R27	C2		
C108	B3	FB31	*C3	R30	*B1		
C109	B3	FB32	C3	R31	*B1		
C110	B3	FB33	C4	R34	*B1		
C111	B3	FB34	C3	R35	*B1		
C112	B3	FB35	*C3	R41	B2		
C113	B3	FB36	*C3	R42	B2		
C114	B3			R43	*A2		
C115	B3	IC1	*A1	R44	*A2		
C116	C4	IC3	*B1	R45	B2		
C117	B3	IC4	*B1	R48	B2		
C118	B4	IC5	*B2	R49	B2		
C119	*C4	IC7	A4	R50	*B2		
C120	*B3	IC8	*C4	R51	*B2		
C121	*B3	IC9	C4	R52	*B2		
C122	*B3	IC12	*C4	R53	A4		
C123	*B4	IC13	*C4	R54	A4		
C124	*B3	IC15	*C4	R55	A4		
C125	*B4	IC16	C2	R56	A4		
C126	C1	IC19	*C2	R57	B4		
C127	*B3	IC20	C1	R58	*C4		
C128	B4	IC21	*C4	R59	*C4		
C129	B3	IC101	B4	R64	C4		
C132	*B4	IC102	B4	R65	C4		
C133	*B4	IC103	B3	R66	C4		
C134	*B3	IC104	*B2	R67	C4		
C135	*B3	IC105	B3	R68	C4		
C136	*B3	IC106	B3	R69	C4		
C137	*B3	IC107	*B4	R70	C4		
C138	*B3	IC108	*B3	R71	C4		
C139	*B3	IC109	*B1	R72	*C4		
C140	*B3	IC110	C3	R73	*C4		
C141	*B3	IC111	*C2	R74	*C4		
C142	*B3			R75	*B4		
C143	*B3	L1	*B1	R76	B4		
C144	*B4			R77	B4		

*:B SIDE

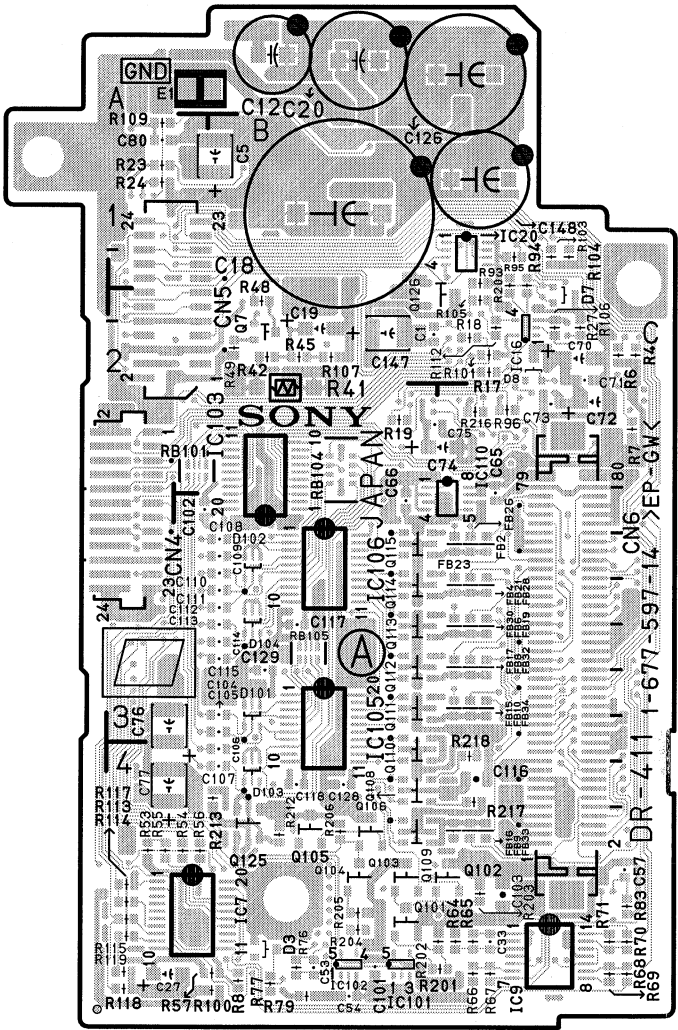

DR-411 -A SIDE-
SUFFIX: -14

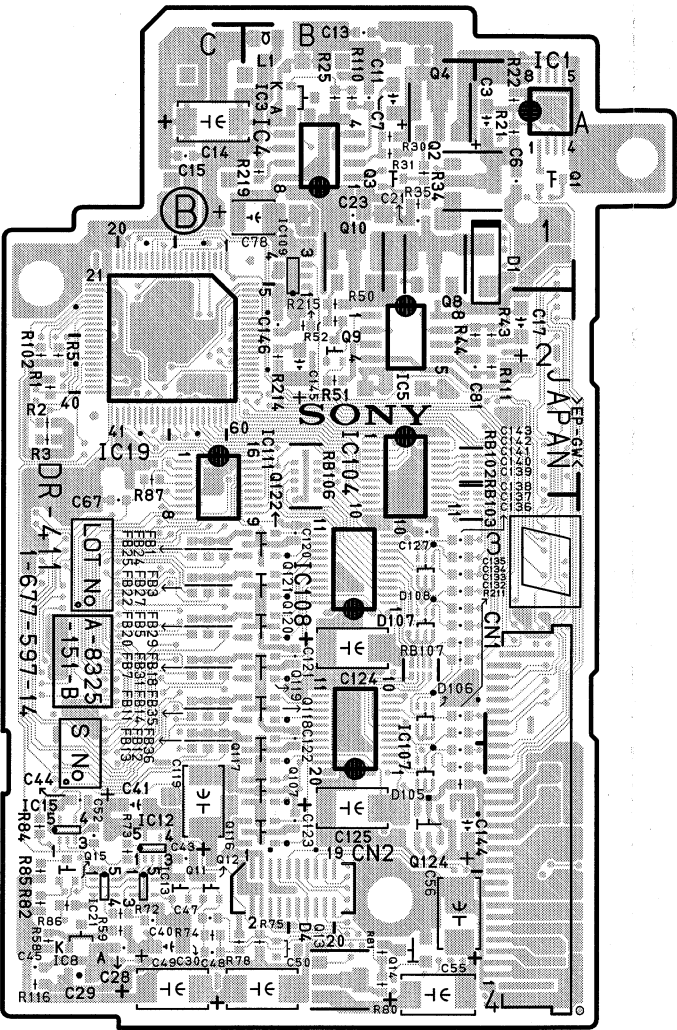


DR-411 -B SIDE-
SUFFIX: -14


DR-411 (1-677-597-13)

C1	C2	C143	*B3	Q3	*B1	R74	*C4
C3	*A1	C144	*B4	Q4	*B1	R75	*B4
C5	B1	C145	*B2	Q5	*B1	R76	B4
C6	*A1	C146	*B2	Q6	*C1	R77	B4
C7	*B1	C147	B2	Q7	B2	R78	*C4
C9	*B1			Q8	*B1	R79	B4
C11	*B1	CN1	*A4	Q9	*B2	R80	*B4
C12	B1	CN2	*B4	Q10	*B1	R81	*B4
C13	*B1	CN4	A2	Q11	*C4	R82	*C4
C14	*C1	CN5	A2	Q12	*C4	R83	*C4
C15	C1	CN6	C3	Q13	*B4	R84	*C4
C17	*A2			Q14	*B4	R85	*C4
C18	B1	D1	*A1	Q15	*C4	R86	*C4
C19	B2	D3	B4	Q101	B4	R87	*C2
C20	B1	D4	*B4	Q102	C4	R93	C1
C21	*B1	D7	C2	Q103	B4	R94	C1
C23	*B1	D8	C2	Q104	B4	R95	C1
C27	A4	D101	B3	Q105	B4	R96	C2
C28	*C4	D102	B3	Q106	B4	R100	B4
C29	*C4	D103	B4	Q107	*B4	R101	C2
C30	*C4	D104	B3	Q108	B4	R102	*C2
C31	*C4	D105	*B4	Q109	B4	R103	C1
C33	C4	D106	*B3	Q110	B4	R104	C1
C40	*C4	D107	*B3	Q111	B3	R105	C2
C41	*C4	D108	*B3	Q112	B3	R106	C2
C43	*C4			Q113	B3	R107	B2
C44	*C4	B1	A1	Q114	B3	R109	A1
C45	*C4			Q115	B3	R110	*B1
C47	*C4	FB1	*C3	Q116	*B4	R111	*A2
C48	*C4	FB2	C3	Q117	*B4	R112	C2
C49	*C4	FB3	*C3	Q118	*B3	R113	A4
C50	*B4	FB4	C3	Q119	*B3	R114	A4
C52	*C4	FB5	*C3	Q120	*B3	R115	A4
C53	B4	FB6	C3	Q121	*B3	R116	*C4
C54	B4	FB7	*C3	Q122	*B3	R117	A4
C55	*B4	FB8	C3	Q124	*B4	R118	A4
C56	*B4	FB9	C4	Q125	B4	R119	A4
C57	C4	FB10	C3	Q126	C2	R201	C4
C65	B2	FB11	*C3			R202	C4
C66	C2	FB12	*C3	R1	*C2	R203	C4
C67	*C2	FB13	*C3	R2	*C2	R204	B4
C70	C2	FB14	*C3	R3	*C2	R205	B4
C71	C2	FB15	C3	R4	C2	R206	B4
C72	C2	FB16	C4	R5	*C2	R211	*B4
C73	C2	FB17	C3	R6	C2	R212	B4
C74	C2	FB18	*C3	R7	C2	R213	B4
C75	C2	FB19	C3	R8	B4	R214	*B2
C76	A3	FB20	*C3	R17	C2	R215	*B2
C77	A4	FB21	C3	R18	C2	RB101	A2
C78	*B1	FB22	*C3	R19	B2	RB102	*B2
C80	A1	FB23	C3	R20	C1	RB103	*B2
C81	*A2	FB24	*C3	R21	*A1	RB104	B2
C101	B4	FB25	*C3	R22	*A1	RB105	B3
C102	A2	FB26	C3	R23	A1	RB106	*B2
C103	C4	FB27	*C3	R24	A1	RB107	*B3
C104	B3	FB28	C3	R25	*B1		
C105	B3	FB29	*C3	R26	*C1		
C106	B4	FB30	C3	R27	C2		
C107	B4	FB31	*C3	R29	*C1		
C108	B3	FB32	C3	R30	*B1		
C109	B3	FB33	C4	R31	*B1		
C110	B3	FB34	C3	R34	*B1		
C111	B3	FB35	*C3	R35	*B1		
C112	B3	FB36	*C3	R37	*B1		
C113	B3			R38	*C1		
C114	B3	IC1	*A1	R41	B2		
C115	B3	IC3	*B1	R42	B2		
C116	C4	IC4	*B1	R43	*A2		
C117	B3	IC5	*B2	R44	*A2		
C118	B4	IC7	A4	R45	B2		
C119	*C4	IC8	*C4	R48	B2		
C120	*B3	IC9	C4	R49	B2		
C121	*B3	IC12	*C4	R50	*B2		
C122	*B3	IC13	*C4	R51	*B2		
C123	*B4	IC15	*C4	R52	*B2		
C124	*B3	IC16	C2	R53	A4		
C125	*B4	IC18	*B2	R54	A4		
C126	C1	IC19	*C2	R55	A4		
C127	*B3	IC20	C1	R56	A4		
C128	B4	IC21	*C4	R57	B4		
C129	B3	IC101	B4	R58	*C4		
C132	*B4	IC102	B4	R59	*C4		
C133	*B4	IC103	B2	R64	C4		
C134	*B3	IC104	*B2	R65	C4		
C135	*B3	IC105	B3	R66	C4		
C136	*B3	IC106	B3	R67	C4		
C137	*B3	IC107	*B4	R68	C4		
C138	*B3	IC108	*B3	R69	C4		
C139	*B3	IC109	*B1	R70	C4		
C140	*B3			R71	C4		
C141	*B3	Q1	*A1	R72	*C4		
C142	*B3	Q2	*B1	R73	*C4		

*:B SIDE

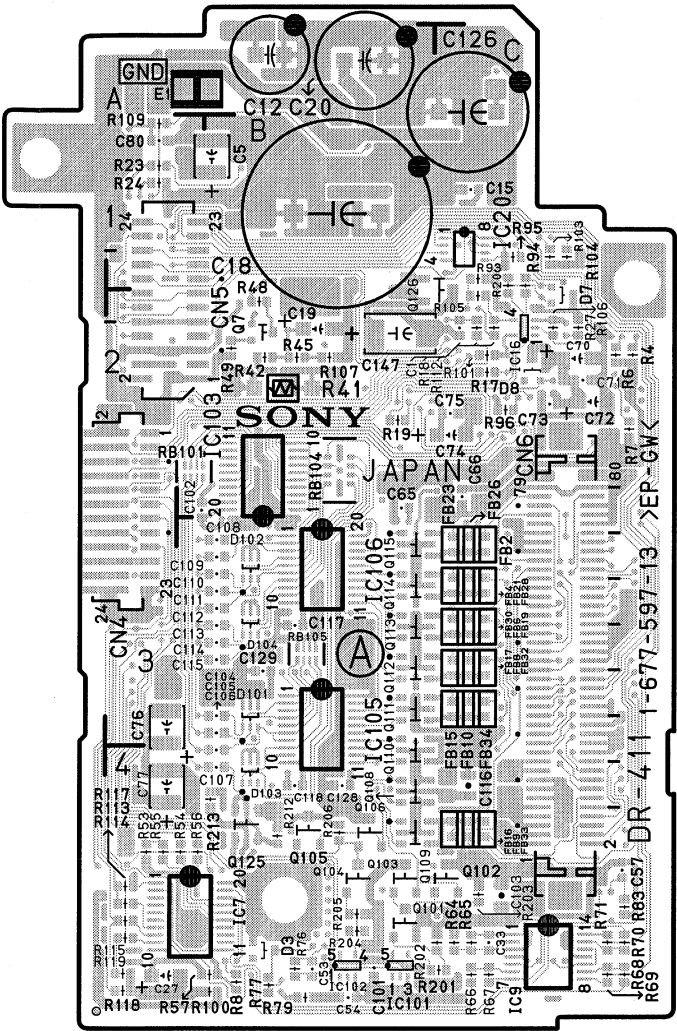

DR-411 -A SIDE-
SUFFIX: -13

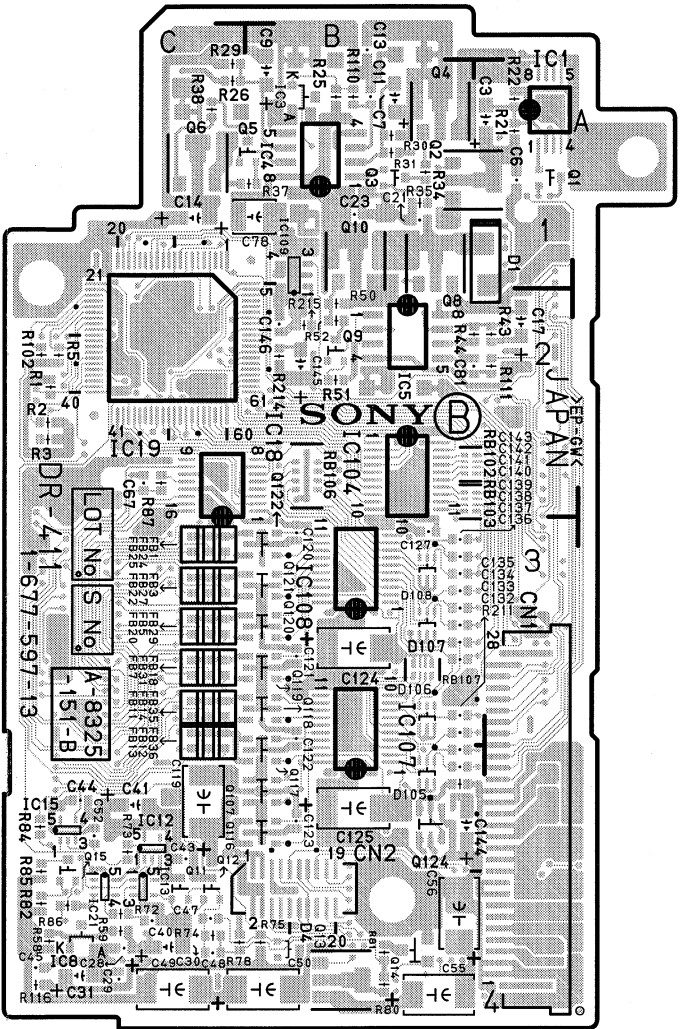


DR-411 -B SIDE-
SUFFIX: -13

DR-411 (1-677-597-11)

C1	A4	IC6	*D4	R82	C5
C3	C3	IC7	A5	R83	C5
C5	*B3	IC8	*D5	R84	B4
C6	*C3	IC9	D5	R85	C5
C7	*A2	IC10	*D3	R86	C5
C9	*A3	IC11	*C2	R87	C4
C11	*A2	IC12	B4	R93	*B3
C12	B1	IC13	*A4	R94	A4
C13	*C1	IC15	B4	R95	*B4
C14	B3	IC16	*B2	R96	*B3
C15	B3	IC18	C4	R100	*C1
C17	*A1	IC19	B4	R101	*B3
C18	B2	IC20	*B4	R102	*A3
C19	*B1	IC21	A4	R103	*A4
C20	A1			R104	*A3
C21	*A1	Q1	B3	R105	*B3
C23	*C1	Q2	*B3	R106	*B2
C24	C5	Q3	*B2	R107	*B1
C25	C4	Q4	*B2	R109	B3
C26	B1	Q5	*B3	R110	*A2
C27	*A5	Q6	*B3	R111	*B2
C28	*C5	Q7	*A1	R112	*B3
C29	*D5	Q8	*A1	R113	A5
C30	*C5	Q9	*B1	R114	A5
C31	*D5	Q10	*C1	R115	A5
C32	C4	Q11	*B4	R116	*D5
C33	C5	Q12	*B4	R117	A5
C34	D2	Q13	C5	R118	A5
C35	C1	Q14	*B4	R119	A5
C36	*C3	Q15	C5		
C37	*C1				
C38	B1	R1	C4		
C39	D4	R2	*C5		
C40	*A4	R3	B4		
C41	B5	R4	C4		
C42	D4	R5	B4		
C43	*A5	R6	*B5		
C44	A4	R7	B4		
C45	B4	R8	*B5		
C46	D4	R17	A4		
C47	*B4	R18	A4		
C48	*B4	R19	A4		
C49	*C5	R20	A4		
C50	*B5	R21	C3		
C51	D5	R22	C3		
C52	B4	R23	B3		
C53	B5	R24	B3		
C54	C5	R25	*B3		
C55	C5	R26	B3		
C56	*B5	R27	B4		
C57	C4	R29	*A3		
C58	C3	R30	*A2		
C59	D2	R31	*A2		
C60	*D3	R34	*B2		
C61	C3	R35	*B2		
C62	C2	R37	*B3		
C63	C2	R38	*B3		
C64	C2	R41	C1		
C65	C5	R42	*B1		
C66	C4	R43	*A1		
C67	C4	R44	*A2		
C68	D2	R45	*B1		
C70	*B4	R48	*A1		
C71	*B4	R49	*A1		
C72	*B3	R50	*C1		
C73	*B4	R51	*B1		
C74	C3	R52	*C1		
C75	B3	R53	A4		
C76	B3	R54	A4		
C77	*A5	R55	A4		
C78	C1	R56	A4		
C80	B3	R57	*A5		
C81	*A2	R58	*D5		
		R59	*D5		
CN1	*A4	R64	C5		
CN2	*C5	R65	C5		
CN4	A3	R66	C5		
CN5	A2	R67	C5		
CN6	D4	R68	D5		
		R69	D5		
D1	B1	R70	D5		
D3	*A4	R71	D5		
D4	B4	R72	*A4		
D7	A4	R73	B4		
D8	A4	R74	*B4		
		R75	B4		
E1	A1	R76	B5		
		R77	*B4		
IC1	B3	R78	*B4		
IC3	*B2	R79	C5		
IC4	*A2	R80	C5		
IC5	*B1	R81	B5		


*:B SIDE

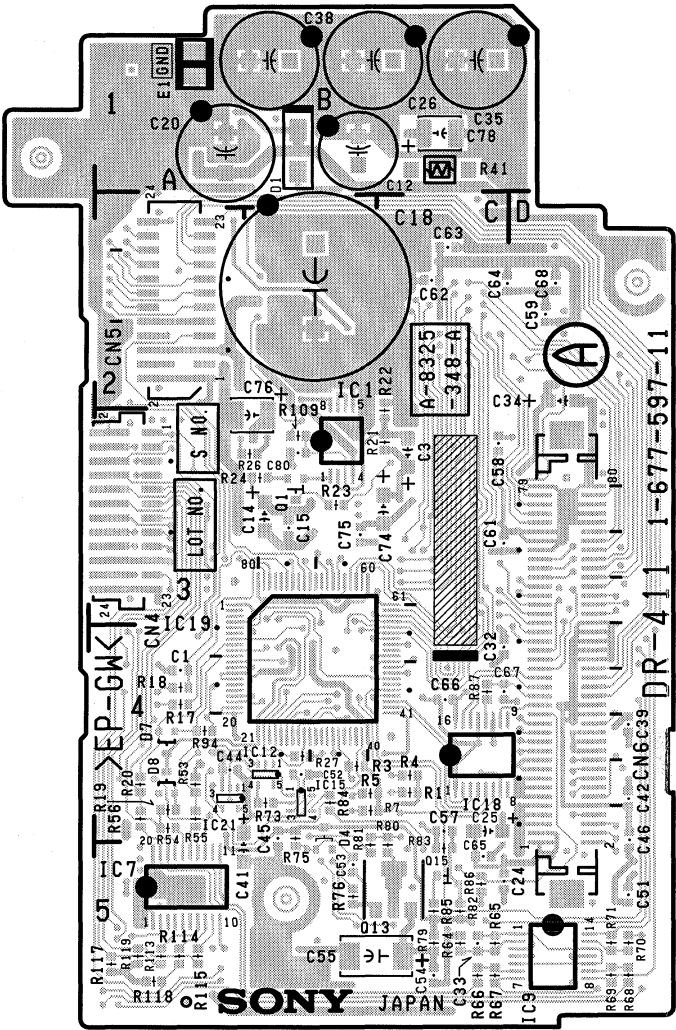

DA-148 (1-677-841-12)

C1	B3	C517	*F1	R1	C1	R221	C2	R535	F1
C2	D2	C518	*E2	R2	*C1	R222	*C2	R536	*F1
C3	D2	C519	*F1	R3	*C1	R223	*C1	R537	F1
C4	B3	C520	*F1	R4	*C1	R224	*D2	R538	F1
C5	E3	C601	D1	R5	*C1	R225	*D1	R539	*F1
C6	B1	C602	*D1	R6	*C1	R300	*E2	R540	*F1
C7	*C1	C603	E1	R7	B1	R301	*E2	R541	*E2
C8	*B1	C604	*E1	R8	*B1	R302	*E3	R542	*F1
C9	*A3	C605	*E1	R9	B1	R303	*E3	R543	*F1
C10	B1	C606	*D1	R10	*B1	R304	*E2	R544	*E2
C11	B1	C607	*D1	R11	C1	R305	E2	R545	*F1
C12	*C1	C608	*D1	R12	B1	R306	E2	R546	*F1
C13	*A1	C609	*E1	R13	C1	R307	E2	R547	*E2
C14	A1	C610	*E1	R14	B1	R308	E2	R601	D2
C15	*A1	C611	*D1	R15	*D1	R309	*E2	R602	*D1
C16	A3	C612	E1	R16	*D1	R310	E2	R603	*D1
C17	C1	C613	D2	R17	*D1	R311	E2	R604	D2
C18	C1	C614	E2	R18	*F3	R312	E2	R605	*D1
C21	*A1	C701	A2	R20	B3	R313	*D2	R606	D2
C23	*A1	C702	*A2	R21	*A3	R316	*E2	R607	*D2
C24	*A2	C703	*A2	R22	*A3	R317	E2	R608	*D1
C25	*B1	C704	A2	R23	B3	R318	*E2	R609	D2
C26	*C1			R23	*A1	R319	*E2	R610	D2
C28	*C1	CN2	*D3	R35	*A1	R320	*E2	R611	*D1
C35	*A2	CN5	D1	R36	*A2	R321	E2	R612	*D1
C36	*A3			R37	*A2	R322	*E2	R613	D2
C37	*A3	DL401	B2	R38	*A2	R323	*E1	R614	*E1
C38	*A3	DL501	F2	R39	*A1	R324	*E2	R615	D2
C39	*A3			R40	A1	R325	E1	R616	D1
C40	*A3	E1	F3	R41	*A1	R400	B3	R617	*E1
C41	A1			R43	A1	R402	B3	R618	D2
C42	A1	FB1	B1	R44	*A1	R403	*B2	R619	E2
C43	*B1	FB2	C1	R45	*B3	R404	*B2	R620	*E1
C44	*A1	FB3	A3	R46	*B3	R405	*B2	R621	*E1
C100	C2			R47	*A3	R406	*B2	R622	E2
C101	*C2	FL100	B2	R48	*B3	R407	B2	R623	*E1
C102	*C2	FL200	C2	R50	*C1	R408	B2	R624	E2
C103	*C2	FL300	E2	R51	A3	R409	*B2	R625	E1
C104	B2	FL400	B2	R61	*A3	R410	*B2	R626	*E1
C105	*B2	FL500	F2	R62	*A3	R411	*B2	R627	E2
C106	*C2	FL501	F2	R63	*A3	R412	*B2	R701	*A2
C107	*C2			R64	*A3	R413	*B2	R702	*A2
C108	*C2	IC1	B3	R65	*B3	R414	*B2	R703	*A2
C109	*C2	IC2	D3	R66	*B1	R417	*B2	R704	*A2
C200	*C2	IC3	D3	R67	*B1	R418	*B2	R705	*A2
C201	*D2	IC4	B3	R68	*B1	R419	*B2	R706	A2
C202	D2	IC5	F3	R69	*B1	R420	*B2	R707	A2
C203	E2	IC7	A3	R70	B1	R421	*B2	R708	A2
C204	D2	IC8	A3	R71	B1	R422	*B2	R709	A2
C205	D2	IC9	*C1	R100	C3	R423	*B2	R710	A2
C206	*C2	IC10	A1	R101	B3	R424	*B2	R711	*A2
C207	*C1	IC11	A1	R102	*B2	R425	*B1	R712	*A2
C208	*D2	IC12	C1	R103	*C2	R426	*B2	R713	B2
C209	*C1	IC13	A3	R104	*B2	R427	B3	R714	C3
C210	*D2	IC14	B3	R105	*C2	R432	D2	R715	E3
C300	*E2	IC17	A3	R106	C2	R433	E2		
C301	*E2	IC100	*C3	R107	C2	R434	C3	RB1	*C3
C302	E2	IC101	C2	R108	*C2	R500	*F3	RB2	*C3
C303	E2	IC200	*D3	R109	*B2	R501	F3	RB3	*B3
C304	*E2	IC201	C2	R110	*C2	R502	*E3	RB4	*D3
C305	*E1	IC211	D2	R111	*C2	R503	F3	RB5	*D3
C306	*E2	IC231	*B2	R112	*C2	R504	*F2	RB6	*D3
C307	*E1	IC251	*F2	R113	*C2	R505	*E2	RB7	*E3
C308	*E2	IC300	*E3	R116	*B2	R506	*F2	RB8	*D3
C400	B2	IC301	E2	R117	C2	R507	*F2	RB9	*B3
C401	*B2	IC400	*B3	R118	*B2	R508	*F2	RB10	*B3
C402	*B2	IC401	B2	R119	*C2	R509	*F2	RB11	*F3
C403	C2	IC500	*F3	R120	*C2	R510	*F2	RB12	*F3
C404	B2	IC501	*F3	R121	C2	R511	*F2	RB13	*F3
C405	*B2	IC502	F1	R122	*C2	R512	*F2	RB14	*A3
C406	B2	IC503	F1	R123	*C2	R513	*F2		
C407	*B2	IC601	*D2	R124	*C2	R514	*F2	RV501	E2
C408	*B1	IC602	*D1	R125	*C2	R515	*F2		
C409	*B2	IC603	*D2	R200	*C2	R516	*E2		
C410	*B2	IC604	*D1	R201	*C2	R517	*F2		
C411	*B1	IC605	*E2	R202	*C3	R518	*F2		
C500	F3	IC606	*E1	R203	*C3	R519	*F1		
C501	F3	IC701	A2	R204	*D2	R520	*F2		
C502	*F2	IC702	*A2	R205	D2	R521	*F2		
C503	*F2			R206	D2	R522	*F1		
C504	*F2	L1	*C1	R207	D2	R523	*F2		
C505	*F2	L2	C1	R208	D2	R524	F2		
C506	F2	L3	*A1	R209	*C2	R525	*F1		
C507	F2	L100	B2	R210	D2	R526	F2		
C508	*F2	L400	C2	R211	D2	R527	*F1		
C509	*F2			R212	D2	R528	*F1		
C511	*F1	Q1	*B1	R213	*D2	R529	*F1		
C512	*F1	Q2	*C1	R216	*C2	R530	F2		
C513	*F1	Q3	B1	R217	C2	R531	*F1		
C514	*F1	Q4	*B1	R218	C2	R532	F2		
C515	*F1	Q7	B1	R219	*C2	R533	*F1		
C516	*F1	Q8	*B1	R220	*C2	R534	F1		


*:B SIDE

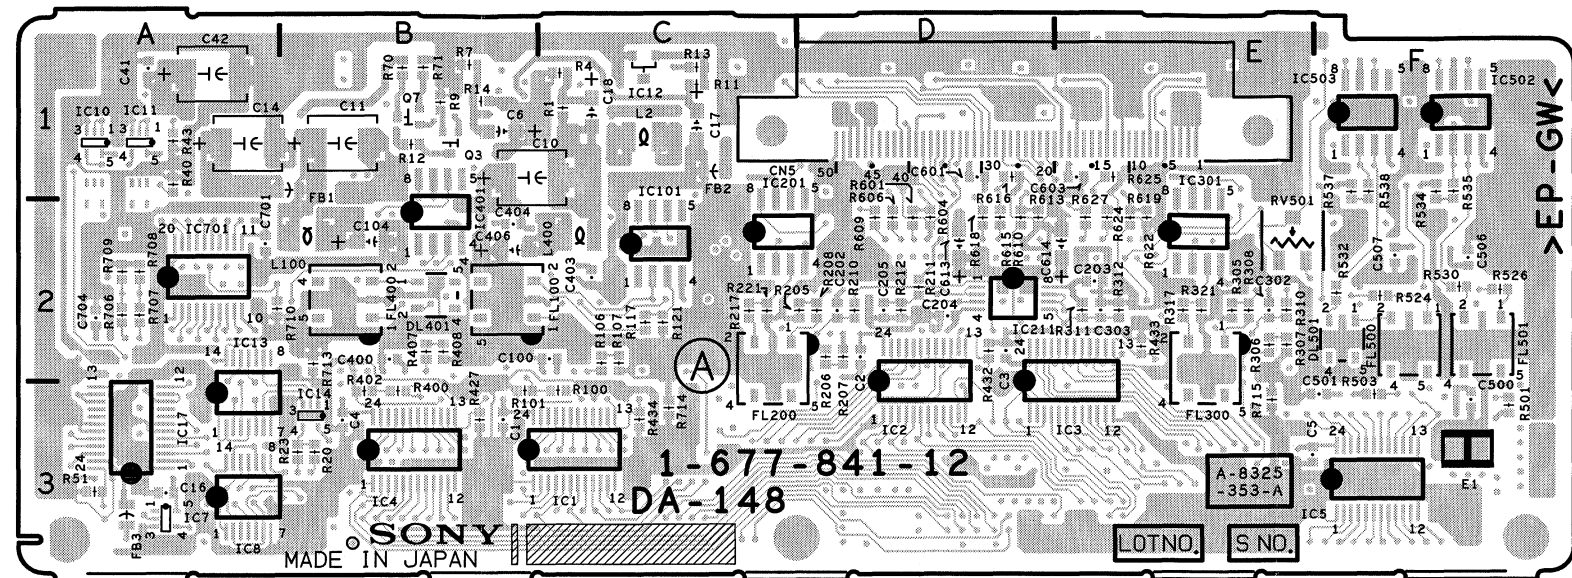


DA-148 (1-677-841-11)

C1	B3	C517	*F1	Q7	B1	R212	D2	R528	*F1
C2	D2	C518	*E2	Q8	*B1	R213	*D2	R529	*F1
C3	D2	C519	*F1			R216	*C2	R530	F2
C4	B3	C520	*F1	R1	C1	R217	C2	R531	*F1
C5	E3	C601	D1	R2	*C1	R218	*C2	R532	F2
C6	B1	C602	*D1	R3	*C1	R219	*C2	R533	*F1
C7	*C1	C603	E1	R4	C1	R220	*C2	R534	F1
C8	*B1	C604	*E1	R5	*C1	R221	C2	R535	F1
C9	*A3	C605	*E1	R6	*C1	R222	*C2	R536	*F1
C10	B1	C606	*D1	R7	B1	R223	*C1	R537	F1
C11	B1	C607	*D1	R8	*B1	R224	*D2	R538	F1
C12	*C1	C608	*D1	R9	B1	R225	*D1	R539	*F1
C13	*A1	C609	*E1	R10	*B1	R300	*E2	R540	*F1
C14	A1	C610	*E1	R11	C1	R301	*E2	R541	*E2
C15	*A1	C611	*D1	R12	B1	R302	*E3	R542	*F1
C16	A3	C612	*E1	R13	C1	R303	*E3	R543	*F1
C17	C1	C613	D2	R14	B1	R304	*E2	R544	*E2
C18	C1	C614	E2	R15	*D1	R305	E2	R545	*F1
C21	*A1	C701	A2	R16	*D1	R306	E2	R546	*F1
C23	*A1	C702	*A2	R17	*D1	R307	E2	R547	*E2
C24	*A2	C703	*A2	R18	*F3	R308	E2	R601	D2
C25	*B1	C704	A2	R20	B3	R309	*E2	R602	*D1
C26	*C1			R21	*A3	R310	*E2	R603	*D1
C28	*C1	CN2	*D3	R22	*A3	R311	E2	R604	D2
C35	*A2	CN5	D1	R23	B3	R312	E2	R605	*D1
C36	*A3			R24	*A3	R313	*D2	R606	D2
C37	*A3	DL401	B2	R25	*A3	R316	*E2	R607	*D2
C38	*A3	DL501	F2	R33	*A1	R317	E2	R608	*D1
C39	*A3			R34	*A1	R318	*E2	R609	D2
C40	*A3	E1	F3	R35	*A1	R319	*E2	R610	D2
C41	A1			R36	*A2	R320	*E2	R611	*D1
C42	A1	FB1	B1	R37	*A2	R321	E2	R612	*D1
C43	*B1	FB2	C1	R38	*A2	R322	*E2	R613	D2
C44	*A1	FB3	A3	R39	*A1	R323	*E1	R614	*E1
C100	C2			R40	A1	R324	*E2	R615	D2
C101	*C2	FL100	B2	R41	*A1	R325	*E1	R616	D1
C102	*C2	FL200	C2	R42	*A1	R400	B3	R617	*E1
C103	*C2	FL300	E2	R43	A1	R402	B3	R618	D2
C104	B2	FL400	B2	R44	*A1	R403	*B2	R619	E2
C105	*B2	FL500	F2	R45	*B3	R404	*B2	R620	*E1
C106	*C2	FL501	F2	R46	*B3	R405	*B2	R621	*E1
C107	*C2			R47	*A3	R406	*B2	R622	E2
C108	*C2	IC1	B3	R48	*B3	R407	B2	R623	*E1
C109	*C2	IC2	D3	R50	*C1	R408	B2	R624	E2
C200	*C2	IC3	D3	R51	A3	R409	*B2	R625	E1
C201	*D2	IC4	B3	R61	*A3	R410	*B2	R626	*E1
C202	D2	IC5	F3	R62	*A3	R411	*B2	R627	E2
C203	E2	IC7	A3	R63	*A3	R412	*B2	R701	*A2
C204	D2	IC8	A3	R64	*A3	R413	*B2	R702	*A2
C205	D2	IC9	*C1	R65	*B3	R414	*B2	R703	*A2
C206	*C2	IC10	A1	R66	*B1	R417	*B2	R704	*A2
C207	*C1	IC11	A1	R67	*B1	R418	*B2	R705	*A2
C208	*D2	IC12	C1	R68	*B1	R419	*B2	R706	A2
C209	*C1	IC13	A3	R69	*B1	R420	*B2	R707	A2
C210	*D2	IC14	B3	R70	B1	R421	*B2	R708	A2
C300	*E2	IC15	A1	R71	B1	R422	*B2	R709	A2
C301	*E2	IC16	A1	R100	C3	R423	*B2	R710	A2
C302	E2	IC17	A3	R101	B3	R424	*B2	R711	*A2
C303	E2	IC100	*C3	R102	*B2	R425	*B1	R712	*A2
C304	*E2	IC101	C2	R103	*C2	R426	*B2	R713	B2
C305	*E1	IC200	*D3	R104	*B2	R427	B3	R714	C3
C306	*E2	IC201	C2	R105	*C2	R432	D2	R715	E3
C307	*E1	IC211	D2	R106	C2	R433	E2		
C308	*E2	IC231	*B2	R107	C2	R434	C3	RB1	*C3
C400	B2	IC251	*F2	R108	*C2	R500	*F3	RB2	*C3
C401	*B2	IC300	*E3	R109	*B2	R501	F3	RB3	*B3
C402	*B2	IC301	E2	R110	*C2	R502	F3	RB4	*D3
C403	C2	IC400	*B3	R111	*C2	R503	F3	RB5	*D3
C404	B2	IC401	B2	R112	*C2	R504	*F2	RB6	*D3
C405	*B2	IC500	*F3	R113	*C2	R505	*F2	RB7	*E3
C406	B2	IC501	*F3	R116	*B2	R506	*F2	RB8	*D3
C407	*B2	IC502	F1	R117	C2	R507	*F2	RB9	*B3
C408	*B1	IC503	F1	R118	*B2	R508	*F2	RB10	*B3
C409	*B2	IC601	*D2	R119	*C2	R509	*F2	RB11	*F3
C410	*B2	IC602	*D1	R120	*C2	R510	*F2	RB12	*F3
C411	*B1	IC603	*D2	R121	C2	R511	*F2	RB13	*F3
C500	F3	IC604	*D1	R122	*C2	R512	*F2	RB14	*A3
C501	F3	IC605	*E2	R123	*C2	R513	*F2	RB15	*A3
C502	*F2	IC606	*E1	R124	*C2	R514	*F2		
C503	*F2	IC701	A2	R125	*C2	R515	*F2	RV501	E2
C504	*F2	IC702	*A2	R200	*C2	R516	*F2		
C505	*F2			R201	*C2	R517	*F2		
C506	F2	L1	*C1	R202	*C3	R518	*F2		
C507	F2	L2	C1	R203	*C3	R519	*F1		
C508	*F2	L3	*A1	R204	*D2	R520	*F2		
C509	*F2	L100	B2	R205	D2	R521	*F2		
C511	*F1	L400	C2	R206	D2	R522	*F1		
C512	*F1			R207	D2	R523	*F2		
C513	*F1	Q1	*B1	R208	D2	R524	F2		
C514	*F1	Q2	*C1	R209	*C2	R525	*F1		
C515	*F1	Q3	B1	R210	D2	R526	F2		
C516	*F1	Q4	*B1	R211	D2	R527	*F1		

*:B SIDE

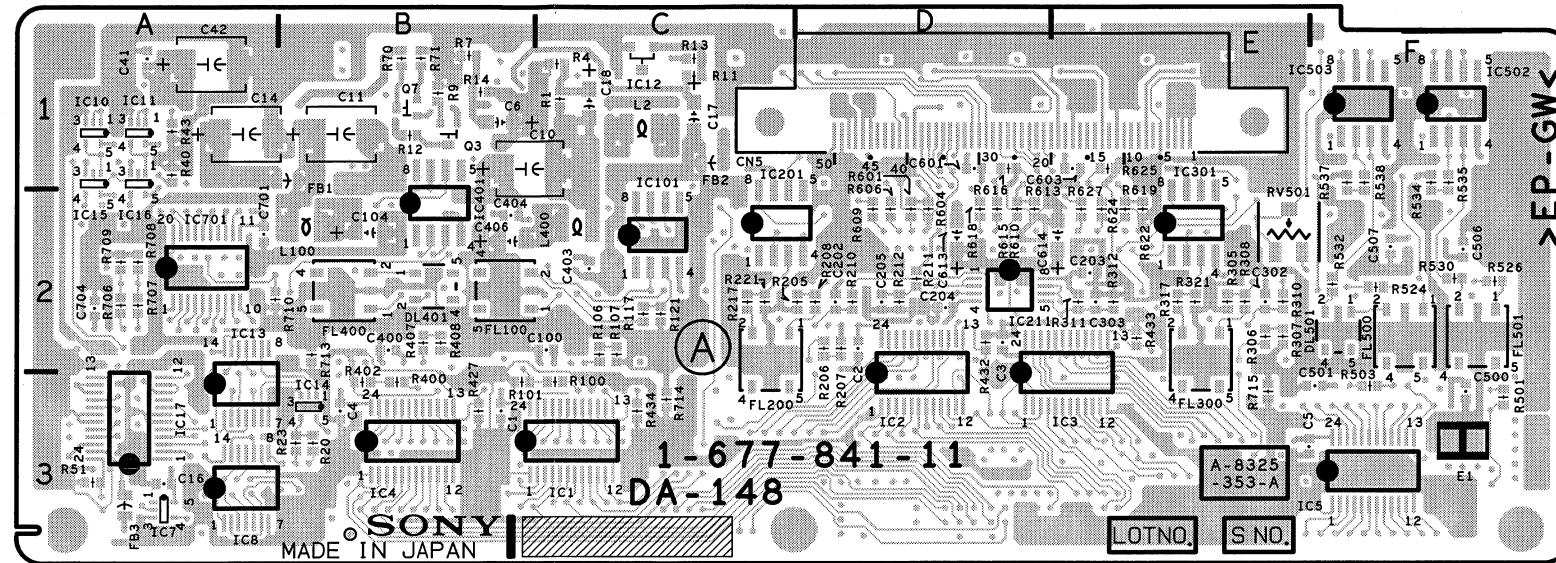

DA-148 -A SIDE-
SUFFIX: -11

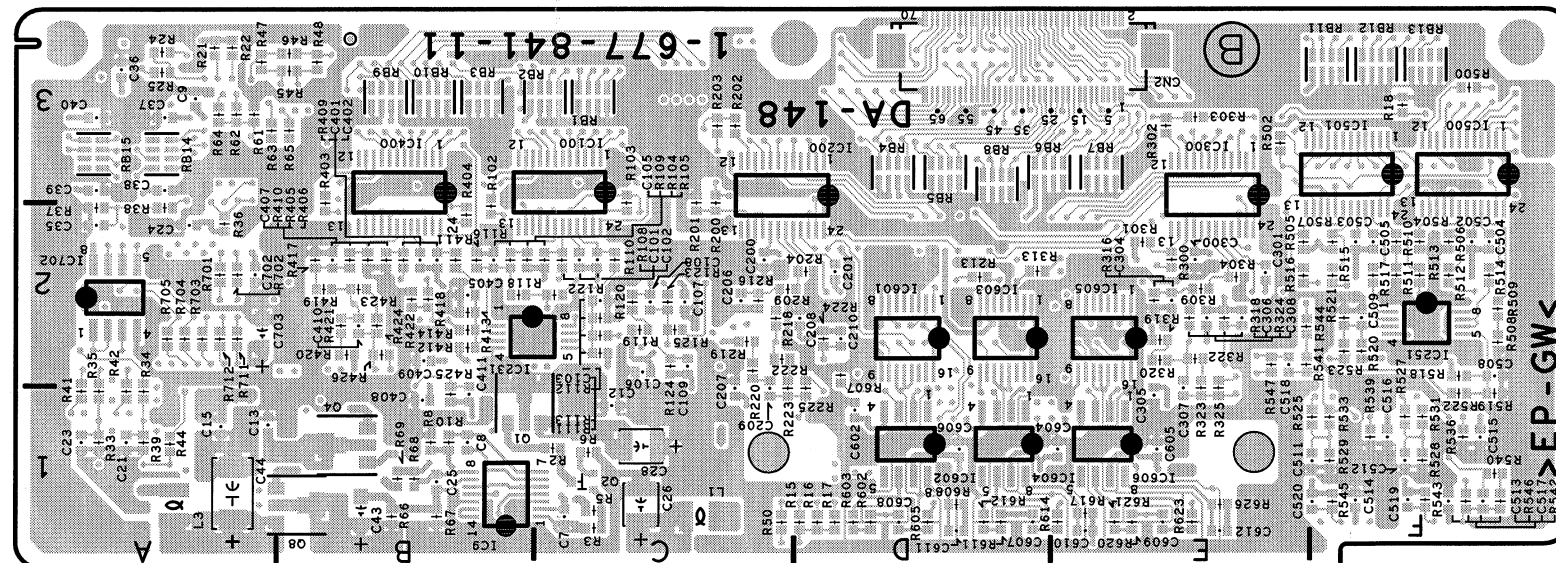

DA-148 -B SIDE-
SUFFIX: -11

DEC-95 (1-667-423-11)

- CL1

CL2

CL3

CL4

CL5

CL6

CL7

CL8

CL9

CL10

CL11

CL12

CL13

CL14

CL15

CL16

CL17

CN1

CN2

CN3

CN4

D1

D2

D3

E1

E2

FL1

FL3

IC1

IC2

IC3

IC4

IC5

IC6

IC7

IC8

IC9

IC10

IC11

IC12

IC13

IC14

IC15

IC16

IC17

IC18

Q1

Q2

Q3

Q4

RB1

RB2

RB3

RB4

RB6

RB7

RB8

RB10

RB11

RB14

RB15

RB16

RB17

RB20

RB21

RB23

TP1

TP2

TP3

TP5

TP6
- *B1

*B1

*C2

*B2

D2

D2

D2

*B2

*B1

*C2

*B2

*B2

*C2

D2

D2

*C1

*D1

C1

A2

E2

D2

A1

A1

A1

A1

D2

*A1

*E1

*C1

*D1

*A1

*B2

A2

*B2

*A2

*A2

D2

*D2

D1

E1

C2

*B2

C2

C2

*B1

C1

*B1

*A1

*A1

*F1

*F2

*C1

*B1

A1

*C1

A1

*D1

*D1

*D1

C2

C2

F1

E1

*C1

*C1

*B1

E2


F2

D2


E2

D2

*:B SIDE

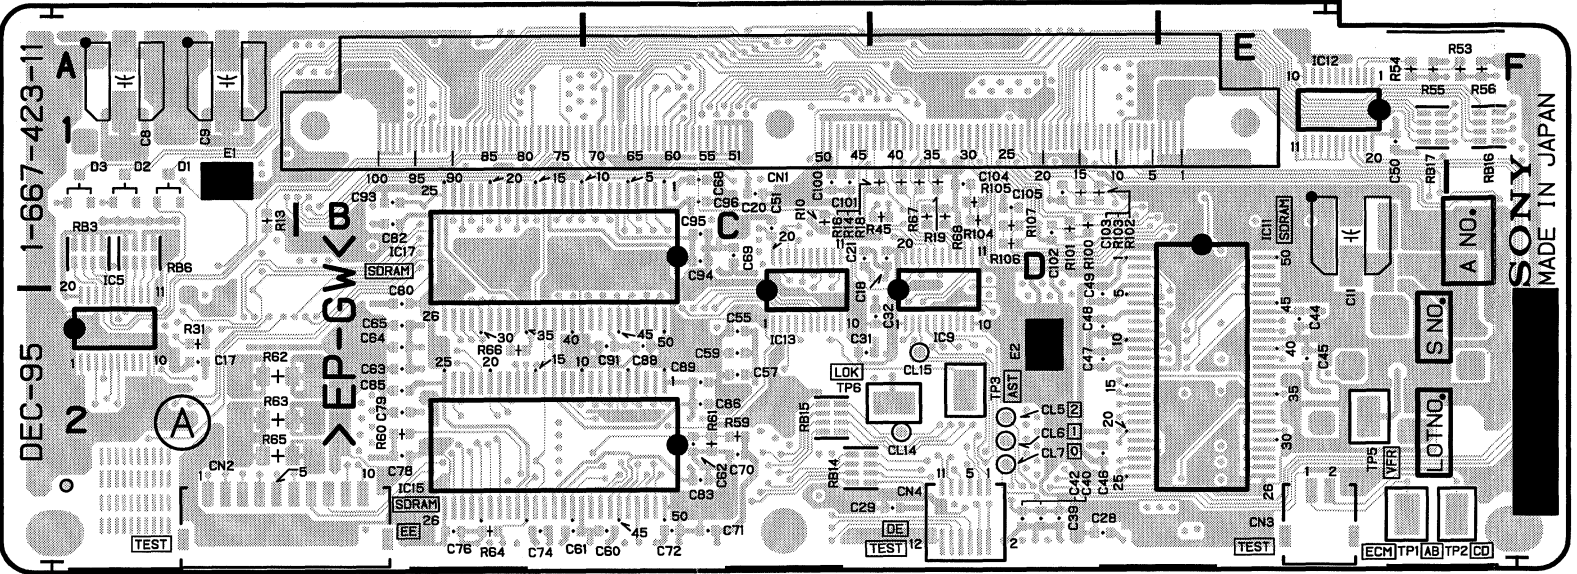

DEC-95 -A SIDE-
SUFFIX: -11

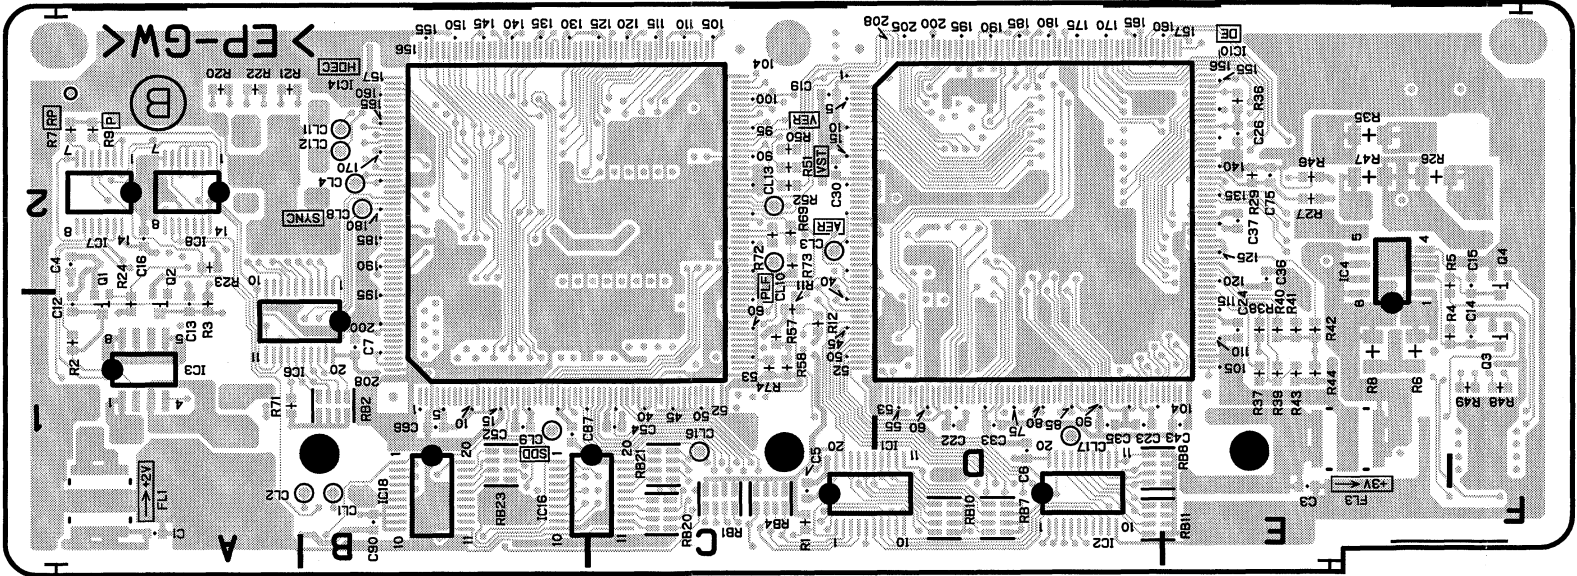


DEC-95 -B SIDE-
SUFFIX: -11


DPR-152 (1-677-606-12)

C1	*C3	C133	*A1	R12	*B2	R240	A2
C2	*C3	C134	*C1	R13	*E2	R241	*A2
C3	*C2	C135	*C1	R15	*E3	R242	*A2
C5	*C1	C136	*C1	R16	*A2	R243	A1
C6	*C2	C137	*C1	R17	*B3	R244	*C2
C7	*C2	C138	*C1	R18	*B3	R245	*C2
C8	*B1	C139	*D1	R19	*B1		
C9	*B2	C140	*D1	R20	*A2	RB1	*B3
C10	*B2	C141	*D1	R21	*A2	RB2	*B3
C11	*B2	C142	B2	R22	*B1	RB3	*B3
C14	*C3	C143	A2	R23	*B1	RB4	B3
C15	*B3	C144	A2	R24	*C1	RB5	B3
C16	*C3	C145	B2	R25	*D1	RB6	B2
C17	*C3	C146	A2	R26	*D1	RB7	B2
C19	*C3	C147	A2	R27	*A1	RB8	B2
C20	*C3	C148	*C2	R28	*A2	RB9	D2
C21	*C2	C149	*A2	R29	*A2	RB10	D2
C23	*C2	C150	*A2	R30	*A2	RB11	D2
C24	*C2	C151	D3	R31	*B2	RB12	D3
C25	*C2	C152	E2	R32	*F1	RB13	D3
C27	*C2	C153	*F1	R33	*C2	RB14	D2
C28	*C2			R34	*B1	RB15	D3
C29	*B1	CL2	E3	R35	*A1	RB16	D3
C30	*F3	CL3	F3	R36	*A1	RB17	*F1
C31	*F3			R37	B2	RB18	*F1
C32	*F3	CN2	*B3	R38	B1	RB19	*F1
C33	*F2	CN3	D3	R39	*A1	RB20	*F1
C34	*F2	CN4	D1	R40	*A2	RB21	D1
C35	*F2	CN5	F1	R41	*C2	RB22	D2
C37	*F2			R42	*B2	RB23	E1
C39	*F2	E1	F3	R43	*A2	RB24	D1
C41	*F2			R44	*A2	RB25	*D1
C42	*F2	FB2	*D1	R46	A3	RB30	*B1
C43	*F3	FB3	*B1	R47	A3	RB31	*B1
C44	*F3	FB4	*C1	R48	A3	RB32	*A1
C45	*F2	FB5	*A1	R49	A3	RB33	*A1
C46	*F2	FB6	E2	R50	A3	RB34	A1
C47	*F3	FB7	*A2	R51	*C3	RB35	B3
C48	*F2	FB8	*B2	R52	*C3	RB36	*C2
C49	*E2	FB9	A2	R53	*C3	RB42	*C2
C50	D2	FB10	A2	R54	*B2	RB43	B2
C52	*B2	FB11	*A2	R55	*C2	RB44	B2
C53	A2	FB12	A1	R56	*C1	RB45	A2
C54	A2	FB13	*D1	R57	*B1	RB46	A2
C57	A1	FB14	*D1	R58	*C1	RB47	A2
C58	A1	FB15	*D1	R59	*C1	RB48	*B1
C60	D2			R60	*C3	RB49	*B1
C61	E3	FL10	D2	R61	*C2	RB50	*C1
C62	E2			R68	*B2	RB51	*D1
C63	*B2	IC1	C2	R69	*B2	RB52	*C2
C64	*D1	IC2	F2	R70	A2	RB53	*C3
C65	*D1	IC3	*B2	R71	A1	RB71	*E1
C66	*D1	IC4	*A2	R73	*C2	RB72	*E1
C68	A3	IC5	*A1	R74	*B2	RB73	E1
C69	A2	IC6	*C3	R75	*C2	RB74	E1
C71	A1	IC7	*C2	R76	*C2	RB84	*D2
C72	D1	IC8	B3	R81	*A2	RB85	*D3
C73	E2	IC9	*C1	R82	A2	RB86	*D2
C74	*B1	IC10	*B1	R83	*B2	RB87	*D2
C75	*C1	IC11	*C3	R104	*C2	RB88	D3
C76	*C1	IC14	A3	R201	*C3	RB89	A2
C77	*C1	IC15	A2	R204	*C3	RB90	A2
C78	*C1	IC20	*D1	R206	E2	RB91	*E2
C79	*C1	IC21	*E1	R207	*E1	RB92	*E2
C100	*D3	IC22	*E1	R208	*C3		
C101	*B2	IC51	*E1	R209	*C3		
C102	*B2	IC52	E2	R210	*B1		
C103	*B2	IC54	*D2	R211	*E1		
C104	*B2	IC55	*D2	R215	*D2		
C105	*E1	IC57	*B1	R216	*D2		
C106	*E2	IC58	*E2	R218	*D2		
C108	*D1	IC59	*E2	R219	*D2		
C109	D2	IC61	*A3	R220	D2		
C110	*D1	IC62	A2	R221	*D2		
C111	*D2	IC63	A2	R222	*D1		
C112	*D2	IC64	A2	R223	*D1		
C113	*D2	IC65	*C1	R224	D2		
C114	D2			R225	D2		
C115	*D2	L1	A1	R226	D2		
C116	*D1	L3	D2	R227	*C2		
C117	D1			R228	D2		
C118	*A1	R1	*B2	R229	*D1		
C119	*A1	R2	*B3	R230	*D2		
C120	*A1	R3	*B3	R231	*B3		
C124	B2	R4	*C3	R232	*B3		
C125	*B1	R5	*B3	R233	*C3		
C126	*B1	R6	*E1	R234	*C3		
C127	*B1	R7	*A1	R235	*C2		
C128	*B1	R8	*F2	R236	*C1		
C129	*B1	R9	*E3	R237	*C1		
C130	*A3	R10	*E3	R238	*A2		
C131	*A2	R11	A1	R239	*B2		

*:B SIDE

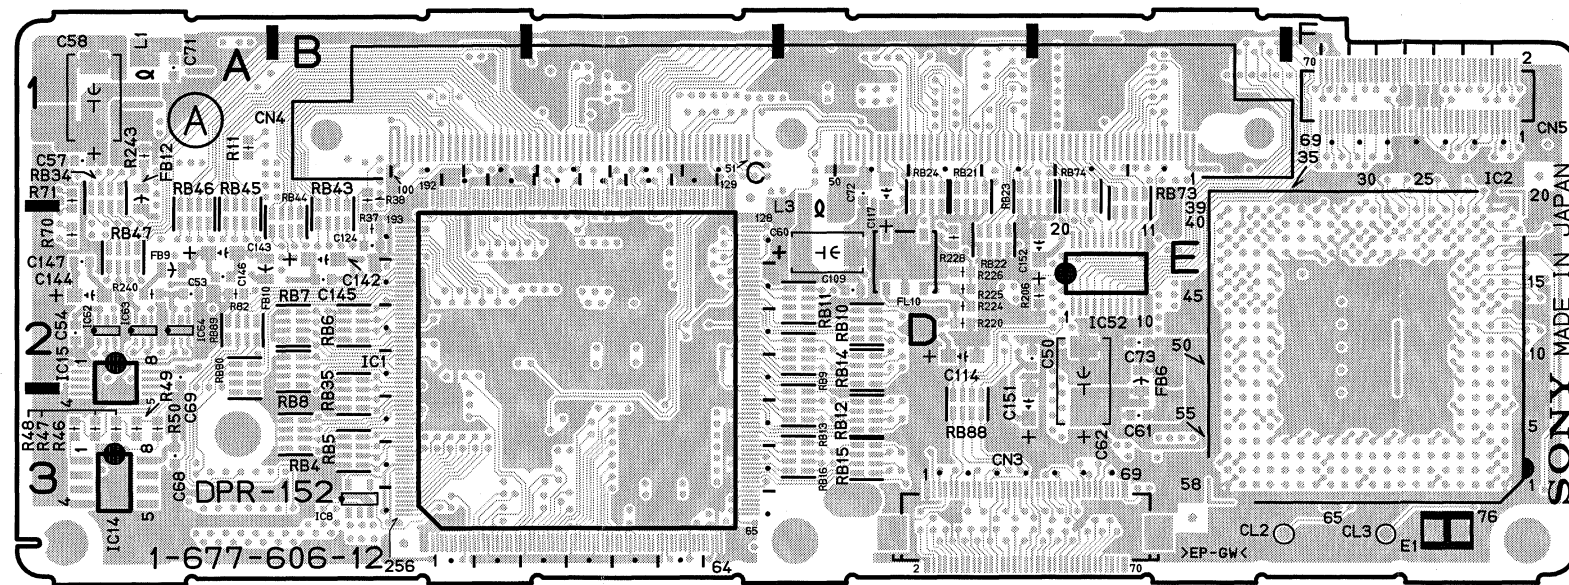

DPR-152 -A SIDE-
SUFFIX: -12

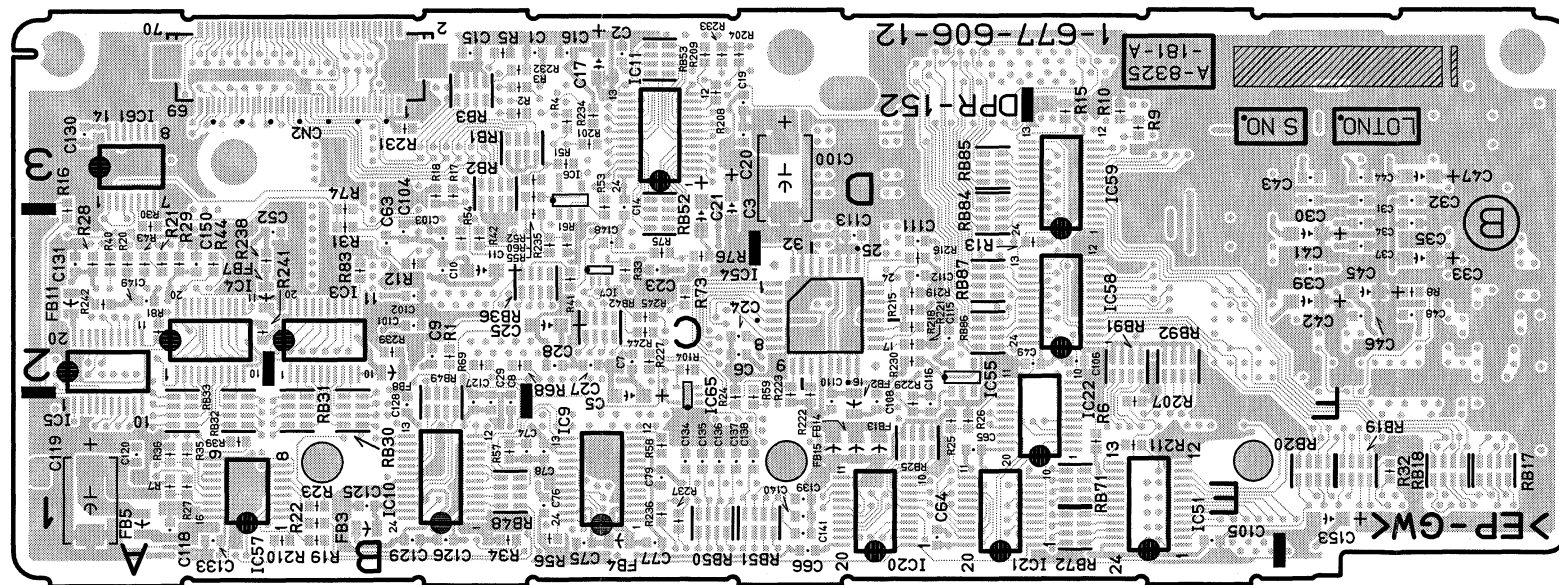


DPR-152 -B SIDE-
SUFFIX: -12


DPR-152 (1-677-606-11)

C1	*C3	C120	*A1	R34	*B1	RB34	A1
C2	*C3	C124	B1	R35	*A1	RB35	B3
C3	*C3	C125	*B1	R36	*A1	RB36	*C2
C4	*C3	C126	*B1	R37	B1	RB42	*C2
C5	*C2	C127	*B1	R38	B1	RB43	B2
C6	*C2	C128	*B1	R39	*A1	RB44	B2
C7	*C2	C129	*B1	R40	*A2	RB45	A2
C8	*B1	C130	*A2	R41	*B2	RB46	A2
C9	*B2	C131	*A3	R42	*B2	RB47	A2
C10	*B2	C133	*A1	R43	*A2	RB48	*B1
C11	*B3			R44	*A2	RB49	*B1
C12	*B3	CL2	F3	R46	A3	RB71	*E1
C13	*C3	CL3	F3	R47	A3	RB72	*E1
C14	*C3			R48	A3	RB73	E1
C15	*B3	CN2	*B3	R49	A3	RB74	E1
C16	*C3	CN3	D3	R50	A3	RB84	*D2
C17	*C3	CN4	D1	R51	*C3	RB85	*D3
C18	*C3	CN5	F1	R52	*C3	RB86	*D2
C19	*C3			R53	*C3	RB87	*D2
C20	*C3	E1	E3	R54	*B2	RB88	D3
C21	*C2			R55	*C2	RB89	A2
C22	*C2	FB2	*D1	R56	*C1	RB90	A2
C23	*C2	FB3	*B1	R57	*B1		
C24	*C2	FB4	*C1	R58	*C1		
C25	*C2			R59	*C1		
C26	*C2	FL10	D2	R68	*C1		
C27	*C2			R69	*B2		
C28	*C2	IC1	C2	R70	A2		
C29	*B1	IC2	F2	R71	A1		
C30	*F3	IC3	*B2	R73	*C2		
C31	*F3	IC4	*A2	R74	*B2		
C32	*F3	IC5	*A1	R75	*C2		
C33	*F2	IC6	*C3	R76	*C2		
C34	*F2	IC7	*C2	R81	*A2		
C35	*F2	IC8	B3	R82	A2		
C36	*F2	IC9	*C1	R83	*B2		
C37	*F2	IC10	*B1	R104	*B1		
C38	*F2	IC11	*C3	R201	*C3		
C39	*F2	IC14	A3	R204	*C3		
C40	*F2	IC15	A2	R206	*E2		
C41	*F2	IC20	*C1	R207	*E1		
C42	*F2	IC21	*D1	R210	*B1		
C43	*F3	IC22	*E1	R211	*E1		
C44	*F3	IC51	*E1	R215	*D2		
C45	*F3	IC52	E2	R216	*D2		
C46	*F2	IC54	*D2	R218	*D2		
C47	*F2	IC55	*D2	R219	*D2		
C48	*F2	IC57	*B1	R220	D2		
C49	*E2	IC58	*E2	R221	*D2		
C50	D2	IC59	*E2	R222	*D1		
C52	*A2	IC61	*A2	R223	*D1		
C53	A2	IC62	A2	R224	D2		
C54	A2	IC63	A2	R225	D2		
C57	A1	IC64	A2	R226	D2		
C58	A1			R227	*C2		
C60	D2	L1	A1	R228	D2		
C61	E3	L2	*A1	R229	*D1		
C62	E2	L3	D2	R230	*D2		
C63	*B2	L4	E2	R231	*B3		
C64	*D1			R232	*C3		
C65	*D1	R1	*B2	R233	*C3		
C66	*C1	R2	*B3	R234	*C3		
C68	A3	R3	*C3				
C69	A2	R4	*C3	RB1	*C3		
C71	A1	R5	*B3	RB2	*B3		
C72	D1	R6	*D1	RB3	*B3		
C73	E2	R7	*A1	RB4	B3		
C74	*B1	R8	*F2	RB5	B3		
C75	*C1	R9	*E3	RB6	B2		
C76	*C1	R10	*E3	RB7	B2		
C77	*C1	R11	*B1	RB8	B2		
C78	*C1	R12	*B2	RB9	D2		
C79	*C1	R13	*E2	RB10	D2		
C100	*D3	R15	*E3	RB11	D2		
C101	B2	R16	*A2	RB12	D3		
C102	*B2	R17	*B3	RB13	D3		
C103	*B2	R18	*B3	RB14	D2		
C104	*B2	R19	*B1	RB15	D3		
C105	*E1	R20	A2	RB16	D3		
C106	E2	R21	*A2	RB17	*F1		
C108	*D1	R22	*B1	RB18	*F1		
C109	D2	R23	*B1	RB19	*F1		
C110	*D1	R24	*C1	RB20	*F1		
C111	*D2	R25	*D1	RB21	D1		
C112	*D2	R26	*D1	RB22	D2		
C113	*D2	R27	*A1	RB23	D1		
C114	D2	R28	A2	RB24	D1		
C115	*D2	R29	A2	RB25	*D1		
C116	*D1	R30	*B3	RB30	*B1		
C117	D1	R31	*B2	RB31	*B1		
C118	*A1	R32	*F1	RB32	*A1		
C119	*A1	R33	*C2	RB33	*A1		

*:B SIDE

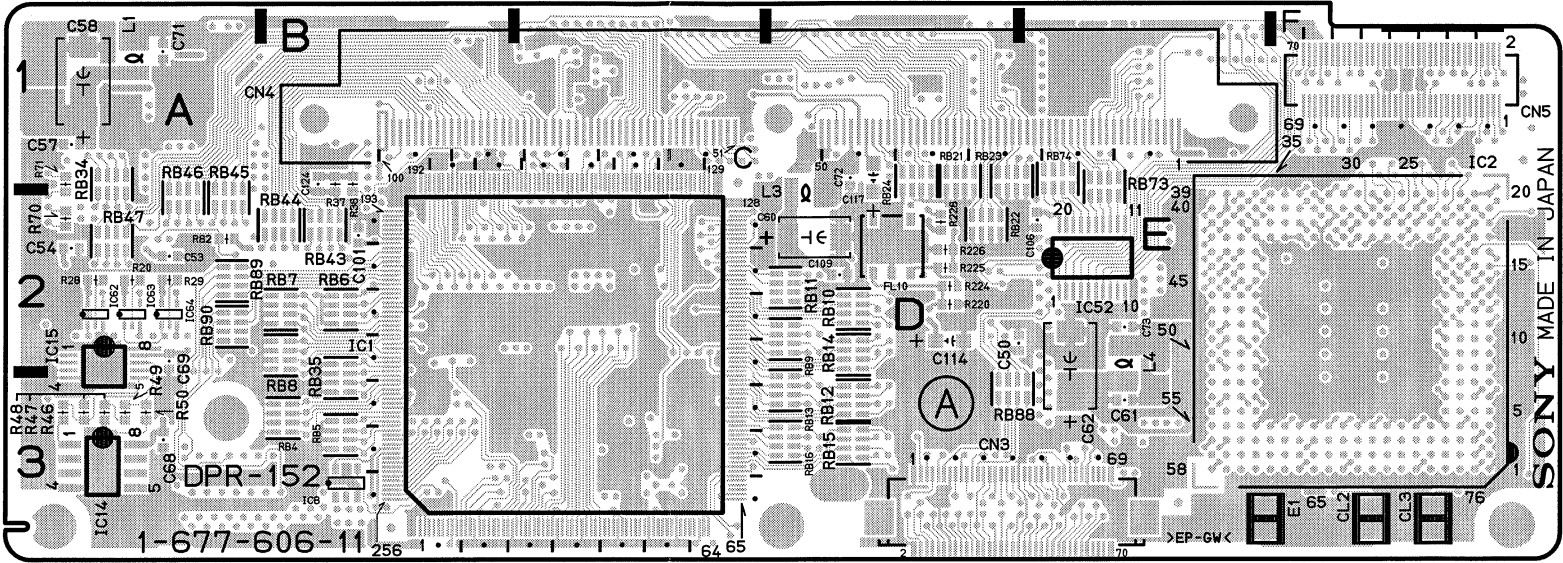

DPR-152 -A SIDE-
SUFFIX: -11

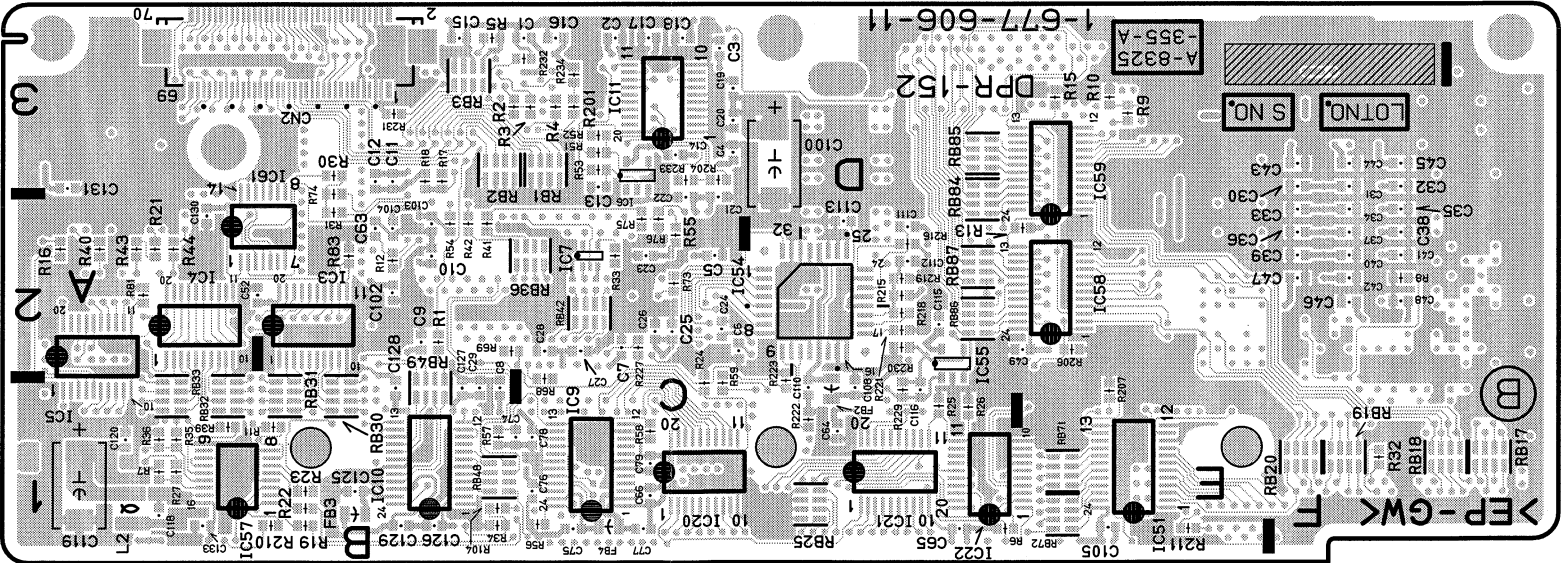


DPR-152 -B SIDE-
SUFFIX: -11


DPR-157 (1-677-607-12)

- | | |
|-----|-----|
| C3 | *B3 |
| C4 | *B3 |
| C5 | C1 |
| C6 | B1 |
| C7 | B1 |
| C8 | A1 |
| C9 | *B3 |
| C10 | *B3 |
| C11 | *B3 |
| C12 | C1 |
| C21 | C4 |
| C22 | B4 |
| C23 | *B4 |
| C24 | *B4 |
| C25 | *A4 |
| C26 | B4 |
| C27 | B4 |
| C28 | B4 |
| C29 | B4 |
| C30 | B4 |
| C31 | A4 |
| C32 | B4 |
| C33 | B4 |
| CN1 | C2 |
| CN2 | *C3 |
| IC1 | B2 |
| IC2 | *B3 |
| IC3 | *B3 |
| IC4 | *A3 |
| IC5 | *C4 |
| IC6 | *B4 |
| L1 | *C4 |
| L2 | *C4 |
| L3 | *B3 |
| R1 | B3 |
| R2 | B3 |
| R3 | A3 |
| R4 | B3 |
| R5 | B3 |
| R6 | B3 |
| R7 | B3 |
| R8 | B3 |
| R9 | B3 |
| R10 | B3 |
| R11 | A3 |
| R12 | B3 |
| R13 | *B4 |
| R14 | *B4 |
| R15 | *B4 |
| R16 | *B4 |
| R17 | *B4 |
| R18 | *B4 |
| R19 | B4 |
| R20 | B4 |
| R21 | B4 |
| R22 | B4 |
| R23 | B4 |
| R24 | A4 |
| R25 | *B4 |
| R26 | *B4 |
| R27 | *B4 |
| R28 | C4 |
| R29 | C4 |
| R30 | C3 |
| R31 | A3 |
| R32 | B3 |
| R33 | *A2 |
| R34 | *B2 |
| R35 | *B2 |
| R36 | C4 |
| R37 | C4 |
| R38 | C4 |
| R39 | C4 |
| R40 | C3 |
| R41 | C4 |
| R42 | A1 |
| R43 | A1 |
| R44 | C3 |
| R45 | C3 |
| R46 | A1 |
| R47 | *B3 |
| R48 | C4 |

*:B SIDE

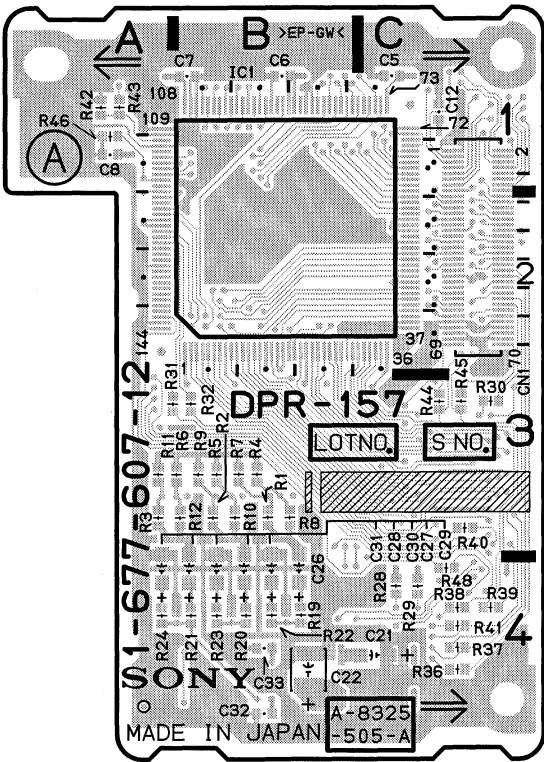

DPR-157 -A SIDE-
SUFFIX: -12

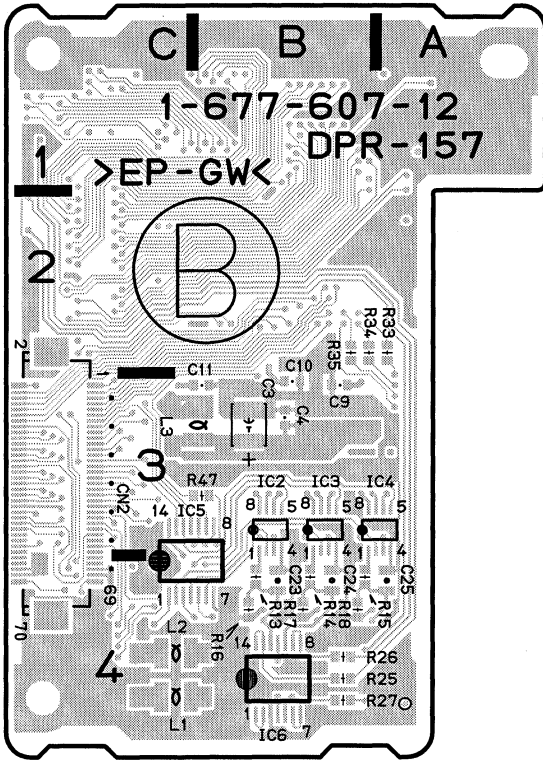


DPR-157 -B SIDE-
SUFFIX: -12


DPR-157 (1-677-607-11)

C3	*B3
C4	*B3
C5	C1
C6	B1
C7	B1
C8	A1
C9	*B3
C10	*B3
C11	*B3
C12	C1
C21	C4
C22	B4
C23	*B4
C24	*B4
C25	*A4
C26	B4
C27	B4
C28	B4
C29	B4
C30	B4
C31	A4
C32	B4
C33	B4
CN1	C2
CN2	*C3
IC1	B2
IC2	*B3
IC3	*B3
IC4	*A3
IC5	*C4
IC6	*B4
L1	*C4
L2	*C4
L3	*B3
R1	B3
R2	B3
R3	A3
R4	B3
R5	B3
R6	B3
R7	B3
R8	B3
R9	B3
R10	B3
R11	A3
R12	B3
R13	*B4
R14	*B4
R15	*B4
R16	*B4
R17	*B4
R18	*B4
R19	B4
R20	B4
R21	B4
R22	B4
R23	B4
R24	A4
R25	*B4
R26	*B4
R27	*B4
R28	C4
R29	C4
R30	C3
R31	A3
R32	B3
R33	*A2
R34	*B2
R35	*B2
R36	C4
R37	C4
R38	C4
R39	C4
R40	C3
R41	C4
R42	A1
R43	A1

*:B SIDE

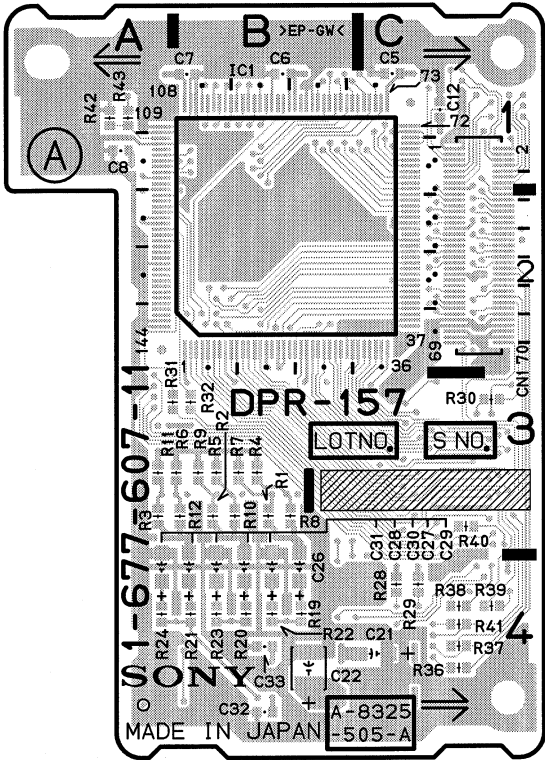


DPR-157 -A SIDE-
SUFFIX: -11

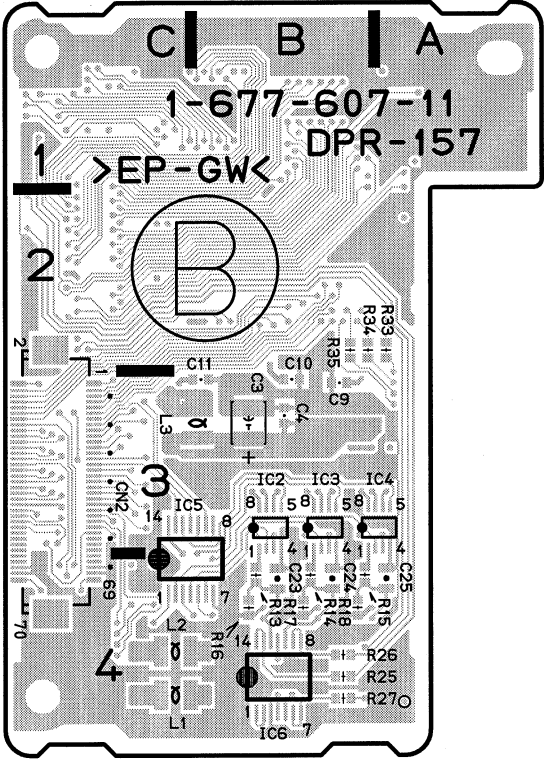


DPR-157 -B SIDE-
SUFFIX: -11

DPR-227 (1-685-660-12)

C1	*B3	C130	*A2	R22	*C3	RB6	B2
C2	*C3	C131	*B2	R23	*C3	RB7	B2
C3	*B3	C133	*C2	R24	*E1	RB8	B2
C4	B3	C142	A2	R25	*A2	RB9	D2
C5	*D3	C143	A1	R26	*D1	RB10	D2
C6	*C3	C144	A3	R27	*C2	RB11	D2
C7	*C2	C145	*B2	R29	E2	RB12	D3
C8	*C1	C146	*A2	R30	*A3	RB13	D3
C9	*C1	C147	A2	R31	*F2	RB14	D2
C10	*B2	C148	*C2	R32	*F2	RB15	D3
C11	*B2	C149	E3	R33	*C2	RB16	D3
C14	*A3	C150	E2	R34	*B1	RB17	*E2
C15	*B3	C151	D2	R35	*C2	RB18	*E2
C16	*C3	C152	E2	R36	*C2	RB19	*E2
C17	*D2	C153	*F1	R37	*B1	RB20	*E2
C19	*C2			R38	*B1	RB21	*D
C20	*C3	CL2	F3	R39	*C2	RB22	*E1
C21	*D2	CL3	F3	R40	*C2	RB23	*D1
C23	*C3			R41	*C1	RB24	*D1
C24	*C2	CN2	*B3	R42	*C1	RB25	*D1
C25	*B2	CN3	D3	R43	E3	RB26	*E3
C27	*C1	CN4	D1	R44	E2	RB30	*B1
C28	*C1			R46	A3	RB31	*B1
C29	*C1	E1	F3	R47	A3	RB32	*A1
C30	*F2			R48	A3	RB33	*A1
C31	*F2	FB1	*B3	R49	A3	RB34	*A1
C32	*F2	FB2	D2	R50	A3	RB35	B2
C33	*F3	FB3	*B1	R52	*C2	RB42	A1
C34	*F3	FB4	*C1	R54	*B3	RB43	B2
C35	*F2	FB5	*C1	R55	*C2	RB44	B2
C36	*A1	FB6	E2	R56	*C1	RB45	A2
C37	*F3	FB7	A2	R57	*C1	RB46	A2
C39	*F2	FB8	*B1	R58	*C1	RB47	A2
C41	*F2	FB10	*C3	R59	*C1	RB50	*D1
C42	*F3	FB15	*F2	R60	A3	RB51	*D1
C43	*F3	FB16	*E1	R61	A3	RB52	*C3
C44	*F2			R68	*B1	RB53	*C3
C45	*F2	FL10	D2	R69	*B1	RB71	*E1
C46	*F2			R70	*A1	RB72	*E1
C47	*F3	IC1	C2	R71	*A1	RB73	*E1
C48	*F2	IC2	F2	R73	*C2	RB74	*E1
C49	*E2	IC3	*B2	R74	*C3	RB84	*D3
C50	*E2	IC4	*A2	R75	*C1	RB85	*D3
C52	A2	IC5	*A2	R76	*C1	RB86	*D3
C53	A1	IC7	*B2	R81	A2	RB87	*D3
C54	A3	IC8	*B3	R82	*B2	RB88	D3
C57	*A1	IC9	*C1	R84	D2	RB89	*B2
C58	A1	IC10	*B1	R104	*B1	RB90	*B2
C60	D2	IC12	*A3	R201	*B3	RB91	*C3
C61	E2	IC13	*B3	R206	*E1	RB92	*C3
C62	E2	IC14	A3	R207	*F1	RB101	F1
C63	E3	IC15	A2	R208	*B3	RB102	F1
C64	*D1	IC21	*D1	R209	*B3	RB103	F1
C65	*D1	IC22	*D1	R210	*C3	RB104	F1
C66	A1	IC51	*F1	R211	*E1	RB105	F1
C68	A3	IC52	*F1	R215	*D2		
C69	A2	IC54	*D2	R216	D2		*:B SIDE
C71	*B1	IC55	D2	R218	*D2		
C72	D2	IC57	*C2	R219	*D2		
C73	E1	IC58	*E2	R220	D2		
C74	*C1	IC59	*E2	R221	*D2		
C75	*C1	IC60	*A1	R222	*D2		
C76	*C1	IC61	*A2	R223	*D2		
C77	*C1	IC62	*A1	R224	D2		
C78	*C1	IC63	E3	R225	D2		
C79	*C1	IC64	E2	R226	D2		
C100	*C3	IC65	*B1	R227	*D2		
C101	*B1			R228	*D2		
C102	*B2	L1	*A1	R229	*D2		
C103	*B2	L3	D2	R230	*D2		
C104	*B2			R231	*B3		
C105	*F1	R1	*B3	R232	*B3		
C106	*F1	R2	*B3	R233	*D1		
C108	D3	R3	*B3	R234	*B3		
C109	*D2	R4	*B3	R235	*B3		
C110	D2	R5	*B3	R236	*C3		
C111	D2	R6	D2	R237	*C3		
C112	*D2	R7	*C2	R239	*B2		
C113	*D2	R8	*F2	R241	*B2		
C114	D3	R9	*F2	R243	*A2		
C115	D2	R10	*F2	R244	*B2		
C116	*D1	R11	*F2	R245	*B2		
C117	D1	R12	E3	R246	*A3		
C118	*C1	R13	*E1	R247	*A3		
C119	*C1	R14	*A2	R248	*A3		
C120	*B1	R15	*B3	R249	*A3		
C124	*B1	R16	*E1				
C125	*B1	R17	*E3	RB1	B3		
C126	*B1	R18	*E3	RB2	B3		
C127	*B1	R19	*C3	RB3	B3		
C128	*B1	R20	E3	RB4	B3		
C129	*B1	R21	*F2	RB5	B3		

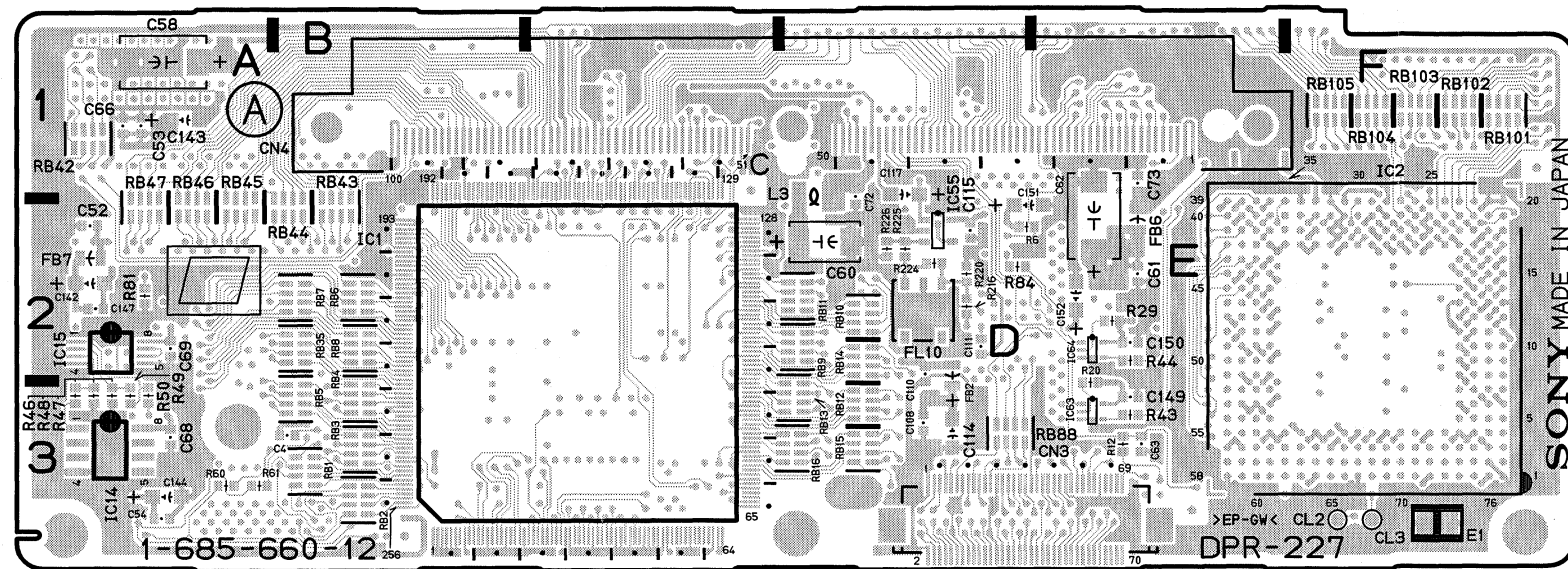

DPR-227 -A SIDE-SUFFIX: -12

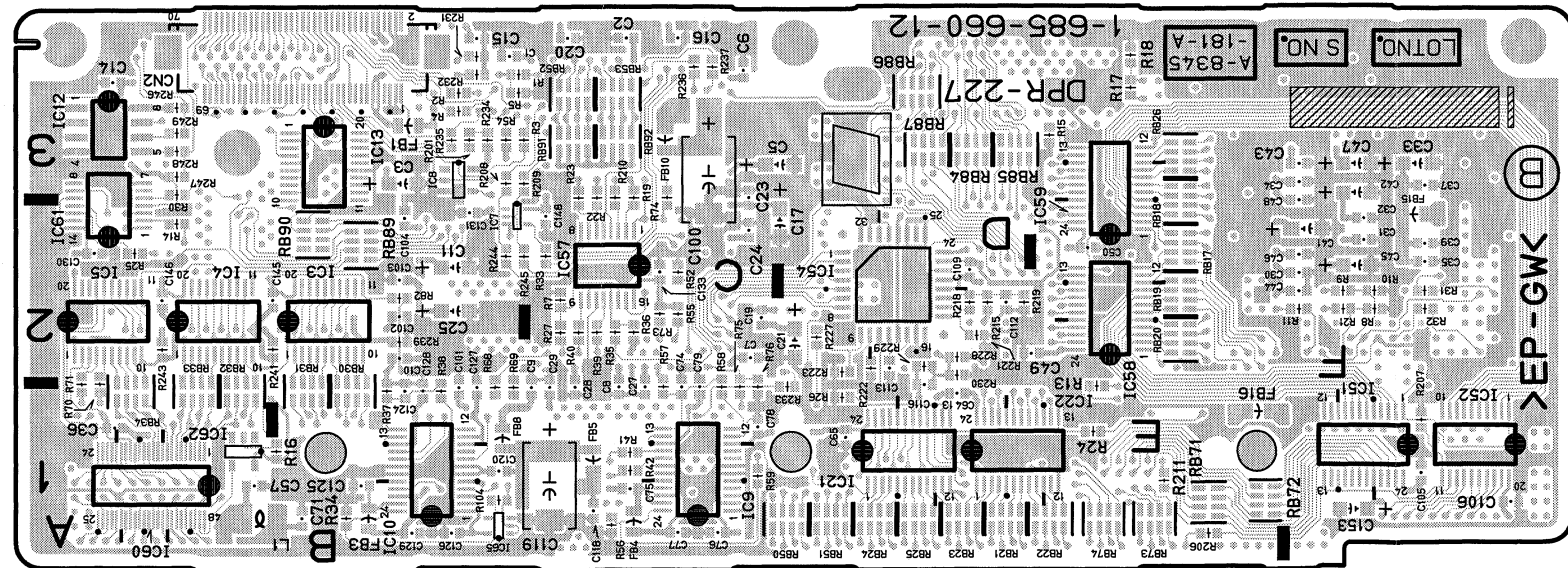


DPR-227 -B SIDE-
SUFFIX: -12

EN-143 (1-677-532-12)

C100	*C1	C402	*A2	R105	*B1	R417	*A1
C101	*E1	C403	*A2	R106	*B1	R418	*A2
C102	*E1	C404	*A2	R107	*A1	R419	*A2
C103	*E1	C405	*A2	R108	*A1	R420	*A2
C104	*C1	C406	*A2	R109	*E1	R421	*A1
C105	*C1	C407	*A2	R110	*E1	R422	A2
C106	E1	C408	*A2	R111	*A2	R423	A2
C107	*E1	C409	*A2	R112	*A2	R424	A2
C108	E1	C410	*A2	R113	*A1	R425	A2
C109	E1	C411	*A2	R114	*B1	R426	A2
C110	*B1	C412	*A2	R200	*E2	R427	A2
C111	*A1	C413	*A2	R201	*E2	R428	*A2
C112	*A1	C414	*A2	R202	*E2	R429	*A2
C113	*A1	C416	A2	R203	*E2	R430	*A2
C114	*E1			R204	*C2	R431	*A2
C115	*E1	CL100	*B1	R205	*C2	R432	*A2
C116	*A1	CL200	*E2	R206	*C2		
C117	*A2	CL202	E1	R207	*C2	RB100	*A1
C118	*A1	CL203	E1	R208	*E2	RB101	*A1
C119	*A2	CL204	*E2	R209	D2	RB102	*A1
C200	*E2	CL300	*C2	R210	D2	RB103	*A1
C201	*E2	CL301	*A2	R211	*E1	RB104	*C1
C202	*C1	CL304	A2	R212	D2	RB105	*C1
C203	*E2	CL307	*C2	R213	D2	RB106	*A1
C204	*E2	CL308	*C2	R214	*E2	RB107	*A1
C205	*C2	CL309	*C2	R215	*E2	RB108	*A1
C206	*C2			R216	*C2	RB109	*A1
C207	D1	CN15	C1	R217	*E2	RB111	*A1
C208	D1			R218	D2	RB200	*E2
C209	*E2	D100	*B1	R219	*E2	RB201	*E2
C210	*E2	D102	*B1	R220	*D1	RB202	E2
C211	D2	D103	*B1	R221	*D1	RB203	E2
C212	*C2			R300	B2	RB204	*E2
C213	*C1	E1	*E2	R301	C2	RB205	*E2
C214	C1	E2	A2	R302	C2	RB300	B1
C215	D1			R303	C2	RB301	C1
C216	*E1	FB100	*C1	R304	C2	RB304	B2
C217	*E2	FB101	*C1	R305	C2	RB305	B2
C218	D2	FB301	B1	R306	C1	RB306	*C1
C219	C2	FB302	B2	R307	B2	RB307	*C1
C220	C1	FB303	A2	R308	*A1	RB308	C1
C221	C2	FB304	A2	R311	B2	RB309	C1
C222	C2	FB305	*D1	R312	*A1	RB310	D1
C223	C2			R313	*C2	RB311	D1
C224	D2	FL100	E1	R314	B2		
C225	D2	FL101	E1	R315	B2	TP200	*E2
C226	D1	FL102	E1	R316	B2	TP300	B2
C227	D2			R317	*A2	TP301	B2
C228	D2	IC100	*B1	R318	*A1	TP302	*D1
C229	D2	IC101	*B1	R319	B2	TP303	*C1
C230	*E2	IC102	A1	R320	B2	TP304	*C2
C231	*E2	IC103	A1	R322	*D1		
C232	*E2	IC104	A1	R323	*D1	X400	A2
C300	C1	IC105	A2	R324	*D1	X401	A2
C301	B2	IC106	A1	R325	*D1	X402	A2
C302	B2	IC107	A2	R326	*D1	X403	A2
C303	*D1	IC108	*A2	R327	*D1		
C304	*D1	IC200	E2	R328	C1		
C305	*D1	IC201	E2	R329	*C1		
C306	*D1	IC202	C1	R330	*C2		
C307	*D1	IC203	E2	R331	*C2		
C309	B1	IC204	*D2	R332	*C1		
C310	C2	IC205	C1	R334	C2		
C311	C2	IC206	D1	R335	C2		
C312	C1	IC207	E2	R337	*B1		
C313	C1	IC300	B1	R338	B2		
C314	C1	IC301	*B2	R339	B2		
C315	C2	IC302	B2	R340	*A1		
C316	C2	IC303	B2	R341	C1		
C317	B2	IC304	*D1	R342	B1		
C319	A1	IC305	B1	R343	C2		
C320	B1	IC306	B2	R344	C2		
C321	*C1	IC307	B2	R345	C2		
C323	*C1	IC308	C2	R346	C2		
C324	*C2	IC309	C2	R347	*C1		
C325	*C2	IC310	*A2	R400	*A1		
C326	C2	IC400	A2	R401	*A1		
C327	C2	IC401	A1	R402	A2		
C328	C2	IC402	*A2	R403	*A2		
C329	*C2	IC403	*A2	R404	*A2		
C330	B2	IC404	*A2	R405	*A2		
C332	*A1			R406	*A1		
C334	B2	Q100	*E1	R407	A1		
C336	A2	Q101	*E1	R408	*A2		
C338	A2	Q400	A2	R409	*A2		
C340	B1	Q401	A2	R410	*A2		
C341	B1	Q402	A2	R411	*A2		
C342	B1			R412	*A2		
C343	*C2	R100	*B1	R413	*A2		
C344	*C2	R101	*A1	R414	*A2		
C400	*A1	R102	*E1	R415	*A2		
C401	*A2	R104	*A1	R416	*A2		


*:B SIDE

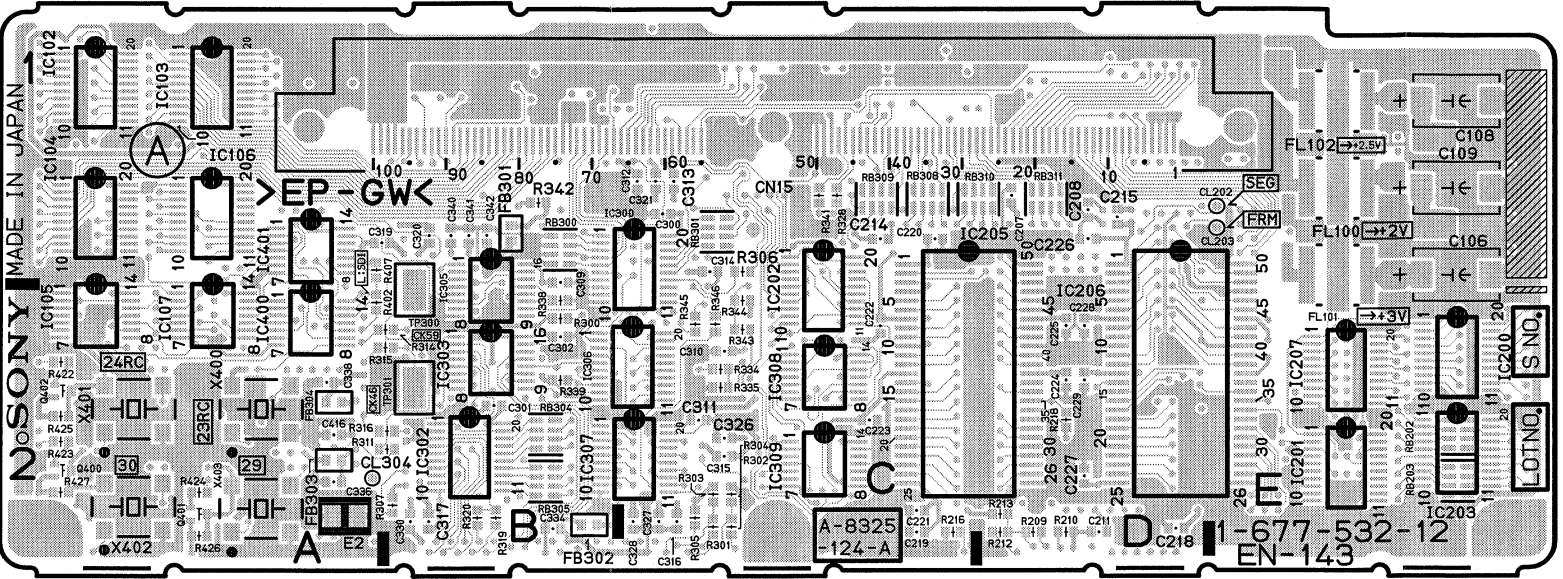

EN-143 (1-677-532-11)


C100	*C1	C402	*A2	R106	*B1	R422	A2
C101	*E1	C403	*A2	R107	*A1	R423	A2
C102	*E1	C404	*A2	R108	*A1	R424	A2
C103	*E1	C405	*A2	R109	*E1	R425	A2
C104	*C1	C406	*A2	R110	*E1	R426	A2
C105	*C1	C407	*A2	R111	*A2	R427	A2
C106	E1	C408	*A2	R112	*A2	R428	*A2
C107	*E1	C409	*A2	R113	*A1	R429	*A2
C108	E1	C410	*A2	R200	*E2	R430	*A2
C109	E1	C411	*A2	R201	*E2	R431	*A2
C110	*B1	C412	*A2	R202	*E2	R432	*A2
C111	*A1	C413	*A2	R203	*E2		
C112	*A1	C414	*A2	R204	*C2	RB100	*A1
C113	*A1	C416	A2	R205	*C2	RB101	*A1
C114	*E1			R206	*C2	RB102	*A1
C115	*E1	CL100	*E1	R207	*C2	RB103	*A1
C116	*A1	CL200	*E2	R208	*E2	RB104	*C1
C117	*A2	CL202	E1	R209	D2	RB105	*C1
C118	*A1	CL203	E1	R210	D2	RB106	*A1
C119	*A2	CL204	*E2	R211	*E1	RB107	*A1
C200	*E2	CL300	*C2	R212	D2	RB108	*A1
C201	*E2	CL301	*A2	R213	D2	RB109	*A1
C202	*C1	CL304	A2	R214	*E2	RB111	*A1
C203	*E2	CL307	*C2	R215	*E2	RB200	*E2
C204	*E2			R216	C2	RB201	*E2
C205	*C2	CN15	C1	R217	*E2	RB202	E2
C206	*C2			R218	D2	RB203	E2
C207	D1	D100	*B1	R219	*E2	RB204	*E2
C208	D1	D101	*B1	R220	*D1	RB205	*E2
C209	*E2	D102	*B1	R221	*D1	RB300	B1
C210	*E2	D103	*B1	R300	B2	RB301	C1
C211	D2			R301	C2	RB304	B2
C212	*C2	E1	*E2	R302	C2	RB305	B2
C213	*C1	E2	A2	R303	C2	RB306	*C1
C214	C1			R304	C2	RB307	*C1
C215	D1	FB100	*C1	R305	C2	RB308	C1
C216	*E1	FB101	*C1	R306	C1	RB309	C1
C217	*E2	FB301	B1	R307	B2	RB310	D1
C218	D2	FB302	B2	R308	*A1	RB311	D1
C219	C2	FB303	A2	R311	B2		
C220	C1	FB304	A2	R312	*A1	TP200	*E2
C221	C2	FB305	*D1	R313	*C2	TP300	B2
C222	C2			R314	B2	TP301	B2
C223	C2	FL100	E1	R315	B2	TP302	*D1
C224	D2	FL101	E1	R316	B2	TP303	*C1
C225	D2	FL102	E1	R317	*A2	TP304	*C2
C226	D1			R318	*A1		
C227	D2	IC100	*B1	R319	B2	X400	A2
C228	D2	IC101	*E1	R320	B2	X401	A2
C229	D2	IC102	A1	R322	*D1	X402	A2
C230	*E2	IC103	A1	R323	*D1	X403	A2
C231	*E2	IC104	A1	R324	*D1		
C232	*E2	IC105	A2	R325	*D1		
C300	C1	IC106	A1	R326	*D1		
C301	B2	IC107	A2	R327	*D1		
C302	B2	IC108	*A2	R328	C1		
C303	*D1	IC200	E2	R329	*C1		
C304	*D1	IC201	E2	R330	*C2		
C305	*D1	IC202	C1	R331	*C2		
C306	*D1	IC203	E2	R332	*C1		
C307	*D1	IC204	*D2	R334	C2		
C309	B1	IC205	C1	R335	C2		
C310	C2	IC206	D1	R337	*B1		
C311	C2	IC207	E2	R338	B2		
C312	C1	IC300	B1	R339	B2		
C313	C1	IC301	*B2	R340	*A1		
C314	C1	IC302	B2	R341	C1		
C315	C2	IC303	B2	R342	B1		
C316	C2	IC304	*D1	R343	C2		
C317	B2	IC305	B1	R344	C2		
C319	A1	IC306	B2	R400	*A1		
C320	B1	IC307	B2	R401	*A1		
C321	C1	IC308	C2	R402	A2		
C323	*C1	IC309	C2	R403	*A2		
C324	*C2	IC310	*A2	R404	*A2		
C325	*C2	IC400	A2	R405	*A2		
C326	C2	IC401	A1	R406	*A1		
C327	C2	IC402	*A2	R407	A1		
C328	C2	IC403	*A2	R408	*A2		
C329	*C2	IC404	*A2	R409	*A2		
C330	B2			R410	*A2		
C332	*A1	Q100	*E1	R411	*A2		
C334	B2	Q101	*E1	R412	*A2		
C336	A2	Q400	A2	R413	*A2		
C338	A2	Q401	A2	R414	*A2		
C340	B1	Q402	A2	R415	*A2		
C341	B1			R416	*A2		
C342	B1	R100	*B1	R417	*A1		
C343	*C2	R101	*A1	R418	*A2		
C344	*C2	R102	*E1	R419	*A2		
C400	*A1	R104	*A1	R420	*A2		
C401	*A2	R105	*B1	R421	*A1		

*:B SIDE

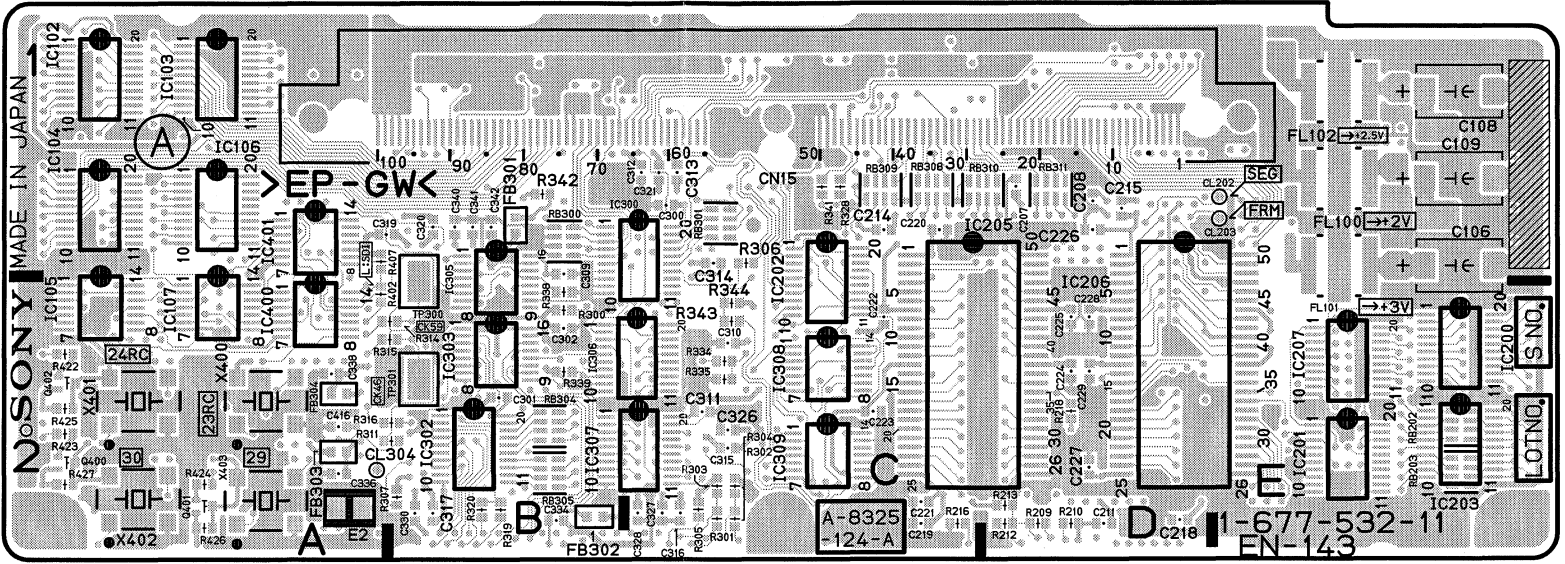


ENC-59 (1-677-533-11)

C1	*C1	C239	*B1	R112	E2
C2	A1	C240	*A1	R113	F2
C3	*C1	C241	*B1	R114	D2
C4	*E1	C242	C2	R200	C1
C5	A1	C243	*C2	R201	C1
C6	F1	C244	C2	R202	C1
C7	A2	C245	C2	R203	C1
C8	B2	C246	*C2	R204	C1
C9	B2	C247	*C2	R205	C2
C10	B2			R206	C2
C11	F1	CL1	A1	R207	*B1
C12	F1	CL100	D2	R208	A2
C13	*A1	CL101	D2	R209	C2
C14	*A1	CL102	F2	R210	C2
C15	*F1	CL200	*C1	R211	A1
C16	*F1			R212	A1
C17	*B2	CN2	B2	R213	A1
C18	*A2	CN3	C2	R214	A1
C19	*A2	CN16	C1	R215	A1
C20	*A2	CN17	D2	R216	*B2
C100	D2			R217	*B2
C101	D2	D1	*A1	R218	*C1
C102	*D1	D2	*A1	R219	*C1
C103	D2	D3	*A1	R220	*C1
C104	*F2			R221	*C1
C105	*E1	E1	*C2	R222	*C1
C106	*F1	E2	F2	R223	*C2
C107	*F2			R224	*C2
C108	*F2	FL1	A1	R225	*C1
C109	F2	FL2	*F1	R226	*C1
C110	D2			R227	*C1
C111	*E2	IC1	A2	R228	*C1
C112	*E1	IC2	*A1	R229	*C2
C113	*F1	IC3	*F1	R230	*C2
C114	*F2	IC4	B2	R231	*D2
C115	*F2	IC5	B1	R232	*D2
C116	*F2	IC6	B2		
C117	F2	IC7	*A2	RB1	B1
C118	D2	IC8	*A2	RB2	A2
C119	*E2	IC9	*A2	RB3	A2
C120	F2	IC10	*A2	RB4	B2
C121	E2	IC11	A2	RB5	*A2
C122	F2	IC12	A2	RB6	B2
C123	F2	IC100	D1	RB7	B2
C124	F2	IC101	D2	RB8	*B2
C125	F2	IC102	D2	RB9	B2
C126	F1	IC103	*E2	RB10	A2
C127	E1	IC104	*E2	RB11	A2
C128	*F1	IC105	F2	RB100	D1
C129	*F1	IC106	F1	RB101	D1
C130	E2	IC107	D2	RB200	*D1
C131	F2	IC200	*E1	RB201	C1
C132	D2	IC201	*D2	RB202	*D1
C200	*R1	IC202	C2	RB203	C1
C201	*D2	IC203	C2	RB204	*B1
C202	C2	IC204	B2	RB205	*B1
C203	C1	IC206	*B2	RB206	*B1
C204	B2	IC207	C1	RB207	*B1
C205	*A1	IC209	A2	RB208	*D1
C206	*A2	IC210	A2	RB209	*D1
C207	*A2	IC211	A1	RB210	*D1
C208	A2			RB211	*D2
C209	*A2	Q1	*A1	RB212	*D2
C210	B2	Q2	*A1	RB213	*D2
C211	B2	Q3	*F1		
C212	*B2	Q4	*F1	TP100	D2
C213	*B2			TP101	F2
C214	A1	R1	B1	TP200	A1
C215	C1	R2	F1		
C216	*C1	R3	*E1	X200	*A1
C217	*C2	R4	*A2	X201	*A2
C218	*C1	R5	*A2	X202	*A1
C219	*C2	R6	*A2	X203	A2
C220	*C1	R7	*A1	X204	*A2
C221	A2	R8	*A1		
C222	*C1	R9	*F1	*:B SIDE	
C223	*C2	R10	*F1		
C224	*B2	R11	*A2		
C225	*B2	R12	*A2		
C226	*B1	R13	*A1		
C227	*B1	R100	D2		
C228	*B1	R101	D2		
C229	*B1	R102	D2		
C230	*C1	R103	D2		
C231	*C1	R104	D2		
C232	*C2	R105	D2		
C233	B2	R106	*E2		
C234	*B2	R107	F2		
C235	*B1	R108	D2		
C236	*B1	R109	D2		
C237	*B1	R110	F2		
C238	*B1	R111	*E2		

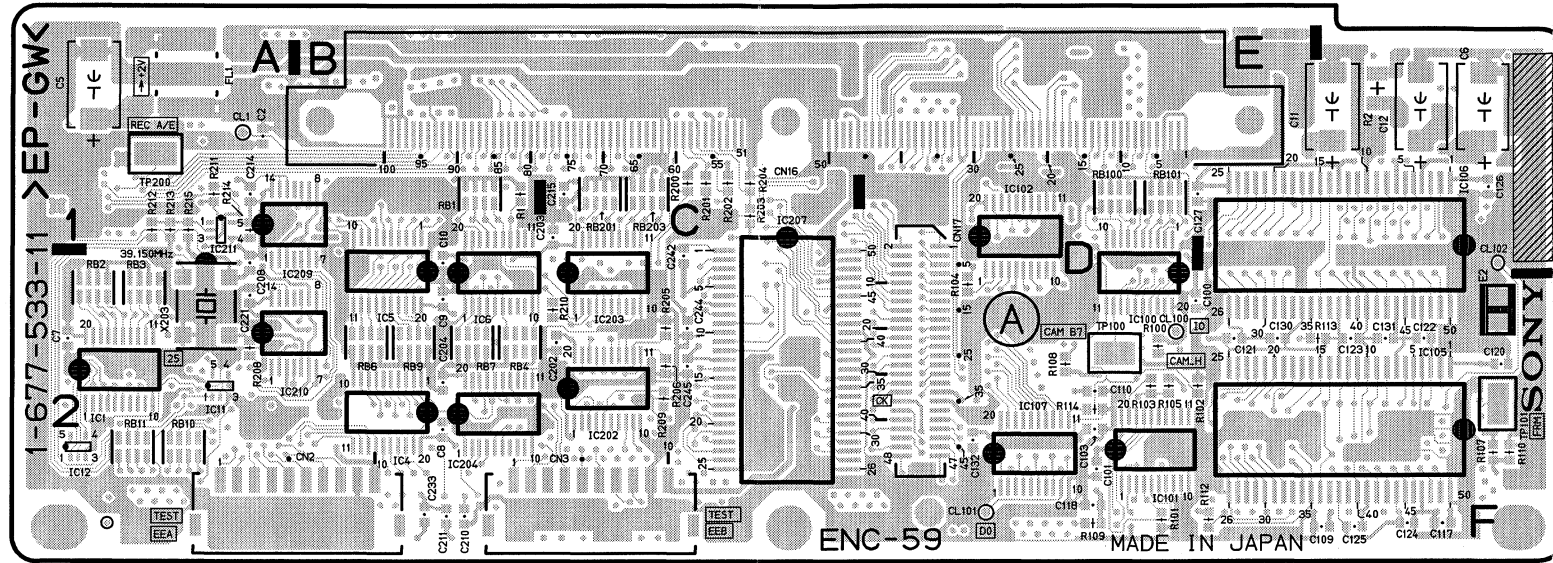


ENC-59 -A SIDE-SUFFIX: -11

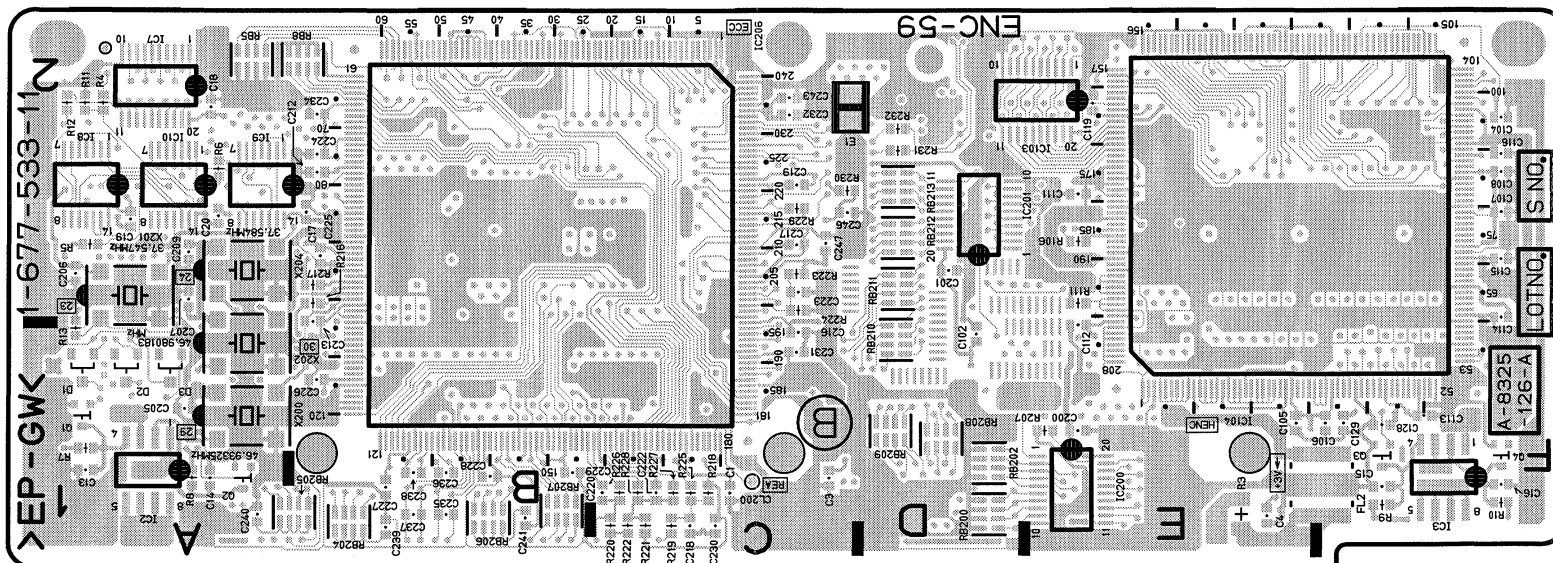


ENC-59 -B SIDE-
SUFFIX: -11

EQ-89 (1-677-534-11)


C1	B1	C238	*C2	C434	*E1	L101	B1	R131	*A1	R254	*C2	R406	*E2	R607	*A1
C2	B1	C239	*C2	C435	E1	L102	B1	R132	A1	R255	*C2	R407	*D2	R608	*A1
C3	E1	C240	*B2	C436	E1	L103	B1	R133	*B2	R256	*C2	R408	F1	R609	*A1
C4	C1	C241	C1	C437	*E2	L104	A1	R134	A1	R257	C1	R409	*E2	R610	*A1
C5	B1	C242	*C2	C438	*E2	L105	A1	R135	A1	R258	*C1	R410	*E2	R611	*A1
C6	E1	C243	*C2	C439	*E2	L106	B1	R136	*A1	R259	*C1	R411	*E2	R613	*A1
C100	*A2	C244	*C2	C440	*E2	L200	C1	R137	*B2	R260	*C1	R413	*E2	R614	*A1
C101	*A2	C245	*C1	C441	F1	L201	C1	R138	*A1	R261	*C2	R414	*D2	R615	*A1
C102	*A2	C246	*C2	C442	*E2	L202	C1	R139	*A1	R262	*C1	R415	*E2	R616	*A1
C103	*A2	C247	*B2	C443	*E2	L203	C1	R140	*A2	R263	*C1	R416	*E1	R617	*A1
C104	A1	C300	*C2	C444	*E2	L204	C1	R141	*A1	R264	*C2	R417	*E2	R619	*A1
C105	A1	C301	*C2	C445	*F1	L205	C1	R142	*A1	R265	*C2	R418	*D2	R620	*A1
C106	A1	C302	*D2	C446	*E2	L206	C1	R143	*A1	R266	*B1	R419	*E2	R621	*A1
C107	A1	C303	*D2	C447	*D2	L300	D1	R144	*A2	R267	B1	R420	*E2	R622	*A1
C108	A1	C304	C1	C500	B1	L301	D1	R145	*A2	R268	C1	R421	*E1	R623	A1
C109	*A2	C305	C1	C501	B1	L302	D1	R146	*A1	R269	*C1	R422	*E2	R700	F1
C110	*A2	C306	C1	C600	A1	L303	D1	R147	*A2	R270	*C1	R423	*E1	R701	*E1
C111	*A2	C307	C1	C601	A1	L304	D1	R148	*A2	R300	C1	R424	*E1	R702	*E1
C112	*A2	C308	C1	C700	F1	L305	D1	R149	*B2	R301	*C2	R426	*E1	R703	*E1
C113	*A2	C309	*C2	C701	F1	L306	D1	R150	*A2	R302	*D2	R427	*E2	R704	*E1
C114	*A1	C310	*C2	C800	*D1	L400	E1	R151	*B2	R303	*D1	R428	*D2	R705	*E1
C115	*A1	C311	*C2	C801	*C1	L401	E1	R152	*B2	R304	*D1	R429	*E1	R707	*E1
C116	*A1	C312	*D2			L402	E1	R153	*B2	R305	*C2	R430	*E1	R708	*E1
C117	*A2	C313	*C2	CN1	A2	L403	E1	R154	*B2	R306	*C2	R431	*E1	R709	*E1
C118	*A2	C314	*C1	CN2	B2	L404	E1	R155	*B2	R307	*C2	R432	*E1	R710	*E1
C119	*A2	C315	*C1	CN3	D2	L405	E1	R156	*B2	R308	D1	R433	*E2	R711	*F1
C120	*A1	C316	*C1	CN4	E2	L406	F1	R157	B1	R309	*C2	R434	*E1	R713	*E1
C121	*A1	C317	*C2	CN5	E2			R158	*B1	R310	*C2	R435	E1	R714	*E1
C122	*A1	C318	*D2	CN11	D1			R159	*B1	R311	*C2	R436	*B1	R715	*E1
C123	*A2	C319	*C2			Q100	A1	R160	*B1	R313	*C2	R437	*E2	R716	*E1
C124	*A2	C320	*C1	CV100	B1	Q102	*B2	R161	*A2	R314	*C2	R438	*E1	R717	*E1
C125	A1	C321	*D1	CV200	C1	Q103	*A1	R162	*B1	R315	*D2	R439	*E1	R719	*E1
C126	*A1	C322	*D1	CV300	D1	Q104	A1	R163	*B1	R316	*C1	R440	*E2	R720	*E1
C127	*A2	C323	*C2	CV400	E1	Q105	*B1	R164	*A2	R317	*D2	R441	*E1	R721	*

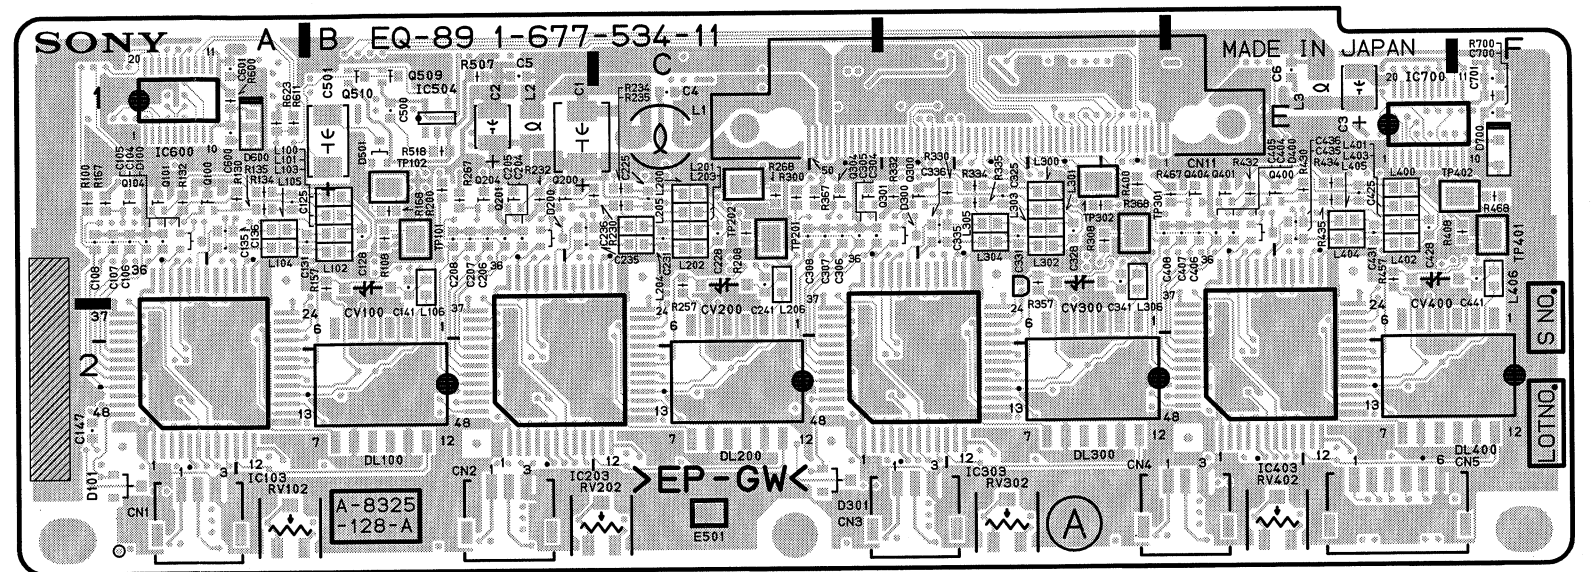


EQ-89 -A SIDE-SUFFIX: -11

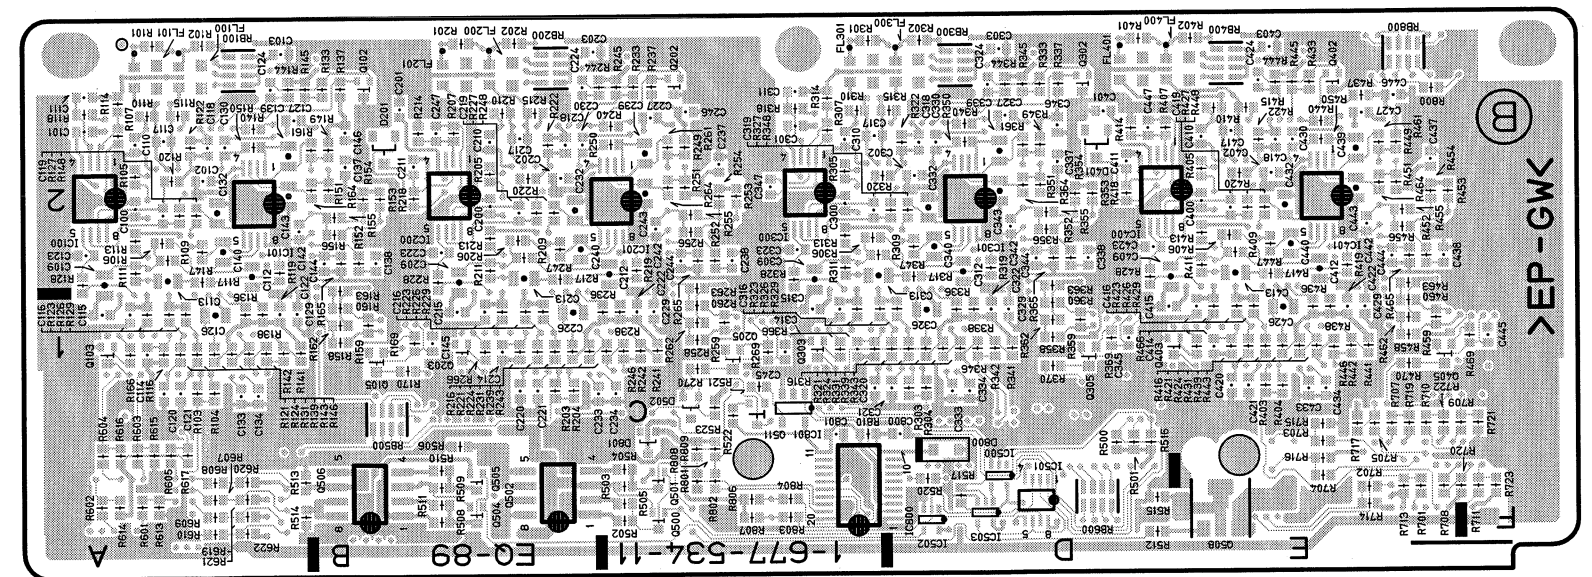

EQ-89 -B SIDE-
SUFFIX: -11

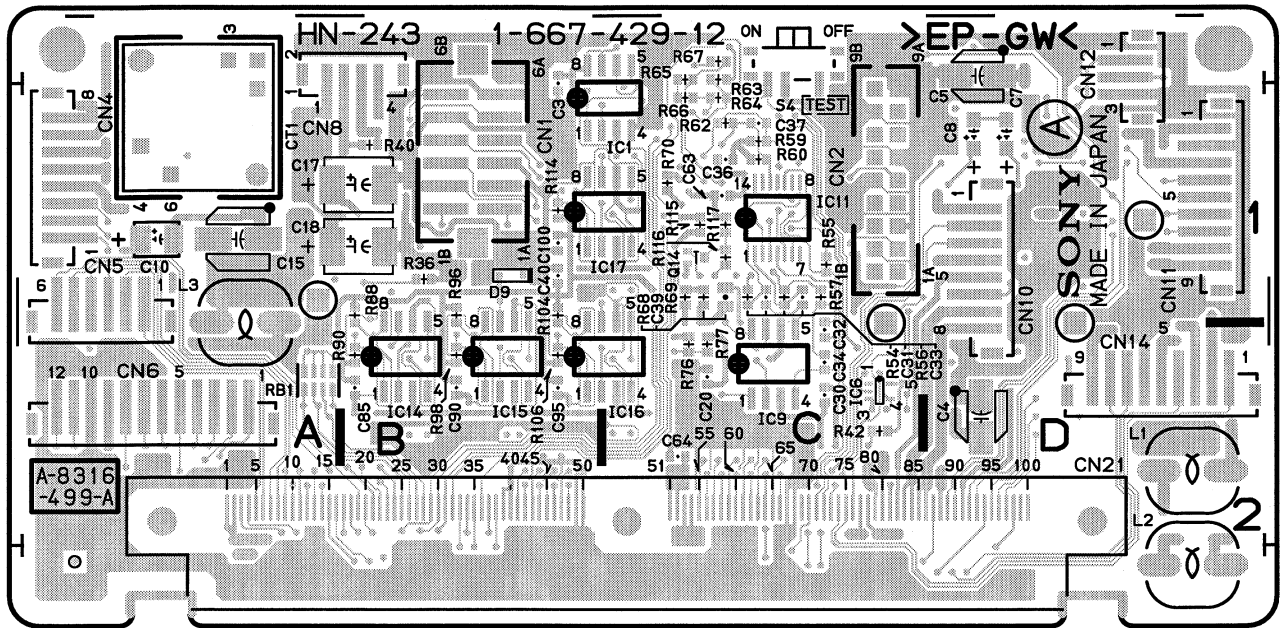


HN-243 -A SIDE-
SUFFIX: -12

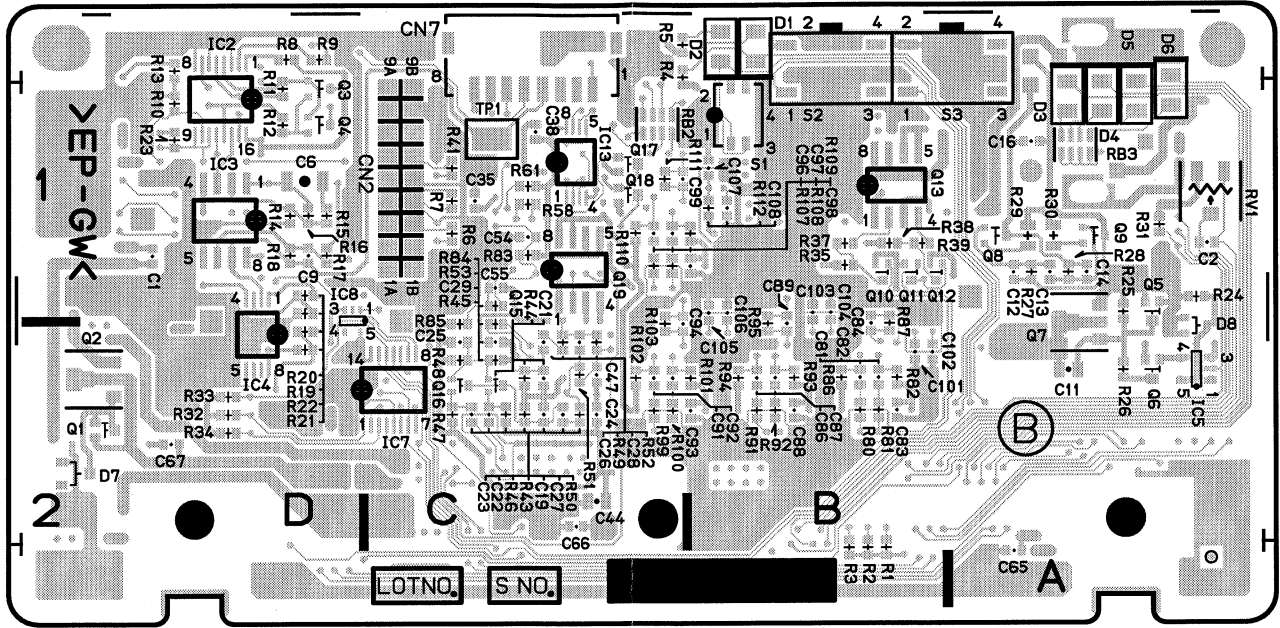


HN-243 -B SIDE-
SUFFIX: -12

HN-243 (1-667-429-12)


CN1	B1	L1	D2
CN2	C1	L2	D2
CN4	A1	L3	A1
CN5	A1		
CN6	A2	Q1	*D2
CN7	*C1	Q2	*D2
CN8	B1	Q3	*D1
CN10	D1	Q4	*D1
CN11	D1	Q5	*A1
CN12	D1	Q6	*A2
CN14	D2	Q7	*A2
CN21	C2	Q8	*A1
		Q9	*A1
CT1	A1	Q10	*B1
		Q11	*B1
D1	*B1	Q12	*B1
D2	*B1	Q13	*B1
D3	*A1	Q14	C1
D4	*A1	Q15	*C2
D5	*A1	Q16	*C2
D6	*A1	Q17	*C1
D7	*D2	Q18	*C1
D8	*A2	Q19	*C1
D9	B1		
IC1	B1	RB1	A2
IC2	*D1	RB2	*C1
IC3	*D1	RB3	*A1
IC4	*D1	RV1	*A1
IC5	*A2		
IC6	C2	S1	*B1
IC7	*C2	S2	*B1
IC8	*D1	S3	*A1
IC9	C2	S4	C1
IC11	C1		
IC13	*C1	TP1	*C1
IC14	B2		
IC15	B2		
IC16	B2		
IC17	B1		




HP-90 -A SIDE-
SUFFIX: -11



HP-90 -B SIDE-
SUFFIX: -11

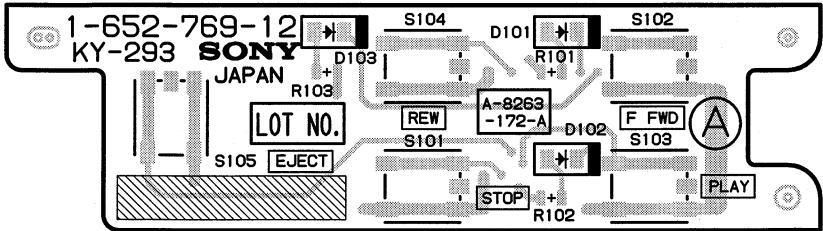

KY-293 -A SIDE-
SUFFIX: -12

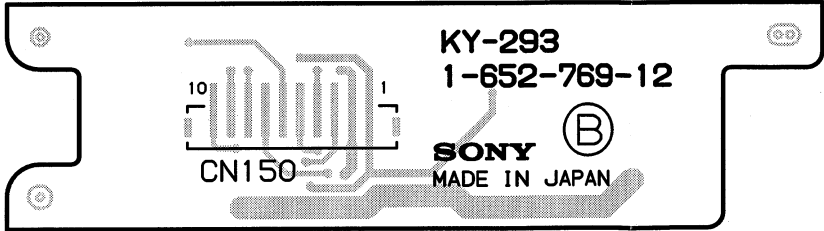


KY-293 -B SIDE-
SUFFIX: -12

IF-819 (1-678-369-11)

C100	*B1	C532	*C1	R102	*C1	R319	*D1	R563	*B2
C101	*B1	C533	A1	R103	*B1	R320	*D1	R564	A3
C102	*C2			R104	*C1	R321	*D1	R565	*A1
C103	*C1	CN8	C1	R105	*C1	R322	*D1	R566	*A1
C104	*C1	CN9	B3	R106	*C1	R323	*C1	R567	*A1
C105	*B3	CN300	D3	R107	*C1	R324	*C1	R568	*A1
C106	*C3			R108	*D3	R325	*B1	R569	*A1
C107	*B1	D100	C2	R109	*D3	R326	*B1	R570	*A1
C108	*C2	D500	*B2	R110	*B1	R331	B2	R571	*A1
C109	*D1	D501	A3	R111	*C1	R332	*B3	R572	*A1
C110	*D1	D502	*B2	R112	*C1	R333	*C1	R573	*B1
C111	*B3	D503	*A2	R113	*C1	R334	*C1	R574	*A2
C113	*D3	D504	B3	R114	*B1	R335	C3	R575	*A1
C114	*C3	D505	*B2	R115	*B1	R336	*D3	R576	*A1
C115	*B2	D506	*A1	R116	*C1	R400	*E2	R577	*A2
C116	*B3			R117	*C1	R401	*D2	R578	*A1
C117	*B2	E501	A3	R118	*D1	R402	E3	R579	*A2
C118	*B3			R119	*D1	R403	*D3	R580	*A1
C119	C3	IC100	B2	R120	*D1	R404	D2	R581	*A1
C120	*C3	IC101	*D2	R121	*D1	R405	D2	R582	*A2
C121	*C3	IC102	*D2	R122	*D1	R406	*D1	R583	*A1
C122	*B1	IC103	*C1	R123	*D1	R407	*D1	R584	*A1
C123	*C2	IC104	*B3	R124	*B2	R408	*D1	R585	*A1
C124	*C3	IC105	*C2	R125	*C1	R409	*D2	R586	A1
C125	*C3	IC106	*B2	R126	*C1	R410	*D2		
C126	*B3	IC107	*B2	R127	*B3	R412	*D2	RB100	*B1
C127	*C3	IC108	*D3	R128	*B3	R413	*D2	RB101	*C3
C128	*C3	IC109	*C3	R129	*B3	R414	*D3	RB102	*C3
C129	*C3	IC110	*C2	R130	*C3	R415	*D1	RB103	*C1
C130	*C3	IC111	C3	R131	*C3	R500	A3	RB200	*E2
C200	*D3	IC112	*B2	R132	*C3	R501	*A2	RB201	E3
C201	E2	IC113	*C2	R134	*D1	R502	*A2	RB202	*E2
C202	*C2	IC114	*C3	R135	*D1	R503	*A2	RB203	E3
C203	E3	IC115	*B3	R136	*D1	R504	*A2	RB204	*E3
C204	*E2	IC200	E2	R137	*D1	R505	*A2	RB205	*E3
C205	*E3	IC201	*D3	R138	*B3	R506	*A2	RB300	*B3
C206	*E2	IC204	*E2	R140	*C2	R507	*A2	RB301	*B3
C207	*E3	IC205	*E3	R141	*C2	R508	*A2	RB302	*B3
C208	*E3	IC206	*E3	R142	*B2	R509	A2	RB303	*B3
C209	E3	IC207	E3	R143	*C2	R510	A3	RB304	*E2
C210	E3	IC208	E2	R144	*B2	R511	A3		
C211	C2	IC209	E1	R145	*C2	R512	*B2	S300	*E1
C212	E1	IC210	E1	R149	*D3	R513	*B2		
C213	*E1	IC211	C3	R150	*B2	R514	A3	TP400	*D2
C214	E2	IC300	D2	R151	*B2	R515	A3	TP401	*D2
C300	D3	IC301	D3	R152	*B2	R516	*A3	TP402	*D2
C301	*E1	IC302	*E1	R153	*D3	R517	*A3	TP403	D2
C302	*E2	IC303	*E1	R154	*C3	R518	*B2		
C400	E3	IC400	D2	R155	*B2	R519	*A2	X100	*B2
C401	*D2	IC401	D2	R156	*B2	R520	*B2	X400	*D3
C402	D2	IC402	*D3	R157	*C2	R521	*A3		
C403	*D3	IC403	*D2	R158	C3	R522	*A3		
C404	*D3	IC404	*D2	R159	C3	R523	A2		
C405	*E3	IC405	*D2	R160	*D1	R524	A2		
C406	*D2	IC500	A3	R161	*D1	R525	A3		
C407	*D1	IC501	*A3	R162	*D3	R526	*A3		
C408	D2	IC502	A2	R163	*D3	R527	A2		
C409	*D2	IC503	*A2	R164	*B2	R528	*A3		
C410	D2	IC504	*A1	R165	*C2	R529	*A3		
C411	*D2	IC505	*A3	R166	*C2	R530	*A3		
C500	*A2			R167	*B1	R531	*B2		
C501	*A2	L2	*D3	R168	*B1	R532	*B2		
C502	A3	L500	A1	R169	*B2	R533	*B3		
C503	A3	L501	*B2	R170	*B2	R534	A2		
C504	A3	L502	*D2	R171	*D1	R535	A3		
C505	A3	L503	*E1	R172	*D1	R536	B3		
C506	*A2	L504	C2	R173	*B2	R537	B2		
C507	*A2			R200	E2	R538	*A3		
C508	*A2	PH400	D2	R201	E2	R539	*A3		
C509	A3			R202	E3	R540	*A2		
C510	*A3	Q100	E3	R203	E3	R541	*A2		
C511	B3	Q300	D2	R205	C2	R542	B3		
C512	*A3	Q301	D3	R206	C3	R543	*A3		
C513	A3	Q302	*B1	R207	C3	R544	*B3		
C514	B3	Q303	*C1	R300	D3	R545	B3		
C515	*B3	Q304	*D1	R301	D3	R546	A3		
C516	A1	Q500	*A3	R302	D3	R547	*A3		
C517	A2	Q501	*B2	R303	D3	R548	*B3		
C518	A1	Q502	*A3	R304	D3	R549	A3		
C519	*A1	Q503	*B2	R305	D3	R550	*A3		
C520	*A1	Q504	*A3	R306	D3	R551	*A3		
C521	*A1	Q505	A2	R308	*E1	R552	B3		
C522	A1	Q506	A1	R309	*E1	R553	B3		
C523	A2	Q507	*A1	R310	*B1	R554	*A3		
C524	*A2	Q508	A1	R311	*C1	R555	B3		
C525	*A1	Q509	A2	R312	*C1	R556	A3		
C526	*A2	Q510	*A3	R313	*C1	R557	A3		
C527	*A1	Q512	*A1	R314	*C1	R558	A2		
C528	*E2	Q513	*A1	R315	*C1	R559	A2		
C529	C2			R316	*C1	R560	A2		
C530	*E1	R100	*B1	R317	*D1	R561	A2		
C531	D2	R101	*B1	R318	*D1	R562	A3		


*:B SIDE

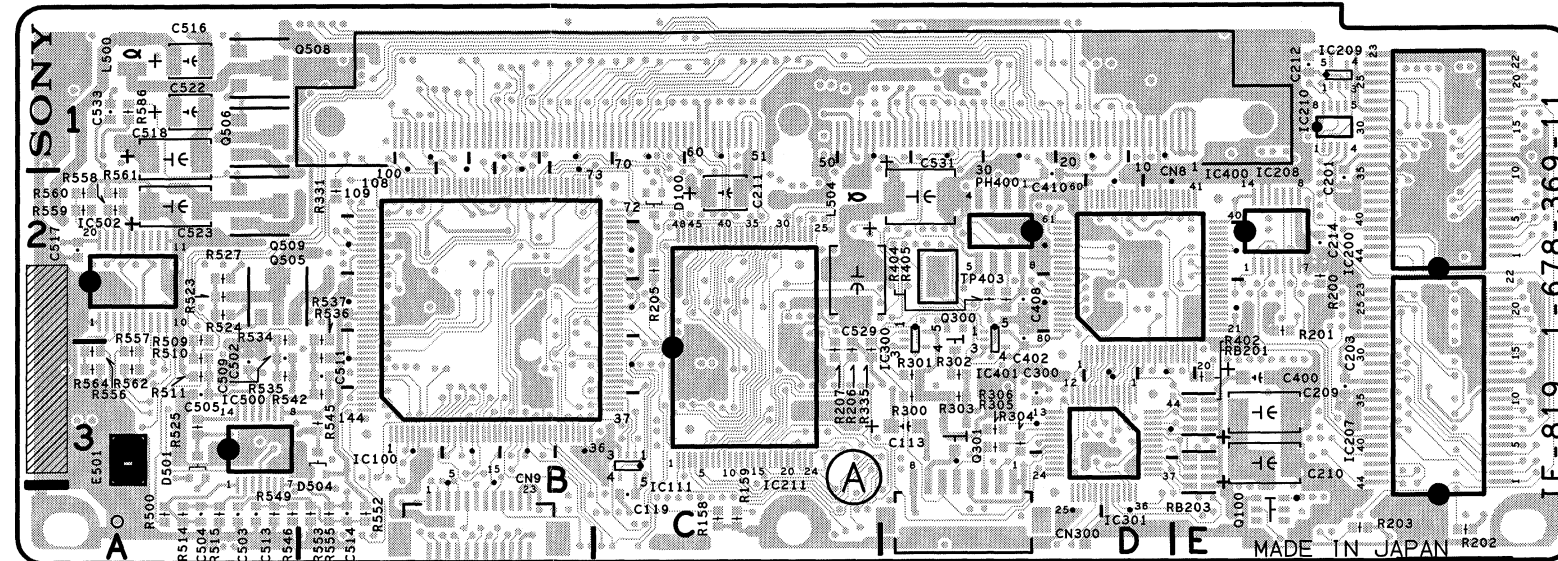


MA-92 (1-667-754-12)

CN1	A3
CN2	B2
CN3	A2
CN4	A1
D1	B2
D2	A2
D3	B2
D4	A2
IC1	A1
IC2	*B2
IC3	*A2
L1	A3
L2	A3
L3	A3
L4	A3
Q1	A3
Q2	A3
Q3	A2
Q4	A2

*:B SIDE

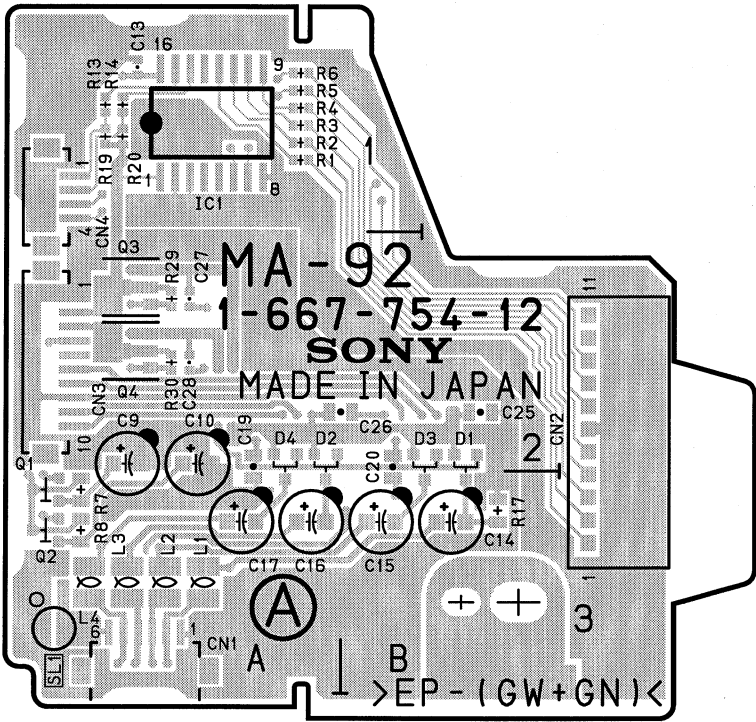

MA-92 -A SIDE-
SUFFIX: -12

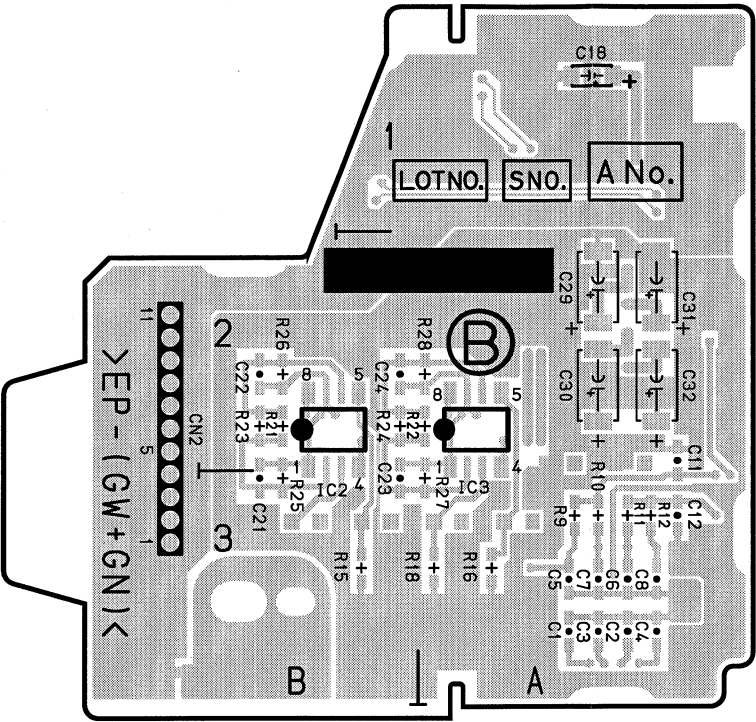

MA-92 -B SIDE-
SUFFIX: -12

MB-877 (1-677-536-11)

C1 J4
C2 J3
C3 B4
C4 F2
C5 A5
C6 D3
C11 J6
C12 J6
C13 J6


CL1 J2

CN1 B4
CN2 B3
CN3 C3
CN4 C3
CN5 D4
CN6 E3
CN7 E3
CN8 E3
CN9 F3
CN10 F3
CN11 J4
CN12 H3
CN13 H3
CN14 J3
CN15 G3
CN16 G3
CN20 *J4
CN21 *A4
CN30 A2
CN31 A4
CN32 A6
CN33 A3
CN34 A3
CN36 A6
CN37 A6
CN38 A6
CN40 H6
CN41 C6
CN42 D6
CN44 H6
CN45 E6
CN46 J5
CN48 J5
CN50 E1
CN51 H1
CN52 G6
CN53 G1
CN54 F1
CN55 B6
CN56 H1
CN57 B2
CN101 J2
CN102 J1
CN108 F6
CN109 A6


L1 J6
L2 J6
L3 J6

R1 H2
R2 J2
R3 G5
R4 F5
R5 F5

*:B SIDE

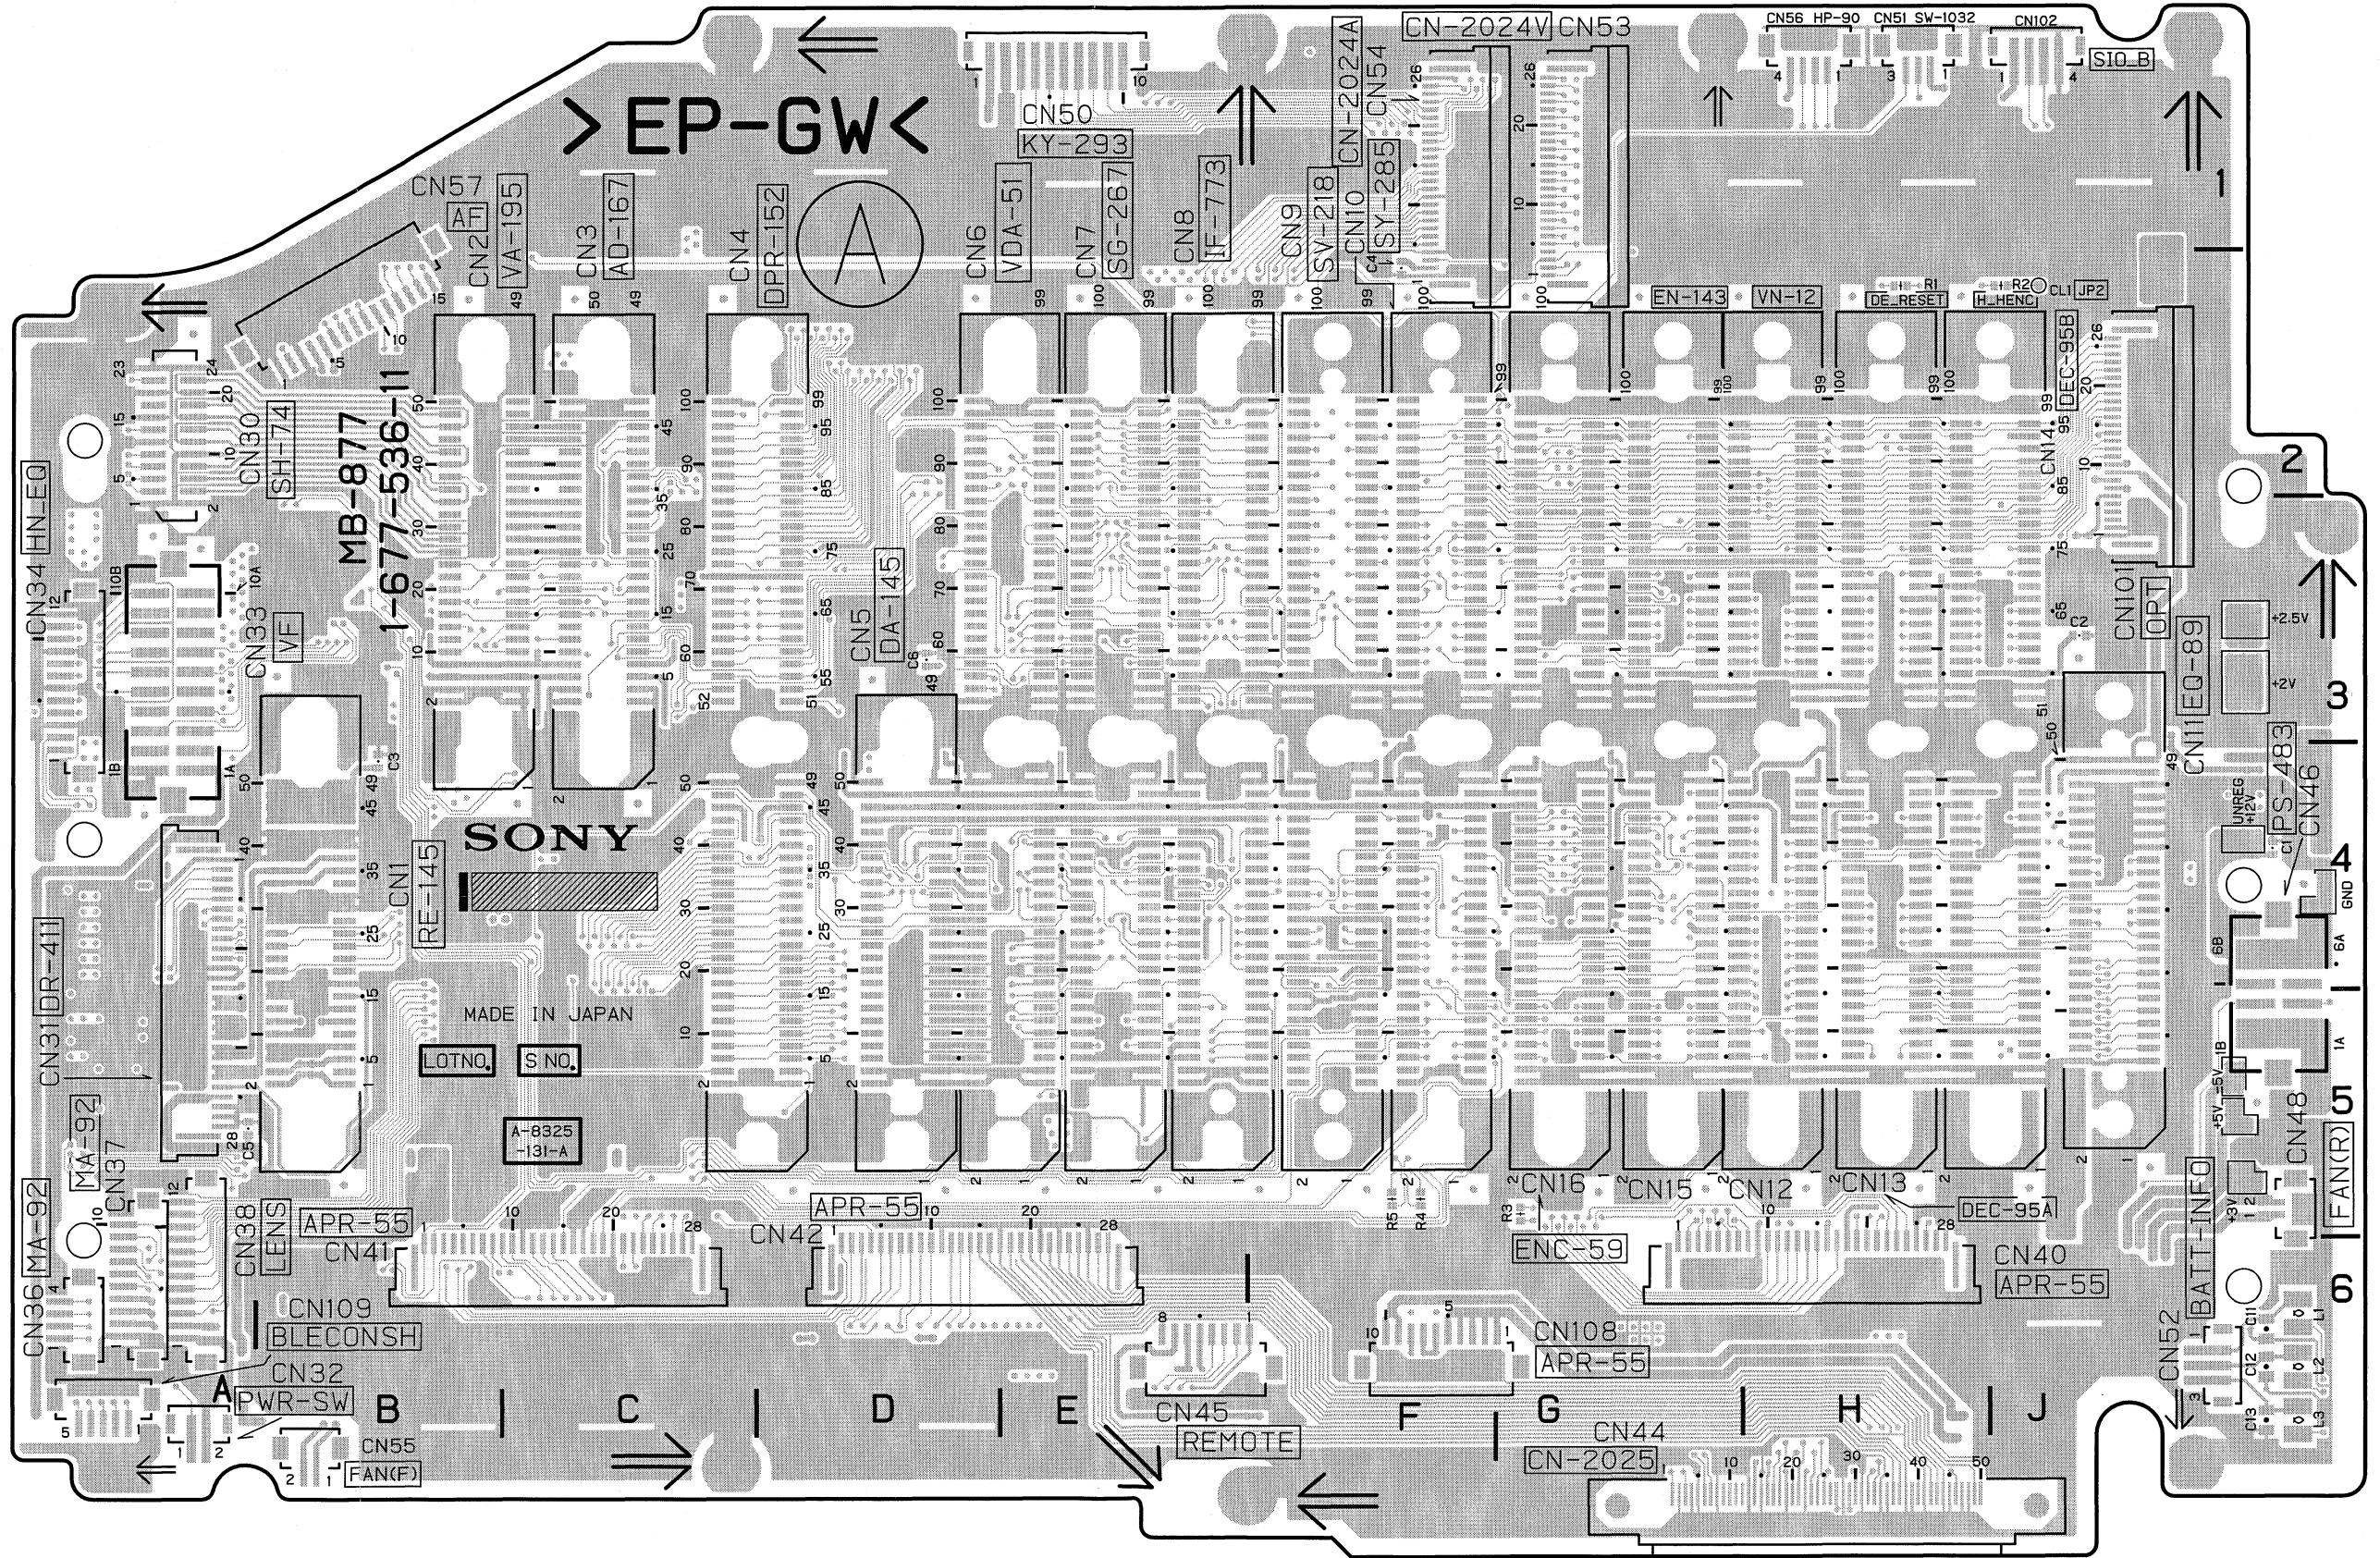

MB-877 -A SIDE-
SUFFIX: -11

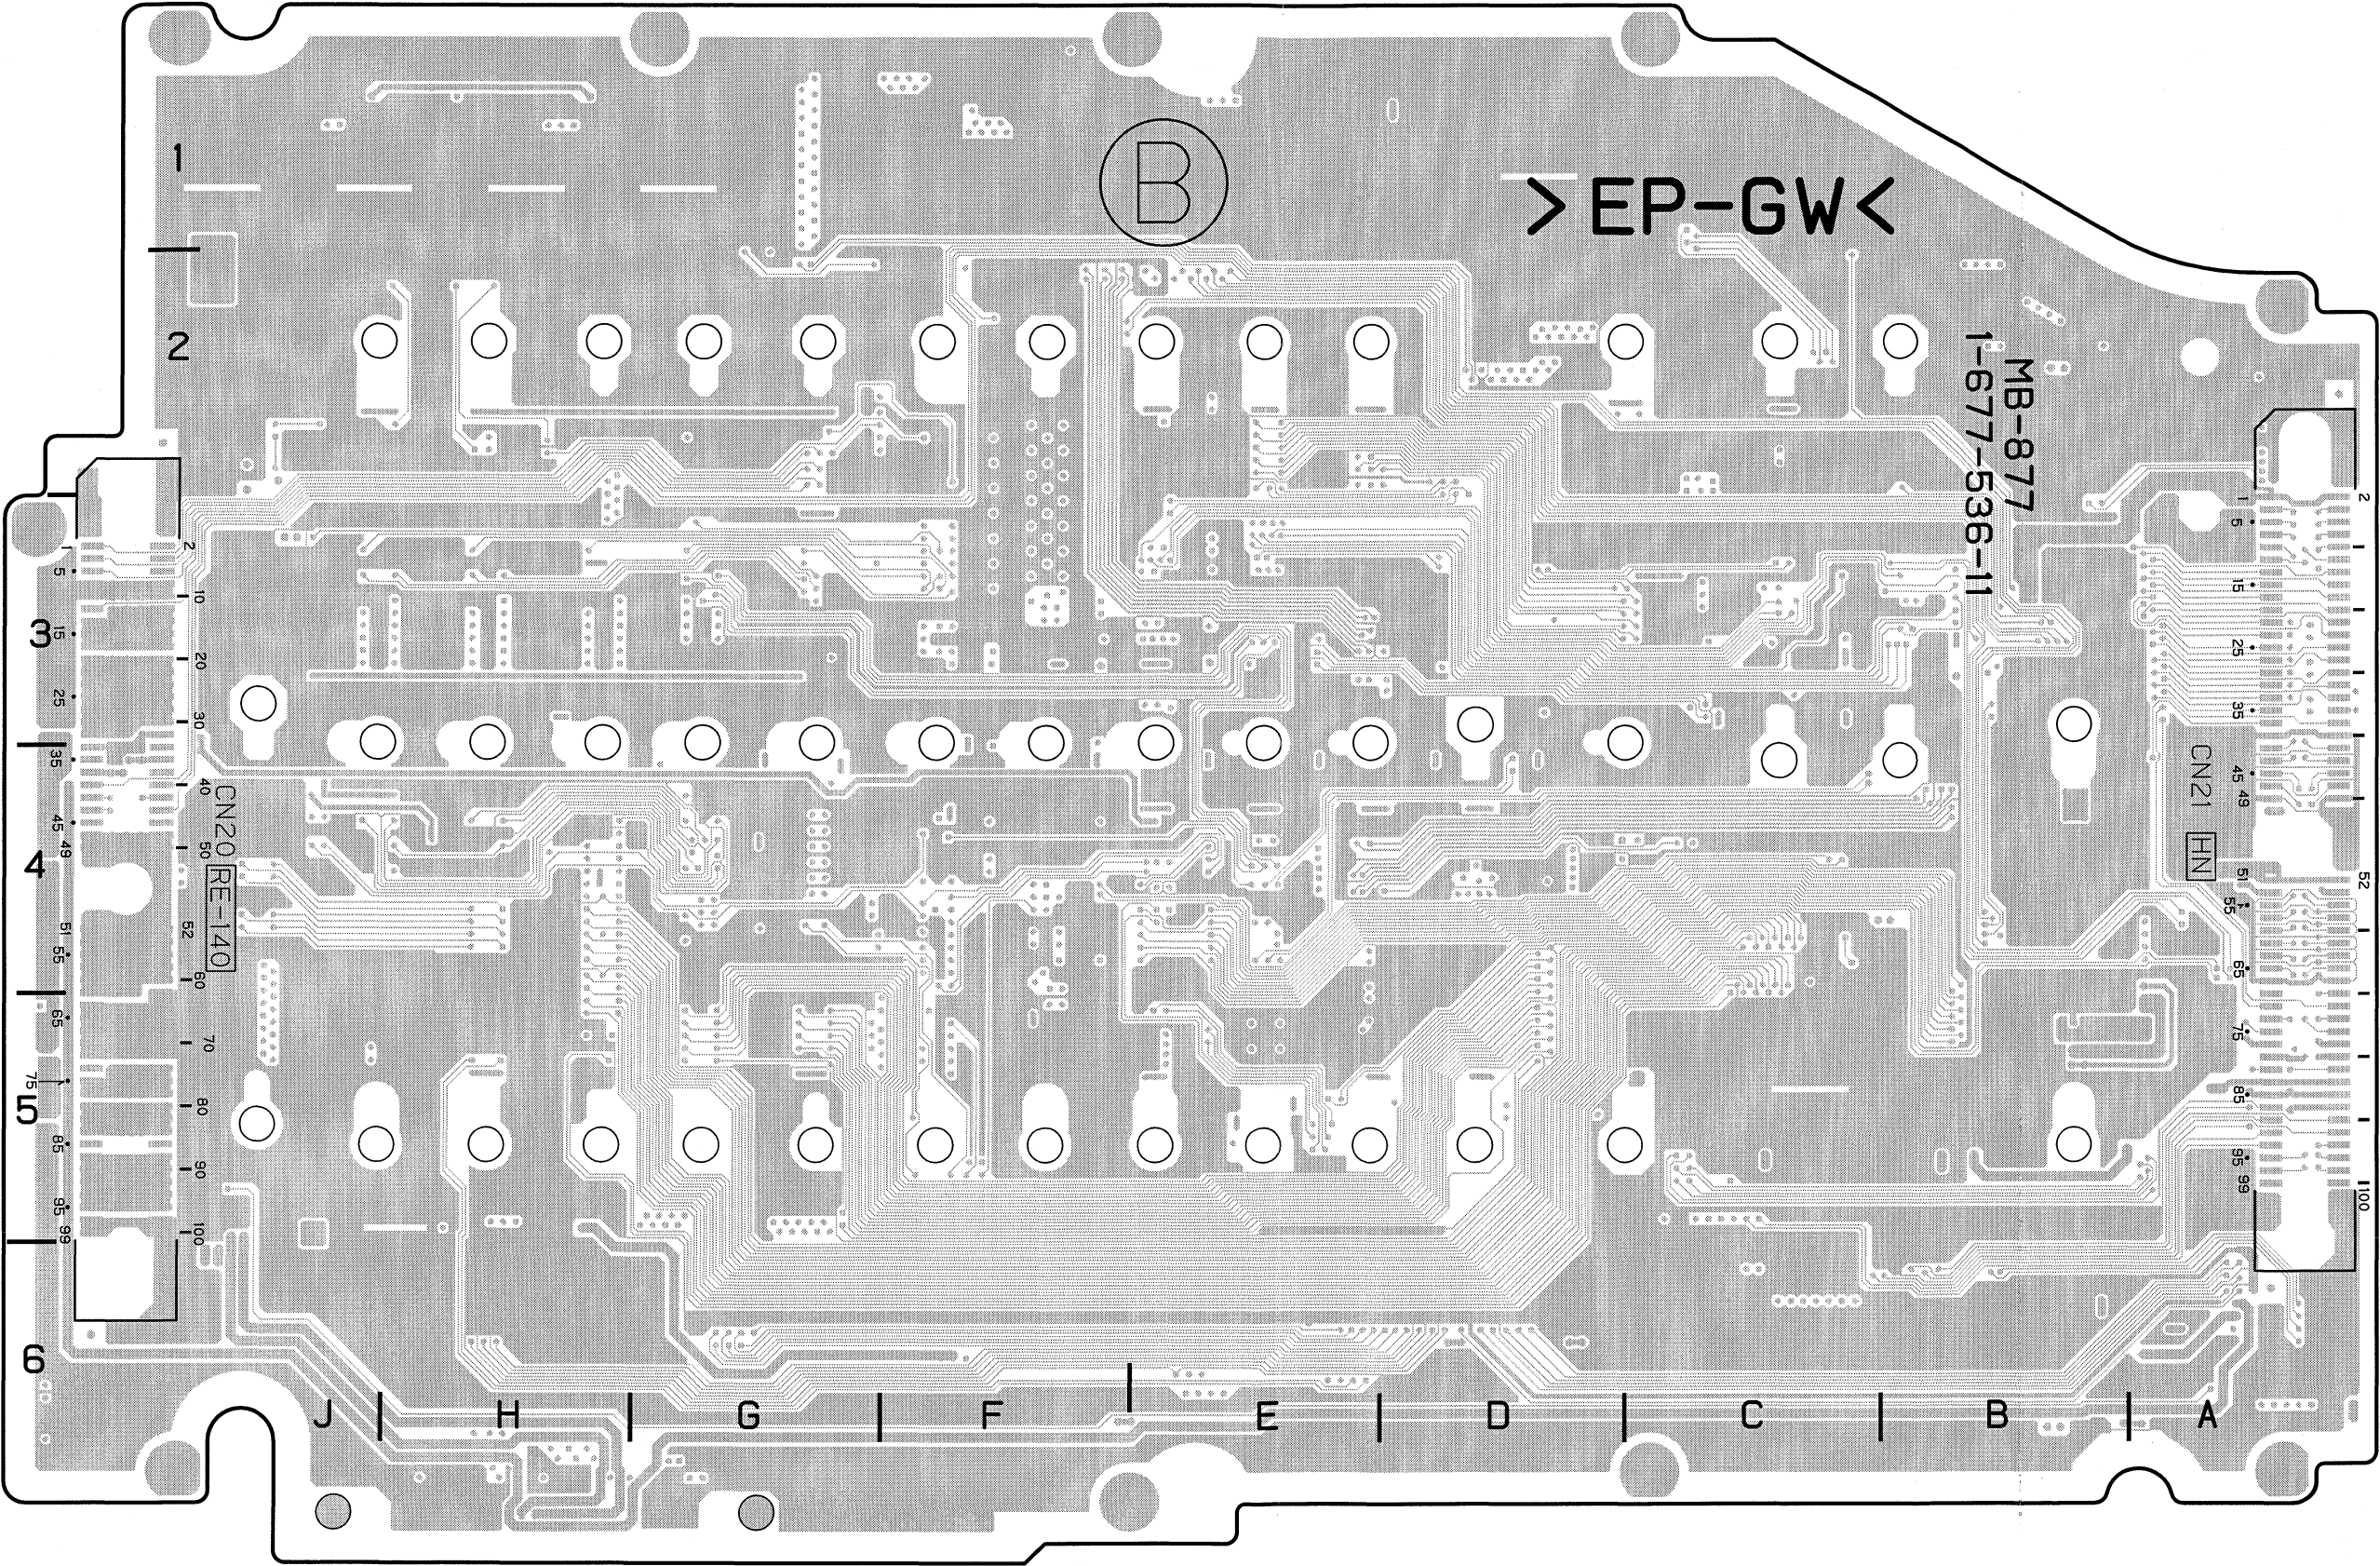


MB-877 -B SIDE-
SUFFIX: -11


PA-238 (1-677-568-12)

C1	*B5	C99	F3	Q2	B5	R88	*D3	R227	*G5
C2	C5	C100	D2	Q3	A5	R89	*C3	R229	G4
C4	B5	C101	D3	Q4	*A4	R90	*C3	R230	G4
C5	A2	C102	*F3	Q9	*A4	R91	*C3	R231	G5
C6	B3	C103	D2	Q10	*A4	R92	*B4	R232	G5
C7	A5	C104	B5			R93	*B4	R233	A3
C8	A4	C111	*C1	R1	G5	R94	*H3	R234	*A3
C9	*A5	C112	*E1	R2	*H5	R95	*G3	R235	A3
C10	A4	C113	*G2	R3	G5	R96	*G2	R236	*E4
C11	A5	C190	*H4	R4	E5	R97	G2	R237	*E4
C12	E4	C191	*G5	R5	E5	R98	F3	R238	*E4
C13	E4	C192	*G5	R6	E5	R99	*E3	R239	F1
C14	E4	C193	*G5	R7	F5	R100	*E2	R240	F1
C15	*F4	C201	*H5	R8	F5	R101	E2	R241	G1
C16	G4	C202	H4	R9	F5	R102	D3	R242	F1
C17	*F4	C203	*H4	R10	*B5	R103	*C3	R243	D1
C18	*F4	C204	G5	R11	*B5	R104	*C2	R244	D1
C19	*B4	C205	G4	R13	*A5	R105	*C2	R245	E1
C21	*G3	C206	*F5	R14	*A5	R106	*G3	R246	E1
C22	E4	C210	H4	R15	B4	R107	*E3	R247	C1
C23	*C3	C211	G4	R16	B5	R108	*C3	R248	C1
C24	*E3	C212	G5	R17	*B5	R109	*G1	R249	C1
C25	D4	C220	B4	R18	A5	R110	*G1	R250	C1
C26	C5	C221	A4	R19	A5	R111	*E1		
C28	E5	C222	H4	R20	A4	R112	*E1	RV101	F3
C29	*G4	C223	*H5	R21	*E4	R113	*C1	RV102	G1
C30	*D4	C224	G5	R22	*E4	R114	*C1	RV201	D3
C31	*E4	C225	*A3	R23	*E4	R115	*G1	RV202	E1
C32	*C4	C226	A3	R24	*E4	R116	*G1	RV301	B3
C33	*C4	C227	*G2	R25	*E4	R117	*E1	RV302	C1
C34	*B4	C228	*E2	R26	*E4	R118	*E1		
C35	G3	C229	*C2	R27	*F5	R119	*C1		
C36	*D4			R28	*F5	R120	*C1		
C37	E3	CN1	*C5	R29	*B3	R121	G3		
C38	*C4	CN2	*C5	R30	E5	R122	E3		
C39	C3	CN3	*C5	R31	*G4	R123	C3		
C40	*B4	CN4	*E5	R32	*F4	R124	*H3		
C41	G3	CN5	*G5	R33	*E4	R130	*G3		
C42	*D4	CN6	*E5	R34	D4	R131	*E3		
C43	*E3	CN7	D1	R35	*C3	R132	*C3		
C44	*C4	CN8	F1	R36	*B3	R133	*F3		
C45	*C3	CN9	G1	R37	*A4	R134	*D3		
C46	*B4			R38	*H4	R135	*F1		
C47	*F2	D1	B4	R39	*E4	R136	*F1		
C48	*G3			R40	*C4	R137	*E1		
C49	*D4	DL101	G3	R41	B4	R138	*D1		
C50	*D4	DL103	G3	R42	*B4	R139	*C1		
C51	*D2	DL106	F3	R43	*G4	R140	*C1		
C52	*E2	DL109	F2	R44	*G4	R141	E2		
C53	*C4	DL111	G2	R45	*D4	R142	G2		
C54	*C4	DL201	F3	R46	E4	R143	H2		
C55	*B2	DL203	E3	R47	*D4	R144	*G1		
C56	*C2	DL206	D3	R48	*E4	R145	*G2		
C57	*B4	DL209	D2	R49	*C4	R146	G2		
C58	*B4	DL210	H3	R50	C4	R147	G2		
C59	G2	DL211	E2	R51	*C4	R148	*G1		
C60	G2	DL301	C3	R52	*C4	R149	*G2		
C61	F2	DL303	B3	R53	*C4	R150	F2		
C62	E2	DL306	B3	R54	C4	R151	*E1		
C63	C2	DL309	B2	R55	*G4	R152	*E1		
C64	C2	DL311	B2	R56	*D4	R153	F2		
C65	*G1			R57	*E3	R154	E2		
C66	*G1	E1	B2	R58	*C4	R155	*E1		
C67	*E1			R59	*C3	R156	*E2		
C68	*E1	FB101	*H1	R60	*B4	R157	C2		
C69	*C1	FB201	*F1	R61	*G3	R158	C2		
C70	*C1	FB301	*D1	R62	*D4	R159	*C1		
C71	G3			R63	*E3	R160	*C1		
C72	E3	IC1	*B5	R64	*C4	R161	D2		
C73	C3	IC2	B5	R65	*C3	R162	C2		
C74	G2	IC3	G4	R66	*B4	R163	*C1		
C75	E2	IC4	F4	R67	*G4	R164	*C2		
C76	C2	IC5	*A4	R68	*D4	R190	*H3		
C77	H3	IC6	G4	R69	*E3	R191	H3		
C78	*F3	IC7	D4	R70	*C4	R192	*H5		
C79	*D3	IC8	E3	R71	*C3	R193	*G5		
C83	*G3	IC9	C4	R72	*B4	R194	*H5		
C84	*E3	IC10	C3	R73	G3	R201	*H5		
C85	*C3	IC11	B4	R74	*D4	R202	H5		
C86	*F1	IC12	*H2	R75	E3	R203	H4		
C87	*H1	IC13	*F2	R76	*C4	R204	H4		
C88	H2	IC14	*D2	R77	C3	R205	*H4		
C89	*H1	IC15	*G5	R78	*B4	R206	*G4		
C90	*H3	IC16	*H4	R79	*G3	R207	*G4		
C91	*D1	IC17	*G4	R80	*G3	R208	G4		
C92	*F1	IC19	G5	R81	*G3	R209	G5		
C93	F2	IC20	*A3	R82	*F4	R210	*F5		
C94	*C1	IC21	*A3	R83	*F4	R221	H4		
C95	*D1	IC22	A3	R84	*E3	R222	H4		
C96	*D3	IC23	A3	R85	*E3	R223	H4		
C97	H1			R86	*E3	R225	*G5		
C98	*F1	Q1	*A5	R87	*D3	R226	*G5		

*:B SIDE

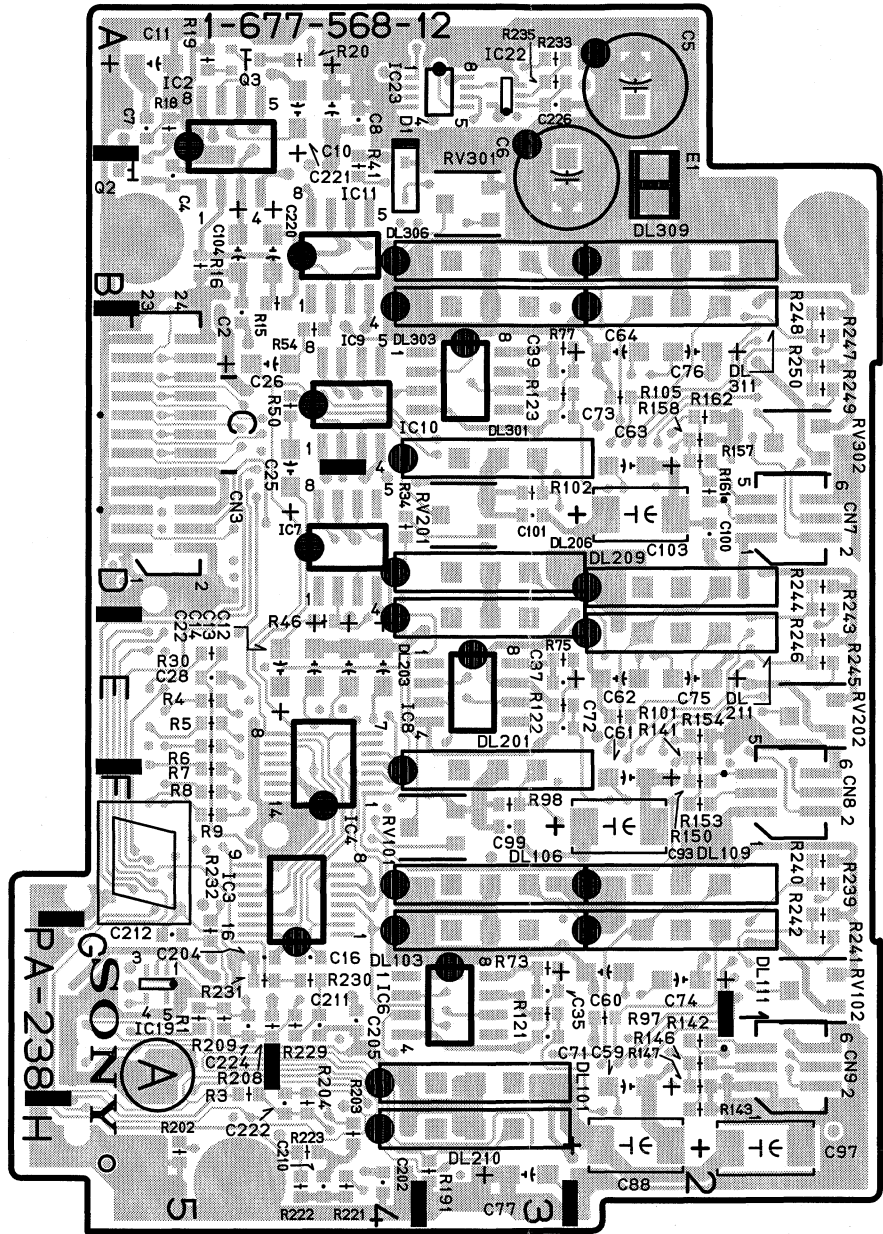

PA-238 - A SIDE-
SUFFIX: -12

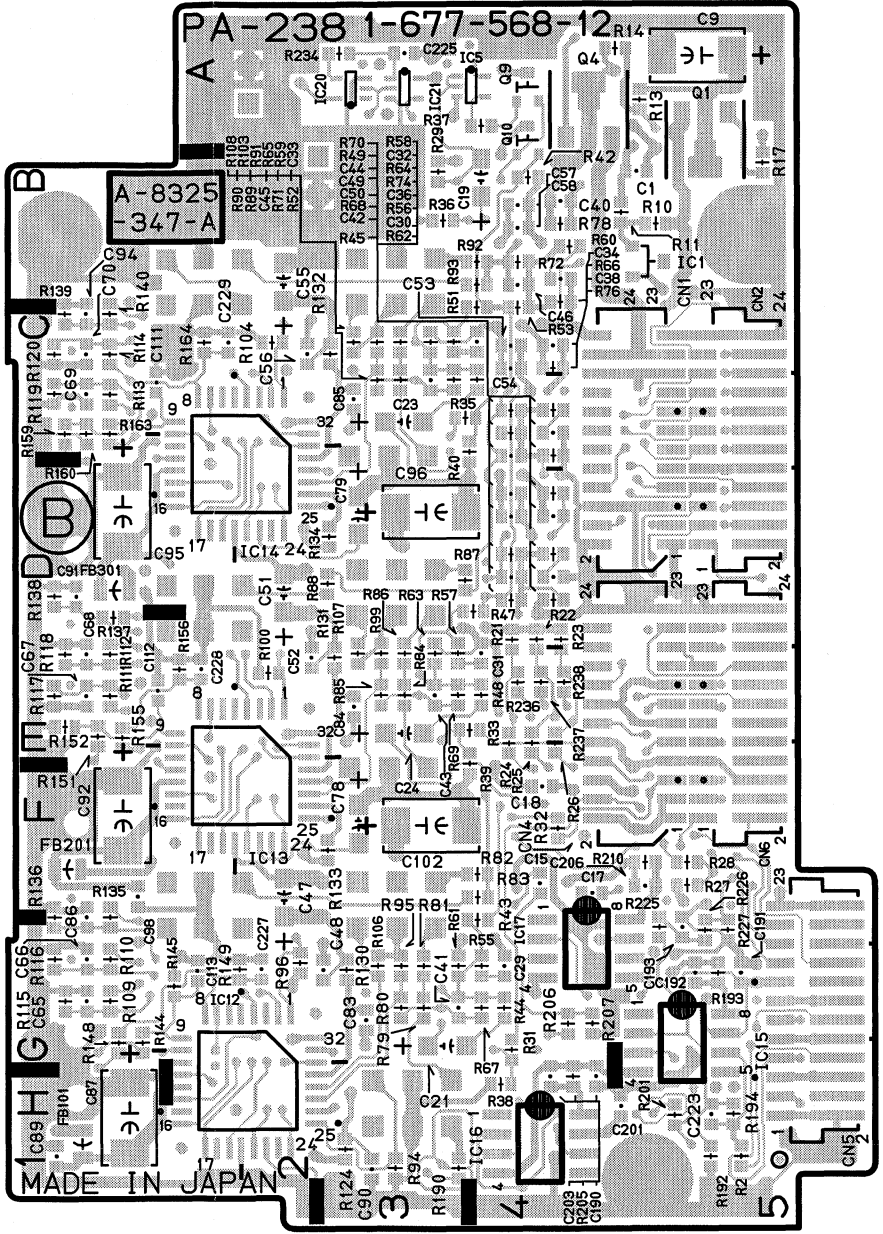


PA-238 - B SIDE-
SUFFIX: -12


PA-238 (1-677-568-11)

C1	*B5	C99	F3	R1	G5	R94	*H3	R234	*A3
C2	C5	C100	D2	R2	*H5	R95	*G3	R235	A3
C4	B5	C101	D3	R3	G5	R96	*G2	R236	*E4
C5	A2	C102	*F3	R4	E5	R97	G2	R237	*E4
C6	B3	C103	D2	R5	E5	R98	*F3	R238	*E4
C7	A5	C104	B5	R6	E5	R99	*E2	R239	F1
C8	A4	C190	*H4	R7	F5	R100	*E2	R240	F1
C9	*A5	C191	*G5	R8	F5	R101	E2	R241	G1
C10	A4	C192	*G5	R9	F5	R102	D3	R242	F1
C11	A5	C193	*G5	R10	*B5	R103	*C3	R243	D1
C12	E4	C201	*H5	R11	*B5	R104	*C2	R244	D1
C13	E4	C202	H4	R13	*A5	R105	C2	R245	E1
C14	E4	C203	*H4	R14	*A5	R106	*G3	R246	E1
C15	*F4	C204	G5	R15	B4	R107	*E3	R247	C1
C16	G4	C205	G4	R16	B5	R108	*C3	R248	C1
C17	*F4	C206	*F5	R17	*B5	R109	*G1	R249	C1
C18	*F4	C210	H4	R18	A5	R110	*G1	R250	C1
C19	*B4	C211	G4	R19	A5	R111	*E1		
C21	*G3	C212	G5	R20	A4	R112	*E1	RV101	F3
C22	E4	C220	B4	R21	*E4	R113	*C1	RV102	G1
C23	*C3	C221	A4	R22	*E4	R114	*C1	RV201	D3
C24	*E3	C222	H4	R23	*E4	R115	*G1	RV202	E1
C25	D4	C223	*H5	R24	*E4	R116	*G1	RV301	B3
C26	C5	C224	G5	R25	*E4	R117	*E1	RV302	C1
C28	E5	C225	*A3	R26	*E4	R118	*E1		
C29	*G4	C226	A3	R27	*F5	R119	*C1		
C30	*D4			R28	*F5	R120	*C1		
C31	*E4	CN1	*C5	R29	*B3	R121	G3		
C32	*C4	CN2	*C5	R30	E5	R122	E3		
C33	*C4	CN3	C5	R31	*G4	R123	C3		
C34	*B4	CN4	*E5	R32	*F4	R124	*H3		
C35	G3	CN5	*G5	R33	*E4	R130	*G3		
C36	*D4	CN6	*E5	R34	D4	R131	*E3		
C37	E3	CN7	D1	R35	*C3	R132	*C3		
C38	*C4	CN8	F1	R36	*B3	R133	*F3		
C39	C3	CN9	G1	R37	*A4	R134	*D3		
C40	*B4			R38	*H4	R135	*F1		
C41	*G3	D1	B4	R39	*E4	R136	*F1		
C42	*D4			R40	*C4	R137	*D1		
C43	*E3	DL101	G3	R41	B4	R138	*D1		
C44	*C4	DL103	G3	R42	*B4	R139	*C1		
C45	*C3	DL106	F3	R43	*G4	R140	*C1		
C46	*B4	DL109	F2	R44	*G4	R141	E2		
C47	*F2	DL111	G2	R45	*D4	R142	G2		
C48	*G3	DL201	F3	R46	E4	R143	H2		
C49	*D4	DL203	E3	R47	*D4	R144	*G1		
C50	*D4	DL206	D3	R48	*E4	R145	*G2		
C51	*D2	DL209	D2	R49	*C4	R146	G2		
C52	*E2	DL210	H3	R50	C4	R147	G2		
C53	*C4	DL211	E2	R51	*C4	R148	*G1		
C54	*C4	DL301	C3	R52	*C4	R149	*G2		
C55	*B2	DL303	B3	R53	*C4	R150	F2		
C56	*C2	DL306	B3	R54	C4	R151	*E1		
C57	*B4	DL309	B2	R55	*G4	R152	*E1		
C58	*B4	DL311	B2	R56	*D4	R153	F2		
C59	G2			R57	*E3	R154	E2		
C60	G2	E1	B2	R58	*C4	R155	*E1		
C61	F2			R59	*C3	R156	*E1		
C62	E2	FB101	*H1	R60	*B4	R157	D2		
C63	C2	FB201	*F1	R61	*G3	R158	C2		
C64	C2	FB301	*D1	R62	*D4	R159	*C1		
C65	*G1			R63	*E3	R160	*C1		
C66	*G1	IC1	*B5	R64	*C4	R161	D2		
C67	*E1	IC2	B5	R65	*C3	R162	C2		
C68	*E1	IC3	G4	R66	*B4	R163	*C1		
C69	*C1	IC4	F4	R67	*G4	R164	*C1		
C70	*C1	IC5	*A4	R68	*D4	R190	*H3		
C71	G3	IC6	G4	R69	*E3	R191	H3		
C72	E3	IC7	D4	R70	*C4	R192	*H5		
C73	C3	IC8	E3	R71	*C3	R193	*G5		
C74	G2	IC9	C4	R72	*B4	R194	*H5		
C75	E2	IC10	C3	R73	G3	R201	*H5		
C76	C2	IC11	B4	R74	*D4	R202	H5		
C77	H3	IC12	*H2	R75	E3	R203	H4		
C78	*F3	IC13	*F2	R76	*C4	R204	H4		
C79	*D3	IC14	*D2	R77	C3	R205	*H4		
C83	*G3	IC15	*G5	R78	*B4	R206	*G4		
C84	*E3	IC16	*H4	R79	*G3	R207	*G4		
C85	*C3	IC17	*G4	R80	*G3	R208	G4		
C86	*F1	IC19	G5	R81	*G3	R209	G5		
C87	*H1	IC20	*A3	R82	*F4	R210	*F5		
C88	H2	IC21	*A3	R83	*F4	R221	H4		
C89	*H1	IC22	A3	R84	*E3	R222	H4		
C90	*H3	IC23	A3	R85	*E3	R223	H4		
C91	*D1			R86	*E3	R225	*G5		
C92	*F1	Q1	*A5	R87	*D4	R226	*G5		
C93	F2	Q2	B5	R88	*D4	R227	*G5		
C94	*C1	Q3	A5	R89	*C3	R229	G4		
C95	*D1	Q4	*A4	R90	*C3	R230	G4		
C96	*D3	Q9	*A4	R91	*C3	R231	G5		
C97	H2	Q10	*A4	R92	*B4	R232	G5		
C98	*F1			R93	*B4	R233	A3		


*:B SIDE

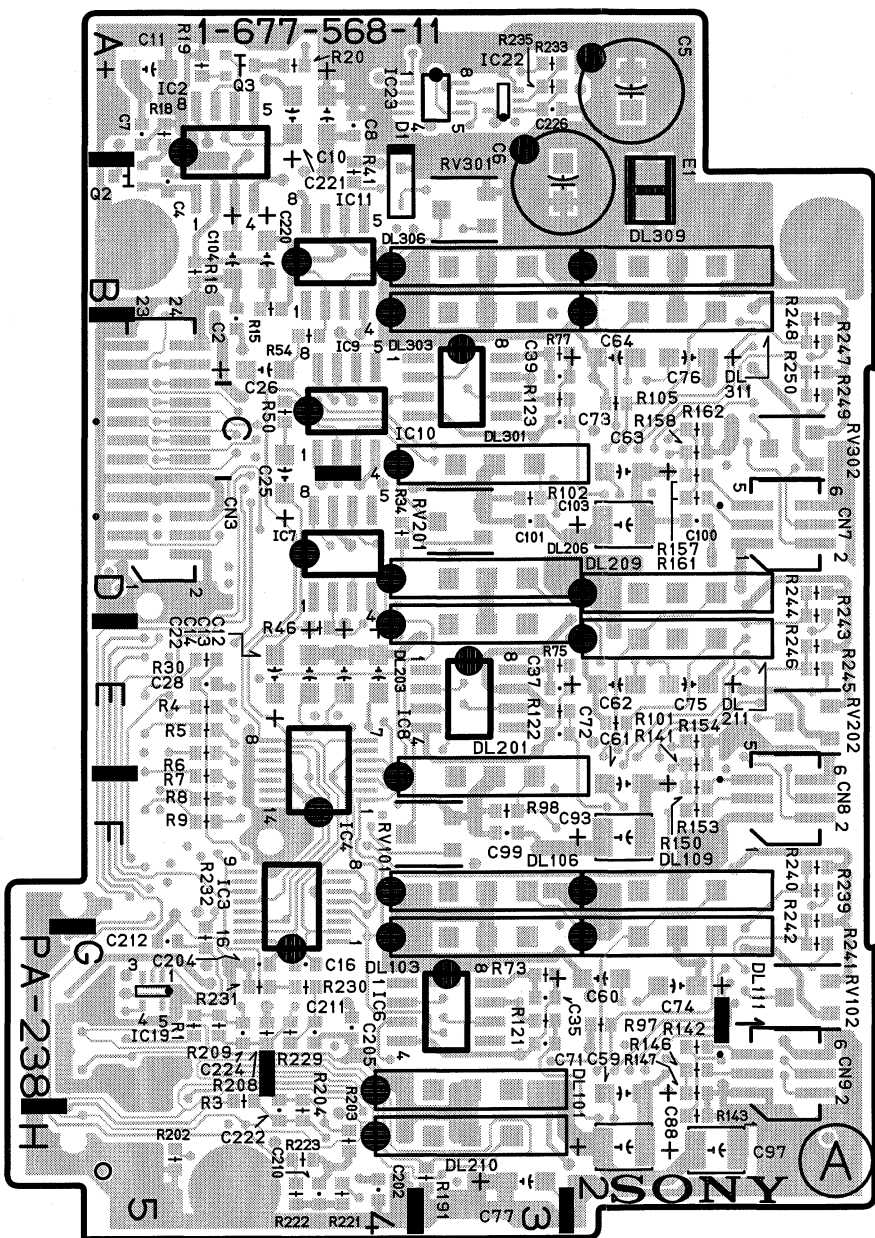


PA-238 -A SIDE-
SUFFIX: -11

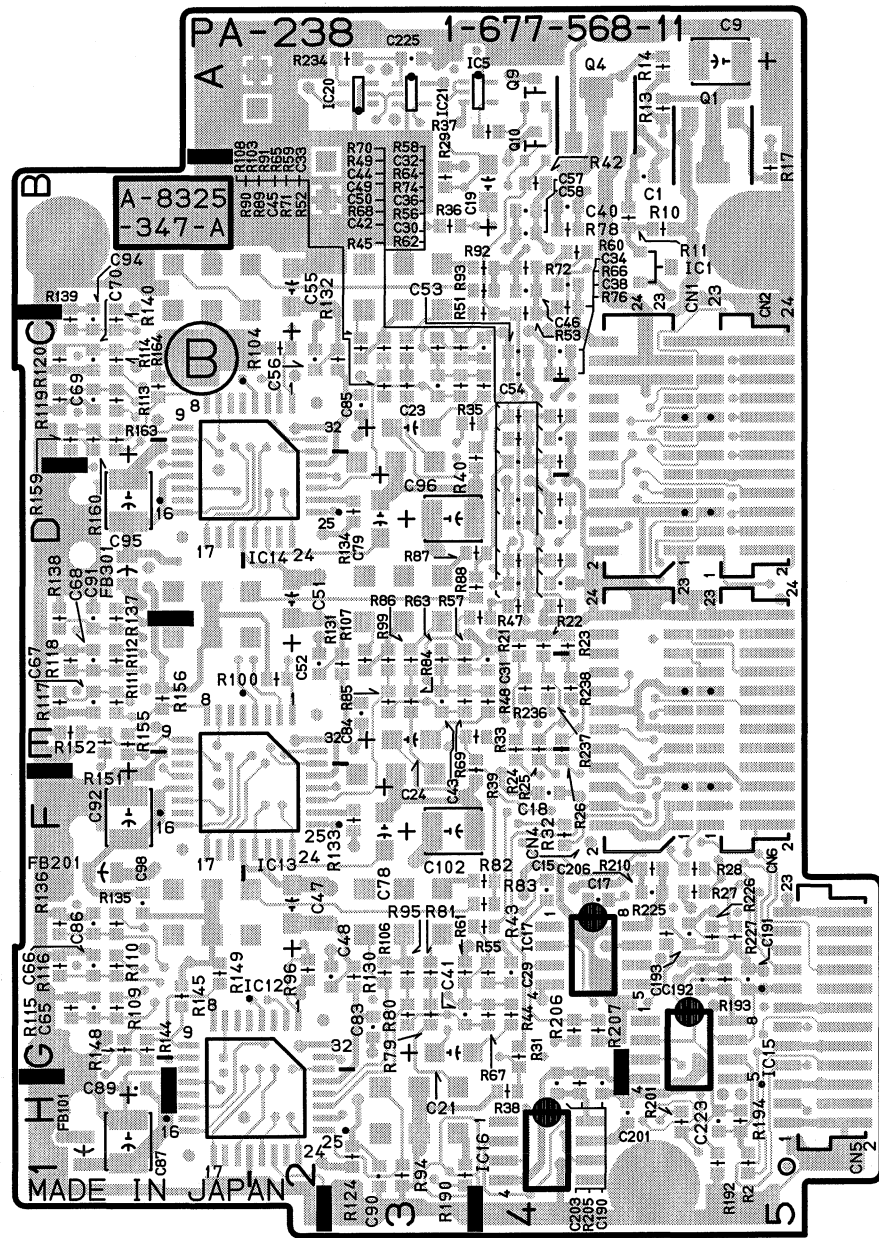


PA-238 -B SIDE-
SUFFIX: -11

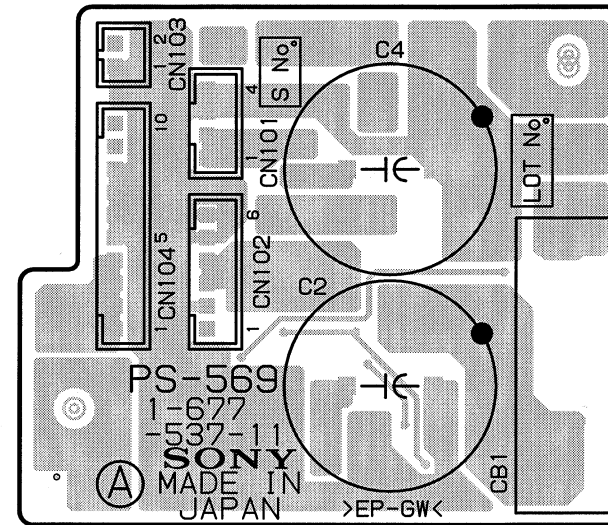


PS-569 -A SIDE-SUFFIX: -11

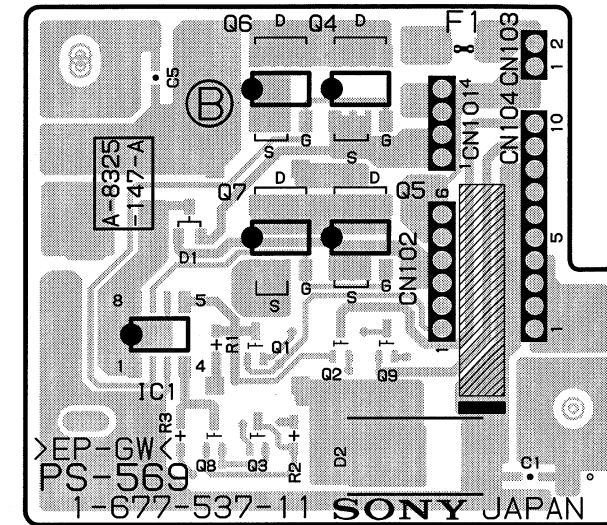

PS-569 -B SIDE-
SUFFIX: -11

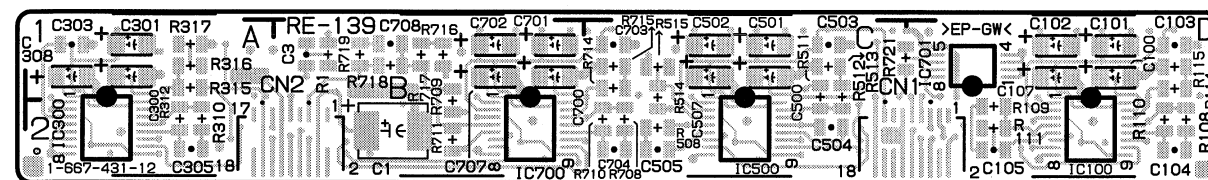

RE-139 -A SIDE-SUFFIX: -12

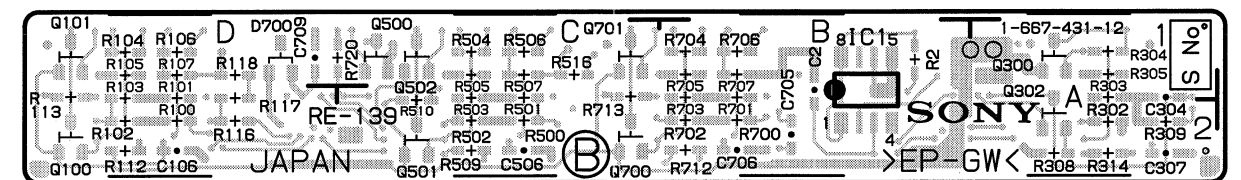

RE-139 -B SIDE-
SUFFIX: -12

RE-139 (1-667-431-12)

CN1	D2
CN2	B2

D700 *D1

IC1 *B2

IC100	D2
IC300	A2

IC500	C2
IC700	B2

IC701 D1

Q100 * D2
Q101 * D1

Q300 *A1
Q302 *A2

Q500 * C1
Q501 * C2

Q502 * C1
Q700 * C2

Q701 * C1

*:B SIDE

RE-140 (1-667-432-12)

CN1 C1
CN2 F1
CN4 A1
CN20 D3


D1 *C3
D2 *C3
D3 *E3
D4 *C2
D6 *C3
D7 *F3
D100 *D1
D101 *D1
D200 *C1
D201 *C1
D300 *G2
D301 *G2
D500 *E2
D600 *E1
D700 *G1
D701 *F1
D800 *F1
D801 *F1

IC1 *B2
IC2 *B1


L100 C1
L101 D2
L102 C2
L200 B1
L201 C2
L202 C2
L300 G2
L301 G2
L302 F2
L500 D1
L501 D1
L600 E1
L601 E2
L602 D2
L700 F1
L701 F2
L702 F2
L800 F1
L801 E2
L802 E2

Q1 *C2
Q2 *B1
Q3 *B1
Q4 *C3
Q5 *D3
Q6 *E3
Q7 *D3
Q8 *E2
Q100 *D1
Q101 *D1
Q102 *D1
Q103 *D2
Q104 *D2
Q200 *C1
Q201 *C1
Q202 *C2
Q203 *C2
Q300 *G1
Q301 *G1
Q302 *G1
Q303 *G3
Q304 *G3
Q500 *E1
Q501 *E1
Q502 *E1
Q503 *E2
Q504 *E2
Q600 *F1
Q601 *F1
Q602 *E1
Q700 *G1
Q701 *G1
Q702 *F2
Q703 *F2
Q704 *G1
Q800 *F1
Q801 *F1
Q802 *F1
Q803 *E1
Q804 *E1
Q805 *E3


*:B SIDE

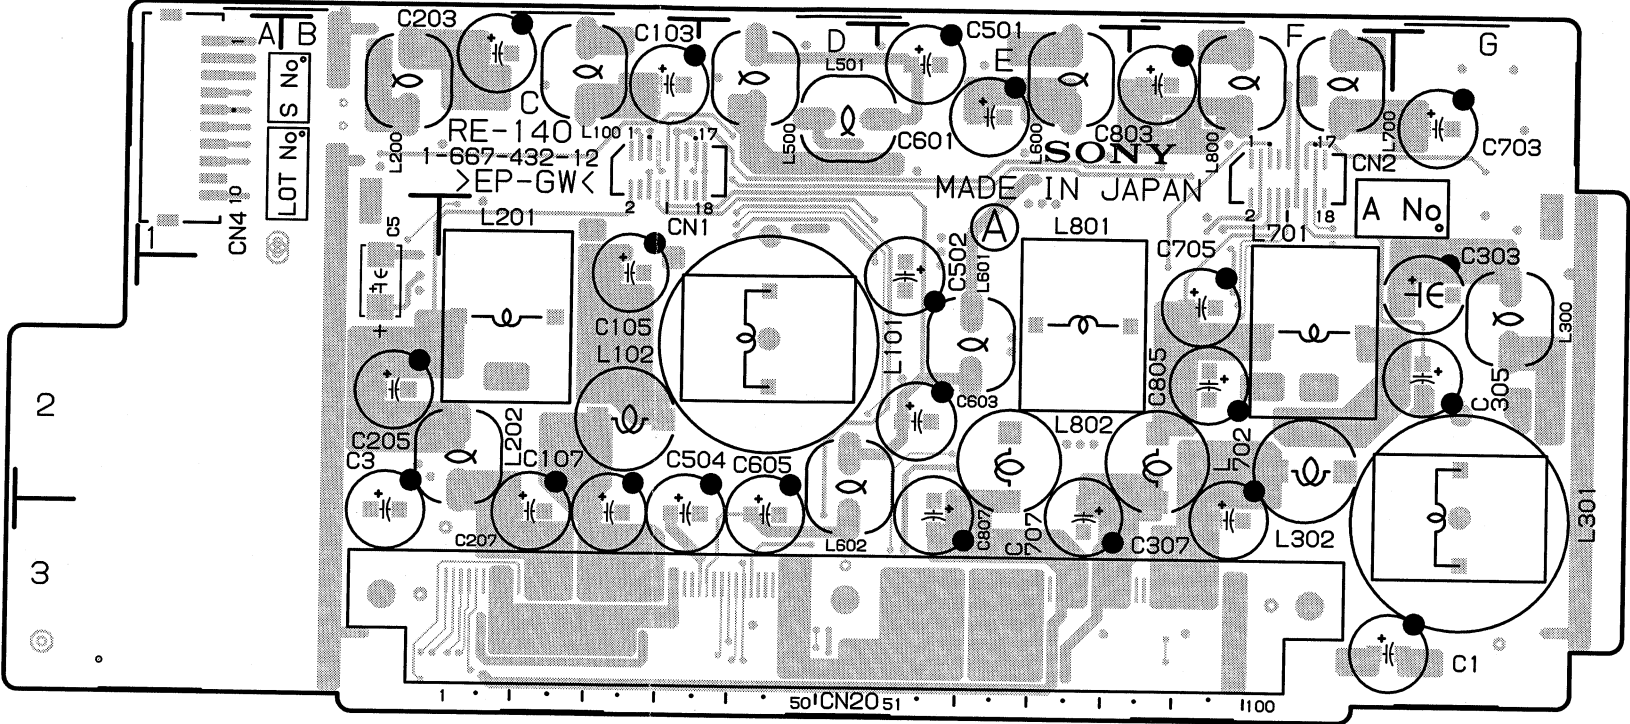


RE-140 -A SIDE-
SUFFIX: -12

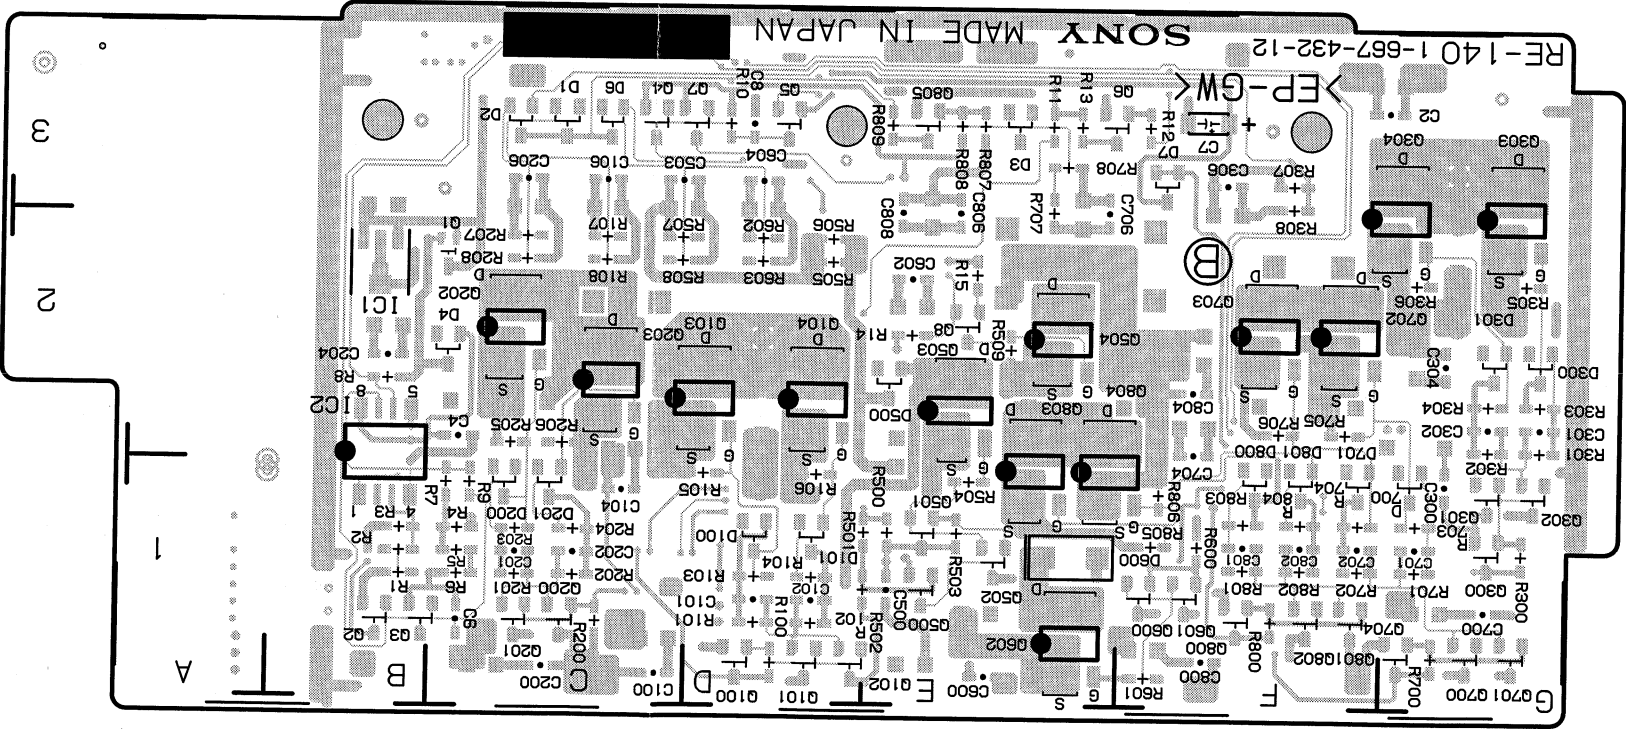

RE-140 -B SIDE-
SUFFIX: -12

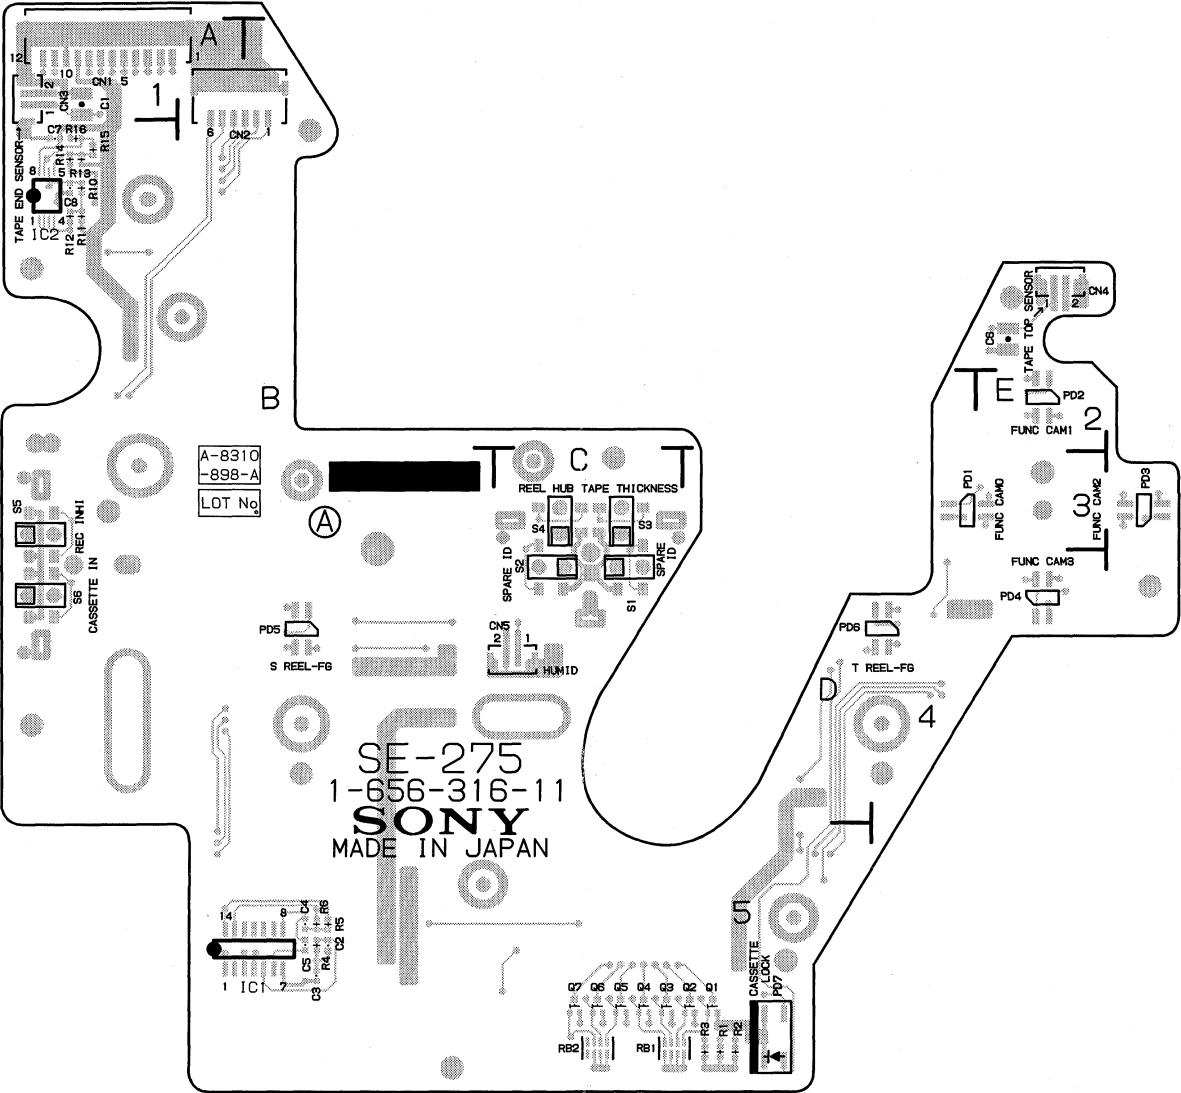

SE-275 -A SIDE-
SUFFIX: -11

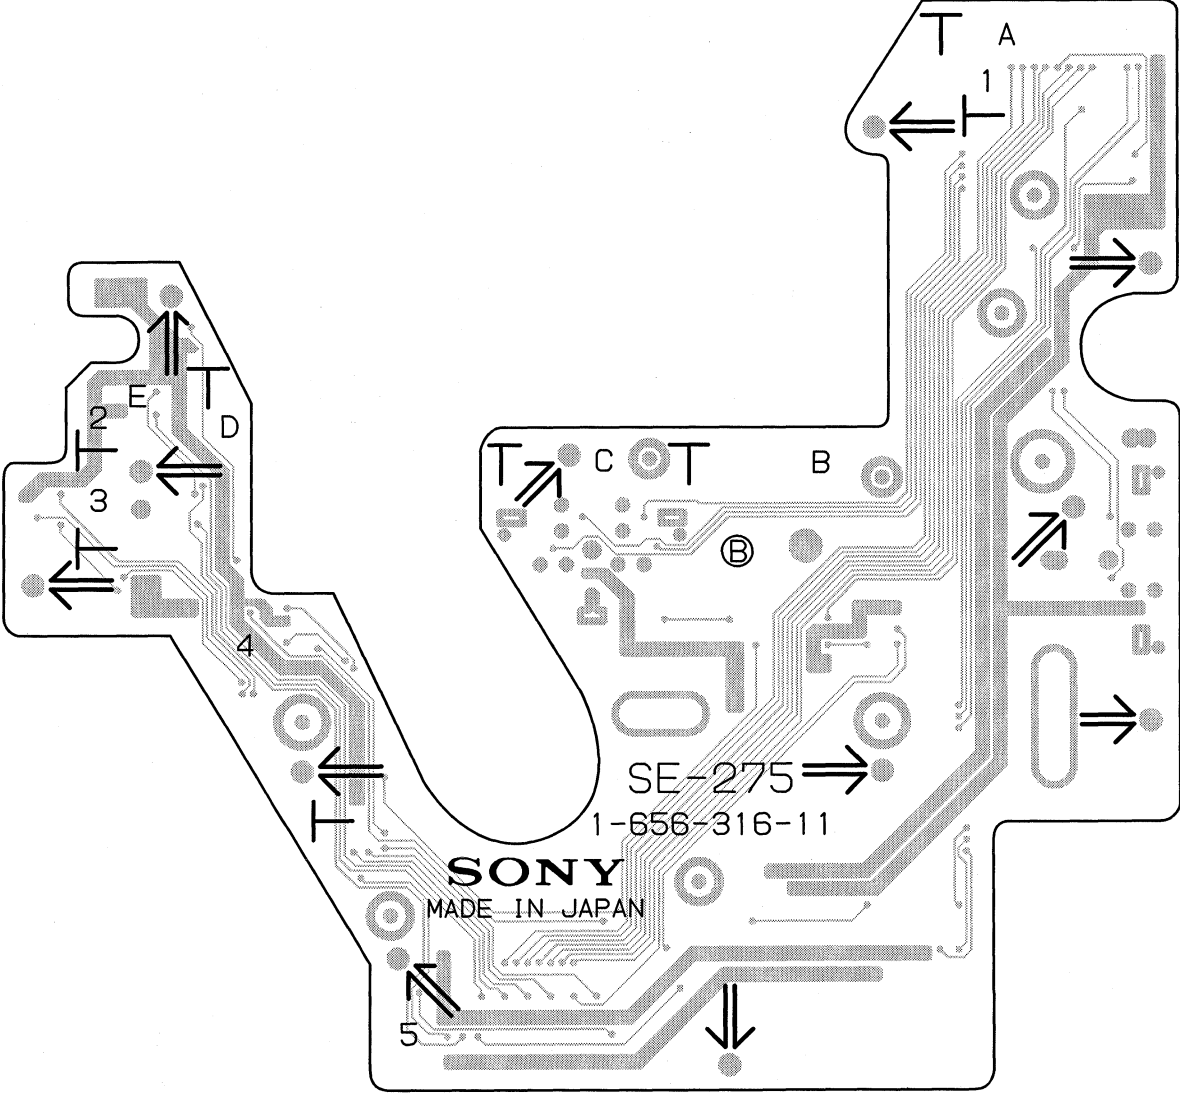

SE-275 -B SIDE-
SUFFIX: -11


SE-275 (1-656-316-11)

C1	A1	IC1	A5	Q5	C5	R15	A2
C2	B5	IC2	A2	Q6	C5	R16	A2
C3	B5			Q7	C5		
C4	B5	PD1	D3	R1	D5	RB1	C5
C5	B5	PD2	E2	R2	D5	RB2	C5
C6	E2	PD3	E3	R3	D5	S1	C4
C7	A2	PD4	E4	R4	B5	S2	C4
C8	A2	PD5	B4	R5	B5	S3	C3
		PD6	D4	R6	B5	S4	C3
		PD7	D5	R10	A2	S5	A3
CN1	A1			R11	A2	S6	A4
CN2	A1			R12	A2		
CN3	A1	Q1	D5	R13	A2		
CN4	E2	Q2	D5	R14	A2		
CN5	C4	Q3	C5				
		Q4	C5				


SG-267 (1-677-591-12)

C1	D1	C99	*C3	Q33	E2	R90	D2	R183	*C3
C2	F3	C100	*C3	Q34	*B3	R91	E1	R184	*C3
C3	E2	C101	*C3	Q35	*B3	R92	D1	R185	*C3
C4	E2	C102	*C3	Q36	*F2	R93	D3	R186	*B1
C5	E2	C103	*C3	Q37	*F2	R94	*E3	R187	*B1
C6	E2	C104	*D2			R95	*E3	R188	*C3
C7	E2	C105	*D2	R1	C2	R96	*B3	R189	*C3
C8	E2	C106	*D2	R2	D2	R97	A1	R190	*C3
C9	C2			R3	E1	R98	*A1	R191	*C3
C10	F2	CL1	B2	R4	E1	R99	*C1	R192	*C3
C11	E2	CL2	B2	R5	D1	R100	*C1	R193	A1
C12	E2	CL3	B2	R6	D1	R101	*B2	R194	A1
C13	*B2	CL4	B2	R7	E1	R102	*B2	R195	B2
C14	*D2	CL5	A1	R8	E1	R103	*F2	R196	B1
C15	E2	CL6	B2	R9	C2	R104	*F2	R197	C2
C16	E2	CL7	B2	R10	C2	R105	*E1	R198	*C2
C17	F2	CL8	B2	R11	C2	R106	*F1	R199	*C2
C18	C2	CL9	B2	R12	E2	R107	*F1	R200	*C2
C19	D2	CL10	A1	R13	E2	R108	*F1	R201	*C2
C20	*E2	CL12	B1	R14	E2	R109	*F1	R202	*C2
C21	*E2	CL13	A1	R15	E2	R110	*F1	R205	A1
C22	D3	CL14	B1	R16	E2	R111	*F1	R206	*B1
C23	D2	CL16	B1	R17	E2	R112	*F1		
C24	C2			R18	F3	R113	*F1	RB1	B3
C25	C2	CN7	C1	R19	E2	R114	*F2	RB2	B2
C26	D2			R20	E2	R115	F2	RB4	A1
C27	*E2	D1	*F2	R21	E2	R116	A3	RB5	A1
C28	*D2	D3	*D2	R22	E1	R117	*F1	RB9	C2
C29	D2	D4	*E2	R23	*F2	R118	*F2	RB10	C1
C30	D1	D5	*B3	R24	*F2	R119	*F1	RB11	*C1
C31	B3			R25	*F2	R120	*F1		
C32	*E2	E1	F3	R26	*F3	R121	A3		
C33	*D3			R27	F3	R122	*B3		
C34	*E3	FB1	*D1	R29	E2	R123	A2		
C35	D2	FB2	E1	R30	E2	R124	A2		
C36	D2			R31	C2	R125	F1		
C37	*D2	IC4	*F1	R34	C2	R126	*F1		
C38	D3	IC5	F1	R35	C2	R127	A2		
C39	*E2	IC8	*E2	R36	*E2	R128	A2		
C40	D3	IC9	*E2	R37	*E2	R129	B2		
C41	*D1	IC11	*D2	R38	D2	R130	A2		
C42	D3	IC12	*D2	R39	D2	R131	B2		
C43	*E1	IC13	*A1	R40	*E2	R132	A2		
C44	*D3	IC14	*E2	R41	*E2	R133	A2		
C45	D3	IC15	*D2	R42	D3	R134	A2		
C46	*D3	IC16	B3	R43	*E2	R135	A2		
C47	*D1	IC17	*B3	R44	*E2	R136	*F1		
C48	*D1	IC18	*D3	R45	C2	R137	*F1		
C49	*D1	IC19	*D3	R46	D3	R138	*F1		
C50	*D1	IC20	D2	R47	D3	R139	*F2		
C51	*D1	IC21	D3	R48	D2	R140	A2		
C52	*C2	IC22	*E2	R49	D2	R141	A1		
C53	*D1	IC24	*E1	R50	D2	R142	B1		
C54	*D1	IC25	*D1	R51	*D2	R143	*B3		
C55	*C1	IC26	*B2	R52	B3	R145	B2		
C56	A1	IC28	*B2	R53	B3	R146	B2		
C57	F2	IC29	*C2	R54	*D2	R147	*E2		
C58	*B2	IC30	*C2	R55	D2	R148	*C1		
C59	*F1	IC31	*B1	R56	*D3	R149	*C1		
C60	F2	IC32	C2	R57	*D2	R150	*C1		
C61	A3	IC33	C2	R58	*E2	R151	*C1		
C62	B3	IC34	C3	R59	*E2	R152	*B3		
C63	F1	IC35	C3	R60	*D2	R153	*B3		
C64	F2	IC36	*A2	R61	*D2	R154	*B3		
C65	*F1	IC37	*A3	R62	D2	R155	*B3		
C66	F1	IC38	*A1	R63	*E2	R156	*B3		
C67	*F1	IC46	A2	R64	E2	R157	*B3		
C68	*B2	IC47	*B1	R65	*D3	R158	*B3		
C69	F1			R66	D2	R159	*B3		
C70	*F1	L1	F3	R67	D2	R160	*C3		
C71	F1	L2	F2	R68	D2	R161	A1		
C72	A2	L3	F2	R69	D3	R162	*C2		
C73	F1	L4	D1	R70	D3	R163	*C2		
C74	*E1	L5	D2	R71	*D3	R164	*C2		
C80	B1	L6	E1	R72	D2	R165	*C2		
C81	A1	L7	C2	R73	*E3	R166	*C3		
C82	A1			R74	D2	R167	*C3		
C84	*B1	Q3	F3	R75	*E3	R168	*C3		
C85	*B2	Q4	F3	R76	E2	R169	*C3		
C86	*A2	Q5	F2	R77	D2	R170	*C3		
C87	*C2	Q6	F2	R78	*D1	R171	*C3		
C88	*A1	Q7	*F2	R79	*D1	R172	*C3		
C89	*A1	Q8	F1	R80	D3	R173	*C2		
C90	*C2	Q9	F2	R81	D2	R174	*C3		
C91	*C3	Q10	*F1	R82	D3	R175	*C3		
C92	*C2	Q11	*F2	R83	D3	R176	*B1		
C93	*C2	Q27	*E2	R84	*B3	R177	*B1		
C94	A1	Q28	E2	R85	D3	R178	*C3		
C95	*A3	Q29	D2	R86	D2	R179	*C3		
C96	*B3	Q30	E2	R87	*D2	R180	*C3		
C97	*C3	Q31	E2	R88	*E1	R181	*C3		
C98	*A2	Q32	*D2	R89	*D2	R182	*C3		

*:B SIDE

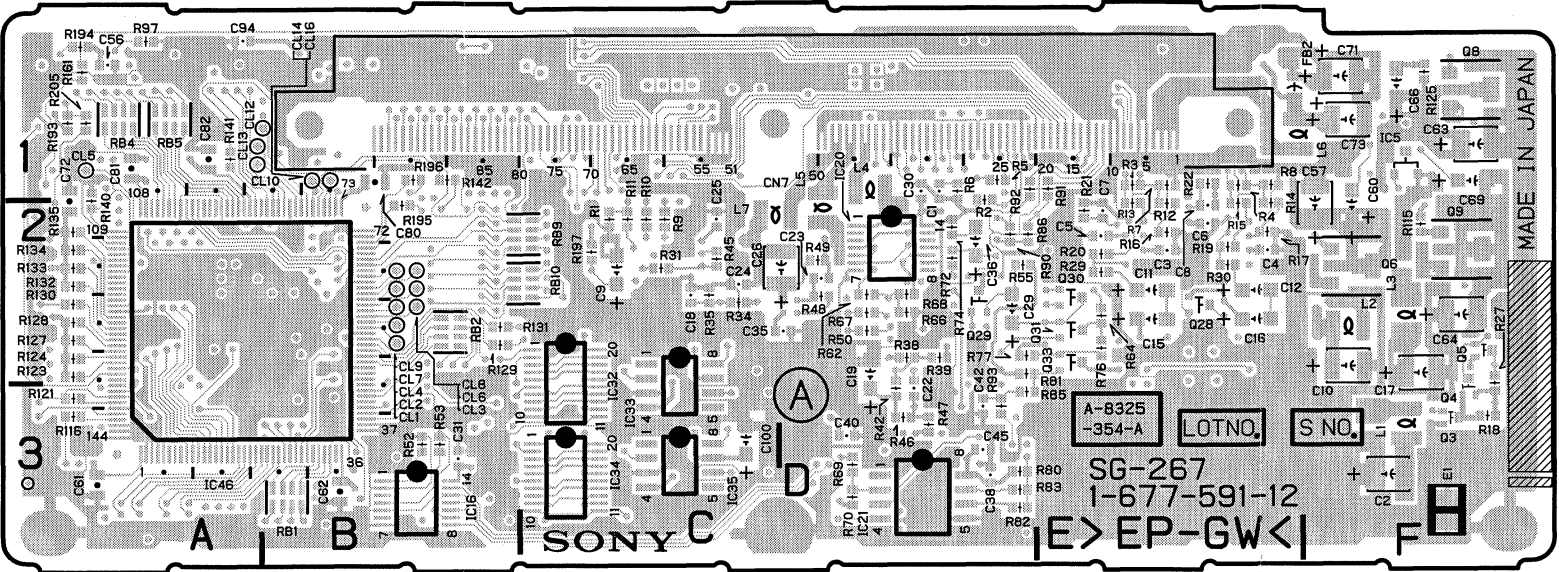

SG-267 -A SIDE-
SUFFIX: -12

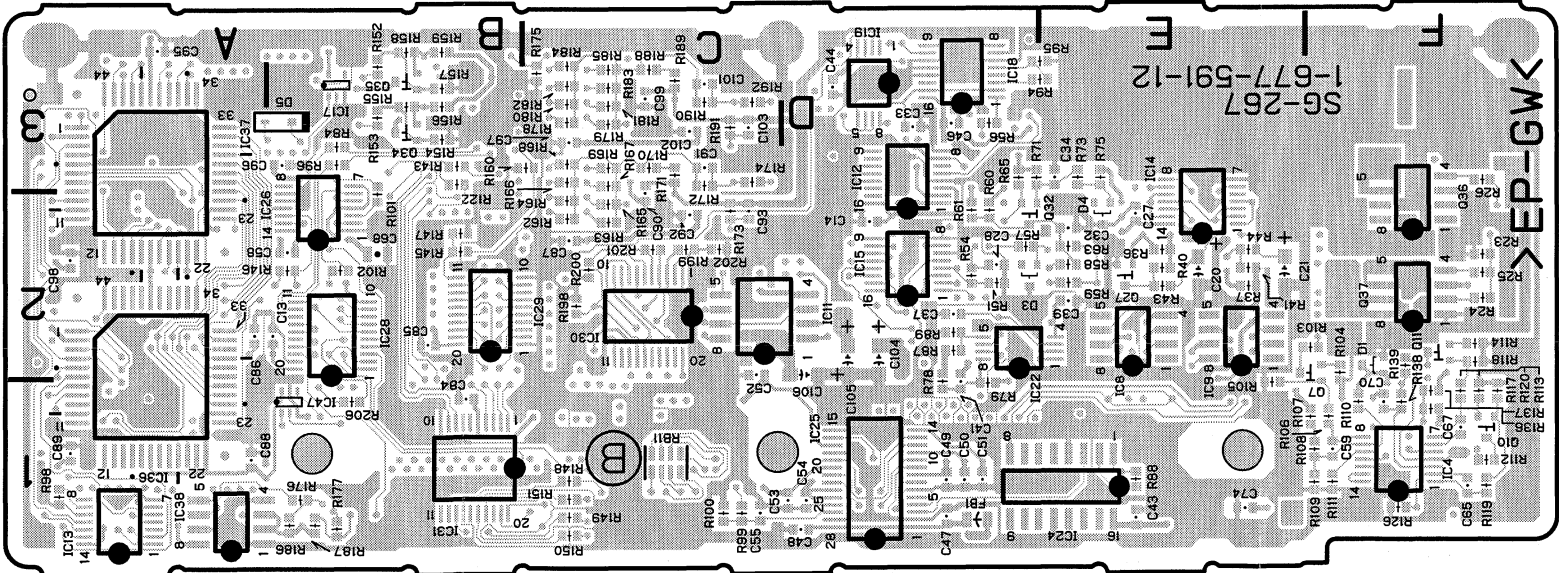


SG-267 -B SIDE-
SUFFIX: -12


SG-267 (1-677-591-11)

C1	D1	C99	*C3	Q33	E2	R90	D2	R183	*C3
C2	F3	C100	C3	Q34	*B3	R91	E1	R184	*C3
C3	E2	C101	*C3	Q35	*B3	R92	D1	R185	*C3
C4	E2	C102	*C3	Q36	*F2	R93	D3	R186	*B1
C5	E2	C103	*C3	Q37	*F2	R94	*E3	R187	*B1
C6	E2	C104	*D2			R95	*E3	R188	*C3
C7	E2	C105	*D2	R1	C2	R96	*B3	R189	*C3
C8	E2	C106	*D2	R2	D2	R97	A1	R190	*C3
C9	C2			R3	E1	R98	*A1	R191	*C3
C10	F2	CL1	B2	R4	E1	R99	*C1	R192	*C3
C11	E2	CL2	B2	R5	D1	R100	*C1	R193	A1
C12	E2	CL3	B2	R6	D1	R101	*B2	R194	A1
C13	*B2	CL4	B2	R7	E1	R102	*B2	R195	B2
C14	*D2	CL5	A1	R8	E1	R103	*F2	R196	B1
C15	E2	CL6	B2	R9	C2	R104	*F2	R197	C2
C16	E2	CL7	B2	R10	C2	R105	*E1	R198	*C2
C17	F2	CL8	B2	R11	C2	R106	*F1	R199	*C2
C18	C2	CL9	B2	R12	E2	R107	*F1	R200	*C2
C19	D2	CL10	A1	R13	E2	R108	*F1	R201	*C2
C20	*E2	CL12	B1	R14	E2	R109	*F1	R202	*C2
C21	*E2	CL13	A1	R15	E2	R110	*F1	R205	A1
C22	D3	CL14	B1	R16	E2	R111	*F1	R206	*B1
C23	D2	CL16	B1	R17	E2	R112	*F1		
C24	C2			R18	F3	R113	*F1	RB1	B3
C25	C2	CN7	C1	R19	E2	R114	*F2	RB2	B2
C26	D2			R20	E2	R115	*F2	RB4	A1
C27	*E2	D1	*F2	R21	E2	R116	A3	RB5	A1
C28	*D2	D3	*D2	R22	E1	R117	*F1	RB9	C2
C29	D2	D4	*E2	R23	*F2	R118	*F2	RB10	C1
C30	D1	D5	*B3	R24	*F2	R119	*F1	RB11	*C2
C31	B3			R25	*F2	R120	*F1		
C32	*E2	E1	F3	R26	*F3	R121	A3		
C33	*D3			R27	F3	R122	*B3		
C34	*E3	FB1	*D1	R29	E2	R123	A2		
C35	D2	FB2	E1	R30	E2	R124	A2		
C36	D2			R31	C2	R125	F1		
C37	*D2	IC4	*F1	R34	C2	R126	*F1		
C38	D3	IC5	F1	R35	C2	R127	A2		
C39	*E2	IC8	*E2	R36	*E2	R128	A2		
C40	D3	IC9	*E2	R37	*E2	R129	B2		
C41	*D1	IC11	*D2	R38	D2	R130	A2		
C42	D3	IC12	*D2	R39	D2	R131	B2		
C43	*E1	IC13	*A1	R40	*E2	R132	A2		
C44	*D3	IC14	*E2	R41	*E2	R133	A2		
C45	D3	IC15	*D2	R42	D3	R134	A2		
C46	*D3	IC16	B3	R43	*E2	R135	A2		
C47	*D1	IC17	*B3	R44	*E2	R136	*F1		
C48	*D1	IC18	*D3	R45	C2	R137	*F1		
C49	*D1	IC19	*D3	R46	D3	R138	*F1		
C50	*D1	IC20	D2	R47	D3	R139	*F2		
C51	*D1	IC21	D3	R48	D2	R140	A2		
C52	*C2	IC22	*E2	R49	D2	R141	A1		
C53	*D1	IC24	*E1	R50	D2	R142	B1		
C54	*D1	IC25	*D1	R51	*D2	R143	*B3		
C55	*C1	IC26	*B2	R52	B3	R145	*B2		
C56	A1	IC28	*B2	R53	B3	R146	*B2		
C57	F2	IC29	*C2	R54	*D2	R147	*B2		
C58	*B2	IC30	*C2	R55	D2	R148	*C1		
C59	*F1	IC31	*B1	R56	*D3	R149	*C1		
C60	F2	IC32	C2	R57	*D2	R150	*C1		
C61	A3	IC33	C2	R58	*E2	R151	*C1		
C62	B3	IC34	C3	R59	*E2	R152	*B3		
C63	F1	IC35	C3	R60	*D2	R153	*B3		
C64	F2	IC36	*A2	R61	*D2	R154	*B3		
C65	*F1	IC37	*A3	R62	D2	R155	*B3		
C66	F1	IC38	*A1	R63	*E2	R156	*B3		
C67	*F1	IC46	A2	R64	E2	R157	*B3		
C68	*B2	IC47	*B1	R65	*D3	R158	*B3		
C69	F1			R66	D2	R159	*B3		
C70	*F1	L1	F3	R67	D2	R160	*C3		
C71	F1	L2	F2	R68	D2	R161	A1		
C72	A2	L3	F2	R69	D3	R162	*C2		
C73	F1	L4	D1	R70	D3	R163	*C2		
C74	*E1	L5	D2	R71	*D3	R164	*C2		
C80	B1	L6	E1	R72	D2	R165	*C2		
C81	A1	L7	C2	R73	*E3	R166	*C3		
C82	A1			R74	D2	R167	*C3		
C84	*B1	Q3	F3	R75	*E3	R168	*C3		
C85	*B2	Q4	F3	R76	E2	R169	*C3		
C86	*A2	Q5	F2	R77	D2	R170	*C3		
C87	*C2	Q6	F2	R78	*D1	R171	*C3		
C88	*A1	Q7	*F2	R79	*D1	R172	*C3		
C89	*A1	Q8	F1	R80	D3	R173	*C2		
C90	*C2	Q9	F2	R81	D2	R174	*C3		
C91	*C3	Q10	*F1	R82	D3	R175	*C3		
C92	*C2	Q11	*F2	R83	D3	R176	*B1		
C93	*C2	Q27	*E2	R84	*B3	R177	*B1		
C94	A1	Q28	E2	R85	D3	R178	*C3		
C95	*A3	Q29	D2	R86	D2	R179	*C3		
C96	*B3	Q30	E2	R87	*D2	R180	*C3		
C97	*C3	Q31	E2	R88	*E1	R181	*C3		
C98	*A2	Q32	*D2	R89	*D2	R182	*C3		

*:B SIDE

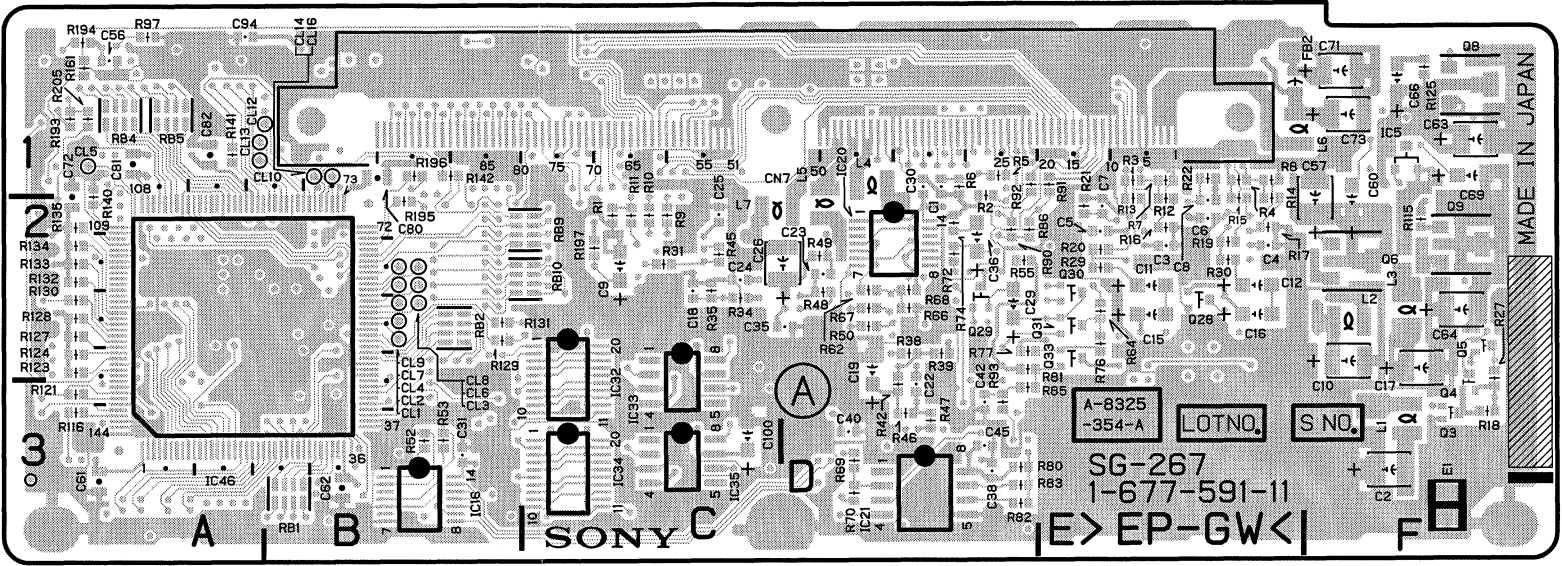

SG-267 -A SIDE-
SUFFIX: -11

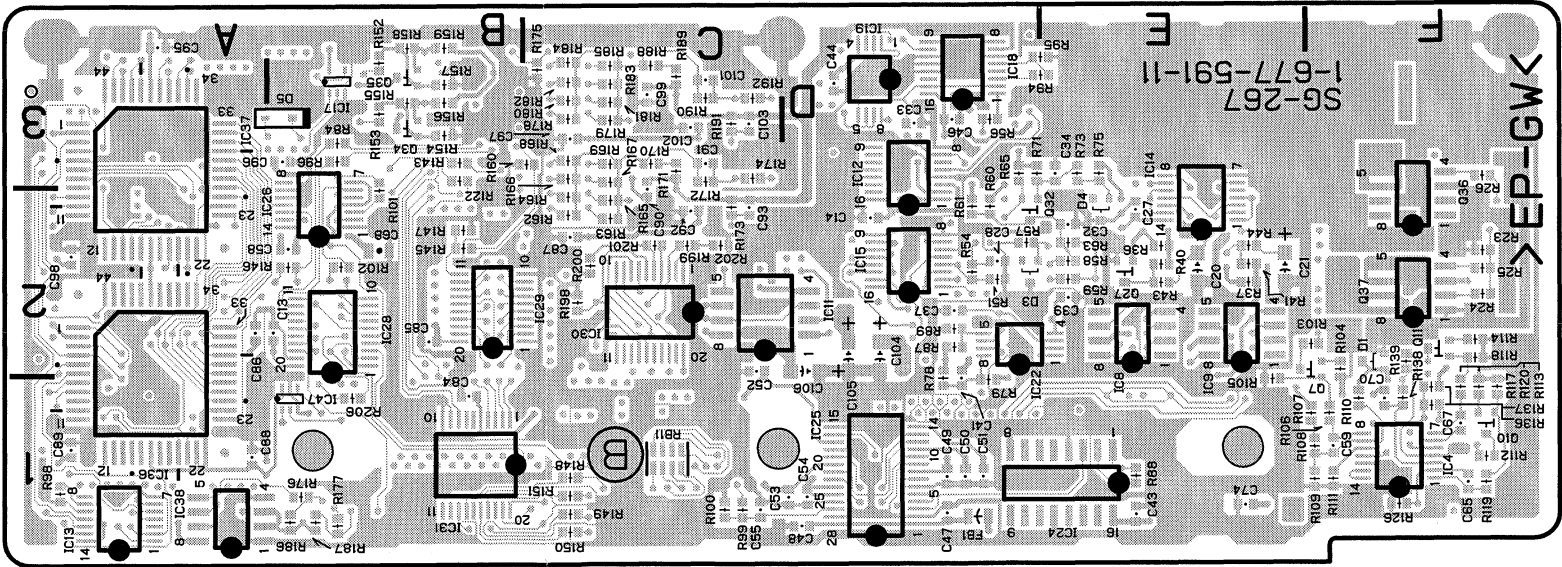


SG-267 -B SIDE-
SUFFIX: -11

SH-74 (1-677-579-11)

C1	A3	IC10	*C3	R67	*A4
C2	*B4	IC11	*B3	R68	*B4
C3	*C4	IC12	*B3	R69	*B4
C4	*B3	IC13	*B3	R70	*B4
C5	*C3	IC14	A3	R71	*B4
C6	*B4	IC15	A3	R72	*A4
C7	*B4	IC16	B4	R73	*A4
C8	*B4	IC17	B3	R74	*B4
C9	*C4	IC18	A3	R75	*B4
C10	A2	IC19	A3	R76	*B4
C11	*A1	IC20	A4	R77	*B4
C12	*A2	IC21	A3	R78	*A3
C13	*A1	IC22	A4	R79	*A4
C14	*C3	IC23	A4	R80	*A4
C15	*B4	IC24	A4	R81	*A4
C16	*B4	IC25	A3	R82	*A4
C17	*B2	IC101	B1	R83	*B4
C18	*C3	IC102	B1	R84	*B4
C19	*C3	IC103	B1	R85	*B4
C20	*B3	IC104	*C2	R86	*B4
C21	*B3			R87	*B4
C22	*B3	Q1	*A2	R88	*A3
C23	*B2	Q2	A2	R89	*B3
C24	*B3	Q3	A2	R90	*B3
C25	*B3	Q4	*A2	R91	*B3
C26	*B3			R92	*B3
C27	*B2	R1	B4	R93	*A3
C28	*B2	R2	B4	R94	*A3
C29	*B3	R3	C2	R95	*A3
C30	*B3	R4	C2	R96	*B3
C31	*C3	R5	*A2	R97	*B3
C32	*B3	R6	A3	R98	*B3
C33	*B2	R7	*A2	R99	*A3
C34	*B3	R8	*A2	R100	*A3
C35	*B2	R9	B4	R101	*A3
C36	B4	R10	C4	R102	*A3
C37	B4	R11	C2	R103	*A3
C38	*A3	R12	*A2	R104	*A4
C39	*A3	R13	*A2	R105	*A4
C40	*A3	R14	C2	R106	*A4
C41	*B4	R15	B4	R107	*A3
C42	*B3	R16	C4	R108	*A3
C43	*A3	R17	C2	R109	*A3
C44	*A3	R18	*A2	R110	*A3
C45	A4	R19	*A2	R111	*A3
C46	B4	R20	A2	R112	*A3
C47	B4	R21	A2	R113	*A3
C48	A4	R22	*B4	R114	*A4
C49	B4	R23	C4	R115	*A4
C50	B3	R24	B4	R116	B1
C51	*A3	R25	C4	R117	B1
C52	*A4	R26	B3	R118	B1
C53	*A4	R27	B3	R119	B1
C54	*A3	R28	B3	R120	B1
C55	*A3	R29	C3	R121	B1
C56	*A3	R30	*C2	R122	B1
C57	*A3	R31	B3	R123	B1
C58	*A3	R32	*C2	R124	B1
C59	*A3	R33	B3	R125	B1
C60	*A3	R34	B2	R126	B1
C61	A4	R35	B3	R127	B1
C62	A4	R36	*C2	R128	C2
C63	B1	R37	*B2	R129	C2
C64	B1	R38	B2	R130	C2
C65	B1	R39	B3		
C101	*B1	R40	B2	RV101	A1
C102	*B1	R41	B3	RV102	A1
C103	*B1	R42	C3	RV103	A1
C104	*B1	R43	B3		
C105	*B1	R44	B3		
C106	*B1	R45	C3		
C107	*B1	R46	B2		
C108	*B1	R47	B3		
C109	*B1	R48	B2		
C110	A3	R49	B3		
C111	A2	R50	B2		
		R51	*B4		
CN1	*C4	R52	*B3		
CN2	A1	R53	*B4		
CN3	*A3	R54	*B4		
		R55	*B3		
E1	A4	R56	*B3		
		R57	*A3		
IC1	*C3	R58	*A3		
IC2	*B4	R59	*A3		
IC3	*C2	R60	*A3		
IC4	*A2	R61	*A3		
IC5	A2	R62	*A3		
IC6	*B4	R63	*A4		
IC7	*B4	R64	*A4		
IC8	*B3	R65	*A4		
IC9	*C3	R66	*A4		


*:B SIDE

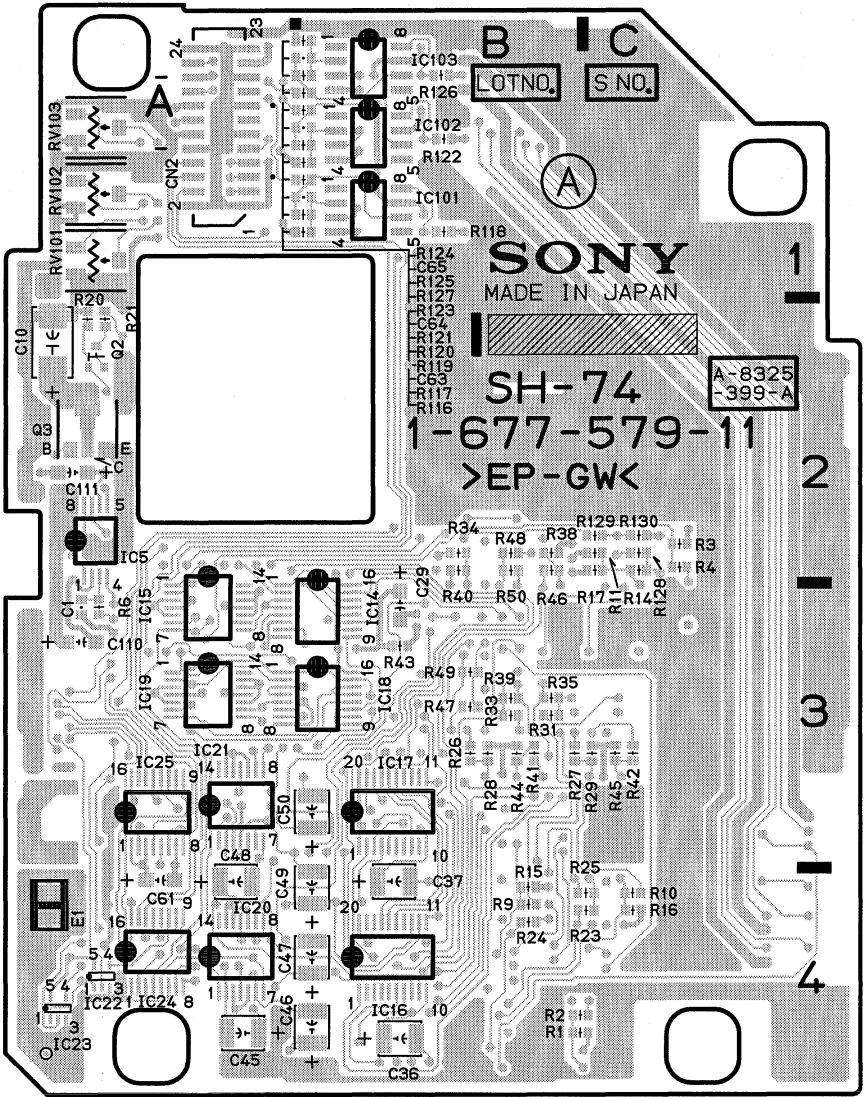


SV-218 (1-677-538-11)

C1	A1	IC15	*E2	R71	*D2	R164	*C1
C2	A1	IC16	*E2	R72	*C1	R165	*C1
C3	A1	IC17	*E1	R73	C2	R166	*C1
C4	A1	IC18	C1	R74	E2	R167	*C1
C5	A1	IC19	*D2	R75	E2	R168	*C1
C6	A1	IC21	*D2	R76	C2	R169	*C1
C7	A1	IC23	B2	R77	*D2	R170	*C1
C8	A1			R78	C2	R171	*C1
C9	*A1	L1	E1	R80	B2	R172	*C1
C10	*A1	L2	E1	R81	C2	R173	*C1
C11	A1	L3	B1	R82	C2	R174	*D1
C12	A1			R83	C2	R175	*D1
C13	*A1	Q1	*E2	R84	C2	R176	*D1
C14	A1	Q2	*E2	R85	*C1	R177	*D1
C15	A1	Q3	*E2	R86	*C1	R178	*D1
C16	A1	Q5	*E1	R87	E2	R179	*C1
C17	A1	Q6	*E1	R88	*C1	R180	*C1
C18	*E2	Q7	*E1	R89	*C1	R181	*D1
C19	*E2	Q8	*E1	R90	*C1	R182	*C1
C20	*E1	Q9	*E2	R91	*B1		
C21	*E2	Q10	*E2	R92	*C1	S1	E2
C22	*E2	Q11	E2	R93	*C1		
C23	*E2	Q12	*D1	R94	*C1	TP1	A1
C24	*E2	Q13	*D1	R95	*C1	TP2	A1
C25	*E2	Q14	*D1	R96	*D1	TP3	A2
C26	*E2			R97	*C1	TP4	A2
C27	*E2	R1	*A1	R98	*D2		
C28	*E2	R2	*A1	R99	*D2	X1	*D2
C29	E1	R3	*A1	R100	*D2		
C30	*E1	R4	*A1	R101	*E2		
C31	*E1	R5	A1	R102	*D2		
C32	*E1	R6	A1	R103	*E2		
C33	*E1	R7	A1	R104	*E2		
C34	*E2	R8	A1	R105	*E2		
C35	*E2	R9	A1	R106	*D2		
C36	*E2	R10	A1	R107	*D2		
C37	*E2	R11	A1	R108	*B2		
C38	*E2	R12	A1	R109	*B1		
C39	*E2	R13	A1	R110	*B1		
C40	E1	R14	A1	R111	*B1		
C41	*E1	R15	A1	R112	*B1		
C50	*C2	R16	A1	R113	*B1		
C51	*C1	R17	A1	R114	*B1		
C52	C1	R18	A1	R115	*B1		
C53	B1	R19	*E2	R116	*C1		
C54	C2	R20	*E2	R117	*B1		
C55	A1	R21	*E2	R118	*B1		
C56	C1	R22	*E2	R119	*B1		
C57	*E1	R23	*E2	R120	*B1		
C58	*D2	R24	*E1	R121	*B1		
C59	*D2	R25	*E2	R122	*B1		
C60	*D2	R26	*E1	R123	*B1		
C61	*D2	R27	*E1	R124	*B1		
C62	*D2	R28	*E2	R125	*B1		
C63	*D2	R29	*E2	R126	*B1		
C64	*D2	R30	*E2	R127	*B1		
C65	A2	R31	*E2	R128	*B1		
C66	*E2	R32	*E2	R129	*B1		
C67	*A2	R33	*E2	R130	*B1		
C68	*C2	R34	*E2	R131	*B1		
C69	A2	R35	*E2	R132	*B1		
		R36	*E1	R133	*C1		
CN1	E2	R37	*E1	R134	*B1		
CN2	C2	R38	*E1	R135	*B1		
CN9	C1	R39	*E1	R136	*B1		
CN102	A2	R40	*E1	R137	*B1		
		R41	*E1	R138	*B1		
D1	E2	R42	*E1	R139	*B1		
D2	E2	R43	*E1	R140	*B1		
D3	C2	R44	*E1	R141	*C2		
D4	C2	R45	*E1	R142	*C1		
D5	C2	R46	*E1	R143	*C1		
D6	*E1	R47	*E1	R144	*C1		
		R48	*E1	R145	*C1		
E1	A2	R49	*E1	R146	*C2		
E2	E2	R50	*E1	R147	*D1		
E3	E2	R51	*E1	R148	*C1		
E4	A1	R52	*E1	R149	*C1		
		R53	*E1	R150	*D1		
IC1	D2	R54	*E1	R151	*C1		
IC2	B2	R55	*E1	R152	*C1		
IC3	*A2	R56	*E1	R153	*D1		
IC4	*A2	R57	*E2	R154	*D1		
IC5	*B1	R58	*E2	R155	*D1		
IC6	*D1	R59	*E2	R156	*C1		
IC7	*A1	R60	*E2	R157	*D1		
IC8	*A2	R61	*E2	R158	*C1		
IC9	*A2	R62	*E2	R159	*C1		
IC11	A1	R63	*E2	R160	*C1		
IC12	A1	R64	*E1	R161	*C1		
IC13	A1	R65	*E1	R162	*C1		
IC14	*E2	R70	*C2	R163	*C1		


*:B SIDE

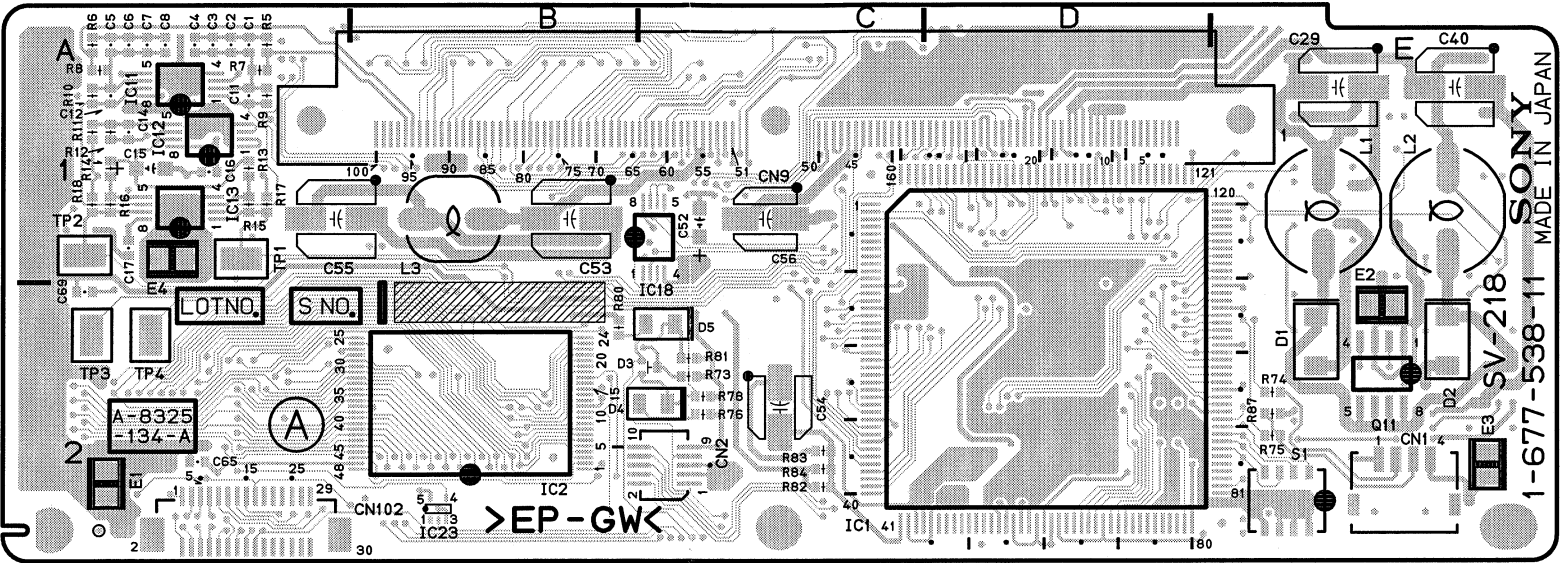


SV-218 -A SIDE-
SUFFIX: -11

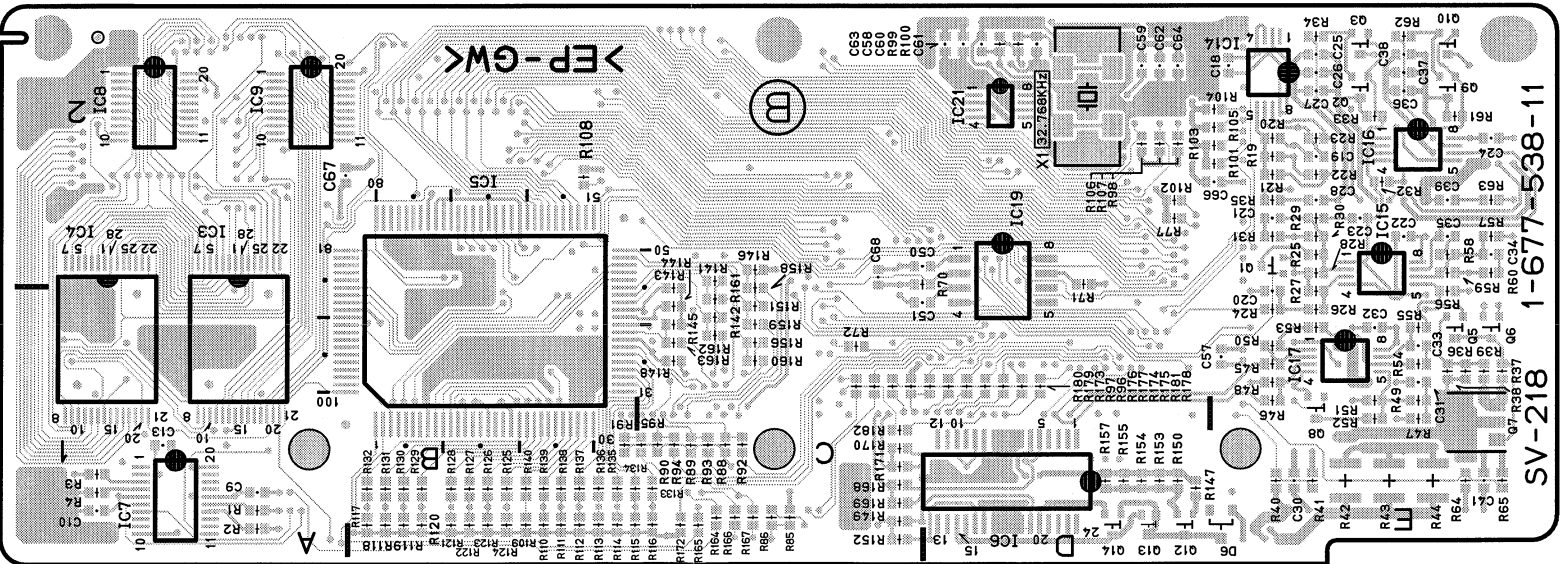


SV-218 -B SIDE-
SUFFIX: -11

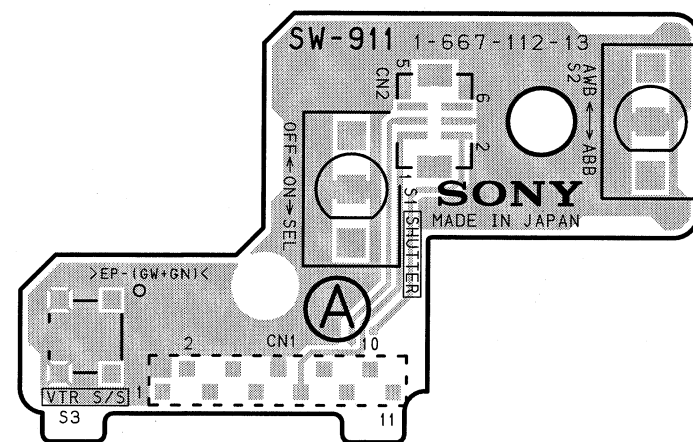


SW-911 -A SIDE-
SUFFIX: -13

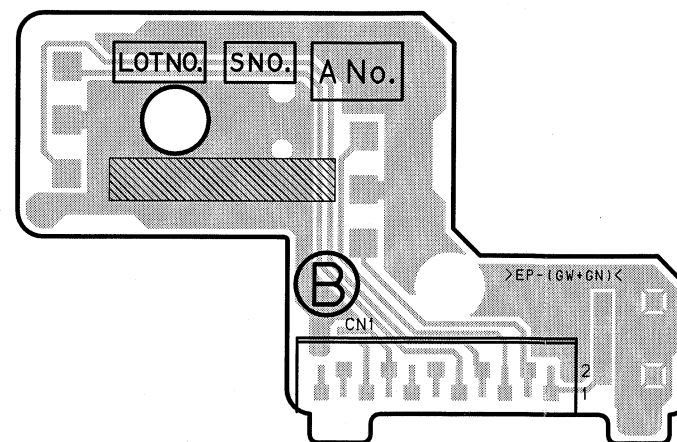


SW-911 -B SIDE-
SUFFIX: -13




SW-1032 -A SIDE-
SUFFIX: -11




SW-1032 -B SIDE-
SUFFIX: -11

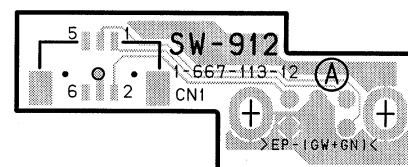


SW-912 -A SIDE-
SUFFIX: -12

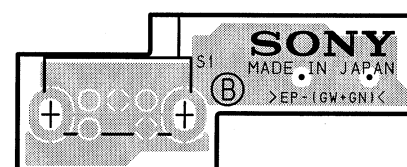


SW-912 -B SIDE-
SUFFIX: -12




SW-912 -A SIDE-
SUFFIX: -11



SW-912 -B SIDE-
SUFFIX: -11

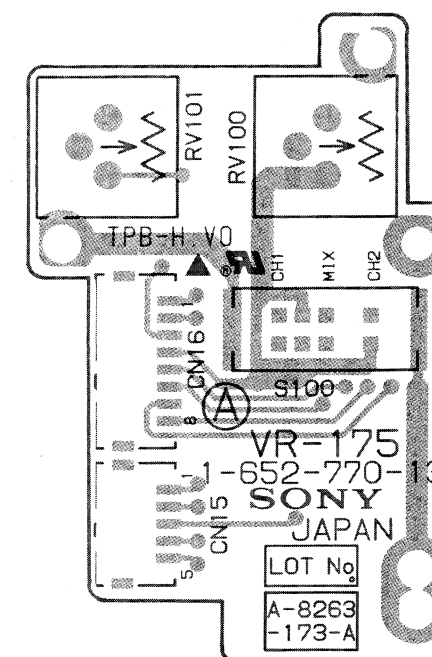


VR-175 -A SIDE-
SUFFIX: -13

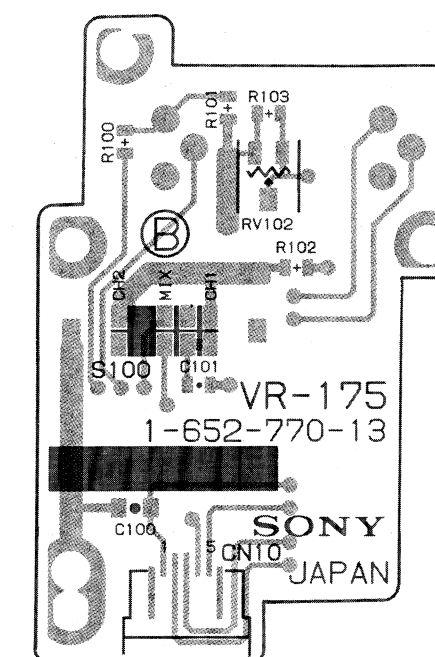


VR-175 -B SIDE-
SUFFIX: -13

SY-285 (1-677-539-11)

C1	*F1	R42	A1	X200	B2
C2	F2	R43	*A1		
C3	*B2	R44	A1		
C4	A1	R45	A1		
C5	*F2	R46	A1		
C6	*C1	R47	*A1		
C7	E2	R48	A1		
C8	*E2	R49	*A1		
C9	*E2	R50	A1		
C10	E2	R51	*A1		
C11	E2	R52	A1		
C200	B2	R53	*A1		
C201	B1	R54	*B1		
C202	A2	R55	*B1		
		R56	*B1		
CN1	F2	R57	*B1		
CN2	E2	R58	*B1		
CN10	C1	R59	*B1		
CN101	A2	R60	A2		
CN110	B2	R61	A2		
		R62	D2		
D1	*F2	R63	D2		
D2	F2	R64	D2		
D3	F2	R65	D2		
		R66	D2		
E1	A1	R67	D2		
E2	B2	R68	*D1		
E3	F2	R69	*D1		
E4	E1	R70	*D1		
		R71	*C1		
IC1	D2	R72	*C1		
IC2	*D2	R73	*C1		
IC3	*C2	R74	*C1		
IC4	*C2	R75	*C1		
IC5	C2	R76	*B1		
IC6	*A1	R77	*A1		
IC7	*A2	R78	D1		
IC8	*A2	R79	*C1		
IC9	A1	R80	*C1		
IC10	A1	R81	D1		
IC11	*B1	R82	D1		
IC12	*C1	R83	D1		
IC13	*D1	R84	D1		
IC14	*D2	R85	*B1		
IC15	*E1	R86	*B1		
IC16	F1	R87	*B1		
IC17	*E1	R88	D2		
IC18	*D2	R89	D2		
IC19	*B2	R90	*B1		
IC20	*B2	R91	*B1		
IC21	*B2	R92	*D1		
IC22	B1	R93	D1		
IC24	*A1	R94	D1		
IC25	*F1	R95	*C1		
IC26	*D1	R96	*D1		
IC30	A2	R97	*C1		
IC31	*B2	R98	*C1		
IC32	*D2	R99	*D1		
		R100	*C1		
R1	*F1	R101	*D1		
R2	*E1	R102	*C1		
R3	*D1	R103	*D1		
R4	*D1	R104	*C1		
R5	*D1	R105	*D1		
R6	*E2	R106	*C1		
R7	*F2	R107	*B1		
R8	*F2	R108	*B1		
R9	*D1	R109	*B1		
R11	*F2	R110	*B1		
R12	*F2	R113	*B1		
R13	*F2	R114	*B1		
R14	*F2	R116	*F1		
R15	*D1	R117	*F1		
R23	D2	R118	*A2		
R24	D2	R119	*B2		
R25	D2	R120	*A2		
R26	*F2	R202	B2		
R27	E2	R203	A2		
R28	E2	R204	A2		
R29	*F2	R205	*A1		
R30	E1	R206	*A1		
R31	E1	R207	B2		
R32	E1	R208	*E1		
R33	E2	R209	*E1		
R34	E2				
R35	D1	S1	F2		
R36	E2	S2	E1		
R37	E2				
R38	*D2	TP1	B1		
R39	*A1	TP2	B2		
R40	A1				
R41	*A1	X1	E2		

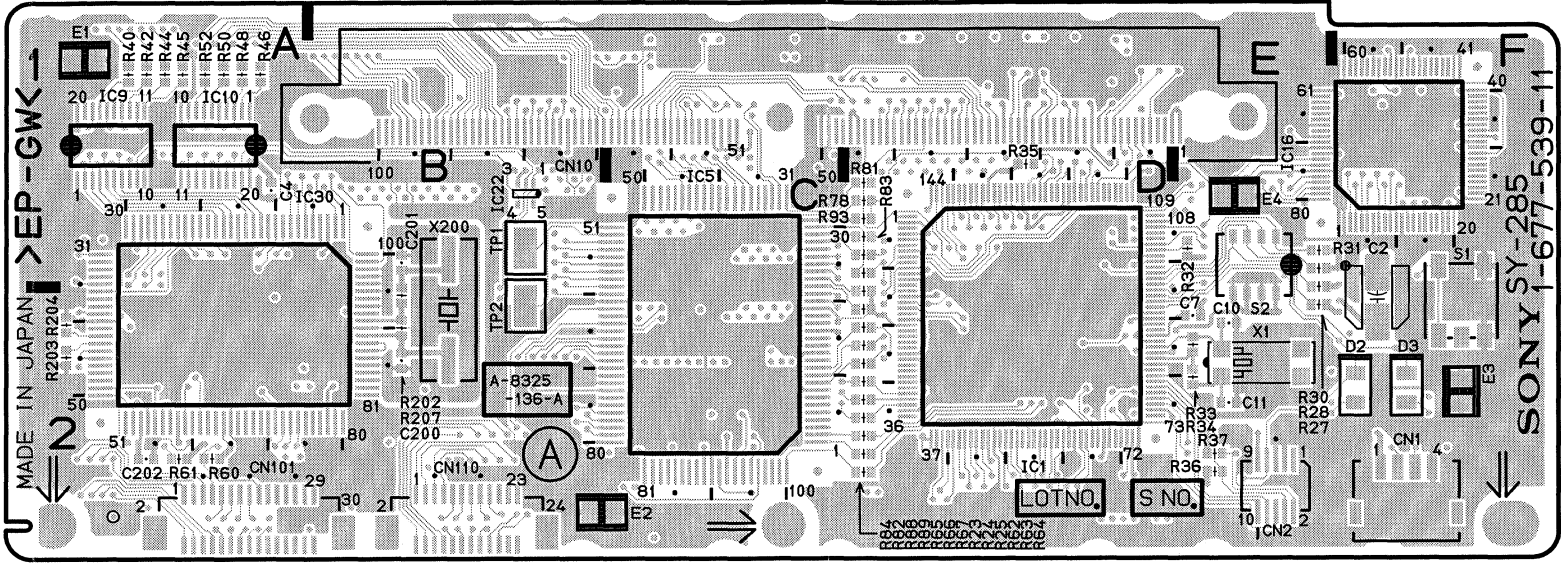


SY-285 -A SIDE-
SUFFIX: -11

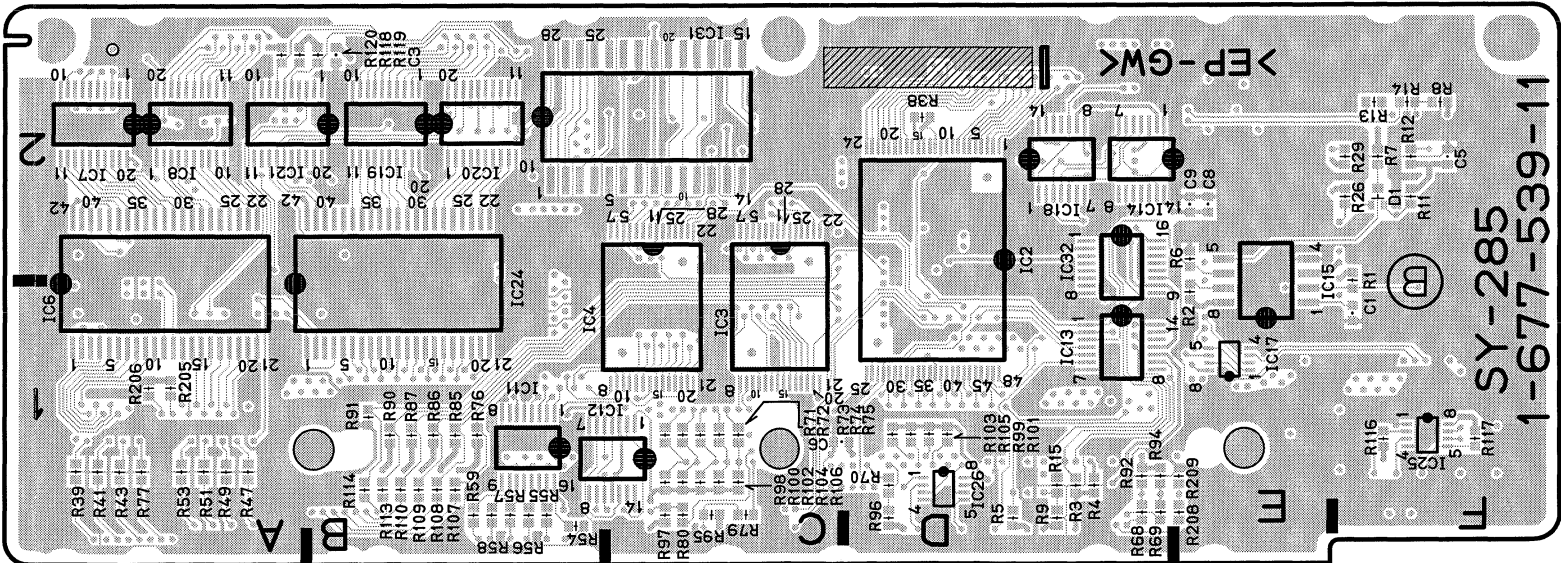


SY-285 -B SIDE-
SUFFIX: -11

TG-213 (1-677-580-13)

C1	*D2	R35	*D4
C2	*D2	R36	*E5
C3	*C2	R37	*D2
C4	*D3	R38	*C2
C5	*D3	R39	*D6
C6	*C5	R42	*D1
C7	*B5	R43	*D1
C9	*B6	R44	*C1
C11	B6	R45	*D1
C12	*B6	R52	*E2
C13	*C2	R53	E2
C14	C2	R54	E1
C15	*C2	R56	*D4
C19	*C2	R58	*B5
C20	*E3	R62	*C4
C22	*E4	R63	*C4
C23	B2	R64	*C5
C24	*B2	R65	*B5
C25	*B4	R67	*C5
C26	*C4	R68	*C5
C27	*E4	R69	*C5
C28	B3	R70	*C5
C29	*E5	R71	*C5
C30	*A3	R72	*B5
C31	*B3	R73	*B5
C32	*D2	R74	*B4
C33	*D2	R75	*C5
C34	D2	R76	*C5
C37	*E6	R77	*C4
C38	*D3	R78	*C3
C39	*D2	R79	*C5
C40	C2	R90	*C5
C41	*E4		
C42	*D4	X1	E3
		X2	E5
CN1	C1	X3	E3
CN2	C6	X4	E5
D1	*C6	*:B	SIDE
D2	*D6		
DL1	D5		
DL2	D5		
DL3	D4		
DL4	D4		
DL5	A4		
DL6	A5		
DL7	C3		
DL8	C4		
IC1	C2		
IC2	*C2		
IC3	D1		
IC4	D1		
IC5	C3		
IC7	D2		
IC8	*D4		
IC9	D1		
IC10	*D6		
IC15	C5		
L1	D2		
Q1	*D3		
Q2	D3		
Q3	*E3		
Q4	*C2		
Q5	C2		
Q6	*E4		
R1	*D2		
R2	*D2		
R3	*C2		
R4	*D3		
R5	*C3		
R6	*D1		
R8	*D5		
R9	*C5		
R10	C3		
R11	*C2		
R12	*E2		
R14	*E3		
R16	C2		
R17	C2		
R23	*C2		
R24	*C2		
R27	*E4		
R28	*E4		
R29	*C4		
R30	*C4		
R33	*E3		
R34	*D4		

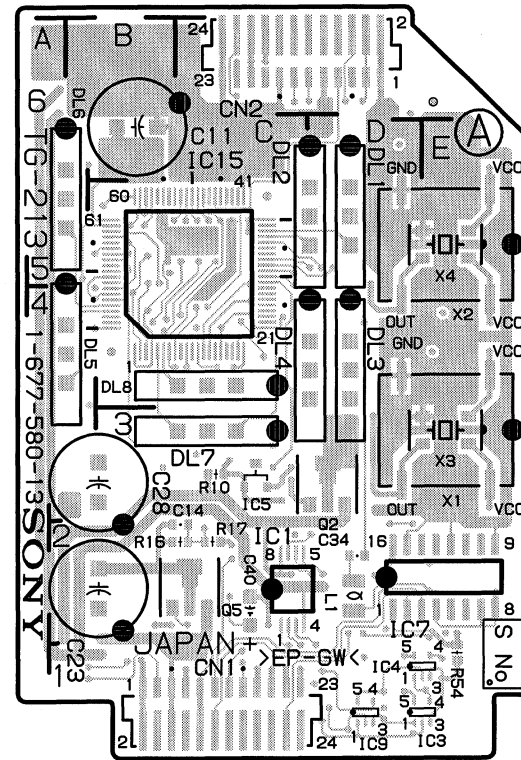


TG-213 -A SIDE-SUFFIX: -13

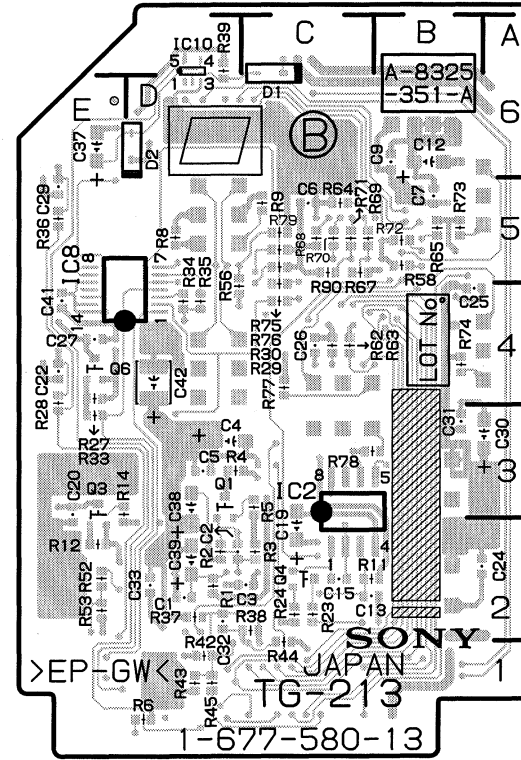


TG-213 -B SIDE-
SUFFIX: -13

TG-213 (1-677-580-12)

C1	*D2	R36	*B5
C2	*D2	R37	*D2
C3	*C2	R38	*C2
C4	*D3	R39	*D6
C5	*D3	R42	*D1
C6	*C5	R43	*D1
C7	*B5	R44	*C1
C9	*B6	R45	*D1
C11	B6	R52	*E2
C12	*B6	R53	*E2
C13	*C2	R54	E1
C14	C2	R56	*D4
C15	*C2	R58	*B5
C19	*C2	R62	*C4
C20	*E3	R63	*C4
C22	*E4	R64	*C5
C23	B2	R65	*B5
C24	*B2	R67	*C5
C25	*B4	R68	*C5
C26	*C4	R69	*C5
C27	*E4	R70	*C5
C28	B3	R71	*C5
C29	*B5	R72	*B5
C30	*A3	R73	*B5
C31	*B3	R74	*B4
C32	*D2	R75	*C5
C33	*D2	R76	*C5
C34	D2	R77	*C4
C37	*B6	R78	*C3
C38	*D3	R79	*C5
C39	*D2	R90	*C5
C40	C2		
C41	*E4	X1	E3
		X2	B5
CN1	C1		
CN2	C6		
		*:B SIDE	
D1	*C6		
D2	*D6		
DL1	D5		
DL2	D5		
DL3	D4		
DL4	D4		
DL5	A4		
DL6	A5		
DL7	C3		
DL8	C4		
IC1	C2		
IC2	*C2		
IC3	D1		
IC4	D1		
IC5	C3		
IC7	D2		
IC8	*D4		
IC9	D1		
IC10	*D6		
IC15	C5		
L1	D2		
Q1	*D3		
Q2	D3		
Q3	*E3		
Q4	*C2		
Q5	C2		
Q6	*E4		
R1	*D2		
R2	*D2		
R3	*C2		
R4	*D3		
R5	*C3		
R6	*D1		
R8	*D5		
R9	*C5		
R10	C3		
R11	*C2		
R12	*E2		
R14	*E3		
R16	C2		
R17	C2		
R23	*C2		
R24	*C2		
R27	*E4		
R28	*E4		
R29	*C4		
R30	*C4		
R33	*E3		
R34	*D4		
R35	*D4		

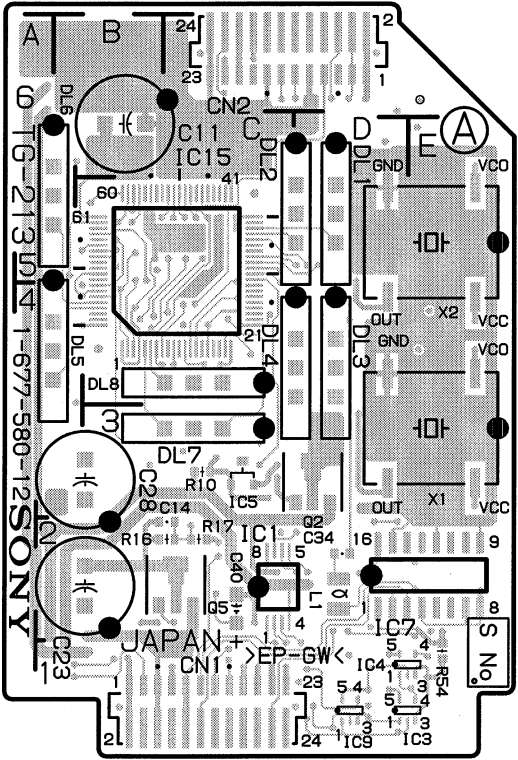


TG-213 -A SIDE-
SUFFIX: -12

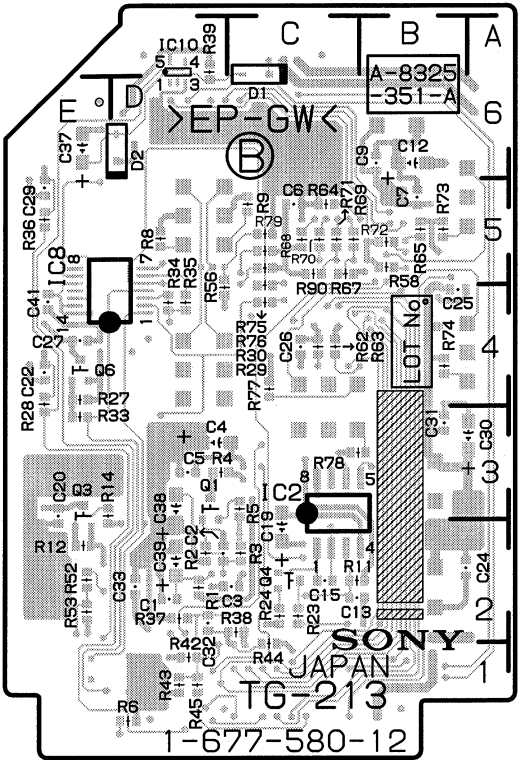


TG-213 -B SIDE-
SUFFIX: -12

TG-213 (1-677-580-11)

C1	*D2	R36	*E5
C2	*D2	R37	*D2
C3	*C2	R38	*C2
C4	*D3	R39	*D6
C5	*D3	R42	*D1
C6	*C5	R43	*D1
C7	*B5	R44	*C1
C9	*B6	R45	*D1
C11	B6	R52	*E2
C12	*B6	R53	*E2
C13	*C2	R54	E1
C14	C2	R56	*D4
C15	*C2	R58	*B5
C19	*C2	R62	*C4
C20	*E3	R63	*C4
C22	*E4	R64	*C5
C23	B2	R65	*B5
C24	*B2	R67	*C5
C25	*B4	R68	*C5
C26	*C4	R69	*C5
C27	*E4	R70	*C5
C28	B3	R71	*C5
C29	*E5	R72	*B5
C30	*A3	R73	*B5
C31	*B3	R74	*B4
C32	*D2	R75	*C5
C33	*D2	R76	*C5
C34	D2	R77	*C4
C37	*E6	R78	*C3
C38	*D3	R79	*C5
C39	*D2		
C40	C2	X1	E3
C41	*E4	X2	E5
CN1	C1	*:B SIDE	
CN2	C6		
D1	*C6		
D2	*D6		
DL1	D5		
DL2	D5		
DL3	D4		
DL4	D4		
DL5	A4		
DL6	A5		
DL7	C3		
DL8	C4		
IC1	C2		
IC2	*C2		
IC3	D1		
IC4	D1		
IC5	C3		
IC7	D2		
IC8	*D4		
IC9	D1		
IC10	*D6		
IC15	C5		
L1	D2		
Q1	*D3		
Q2	D3		
Q3	*E3		
Q4	*C2		
Q5	C2		
Q6	*E4		
R1	*D2		
R2	*D2		
R3	*C2		
R4	*D3		
R5	*C3		
R6	*D1		
R8	*D5		
R9	*C5		
R10	C3		
R11	*C2		
R12	*E2		
R14	*E3		
R16	C2		
R17	C2		
R23	*C2		
R24	*C2		
R27	*E4		
R28	*E4		
R29	*C4		
R30	*C4		
R33	*E3		
R34	*D4		
R35	*D4		

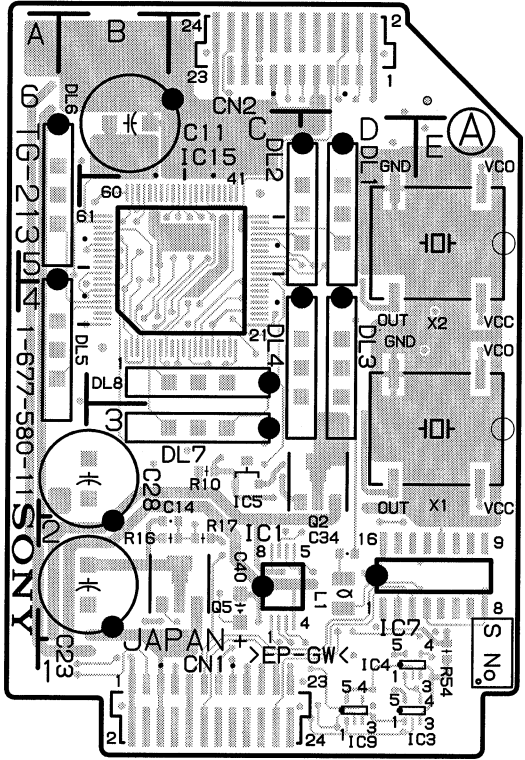

TG-213 -A SIDE-
SUFFIX: -11

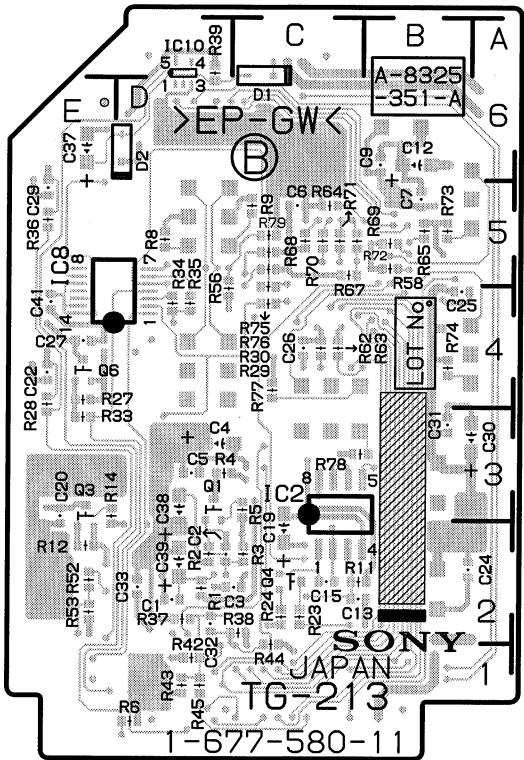


TG-213 -B SIDE-
SUFFIX: -11

VA-195 (1-677-593-12)

C1	*B1	C235	*C1	IC209	B2	R24	*D1	R148	*B2	R264	*C1	R385	*E2
C2	*B1	C236	*C1	IC210	B2	R25	*D1	R149	*B2	R265	*C1	R386	*A1
C3	*D1	C238	*C2	IC212	*C2	R26	*D1	R150	A2	R266	*C1	R387	*B1
C4	*D1	C239	*B2	IC301	D2	R27	*D1	R151	A2	R272	*C2	R388	*A1
C5	D1	C240	*C1	IC302	C2	R28	*D1	R152	A2	R273	*C2	R389	*A1
C6	*D1	C241	*B1	IC303	D2	R29	D1	R153	*B2	R274	*C2		
C7	*E1	C301	*C2	IC304	*C2	R30	*E1	R154	A2	R275	*C2		
C8	*E1	C302	*D2	IC305	*D2	R31	*D1	R155	*B2	R300	*B1		
C9	*E1	C303	*D2	IC306	C2	R32	*E1	R156	A2	R301	*D2		
C10	*E1	C304	*C2	IC307	D2	R33	*E1	R157	A2	R302	*D2		
C11	*E1	C305	*D2	IC308	C2	R34	*E1	R158	*A1	R303	*D2		
C12	*E2	C306	C2	IC309	D2	R35	*D1	R159	*A1	R304	*D2		
C13	C1	C307	D2	IC310	D2	R36	*E1	R160	*A1	R305	*D2		
C14	*D1	C308	*D2	IC312	*D2	R37	*E1	R161	*A1	R306	*D2		
C15	*D1	C309	*D2	IC313	*A1	R38	*E1	R162	*B1	R307	*D2		
C16	C1	C310	*D2	IC314	E2	R39	*E1	R163	*B1	R308	*D2		
C17	C1	C311	*C2	IC315	*E2	R40	*E1	R164	*B2	R309	*D2		
C101	*A2	C312	*C2			R41	*E1	R165	*A1	R310	*D2		
C102	*A2	C313	*D2	Q1	D1	R42	*E2	R166	*B1	R311	*C2		
C103	*A2	C314	*D2	Q2	*D1	R43	*B1	R167	*B2	R312	*D2		
C104	*A2	C315	*D2	Q3	D1	R44	*B1	R168	*B2	R313	*D2		
C105	*A2	C316	D2	Q4	*D1	R45	*B1	R169	*B1	R314	*C2		
C106	A2	C317	*D2	Q5	*D1	R46	*B1	R170	*B1	R315	*D2		
C107	B2	C318	*D2	Q6	*D1	R48	*E1	R171	*B1	R316	*D2		
C108	*B2	C319	*D2	Q7	*E1	R49	*E1	R172	*A2	R317	D2		
C109	*B2	C320	C2	Q8	*E1	R50	*B1	R173	*A2	R318	D2		
C110	*A2	C321	*D2	Q9	*E1	R52	*E1	R174	*A2	R319	D2		
C111	*A2	C322	*C2	Q10	*B1	R53	*E1	R175	*A2	R320	*D2		
C112	*A2	C323	*C1	Q11	*C1	R54	*E1	R200	*B1	R321	*D2		
C113	*B2	C324	*D2	Q12	*C1	R55	*E1	R201	*B2	R322	*D2		
C114	*A2	C325	*D2	Q13	*C1	R56	*C1	R202	*B2	R323	D2		
C115	*A2	C326	D2	Q14	*C1	R57	*C1	R203	*B2	R324	*D2		
C116	A2	C327	D1	Q15	*C1	R58	C1	R204	*B2	R325	*D2		
C117	*A2	C328	D2	Q16	*E2	R59	C1	R205	*B2	R326	*D2		
C118	*A2	C329	D1	Q17	*E2	R60	C1	R206	*B2	R327	*D2		
C119	*A2	C330	D1	Q18	*E2	R61	C1	R207	*C2	R328	*D2		
C120	A2	C331	D2	Q101	*A2	R62	*C1	R208	*B2	R329	D2		
C121	*A2	C332	D2	Q102	*A2	R63	C1	R209	*C2	R330	D2		
C122	*A2	C333	*D1	Q103	*A2	R64	C1	R210	*B2	R331	*D2		
C123	*A1	C334	*D1	Q104	*B2	R65	*C1	R211	*B2	R332	*D2		
C124	*B2	C335	*D2	Q105	*B2	R66	*E2	R212	*B2	R333	*C2		
C125	*B2	C336	*D1	Q106	*B2	R67	*E2	R213	*B2	R334	*C2		
C126	A2	C337	D1	Q107	*A1	R68	*E2	R214	*B2	R335	*C2		
C127	A1	C338	*D2	Q108	*A1	R69	*E2	R215	*B2	R336	*C1		
C128	B2	C339	*D2	Q109	*A1	R100	*B1	R216	*B2	R337	*C1		
C129	B1	C340	*D1	Q110	*B1	R101	*A2	R217	C2	R338	*C1		
C130	A1	C341	*D1	Q111	*B1	R102	*A2	R218	*C2	R339	*D1		
C131	B2	C342	*E2	Q201	*B2	R103	*A2	R219	*C2	R340	*D1		
C132	B2			Q202	*B2	R104	*A2	R220	*C2	R341	*C1		
C133	*B1	CN2	B1	Q203	*B2	R105	*A2	R221	*C2	R342	*C1		
C134	*B1			Q204	*C2	R106	*A2	R222	*C2	R343	*D1		
C135	*B2	DL102	B2	Q205	*C2	R107	*A2	R223	*C2	R344	*C1		
C136	*B1	DL202	C2	Q206	*B1	R108	*A2	R224	C2	R345	*C1		
C137	B1	DL302	D2	Q207	*B1	R109	*A2	R225	C2	R346	*D1		
C138	*A2			Q208	*B1	R110	*A2	R226	*B2	R347	*D1		
C139	*A2	E1	C1	Q209	*C1	R111	*A2	R227	*B2	R348	*D2		
C140	*B1			Q210	*C1	R112	*A2	R228	*B2	R349	*D2		
C141	*A1	FL101	A2	Q301	*C2	R113	*A2	R229	*B2	R350	D2		
C201	*B2	FL201	C2	Q302	*C2	R114	*A2	R230	*B2	R351	D2		
C202	*B2	FL301	D2	Q303	*D2	R115	*A2	R231	*B1	R352	D2		
C203	*C2			Q304	*D2	R116	*A2	R232	*B1	R353	*D2		
C204	*B2	IC1	D1	Q305	*D2	R117	A2	R233	*B1	R354	D2		
C205	*B2	IC2	D1	Q306	*D2	R118	B2	R234	*B1	R355	*D2		
C206	B2	IC3	D1	Q307	*C1	R119	*B2	R235	*B1	R356	D2		
C207	C2	IC4	*D1	Q308	*C1	R120	*B2	R236	*B1	R357	D2		
C208	*C2	IC5	E1	Q309	*D1	R121	*B2	R237	*B1	R358	*D1		
C209	*C2	IC6	E1	Q310	*D1	R122	*B2	R238	*B1	R359	*D1		
C210	*C2	IC7	E2	Q311	*D1	R123	B2	R239	*B1	R360	*D1		
C211	*B2	IC9	*E2			R124	*B2	R240	*B1	R361	*D1		
C212	*B2	IC11	E1	R1	*B1	R125	*B2	R241	*B1	R362	*D1		
C213	*B2	IC12	*C1	R2	*B1	R126	*B2	R242	*B1	R363	*D2		
C214	*C2	IC13	*C1	R3	*B1	R127	*B2	R243	*C2	R364	*D2		
C215	C2	IC101	A2	R4	*B1	R128	*B2	R244	*C2	R365	*D1		
C216	*B2	IC102	A2	R5	*B1	R129	A2	R245	C2	R366	*D1		
C217	*B2	IC103	A2	R6	*B1	R130	A2	R246	C2	R367	*D2		
C218	*B2	IC104	*A2	R7	*B1	R131	*A2	R247	C2	R368	*D2		
C219	B2	IC105	B2	R8	*B1	R132	*A2	R248	*C2	R369	*D1		
C220	*B2	IC106	*B2	R9	D1	R133	*A2	R249	C2	R370	*D1		
C221	*B2	IC107	A2	R10	D1	R134	*A2	R250	*C2	R371	*D1		
C222	*B1	IC108	A2	R11	D1	R135	*A2	R251	C2	R372	*D2		
C223	*C2	IC109	A2	R12	D1	R136	*A1	R252	B2	R373	*D2		
C224	*C2	IC110	A2	R13	D1	R137	*A1	R253	*C1	R374	*D2		
C225	C2	IC111	B2	R14	*D1	R138	*A1	R254	*C1	R375	*D2		
C226	B1	IC112	*A2	R15	*D1	R139	*A1	R255	*B1	R376	E2		
C227	C2	IC201	B2	R16	*D1	R140	*A1	R256	*B1	R377	E2		
C228	C1	IC202	B2	R17	*D1	R141	*A1	R257	*C1	R378	E2		
C229	C1	IC203	C2	R18	*D1	R142	*A1	R258	*C1	R379	E2		
C230	C2	IC204	*B2	R19	D1	R143	*A1	R259	*C2	R380	E2		
C231	C2	IC205	*C2	R20	*D1	R144	*A1	R260	*B1	R381	E2		
C232	*C1	IC206	B2	R21	D1	R145	*A1	R261	*C1	R382	E2		
C233	*C1	IC207	B2	R22	D1	R146	*A1	R262	*C2	R383	E2		
C234	*C2	IC208	B2	R23	D1	R147	*A1	R263	*C2	R384	*E2		


*:B SIDE

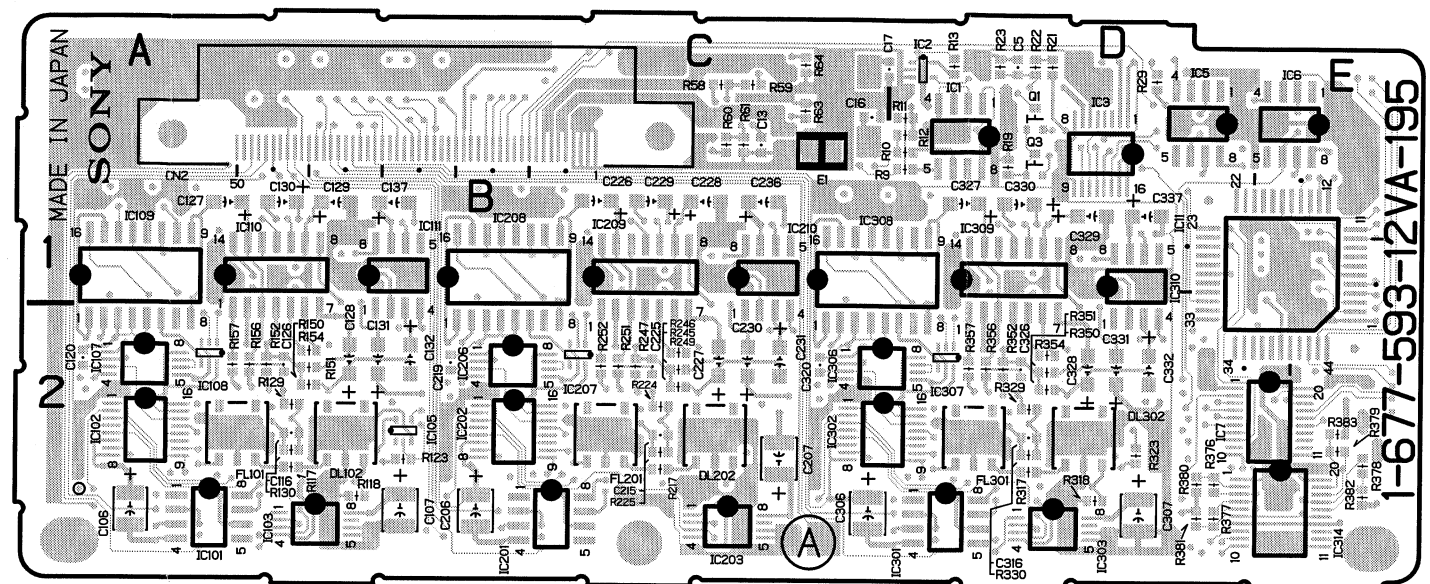

VA-195 (1-677-593-11)


C1	*B1	C235	*C1	IC209	B2	R24	*D1	R148	*B2	R264	*C1	R385	*E2
C2	*B1	C236	C1	IC210	C2	R25	*D1	R149	*B2	R265	*C1	R386	*A1
C3	*D1	C238	*C2	IC212	*C2	R26	*D1	R150	A2	R266	*C1	R387	*B1
C4	*D1	C239	*B2	IC301	D2	R27	*D1	R151	A2	R272	*C2	R388	*A1
C5	D1	C240	*C1	IC302	C2	R28	*D1	R152	A2	R273	*C2	R389	*A1
C6	*D1	C241	*B1	IC303	D2	R29	D1	R153	*B2	R274	*C2		
C7	*E1	C301	*C2	IC304	*C2	R30	*E1	R154	A2	R275	*C2		
C8	*E1	C302	*D2	IC305	*D2	R31	*D1	R155	*B2	R300	*B1		
C9	*E1	C303	*D2	IC306	C2	R32	*E1	R156	A2	R301	*D2		
C10	*E1	C304	*C2	IC307	D2	R33	*E1	R157	A2	R302	*D2		
C11	*E1	C305	*D2	IC308	C2	R34	*E1	R158	*A1	R303	*D2		
C12	*E2	C306	C2	IC309	D2	R35	*D1	R159	*A1	R304	*D2		
C13	C1	C307	D2	IC310	D2	R36	*E1	R160	*A1	R306	*D2		
C14	*D1	C308	*D2	IC312	*D2	R37	*E1	R161	*A1	R307	*D2		
C15	*D1	C309	*D2	IC313	*A1	R38	*E1	R162	*B1	R308	*D2		
C16	C1	C310	*D2	IC314	E2	R39	*E1	R163	*B1	R309	*D2		
C17	C1	C311	*C2	IC315	*E2	R40	*E1	R164	*B2	R310	*C2		
C101	*A2	C312	*C2			R41	*E1	R165	*A1	R311	*C2		
C102	*A2	C313	*D2	Q1	D1	R42	*E2	R166	*B1	R312	*C2		
C103	*A2	C314	*D2	Q2	D1	R43	*B1	R167	*B2	R313	*D2		
C104	*A2	C315	*D2	Q3	D1	R44	*B1	R168	*B2	R314	*C2		
C105	*A2	C316	D2	Q4	*D1	R45	*B1	R169	*B1	R315	*D2		
C106	A2	C317	*D2	Q5	*D1	R46	*B1	R170	*B1	R316	D2		
C107	B2	C318	*D2	Q6	*D1	R48	*E1	R171	*B1	R317	D2		
C108	*B2	C319	*D2	Q7	*E1	R49	*E1	R172	*A2	R318	D2		
C109	*B2	C320	C2	Q8	*E1	R50	*B1	R173	*A2	R319	D2		
C110	*A2	C321	*D2	Q9	*E1	R52	*E1	R174	*A2	R320	*D2		
C111	*A2	C322	*C2	Q10	*B1	R53	*E1	R175	*A2	R321	D2		
C112	*A2	C323	*C1	Q11	*C1	R54	*E1	R200	*B1	R322	*D2		
C113	*B2	C324	*D2	Q12	*C1	R55	*E1	R201	*B2	R323	D2		
C114	*A2	C325	*D2	Q13	*C1	R56	*C1	R202	*B2	R324	*D2		
C115	*A2	C326	D2	Q14	*C1	R57	*C1	R203	*B2	R325	*D2		
C116	A2	C327	D1	Q15	*C1	R58	C1	R204	*B2	R326	*D2		
C117	*A2	C328	D2	Q16	*E2	R59	C1	R205	*B2	R327	*D2		
C118	*A2	C329	D1	Q17	*E2	R60	C1	R206	*B2	R328	*D2		
C119	*A2	C330	D1	Q18	*E2	R61	C1	R207	*C2	R329	D2		
C120	A2	C331	D2	Q101	*A2	R62	*C1	R208	*B2	R330	D2		
C121	*A2	C332	D2	Q102	*A2	R63	C1	R209	*C2	R331	*D2		
C122	*A2	C333	*D1	Q103	*A2	R64	*C1	R210	*B2	R332	*D2		
C123	*A1	C334	*D1	Q104	*B2	R65	*C1	R211	*B2	R333	*C2		
C124	*B2	C335	*D2	Q105	*B2	R66	*E2	R212	*B2	R334	*C2		
C125	*B2	C336	*D1	Q106	*B2	R67	*E2	R213	*B2	R335	*C2		
C126	A2	C337	D1	Q107	*A1	R68	*E2	R214	*B2	R336	*C1		
C127	A1	C338	*D2	Q108	*A1	R69	*E2	R215	*B2	R337	*C1		
C128	B2	C339	*D2	Q109	*A1	R100	*B1	R216	*B2	R338	*C1		
C129	B1	C340	*D1	Q110	*B1	R101	*A2	R217	C2	R339	*D1		
C130	A1	C341	*D1	Q111	*B1	R102	*A2	R218	*C2	R340	*D1		
C131	B2	C342	*E2	Q201	*B2	R103	*A2	R219	*C2	R341	*C1		
C132	B2			Q202	*B2	R104	*A2	R220	*C2	R342	*C1		
C133	*B1	CN2	B1	Q203	*B2	R105	*A2	R221	*C2	R343	*D1		
C134	*B1			Q204	*C2	R106	*A2	R222	*C2	R344	*C1		
C135	*B2	DL102	B2	Q205	*C2	R107	*A2	R223	*C2	R345	*C1		
C136	*B1	DL202	C2	Q206	*B1	R108	*A2	R224	C2	R346	*D1		
C137	B1	DL302	D2	Q207	*B1	R109	*A2	R225	C2	R347	*D1		
C138	*A2			Q208	*B1	R110	*A2	R226	*B2	R348	*D2		
C139	*A2	E1	C1	Q209	*C1	R111	*A2	R227	*B2	R349	*D2		
C140	*B1			Q210	*C1	R112	*A2	R228	*B2	R350	D2		
C141	*A1	FL101	A2	Q301	*C2	R113	*A2	R229	*B2	R351	D2		
C201	*B2	FL201	C2	Q302	*C2	R114	*A2	R230	*B2	R352	D2		
C202	*B2	FL301	D2	Q303	*D2	R115	*A2	R231	*B1	R353	D2		
C203	*C2			Q304	*D2	R116	*A2	R232	*B1	R354	D2		
C204	*B2	IC1	D1	Q305	*D2	R117	A2	R233	*B1	R355	D2		
C205	*B2	IC2	D1	Q306	*D2	R118	B2	R234	*B1	R356	D2		
C206	B2	IC3	D1	Q307	*C1	R119	*B2	R235	*B1	R357	D2		
C207	C2	IC4	*D1	Q308	*C1	R120	*B2	R236	*B1	R358	*D1		
C208	*C2	IC5	E1	Q309	*D1	R121	*B2	R237	*B1	R359	*D1		
C209	*C2	IC6	E1	Q310	*D1	R122	*B2	R238	*B1	R360	*D1		
C210	*C2	IC7	E2	Q311	*D1	R123	B2	R239	*B1	R361	*D1		
C211	*B2	IC9	*E2			R124	*B2	R240	*B1	R362	*D1		
C212	*B2	IC11	E1	R1	*B1	R125	*B2	R241	*B1	R363	*D2		
C213	*B2	IC12	*C1	R2	*B1	R126	*B2	R242	*B1	R364	*D2		
C214	*C2	IC13	*C1	R3	*B1	R127	*B2	R243	*C2	R365	*D1		
C215	C2	IC101	A2	R4	*B1	R128	*B2	R244	*C2	R366	*D2		
C216	*B2	IC102	A2	R5	*B1	R129	A2	R245	C2	R367	*D1		
C217	*B2	IC103	A2	R6	*B1	R130	A2	R246	C2	R368	*D2		
C218	*B2	IC104	*A2	R7	*B1	R131	*A2	R247	*C2	R369	*D1		
C219	B2	IC105	B2	R8	*B1	R132	*A2	R248	C2	R370	*D1		
C220	*B2	IC106	*B2	R9	D1	R133	*A2	R249	C2	R371	*D1		
C221	*B2	IC107	A2	R10	D1	R134	*A2	R250	*C2	R372	*D2		
C222	*B1	IC108	A2	R11	D1	R135	*A2	R251	C2	R373	*D2		
C223	*C2	IC109	A2	R12	D1	R136	*A1	R252	B2	R374	*D2		
C224	*C2	IC110	A2	R13	D1	R137	*A1	R253	*C1	R375	*D2		
C225	C2	IC111	B2	R14	*D1	R138	*A1	R254	*C1	R376	E2		
C226	B1	IC112	*A2	R15	*D1	R139	*A1	R255	*B1	R377	E2		
C227	C2	IC201	B2	R16	*D1	R140	*A1	R256	*C1	R378	E2		
C228	C1	IC202	B2	R17	*D1	R141	*A1	R257	*C1	R379	E2		
C229	C1	IC203	C2	R18	*D1	R142	*A1	R258	*C2	R380	E2		
C230	C2	IC204	*B2	R19	D1	R143	*A1	R259	*B1	R381	E2		
C231	C2	IC205	*C2	R20	*D1	R144	*A1	R260	*B1	R382	E2		
C232	*C1	IC206	B2	R21	D1	R145	*A1	R261	*C1	R383	E2		
C233	*C1	IC207	B2	R22	D1	R146	*A1	R262	*C2	R384	*E2		
C234	*C2	IC208	B2	R23	D1	R147	*A1	R263	*C2				

R385 *E2
R386 *A1
R387 *B1
R388 *A1
R389 *A1
*:B SIDE

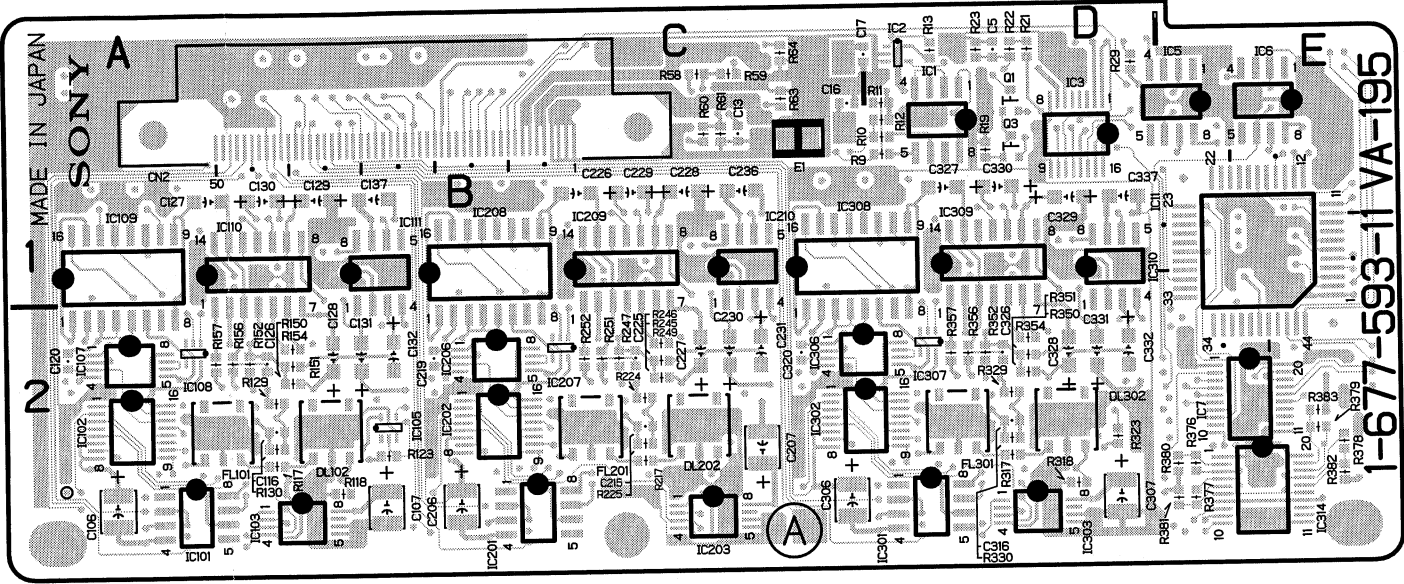

VDA-51 (1-677-594-12)


C1	*D1	C317	*F2	FL302	F3	Q704	A1	R205	*E3	R427	*C2	R713	F1
C2	*D1	C318	*F2	FL601	B2			R206	*E3	R428	*C2	R714	D1
C3	*D1	C319	F1	FL602	B2			R207	*E3	R429	*C2	R715	E1
C4	*D1	C320	*F1			R1	*D1	R208	*E3	R430	*C2	R716	F1
C5	*D1	C321	F2	IC1	*B1	R2	*D1	R209	*E3	R431	*C2	R717	D1
C6	*C1	C322	F2	IC2	*D1	R3	*D1	R210	*E3	R432	*C2	R718	E1
C7	*C1	C323	*F1	IC3	*C1	R4	*D2	R211	*E3	R433	*C2	R719	F1
C8	A2	C400	*C3	IC4	*C1	R5	*C1	R212	*E3	R434	*C2	R720	*A1
C9	A2	C401	*C3	IC5	*C1	R6	*C1	R213	*E3	R435	*C2	R721	*A1
C10	A2	C402	*C3	IC6	*C1	R7	*C1	R214	*E2	R436	*C1	R722	*B2
C11	A2	C403	*C3	IC7	A1	R8	*C1	R215	*E2	R437	*C1	R723	A2
C12	*A1	C404	*C3	IC8	*C1	R9	*D2	R216	*E2	R438	*C1	R724	*D3
C13	*A1	C405	C3	IC9	*A1	R10	*A1	R217	*E2	R439	*C2	R725	*E3
C14	*B1	C406	*C3	IC10	*A1	R11	*A1	R218	*E2	R440	*C2	R726	*F3
C15	*A1	C407	*C3	IC11	*A1	R12	*A1	R219	*E2	R441	*C2		
C16	*A1	C408	C3	IC12	*C1	R13	*A1	R220	*E2	R442	*C2	RV2	C3
C17	*A1	C409	C2	IC101	D3	R14	*A1	R221	*E2	R443	*C1	RV3	D2
C18	*A1	C410	*C2	IC102	D3	R15	*A1	R222	*E2	R444	*C1	RV4	B3
C19	*A1	C411	*C2	IC103	D2	R16	*A1	R223	*E2	R445	*D1		
C20	*B1	C412	C2	IC104	D2	R17	*A1	R224	*E2	R446	*C3		
C21	*C1	C413	D2	IC105	D2	R18	*C1	R225	*E2	R500	*B3		
C30	*B1	C414	*C2	IC106	D2	R19	*A1	R226	*E2	R501	*B3		
C31	*A1	C415	C2	IC201	E3	R20	*C1	R227	*E2	R502	*B3		
C100	D2	C416	C2	IC202	E3	R21	*C1	R228	*E2	R503	*B3		
C101	D3	C417	*C2	IC203	E2	R22	*C1	R229	*E2	R504	*B3		
C102	*D3	C418	*C2	IC204	E2	R23	*B1	R230	*E1	R505	*B3		
C103	*D3	C419	*C2	IC205	E2	R24	*C1	R231	*E1	R506	*B3		
C104	*D3	C420	*C1	IC301	F3	R25	*A1	R232	*E1	R509	*B3		
C105	*D3	C421	D2	IC302	F3	R26	*A1	R233	*E2	R510	*B3		
C106	*D3	C422	C2	IC303	F2	R27	*A1	R234	*E2	R511	*B3		
C107	*D3	C423	*C2	IC304	F2	R28	*A1	R235	*E2	R512	*B3		
C108	*E3	C424	C2	IC305	F2	R29	*A1	R300	*F3	R513	*B3		
C109	*E2	C425	*C2	IC401	C3	R30	*A1	R301	*E3	R514	*B3		
C110	*E3	C426	*C1	IC402	C3	R31	*B1	R302	*E3	R515	*B3		
C111	*D3	C500	B3	IC403	C2	R32	*A1	R303	*F3	R516	*A2		
C112	*D2	C501	*B3	IC404	C2	R33	*B1	R304	*F3	R517	*A2		
C113	*D2	C502	*B3	IC405	C2	R34	*B1	R305	*F3	R518	*A3		
C114	*E2	C503	*B3	IC406	C2	R35	*A2	R306	*F3	R519	*A3		
C115	D2	C504	B3	IC501	B3	R36	*A2	R307	*F3	R520	*A3		
C116	*D2	C505	*B3	IC502	B3	R37	*A2	R308	*F3	R521	*A3		
C117	*D2	C506	B3	IC503	A3	R38	*A2	R309	*F3	R522	B3		
C118	*E2	C507	*B3	IC504	A2	R39	*B1	R310	*F3	R523	*A3		
C119	D2	C508	*B3	IC601	*B2	R40	*B1	R311	*F3	R524	*A3		
C120	*D1	C509	*B3	IC602	C2	R41	*A2	R312	*F3	R525	*B3		
C121	D2	C510	B3	IC603	B2	R42	*D2	R313	*F3	R526	*A2		
C122	E2	C511	*B3	IC701	A2	R43	*D2	R314	*F2	R527	*A2		
C123	*D1	C512	*A3	IC702	A3	R44	*C1	R315	*F2	R528	*A3		
C124	*D2	C513	*A3	IC703	*A3	R45	*D1	R316	*F2	R529	*B2		
C125	*D2	C514	*B2	IC704	A1	R46	*B1	R317	*F2	R530	*B3		
C126	D3	C515	B2	IC705	A3	R100	*D3	R318	*F2	R531	*B3		
C127	*D2	C516	A2	IC706	A3	R101	*D3	R319	*F2	R532	*B3		
C200	E2	C517	*A2	IC707	A2	R102	*D3	R320	*F2	R533	*A2		
C201	E3	C518	B2			R103	*D3	R321	*F2	R534	*A2		
C202	*E3	C522	*A3	L100	C3	R104	*D3	R322	*F2	R535	*A2		
C203	*E3	C550	*A3	L101	C3	R105	*D3	R323	*F2	R536	*A2		
C204	*E3	C600	*B2	L501	A3	R106	*D3	R324	*F2	R537	*B2		
C205	*E3	C601	*B2	L502	A3	R107	*D3	R325	*F2	R538	*B2		
C206	*E3	C602	*C2	L503	D1	R108	*D3	R326	*F2	R539	*A2		
C207	*E3	C603	*B2	L504	D2	R109	*D3	R327	*F2	R540	*A2		
C208	*E3	C604	*C2			R110	*D3	R328	*F2	R541	A3		
C209	*E2	C605	*B2	Q1	*A2	R111	*D3	R329	*F2	R542	A2		
C210	*E3	C606	*B2	Q2	*A2	R112	*D3	R330	*F1	R543	*B2		
C211	*E3	C607	*B2	Q3	*A1	R113	*D3	R331	*F1	R544	B3		
C212	*E2	C608	*B2	Q4	*A1	R114	*D2	R332	*F1	R545	B3		
C213	*E2	C609	*B2	Q101	*D1	R115	*D2	R333	*F2	R600	B1		
C214	*E2	C700	*A2	Q102	*D1	R116	*D2	R334	*F2	R601	B2		
C215	*E2	C701	*A2	Q201	*E1	R117	*D2	R400	*C3	R602	*C2		
C216	*E2	C702	A3	Q202	*E1	R118	*D2	R401	*C3	R603	*C2		
C217	*E2	C703	*A2	Q301	*F1	R119	*D2	R402	*C3	R604	*B1		
C218	*E2	C706	D1	Q302	*F1	R120	*E2	R403	*C3	R605	*B2		
C219	E1	C707	E1	Q400	*C3	R121	*D2	R404	*B3	R606	B2		
C220	*E1	C708	F1	Q401	*C3	R122	*E2	R405	*C3	R607	*B2		
C221	E2	C709	*A1	Q402	*C3	R123	*E2	R406	*C3	R608	*B2		
C222	E2	C710	A2	Q403	*C1	R124	*D2	R407	*C3	R609	*B2		
C223	*E1	C711	*D1	Q404	*C1	R125	*D2	R408	*C3	R610	B2		
C300	F2	C712	*D2	Q405	*C2	R126	*D2	R409	*C3	R611	*C2		
C301	F3			Q406	*C2	R127	*D2	R410	*C3	R612	B2		
C302	*E3	CN6	C1	Q500	*A3	R128	*D2	R411	*C3	R613	*B2		
C303	*F3			Q501	*A3	R129	*E1	R412	*C3	R630	*D3		
C304	*F3	D400	*C3	Q502	*A3	R130	*D1	R413	*C3	R700	*A3		
C305	*F3	D401	*C2	Q503	*A3	R131	*E1	R414	*C3	R701	*A3		
C306	*F3	D500	B3	Q504	*B3	R132	*D2	R415	*C2	R702	*A2		
C307	*F3	D501	B2	Q505	*A2	R133	*D2	R416	*C2	R703	*A3		
C308	*F3	D502	A2	Q506	*B2	R134	*D2	R417	*C2	R704	*A1		
C309	*F2			Q507	*B3	R135	*D2	R418	*C2	R705	*B1		
C310	*F3	E1	F1	Q508	*A1	R136	*D2	R419	*C2	R706	*B1		
C311	*F3			Q509	*A1	R137	*D2	R420	*C2	R707	*B1		
C312	*F2	FL101	D3	Q510	*A2	R138	*D2	R421	*C2	R708	*A3		
C313	*F2	FL102	D3	Q511	*B1	R139	*C3	R422	*C2	R709	C3		
C314	*F2	FL201	E3	Q512	*A2	R200	*E3	R423	*C2	R710	*C2		
C315	F2	FL202	E3	Q701	*B1	R201	*E3	R424	*C2	R711	D1		
C316	*F2	FL301	F3	Q702	*B1	R202	*E3	R425	*C2	R712	E1		
						R203	*E3	R426	*D2				
						R204	*E3						

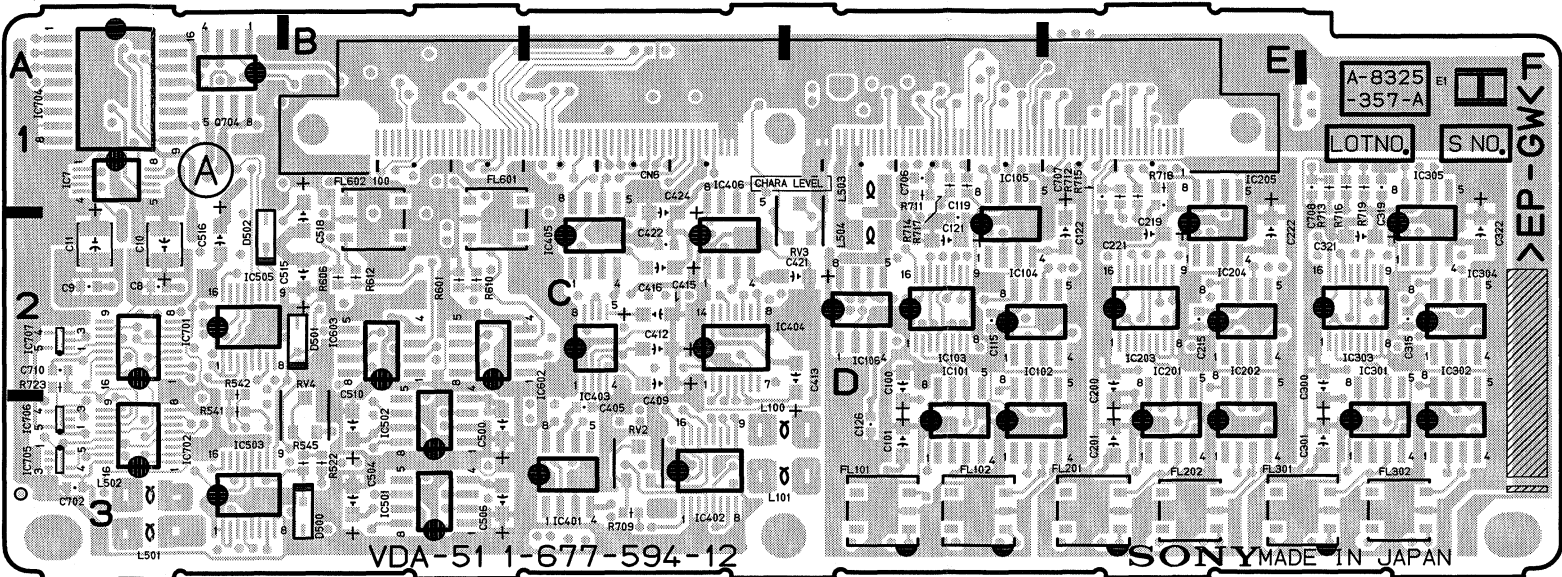


VDA-51 (1-677-594-11)

C1	*D1	C317	*F2	FL302	F3	Q704	A1	R205	*E3	R427	*C2	R714	D1
C2	*D1	C318	*F2	FL601	B2			R206	*E3	R428	*C2	R715	E1
C3	*D1	C319	F1	FL602	B2	R1	*D1	R207	*E3	R429	*C2	R716	F1
C4	*D1	C320	*F1			R2	*D1	R208	*E3	R430	*C2	R717	D1
C5	*D1	C321	F2	IC1	*B1	R3	*D1	R209	*E3	R431	*C2	R718	E1
C6	*C1	C322	F2	IC2	*D1	R4	*D1	R210	*E3	R432	*C2	R719	F1
C7	*C1	C323	*F1	IC3	*C1	R5	*D2	R211	*E3	R433	*C2	R720	*A1
C8	A2	C400	*C3	IC4	*C1	R6	*C1	R212	*E3	R434	*C2	R721	*A1
C9	A2	C401	*C3	IC5	*C1	R7	*C1	R213	*E3	R435	*C2	R722	*B2
C10	A2	C402	*C3	IC6	*C1	R8	*C1	R214	*E2	R436	*C1	R723	A2
C11	A2	C403	*C3	IC7	A1	R9	*D2	R215	*E2	R437	*C1		
C12	*A1	C404	*C3	IC8	*C1	R10	*A1	R216	*E2	R438	*C1	RV2	C3
C13	*A1	C405	*C3	IC9	*A1	R11	*A1	R217	*E2	R439	*C2	RV3	D2
C14	*B1	C406	*C3	IC10	*A1	R12	*A1	R218	*E2	R440	*C2		
C15	*A1	C407	*C3	IC11	*A1	R13	*A1	R219	*E2	R441	*C2		
C16	*A1	C408	*C3	IC12	*C1	R14	*A1	R220	*E2	R442	*C2		
C17	*A1	C409	C2	IC101	D3	R15	*A1	R221	*E2	R443	*C1		
C18	*A1	C410	*C2	IC102	D3	R16	*A1	R222	*E2	R444	*C1		
C19	*A1	C411	*C2	IC103	D2	R17	*A1	R223	*E2	R445	*D1		
C20	*B1	C412	D2	IC104	D2	R18	*C1	R224	*E2	R446	*C3		
C21	*C1	C413	D2	IC105	D2	R19	*A1	R225	*E2	R500	*B3		
C30	*B1	C414	*C2	IC106	D2	R20	*C1	R226	*E2	R501	*B3		
C31	*A1	C415	C2	IC201	E3	R21	*C1	R227	*E2	R502	*B3		
C100	D2	C416	C2	IC202	E3	R22	*C1	R228	*E2	R503	*B3		
C101	D3	C417	*C2	IC203	E2	R23	*B1	R229	*E2	R504	*B3		
C102	*D3	C418	*C2	IC204	E2	R24	*C1	R230	*E1	R505	*B3		
C103	*D3	C419	*C2	IC205	E2	R25	*A1	R231	*E1	R506	*B3		
C104	*D3	C420	*C1	IC301	F3	R26	*A1	R232	*E1	R509	*B3		
C105	*D3	C421	D2	IC302	F3	R27	*A1	R233	*E2	R510	*B3		
C106	*D3	C422	C2	IC303	F2	R28	*A1	R234	*E2	R511	*B3		
C107	*D3	C423	*C2	IC304	F2	R29	*A1	R300	*F3	R512	*B3		
C108	*E3	C424	C2	IC305	F2	R30	*A1	R301	*E3	R513	*B3		
C109	*E2	C425	*C2	IC401	C3	R31	*B1	R302	*E3	R514	*B3		
C110	*E3	C426	*C1	IC402	C3	R32	*A1	R303	*F3	R515	*B3		
C111	*D3	C500	B3	IC403	C2	R33	*B1	R304	*F3	R516	*A2		
C112	*D2	C501	*B3	IC404	C2	R34	*B1	R305	*F3	R517	*A2		
C113	*D2	C502	*B3	IC405	C2	R36	*A2	R306	*F3	R518	*A3		
C114	*E2	C503	*B3	IC406	C2	R37	*A2	R307	*F3	R519	*A3		
C115	D2	C504	B3	IC501	B3	R38	*A2	R308	*F3	R520	*A3		
C116	*D2	C505	*B3	IC502	B3	R39	*B1	R309	*F3	R521	*A3		
C117	*D2	C506	B3	IC503	A3	R40	*B1	R310	*F3	R522	*A3		
C118	*E2	C507	*B3	IC505	A2	R41	*B1	R311	*F3	R523	*A3		
C119	D2	C508	*B3	IC601	*B2	R42	*A2	R312	*F3	R524	*B3		
C120	*D1	C509	*B3	IC602	C2	R43	*D2	R313	*F3	R525	*B3		
C121	D2	C510	B3	IC603	B2	R44	*D2	R314	*F2	R526	*A2		
C122	E2	C511	*B3	IC701	A2	R45	*C1	R315	*F2	R527	*A2		
C123	*D1	C512	*A3	IC702	A3	R46	*B1	R316	*F2	R528	*A3		
C124	*D2	C513	*A3	IC703	*A3	R100	*D3	R317	*F2	R529	*B2		
C125	*D2	C514	*B2	IC704	A1	R101	*D3	R318	*F2	R530	B3		
C126	D3	C515	B2	IC705	A3	R102	*D3	R319	*F2	R531	*B3		
C127	*D2	C516	A2	IC706	A3	R103	*D3	R320	*F2	R532	*B3		
C200	E2	C517	*A2	IC707	A2	R104	*D3	R321	*F2	R533	*A2		
C201	E3	C518	B2			R105	*D3	R322	*F2	R534	*A2		
C202	*E3	C522	*A3	L100	C3	R106	*D3	R323	*F2	R535	*A2		
C203	*E3	C550	*A3	L101	C3	R107	*D3	R324	*F2	R536	*A2		
C204	*E3	C600	*B2	L501	A3	R108	*D3	R325	*F2	R537	*B2		
C205	*E3	C601	*B2	L502	A3	R109	*D3	R326	*F2	R538	*B2		
C206	*E3	C602	*C2	L503	D1	R110	*D3	R327	*F2	R539	*A2		
C207	*E3	C603	*C2	L504	D2	R111	*D3	R328	*F2	R540	*A2		
C208	*E3	C604	*C2			R112	*D3	R329	*F2	R541	A3		
C209	*E2	C605	*C2	Q1	*A2	R113	*D3	R330	*F1	R542	A2		
C210	*E3	C606	*B2	Q2	*A2	R114	*D2	R331	*F1	R543	B3		
C211	*E3	C607	*B2	Q3	*A1	R115	*D2	R332	*F1	R544	B2		
C212	*E2	C608	*B2	Q4	*A1	R116	*D2	R333	*F2	R600	*B1		
C213	*E2	C609	*B2	Q101	*D1	R117	*D2	R334	*F2	R601	B2		
C214	*E2	C700	*A2	Q102	*D1	R118	*D2	R400	*C3	R602	*C2		
C215	E2	C701	*A2	Q201	*E1	R119	*D2	R401	*C3	R603	*C2		
C216	*E2	C702	A3	Q202	*E1	R120	*D2	R402	*C3	R604	*B2		
C217	*E2	C703	*A2	Q301	*F1	R121	*D2	R403	*C3	R605	*B1		
C218	*E2	C706	D1	Q302	*F1	R122	*E2	R404	*B3	R606	B2		
C219	E1	C707	E1	Q400	*C3	R123	*E2	R405	*C3	R607	*B2		
C220	*E1	C708	F1	Q401	*C3	R124	*D2	R406	*C3	R608	*B2		
C221	E2	C709	*A1	Q402	*C3	R125	*D2	R407	*C3	R609	*B2		
C222	E2	C710	A2	Q403	*C1	R126	*D2	R408	*C3	R610	B2		
C223	*E1	C711	*D1	Q404	*C1	R127	*D2	R409	*C3	R611	*C2		
C300	F2	C712	*D2	Q405	*C2	R128	*D2	R410	*C3	R612	B2		
C301	F3			Q406	*C2	R129	*E1	R411	*C3	R613	*B2		
C302	*E3	CN6	C1	Q500	*A3	R130	*D1	R412	*C3	R630	*D3		
C303	*F3			Q501	*A3	R131	*E1	R413	*C3	R700	*A3		
C304	*F3	D400	*C3	Q502	*A3	R132	*D2	R414	*C3	R701	*A3		
C305	*F3	D401	*C2	Q503	*A3	R133	*D2	R415	*C2	R702	*A2		
C306	*F3	D500	B3	Q504	*B3	R134	*D2	R416	*C2	R703	*A3		
C307	*F3	D501	B2	Q505	*A2	R135	*D2	R417	*C2	R704	*A1		
C308	*F3	D502	A2	Q506	*B2	R136	*D2	R418	*C2	R705	*B1		
C309	*F2			Q507	*B3	R137	*D2	R419	*C2	R706	*B1		
C310	*F3	E1	F1	Q508	*A1	R138	*D2	R420	*C2	R707	*B1		
C311	*F3			Q509	*A1	R139	*C3	R421	*C2	R708	*A3		
C312	*F2	FL101	D3	Q510	*A2	R200	*E3	R422	*C2	R709	C3		
C313	*F2	FL102	D3	Q511	*B1	R201	*E3	R423	*C2	R710	*C2		
C314	*F2	FL201	E3	Q512	*A2	R202	*E3	R424	*C2	R711	D1		
C315	*F2	FL202	E3	Q701	*B1	R203	*E3	R425	*C2	R712	E1		
C316	*F2	FL301	F3	Q702	*B1	R204	*E3	R426	*D2	R713	F1		

*:B SIDE

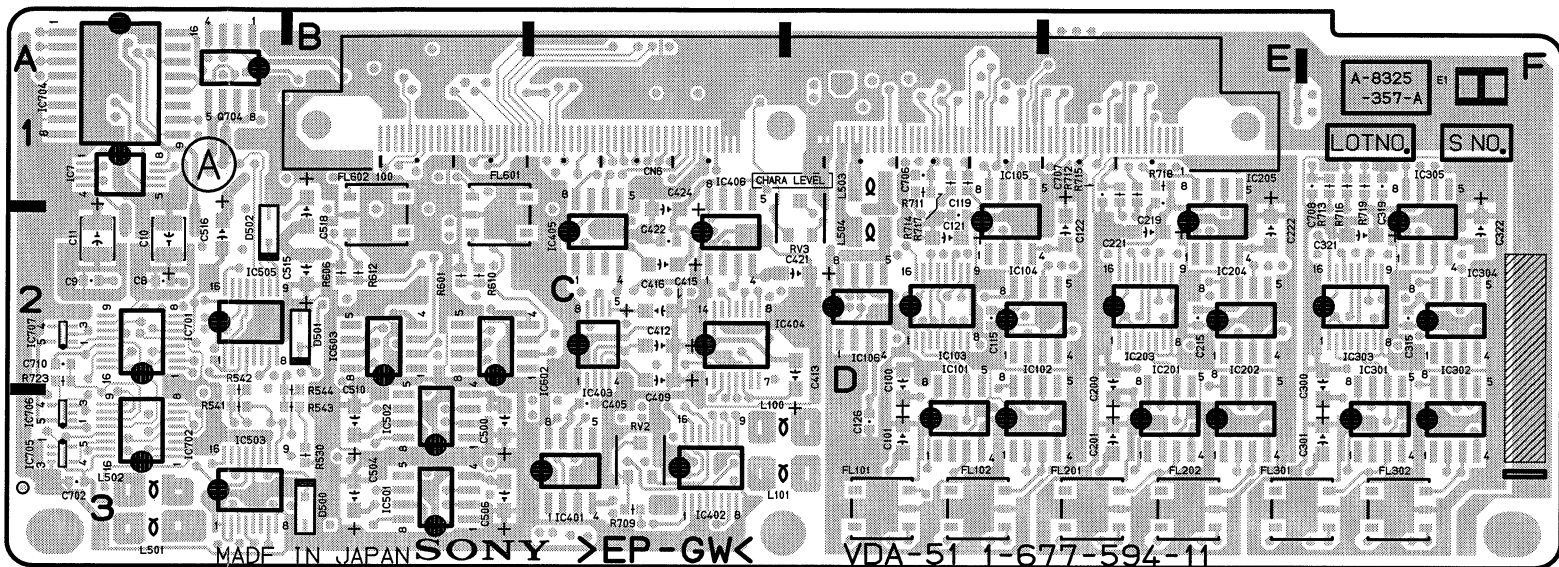

VDA-51 -A SIDE-
SUFFIX: -11

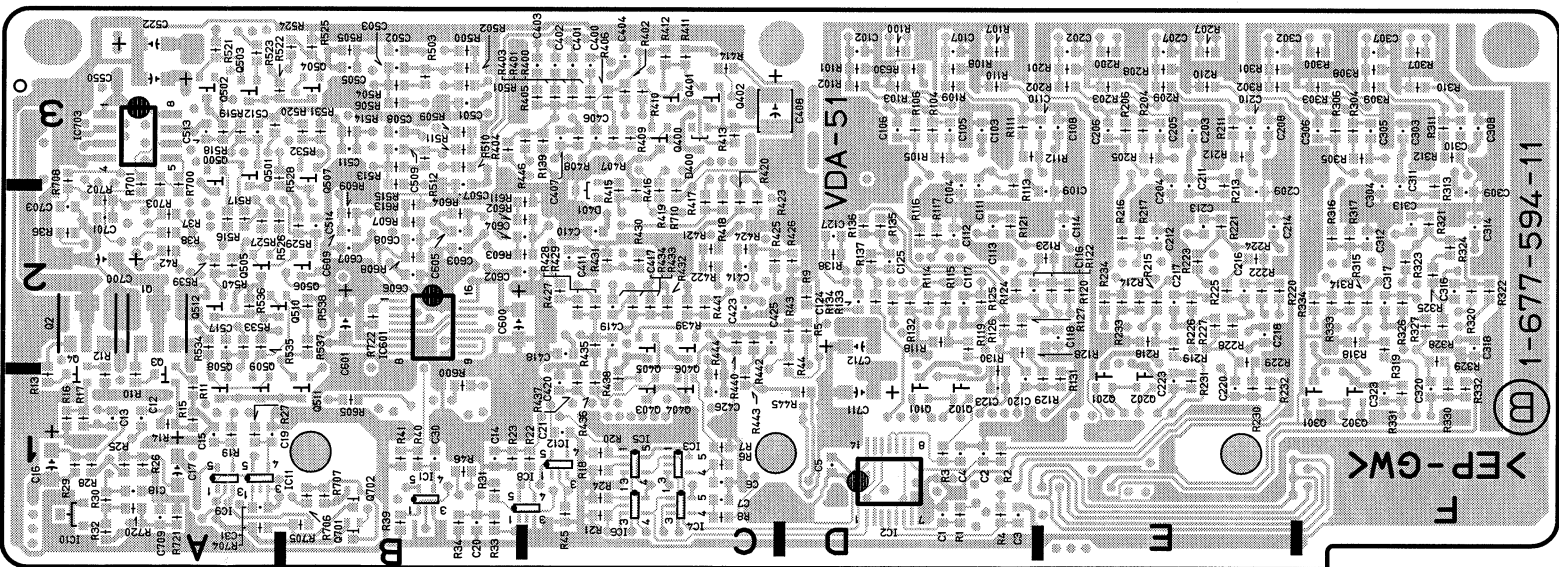

VDA-51 -B SIDE-
SUFFIX: -11

VN-12 (1-677-541-11)

C100	*B1	C271	*D3	R212	D3
C101	*E1	C272	*D3	R213	*D3
C102	D2	C273	*D2	R214	*D3
C103	*B2	C274	*D3	R215	*D3
C104	*D2	C275	*D3	R216	B3
C105	A1	C276	*D3	R217	*D2
C106	D3	C277	*D3	R218	*D2
C107	C2			R219	*D2
C108	*A1	CL1	*B1	R220	D3
C109	*E2	CL2	*B2	R221	D3
C110	*E2	CL3	D2	R222	*B2
C111	*C1			R223	*D2
C112	D2	CN12	D1	R224	*D2
C113	D2	CN100	E3	R225	*D2
C114	*E2			R226	*D2
C115	E2	D100	*B1	R227	*C2
C116	*C3	D101	*B1	R228	*C1
C117	D3	D102	*B1	R229	*C1
C118	*C3			R230	*E3
C119	*C3	E1	C3	R231	*E3
C120	E1	E2	E2	R232	*E2
C200	*B1			R233	*D2
C201	*C2	FB100	D2	R234	*D2
C202	D2	FB200	*E3	R235	*D2
C203	*C2				
C204	*B2	FL100	A1	RB100	*B1
C205	*A2	FL101	E1	RB101	*C1
C206	*A2	FL102	E2	RB102	*C1
C207	A2			RB103	*C1
C208	A2	IC100	*B2	RB104	C2
C209	A2	IC101	*C2	RB105	C2
C210	A3	IC102	*C2	RB106	*C1
C211	A3	IC103	*D1	RB107	*D1
C212	*A3	IC104	A1	RB108	*C3
C213	*B3	IC105	*D3	RB109	*C3
C214	*B3	IC106	E2	RB200	D2
C215	*B2	IC107	*C3	RB201	C2
C216	*B2	IC108	*C2	RB202	*D1
C217	B2	IC200	*C2	RB203	*E2
C218	*B2	IC201	*D1	RB204	*D2
C219	B2	IC202	*C2	RB205	*E2
C220	*B3	IC203	B3	RB206	*C1
C221	*B3	IC204	*A2	RB207	*E3
C222	*B3	IC205	*B2	RB208	*C1
C223	*B3	IC206	*E3	RB209	*E3
C224	*B3	IC207	*E3	RB210	C3
C225	A3	IC208	*E2	RB211	B3
C226	A3	IC209	*E3	RB212	C3
C227	A2	IC210	D3	RB213	B3
C228	*B2	IC211	*D3	RB214	*D1
C229	*B2	IC212	*D3	RB215	*D2
C230	*B2	IC213	*D3	RB216	*D1
C231	*A2	IC214	D3	RB217	*D2
C232	*A3			RB218	*D2
C233	*A2	Q100	*A1	RB219	*E2
C234	*A2	Q101	E2	RB220	E3
C235	A3	Q102	E2		
C236	A2			TP200	E3
C237	*B2	R100	*A1	TP202	E3
C238	*B3	R101	*E2	TP203	E3
C239	*B2	R102	*D2		
C240	*B2	R103	*D1		
C241	*B2	R104	*D1		
C242	*B2	R105	D2		
C243	*E2	R106	*E2		
C244	*E3	R107	*E2		
C245	*E1	R108	*E2		
C246	*E3	R109	*D1		
C247	*E3	R110	*C2		
C248	*E2	R111	*D1		
C249	*E2	R112	*D1		
C250	*E3	R113	*D2		
C251	*E3	R114	*D2		
C252	*D2	R115	*B2		
C253	*D2	R116	*C2		
C254	D2	R117	C2		
C255	*D3	R118	C2		
C256	*D3	R119	*D1		
C257	*D3	R120	*C2		
C258	*D2	R121	*C3		
C259	*D3	R200	*D2		
C260	*D3	R201	*B1		
C261	*D3	R202	*B2		
C262	*D2	R203	*D3		
C263	*D2	R204	A2		
C264	*D2	R205	*B3		
C265	*D2	R206	*E3		
C266	*D3	R207	*E3		
C267	*D3	R208	*E3		
C268	*D3	R209	*E3		
C269	*D3	R210	*E3		
C270	*D3	R211	*E2		

